



Waterproofing

Flooring

Concrete Repair

Trade Product Guide

2nd Edition



Waterproofing, Flooring & Concrete Repair Industries



Branch Locations

For full address details and telephone directory refer back page.

Welcome to the second edition of our Bayset Trade Product Guide. As one Australia's largest independent suppliers to the Waterproofing, Flooring and Concrete Repair Industries, we are proud to present to you our most comprehensive product guide ever. This guide represents the latest technologies from our valued suppliers and gives you, our valued customer complete solutions for any given scenario.



We have been working overtime to ensure that this product guide gives you solutions that are 100% relevant to the Australian market and provides easy access to a large range of products and systems from our conveniently located branches across Queensland. We have also been encouraged by the growing demand from our loyal customers to make Bayset a 'One Stop Shop' for all their product and hardware requirements and our range has grown significantly over the past couple of years to accommodate this.

We hope we have with this product guide made the process all that much easier and stress free with a comprehensive section showing our standard drawings and other useful information that will save you valuable time.

Overall, you'll find the Bayset Trade Product Guide is an easy to navigate full colour reference tool that you will want to have to hand at all times and we urge you to keep one in the truck and on the desk at home. Remember it's just one call and we'll do the rest.

Brad Stephens

Managing Director

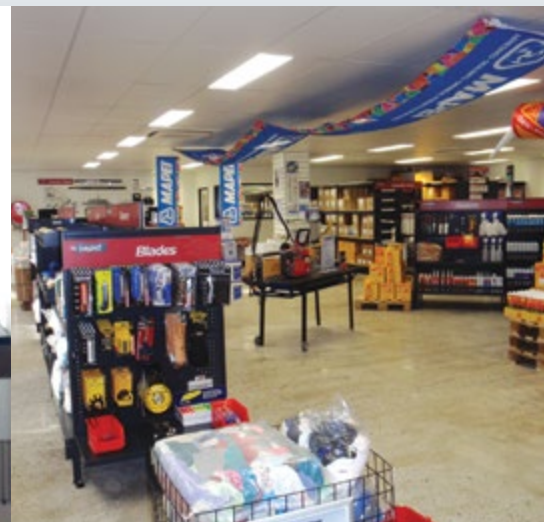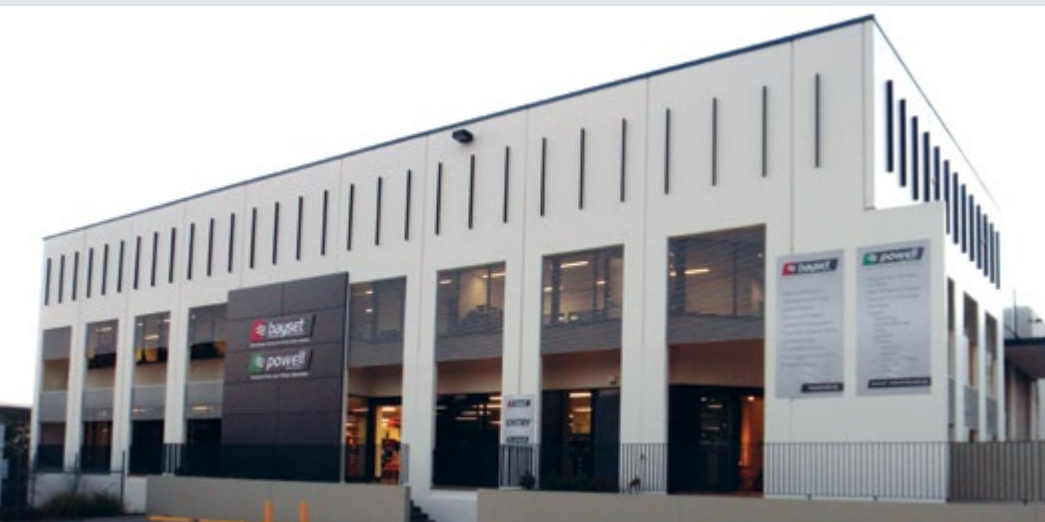

About Bayset

Established in 2000, Bayset is an independent specialist trade supplier to the Waterproofing, Flooring, Concrete Repair, and Building industries. We currently operate seven branches across Queensland and ship to customers across Australia.

Mission

To constantly give our customers outstanding customer service.

With local knowledgeable well trained staff, Bayset pride itself on providing practical solutions for all your difficult problems. Our competitive pricing and prompt delivery make Bayset your ideal supply partner. Our highly respected technical team is capable of analytical problem solving for all remedial projects whether they are commercial, residential, civil or high rise and has direct access to many industry bodies and specialist companies worldwide.

Through quality management practices we strive to bring innovation, environmental awareness, risk mitigation and best practice principles to our customers.

Our vision is to become the No1. Trade supplier to our customer base with industry leading products and services and achieve continued loyalty from our team members, customers and suppliers.

Key Strengths

- ≡ Conveniently located branches
- ≡ Committed and qualified technical staff
- ≡ Prompt attention to problem solving
- ≡ On site quality assurance systems
- ≡ Large stock holdings
- ≡ Extensive product ranges
- ≡ Fully warranted systems
- ≡ Computerised inventory systems
- ≡ Reliable delivery times
- ≡ Accessibility to our technical knowledge
- ≡ Sourcing of specialized items

Showrooms and dedicated training areas are an important part of Bayset's offer allowing our customers, suppliers and staff to interact and learn from our industry experience. Our 3000 square meter Coopers Plains distribution centre has all our key suppliers represented in one showroom and we offer full practical and theoretical training either on site or in house in an atmosphere of learning and real time experience.

Proud Members of:



Warranty

Bayset is a 'distributor' and not a manufacturer of products. We offer the 'Warranty' provided by the original manufacturer and are bound solely by these requirements. On items directly imported (therefore the deemed manufacturer), the warranty offered varies depending on the product and the original source of manufacture. Most items are warranted against faults and defects in manufacture for a period of (12) twelve months; however Bayset assumes no responsibility for the following:

- Improper installation or failure to follow fitting or application instructions
- Failure due to improper maintenance
- Indirect or consequential loss or damage
- Cost of freight or travelling time

Trading Days

Monday to Friday 6.30am - 4.00pm

Settlement Terms

All account customers – nett 30 days from the close of the month that items have been ordered and delivered.
Non-account customers strictly CBD (Cash Before Delivery).

GST

The tax applicable will be governed by the laws operating in Australia at the time of sale.

Special Orders

'Non Stock' items sourced and purchased on your behalf are subject to the relevant suppliers trading terms and conditions.

All Special Orders MUST include a signed 'Bayset – Non-stock purchase order form' In the event of a credit return, a payment of 15%-25% restocking fee will apply. Custom made or made-to-order goods are strictly NON-REFUNDABLE.

Returns for Credit

Stock Items may be returned for credit providing the following:

- Company notified within 30 days.
- Goods returned must be in original condition and free from defects when returned.
- Copy of invoice to accompany goods for return.

Faulty /Damaged Stock

Above conditions apply, however Bayset reserves the right to reject any claim(s) where the item has been opened or used in any application that may void the manufacturer's warranty.

Refer to page 312 for full Terms and Conditions.

Sealants, Adhesives & Accessories

- Polyurethane Sealants 154
- Acrylic Sealants 159
- Silicone Sealants 159
- MS Polymer Sealants 168
- Adhesives -
Flooring, Timber, Carpet & Vinyl 170
- Adhesives -
Construction Adhesives & Anchors 172
- Adhesives - General Adhesives 174
- Fire Rated Sealants 176
- Backing Rod 177



POLYURETHANE SEALANTS

Bostik Seal "N" Flex 1



- A low modulus, one component, and Class-A polyurethane sealant.
- When cured it will form a tough, flexible seal capable of cyclic expansion and compression movement of 50% ($\pm 25\%$) of the original installed joint width.
- Bostik Seal N Flex 1 is resistant to normal weathering conditions such as rain, sunlight, snow, sleet, ozone, atmospheric contamination and pollution.
- Its excellent weather ability enables it to retain its original properties after years of exposure, refer to the CSIRO RILEM LONG-TERM SEALANT DURABILITY STUDY DBCE Doc. 97/196 (M).
- AS4020 Potable Water.



Colour	Size	Code
Grey	600 ml	700-001
Black	600 ml	700-002
White	600 ml	700-003
Bahama Beige	600 ml	700-004
Classic Bone	600 ml	700-005
Epping Grey	600 ml	700-006
Limestone	600 ml	700-007
Manila Sand	600 ml	700-008
Off White	600 ml	700-009
Redwood	600 ml	700-035
Sandstone	600 ml	700-040
Bronze	600 ml	700-041

Note: Colour chart used as a guide only.

Bostik Seal N Flex Fast Cure (FC)



- High performance, fast curing, one component, polyurethane sealant.
- When cured it will form a tough, flexible seal and bond capable of cyclic expansion and compression movement.
- Joints or fabrications formed with this sealant can be expected to extend and compress a total of 50% ($\pm 25\%$) of original joint.
- Fast tack free time and cure rate.
- High bond strength, excellent adhesion, can be over painted when cured.
- Excellent resistance against hydrolysis, ageing and a wide range of chemicals
- Highly flexible to accommodate joint movement of $\pm 25\%$.
- Resistant to fungal attack to AS1157.2. Potable water approval to AS4020.

Colour	Size	Code
Grey	600 ml	700-101
Black	600 ml	700-102
White	600 ml	700-103

Bostik leaders in Construction and Sanitary Sealants



Stronger Bonds, Better Life

Fire Rated Sealants



Firecaulk

Firecaulk is a single component non-sag fire rated acrylic based sealant used for construction joints.



Fireban One

Fireban One is a fire rated low modulus, one component Class A polyurethane sealant when cured will form a tough flexible rated seal.



PU Sealants



Seal N Flex 1

Seal N Flex 1 is a one component low modulus construction joint sealant used for general construction applications.



Seal N Flex FC

Seal N Flex FC is a high performance fast cure polyurethane sealant used for construction expansion joints.



Sanitary Silicones



6S

ZBond 6S is a one component, non-flowing, neutral cure, mid modulus silicone sealant. It cures by absorption of atmospheric moisture to form a flexible and durable elastomeric sealant.

POLYURETHANE SEALANTS

Bostik Construction



- One component, thixotropic, polyurethane based joint sealant which cures under the influence of atmospheric moisture to form an elastomeric material with adhesive properties, in some cases without the need for priming of the substrate.
- Low modulus, good durability.
- One component, no mixing required, paintable (refer limitations).
- Non staining.

Colour	Size	Code
Grey	600 ml	700-091

Bostik Dampfix Seal 'N' Fillet



- High performance fast curing single component polyurethane joint sealant and filler designed specifically to be used to seal perimeter joints, butt joints, fillet joints and general gap sealing prior to application of Bostik Dampfix polyurethane waterproofing membranes.
- Fillet joints to internal wet areas to AS3740, external wet areas to AS4654.
- Expansion and control joints to internal wet areas.
- Filling of static cracks and sheet joints in internal wet areas.

Colour	Size	Code
White	600 ml	700-153



Cetco Cetseal

- Cetseal is a multi-purpose, single component polyether moisture cure sealant/adhesive.
- Cetseal is a low VOC, 100% solids, non-shrinking product with excellent UV resistance.
- The primary applications are as a grade termination sealant, membrane lap sealant and as an adhesive for Cetco RX range of waterstops.

Colour	Size	Code
Grey	300 ml cartridge	712-426
Grey	600 ml sausage	712-427

Protek ProFlex 50FC



- A one part fast curing high modulus sealant which cures to form a flexible and durable high strength watertight seal.
- ProFlex 50 FC has been tested in accordance with international standards.
- High modulus (+ or-) 50%.
- One component, moisture curing.
- Cure rate = 4mm per 24 hours.
- Elongation at break > 900%.

Colour	Size	Code
Grey	600 ml	700-157

POLYURETHANE SEALANTS

Mapei Mapeiflex PU45

- Single component, thixotropic, rapid-hardening polyurethane sealant and adhesive with a high modulus of elasticity.
- Mapeiflex PU45 has been specially developed for sealing expansion joints in horizontal and vertical surfaces, including those which are subject to occasional chemical attack provoked by hydrocarbons.
- It is also recommended for flexible bonds between similar and different materials most commonly used in the building industry for both internal and external applications and as a replacement or to integrate mechanical fasteners.



Colour	Size	Code
Grey	600 ml	700-911

SealBoss® Can-Seal-Foam

- An Instant one component closed-cell polyurethane foam that has been engineered to fully expand inside the applicator 'gun barrel'. When the foam exits the tip of the gun it is almost fully expanded you apply exactly as much foam as you need without the messy and undesired "mushrooming" experience. This feature makes 'predictable' and useable in areas where other products just won't perform.
- With the professional applicator gun you can fill voids precisely.
- Contractors use for many applications such as waterstop purposes in voids and cable runs, as an insulation and seal-foam in general construction and as an instant 'Backer Rod Bead' in applications where joints need a back fill prior to applying the final sealant.



Colour	Size	Code
Light Yellow	675 ml can	712-607

Sika Boom® - AP

Sika Boom AP is a fast curing expanding foam. It can be used as a fixing and insulating foam.

- Filling gaps and voids, blocking out dust, noise and draft.
- Installation of window and door frames, insulation of pipes.

Advantages:

- Can be used upside down, also cut, sanded and painted.
- Suitable for external use. Quick and easy gap filler.
- Has excellent adhesion to most substrates.
- Reaches difficult access areas that need to be filled.



Colour	Size	Code
Light Yellow	750 ml	712-608

Sikaflex Construction

- One component, thixotropic, polyurethane based joint sealant.
- It cures under the influence of atmospheric moisture to form an elastomeric material with adhesive properties, in some cases without the need for priming of the substrate.



Colour	Size	Code
Grey	600 ml	700-201

POLYURETHANE SEALANTS

Sikaflex Pro

- One part component, thixotropic, polyurethane based joint sealant.
- It cures under the influence of atmospheric moisture to form an elastomeric material with adhesive properties, in some cases without the need for priming of the substrate.

Colour	Size	Code
Grey	600 ml	700-221
Black	600 ml	700-222
White	600 ml	700-223
Off White	600 ml	700-902
Beige (Japan)	600 ml	700-903
Sandstone	600 ml	700-904
Dark Amber	600 ml	700-905
Dark Grey	600 ml	700-906
Brick Red	600 ml	700-907
Pale Brown	600 ml	700-908
Redwood	600 ml	700-909

Sikaflex I IFC

- A fast curing one component polyurethane sealant adhesive with permanent elasticity.
- Excellent adhesion on all cement-based materials, brick, ceramics, metals, wood, polyurethane, epoxy, and some polyesters.
- Fast cure rate, high durability, high abrasion resistance and tear strength.
- Good weathering and water resistance.
- Non-sag on vertical joints up to 30mm wide, non-corrosive.
- Certified for use in contact with potable water (AS4020-2005).

Colour	Size	Code
Grey	310 ml	700-899
Black	310 ml	700-900
White	310 ml	700-901
Grey	600 ml	700-910

Sikaflex® - Tank

A one component, thixotropic, polyurethane based joint sealant. It is used in areas for storage, filling and handling of contaminated water and other liquids.

Use for:

- Floor and perimeter joints in areas exposed to chemicals, joints in petrol stations.
- Facilities for storage, filling and handling areas/yards, storage tanks and bunds.
- Sealing joints in water retaining structures such as sewerage and water treatment plants, filtration and aeration tanks.

Advantages:

- Excellent chemical resistance to a wide variety of liquids.
- High mechanical resistance, high tear propagation resistance.
- Excellent movement capacity, non-corrosive, resistant to bacterial attack.
- Movement capability 25%.

Colour	Size	Code
Concrete Grey	600 ml	700-405

ACRYLIC SEALANTS

Bostik Seal N Flex AC

- Single component, water-based construction grade, acrylic sealant for general construction sealing applications.
- Designed for internal and some external applications for vertical sealing requirements where a flexible joint seal is required.
- Excellent weather resistance and durability.



Colour	Size	Code
Grey	600 ml	710-101
Grey	10 litre pail	710-104

SILICONE SEALANTS

Aftek Glazing Weatherproof Silicone

Aftek Xi-860 is a one part, neutral/rapid curing and high modulus silicone, specifically designed for high performance architectural applications.

- Premium high strength performance, low VOC, excellent joint movement capabilities.
- Non-slumping: can be used in vertical and overhead joints.
- Premium resistance to weathering, ultra-violet radiation, vibration, moisture ozone and temperature extremes.
- For use on two sided structural, butt and fin glazing joints, general glazing and weatherproofing, installation of mirrors, metal roofing,
- Aluminium mullions substrates, painted surfaces, concrete stainless steel, metal water tanks, ceramics, and some plastics and rubbers.
- Available in white, silver and grey.



Colour	Size	Code
Translucent	310 ml	701-750

Bostik Plumbfix Kitchen & Bathroom Silicone

- A neutral cure silicone especially formulated to resist mildew when exposed to prolonged hot and humid environments.
- Flexible silicone rubber.
- Anti Fungal – fungicide added.
- Joint movement capabilities +/- 25%.
- Maintains flexible waterproof joint.
- Low odour.



Colour	Size	Code
Translucent	300g cartridge	701-690
White	300g cartridge	701-691

SILICONE SEALANTS

Bostik Z Bond® Sanitary Neutral Cure Silicone



- A one component non-flowing, neutral cure mid modulus silicone sealant.
- Z Bond® 6S contains an effective fungicide, to reduce the growth of mould and mildew.
- Because it is a neutral curing system, it is more pleasant to work with particularly in a confined space.
- It also offers excellent adhesion to powder coated metal.
- The thixotropic nature of this product ensures that it will not slump in typical construction joints.



Colour	Size	Code
Pewter	300 g	701-656
Mid Grey	300 g	701-657
Gloss White	300 g	701-672
Titanium (Off White)	300 g	701-673
Ceramic Ivory	300 g	701-675
Sandstone	300 g	701-676
Beige Sand	300 g	701-677
Charcoal	300 g	701-678
Silver Ash	300 g	701-679
Antique White	300 g	701-680
Taupe	300 g	701-681
Almond Ivory	300 g	701-682
Matt White	300 g	701-683
Translucent	300 g	501-684

Note: Colour chart used as a guide only.

Bostik Kitchen & Bathroom Acetic Cure Silicone



- An acetic curing silicone sealant, designed for use in wet areas such as kitchen, bathroom and shower stalls.
- It is specially formulated to resist mildew even when exposed to prolonged hot and humid environments.
- The sealant does not provide or maintain a nutrient surface for fungus.

Colour	Size	Code
White	300 g	701-533

SILICONE SEALANTS

Bostik V-60 High Performance Glazing Silicone

- It has superior adhesion to painted and anodised aluminium, as well as glass.
- Its high service temperature makes it suitable for use in many industrial and auto motive applications.
- The thixotropic nature of this product ensures that it will not slump in typical construction joints.
- Meets AS4020 Potable Water Approved.

Colour	Size	Code
Translucent	300 g	701-704
White	300 g	701-403
Dark Grey	300 g	701-405
Black	300 g	701-705
Matt Black	300 g	701-407
Silver	300 g	701-408



Bostik Roof & Gutter Silicone

- A high performance, Ultra Violet resistant, one component, neutral cure silicone sealant.
- Bostik Roof & Gutter Silicone is an industrial grade neutral cure silicone sealant designed for sealing lap joints in metal guttering, aluminium roofing, flashings and down pipes.

Colour	Size	Code
Grey	300 g	701-551
Translucent	300 g	701-552
Woodland Grey®	300 g	701-553
Surfmist®	300 g	701-554
Black	300 g	701-555
White	300 g	701-556
Classic Cream™	300 g	701-558
Manor Red®	300 g	701-559
Cottage Green®	300 g	701-561



Bostik Z Bond® V-4 Metal & Masonry Silicone

- A one component, non-flowing, neutral cure, low modulus silicone sealant.
- It cures by absorption of atmospheric moisture to form a flexible and durable elastomeric sealant.
- Z Bond® V-4 is a highly elastic, low modulus, neutral cure silicone sealant.
- It therefore imparts the minimum stress on the adhesion bond between the silicone and the substrate in a working joint.
- The thixotropic nature of this product ensures that it will not slump in typical construction joints.
- Meets AS 4020 for potable water.

Colour	Size	Code
White	300 ml	701-202



SILICONE SEALANTS

CTA™ Polyblend™ S1 Silicone



- High performance, acetoxy cure, sanitary grade, gun applied silicone sealant that is specifically formulated for use with non porous surfaces and cures to form a tough, flexible seal that can accommodate $\pm 25\%$ joint movement and has excellent recovery. Contains a biocide and is ideal for use in wet area applications and resists growth of mildew. It remains permanently flexible and weatherproof and is recommended for use in internal and external applications. Developed to match the range of G10 grouts from Prohesive™. Available in 20 colours.

Colour	Size	Code
White #1	310 ml	701-250
Antique White #11	310 ml	701-251
Alabaster #12	310 ml	701-252
Mushroom #13	310 ml	701-253
Buff #14	310 ml	701-254
Vanilla #17	310 ml	701-255
Ivory #18	310 ml	701-256
Canvas #19	310 ml	701-257
Misty Grey #21	310 ml	701-258
Smoke Grey #22	310 ml	701-259
Platinum Grey #23	310 ml	701-260
Graphite Grey #24	310 ml	701-261
Galaxy Black #25	310 ml	701-262
Coffee #31	310 ml	701-263
Mocha #32	310 ml	701-264
Taupe #33	310 ml	701-265
Chocolate #34	310 ml	701-266
Clover Green #41	310 ml	701-267
Olive #42	310 ml	701-268
Pacific Blue #51	310 ml	701-269

Dow Corning® 680 Sanitary Silicone



It is a high performance, neutral cure silicone sealant designed to resist the growth of mould and mildew where conditions of high humidity and temperature exist. It is ideal for use in and around, bathrooms, laundry, sinks, ceramic tiles, vitreous china, enamel painted surfaces and fibreglass spa units.

- Adheres to a wide range of building materials and finishes including plastics.
- Neutral cure; will not corrode galvanized/zinc-coated steel or attack concrete.
- Excellent resistance to weathering, ultra-violet radiation, vibration, moisture, ozone, temperature extremes, airborne pollutants, cleaning detergents and many solvents.
- Long life reliability; cured sealant stays rubbery from -50°C to $+150^{\circ}\text{C}$ without tearing, cracking, drying out or becoming brittle.
- Capable of withstanding movements up to $\pm 25\%$ of original joint width.
- Non-slumping; can be used in vertical and overhead joints.

Colour	Size	Code
Translucent	300 g	701-951
White	300 g	701-952
Almond Ivory	300 g	701-953
Tile Grey	300 g	701-954



H.B. Fuller

770

SANITARY

SILICONE SEALANT

- ✓ Ideal for glazing and tiling in wet areas
- ✓ Resistant to mould & mildew
- ✓ Interior / exterior
- ✓ +/- 25% joint movement
- ✓ Neutral cure / non-corrosive
- ✓ Available in 300g cartridge



White



Mid Grey



Tile Grey



Translucent



Almond Ivory



www.hbfuller.com.au

SILICONE SEALANTS

HB Fuller 770 Sanitary Silicone



- Fullers 770 Sanitary Silicone Sealant is a high performance, neutral cure silicone sealant.
- It is specifically designed for use in wet areas, contains a mould and mildew inhibitor and is suitable for contact with aluminium shower screens.
- Mould and mildew resistant, permanently flexible; $\pm 25\%$ joint movement.
- Neutral cure – will not corrode concrete or zinc coated / galvanised steel.
- 25 year minimum durability resistance to weathering and UV radiation.
- Resistant to vibration, temperature extremes: -50°C to 150°C .
- Strong adhesion, sag resistant-can be used in vertical and over head joints.

Colour	Size	Code
Translucent	300 g	701-001
Tile Grey	300 g	701-002
White	300 g	701-003
Almond Ivory	300 g	701-024
Mid Grey	300 g	701-025

Dow Corning® 888 Silicone Joint Sealant



Non-sag silicone joint sealant for Portland cement concrete pavement joints. Dow Corning® 888 is a one-part silicone joint material that cures to a low-modulus silicone rubber upon exposure to atmospheric moisture.

- For use in new construction, repair or remedial applications.
- Dow Corning 888 may be used to seal joints that are not uniform in width provided the movement capability of the sealant is not exceeded.
- May also be used in joints with minor spalling.
- High movement capability, 100% extension and 50% compression.
- Cure time will typically be one hour or less in standard conditions.

Colour	Size	Code
Grey	600 ml	701-130

Hypersil 912 Sanitary Silicone



Pasco Hypersil 912 is a high performance, neutral cure, sanitary grade silicone sealant which cures to form a tough and flexible waterproof seal with the added advantage of resisting the growth of mould and mildew.

- Neutral cure, mould/mildew resistant, excellent weathering.
- Highly flexible $\pm 25\%$, long term durability, will not corrode metals.
- Superior adhesion, complies with a 5-GreenStar rating of VOC's less than 5% or 50 grams/litre.

Colour	Size	Code
Light Grey	300 g	701-955

SILICONE SEALANTS

Mapei Mapesil AC Silicone

- Solvent-free, acetic cross-linking, mildew-resistant silicone sealant.
- Sealing joints between sinks or sanitary ware and ceramic tiles in kitchens, bathrooms and showers with colours co-ordinated with the grouts.
- Mapesil AC can also be used for forming a perfectly elastic gasket between different elements in constructions, mechanical engineering, ship-building, automobile manufacturing, and adheres perfectly to glass, ceramics and anodized aluminium.



Colour	Size	Code
White (100)	310 ml	701-902
Manhattan (110)	310 ml	701-903
Silver Grey (111)	310 ml	701-904
Med Grey (112)	310 ml	701-905
Anthracite (114)	310 ml	701-906
Black (120)	310 ml	701-907
Jasmine (130)	310 ml	701-908
Vanilla (131)	310 ml	701-909
Beige (132)	310 ml	701-910
Caramel (141)	310 ml	701-911
Brown (142)	310 ml	701-912
Terracotta (143)	310 ml	701-913
Chocolate (144)	310 ml	701-914
Yellow (150)	310 ml	701-915
Magnolia (160)	310 ml	701-916
Mauve (161)	310 ml	701-917
Terra Di Siena (145)	310 ml	701-918
Coral Red (140)	310 ml	701-919
Violet (162)	310 ml	701-920
Crocus Blue (170)	310 ml	701-921
Turquoise (171)	310 ml	701-922
Mint (180)	310 ml	701-923
Tourmaline (182)	310 ml	701-924
Jade Green (181)	310 ml	701-925
Space Blue (172)	310 ml	701-926
Trans (999)	310 ml	701-927
Cement Grey (113)	310 ml	701-928



Note: Colour chart used as a guide only.

SILICONE SEALANTS

ProSan 2 MR200



- ProSan 2 MR200 mould resistant series silicone sealant range is a professional contractors grade that has been specifically designed as a high quality wet area sealant where growth of unsightly mould and mildew needs to be minimised.

Colour	Size	Code
Stone	300 ml	701-800
Travertine	300 ml	701-801
Havana	300 ml	701-802
Alabaster	300 ml	701-803
Misty Grey	300 ml	701-804
Off White	300 ml	701-805
Dark Bronze	300 ml	701-806
Ceramic Ivory	300 ml	701-807

Sika Sikasil® C Neutral Cure Silicone



- Sikasil-C is a single component, ready for use, neutral silicone sealant that is moisture cured.
- Sikasil-C is suitable for use in general purpose glazing and sealing applications where long term reliability is required.
- Sikasil-C has excellent adhesion to non-porous materials such as glass, ceramics, aluminium, galvanised steel and plastics.

Colour	Size	Code
White	300 g	701-324
Grey	300 g	701-325
Mid Grey	300 g	701-326
Black	300 g	701-327

Sikasil® - Pool



Sikasil® - Pool is a one part neutral curing silicone sealant for use in swimming pools and permanently wet areas. Sikasil® - Pool is suitable for joints in and around swimming pools, areas under permanent water immersion and frequently wet areas, such as shower rooms in sports halls or leisure facilities, between ceramics, tiles, concrete, glass, metals and other typical building substrates, etc.

- Very high water resistance, high chlorine resistance (as required in swimming pools due to use of disinfecting solutions).
- Extremely high resistance to fungal attack, excellent UV and weathering resistance.
- High tear resistance, non-corrosive, high elasticity and flexibility.

Colour	Size	Code
Translucent	600 ml	701-118
Grey	600 ml	701-119
Pool Blue	600 ml	701-120

SILICONE SEALANTS

Sikasil® AP

A one part neutral curing multipurpose silicone sealant suitable for both indoor and outdoor applications.

- Provides primerless adhesion to a wide range of substrates.
- Very good UV and weathering resistance.
- Low odour.
- Non corrosive.

Colour	Size	Code
Black	300 ml	701-409
White	300 ml	701-410
Grey	300 ml	701-411
Clear	300 ml	701-412



Soudal All Purpose Silicone

Soudal All Purpose Silicone is a high grade neutral cure, fully elastic one component joint sealant which meets ISO 11600 F 25LM and ISO 11600 G 25LM.

- Very easy application, colorfast, UV-resistant.
- Stays elastic after curing.
- Available in a wide range of colours.
- Very good adhesion to many materials.
- Low odour, low modulus.
- Suitable for sanitary applications.

Colour	Size	Code
Aluminium Grey	300 ml	701-102
Black	300 ml	701-100
Bronze	300 ml	701-101




MS POLYMER SEALANTS

MS Polymer Based Sealants & Adhesives For Construction & Glazing

MS Polymer based sealants were first introduced in Japan, some 25 years ago. In this relatively short time their market share in the total Japanese sealant market has grown to an impressive 36% of the total market of elastomeric construction sealants. In Europe, MS Polymer sealants were launched in the late 1980's. The rise in popularity of MS Polymer products is due to their versatility and well-balanced properties. MS Polymer sealants are suitable for a wide range of applications in many different fields. The specific main technical properties of MS Polymer based products, which distinguish them from other sealants, are:

- **Environmental Friendliness:** these sealants and adhesives are manufactured without the use of solvents or hazardous raw materials and additives (isocyanates).
- **Safety of Use:** MS Polymer sealants safe to use for the professional applicator. They do not contain isocyanates or solvents and therefore require no special safety equipment.
- **Toolability:** MS Polymer based sealants can be tooled and extruded in almost all weather conditions, both cold and warm.
- **Weather Resistance and Durability:** Outdoor exposure tests comparing different silicone, polyurethane and MS-Polymer based sealants repeatedly give the best results to MS Polymer based sealants which show no cracking, splitting or adhesion failure after many years of exposure to the most trying conditions.
- **Non Staining:** Tests on granite, marble and many other porous materials show that a number of MS Polymer based sealants do not "bleed" into the surface and cause staining and discoloration of these materials.
- **Paintability:** MS Polymer based products provide good paintability with water based paints. Some types can be painted "wet-on-wet" immediately after application.
- **Adhesion On Many Different Substrates:** Of all elastic sealant products, MS Polymer® based sealants and adhesives have the broadest adhesion spectrum.
- **Nil CO2 Release:** Unlike PU sealants MS Polymer sealants will not "bubble" when releasing

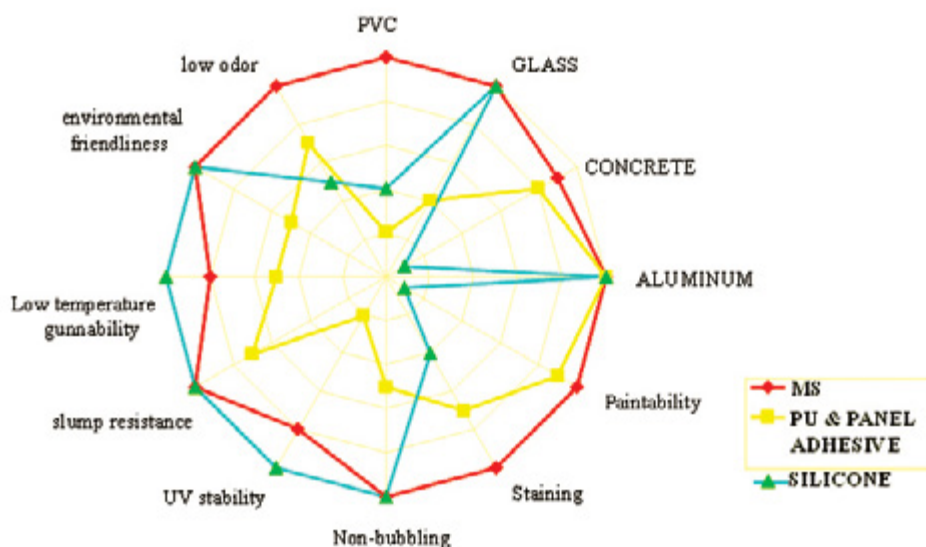

MS POLYMER SEALANTS

Bostik Xtreme Seal & Fix®

- A high performance, flexible sealant and high strength adhesive in one.
- It dries to form a permanent, flexible seal and tough bond.
- Bostik Xtreme Seal & Fix® does not require any primer to adhere to sound, dust-free, degreased surfaces. Bonds and seals just about anything to anything, including wet surfaces.
- Bostik Xtreme Seal & Fix® is waterproof, draught-proof, sandable and paintable when fully cured.
- Use to bond wood, concrete, brick, plaster, glass, ceramics, metals, rigid PVC, insulation boards and foam polystyrene, roof tiles, skirting boards, gutters, downpipes, masonry, wooden and metal doors, window frames, boats, caravans, bodywork, trailers, greenhouses and conservatories.



Colour	Size	Code
White	290ml cartridge	371-335

H.B. Fuller 720 Paintable MS Silicone

A premium quality sealant specially designed to be permanently paintable. Fuller 720 Paintable has a +/- 25% joint movement capability and can be used for interior/exterior applications.

- Isocyanate and solvent free.
- Permanently paintable.
- Excellent resistance to weathering and UV radiation, resists yellowing.
- No bubble formation when curing.
- Paintable with high build, flexible emulsion coatings.
- Does not sag or slump in joints up to 30mm.
- Strong adhesion.
- Will not corrode concrete or metals.



Colour	Size	Code
White	400 g	701-658

Soudal MS35 Seal n Stretch

Soudal Multibond MS35 is a high quality single component joint sealant with high adhesive strength based on hybrid-polymer technology.

- Good applicability and toolability, high adhesive strength.
- Permanently elastic after cure, paintable with waterbased paints.

Applications:

- Sealing and bonding in the building and construction industry.
- Sanitary and kitchen areas-resists mould growth.
- Structural bonding in vibrating constructions.
- Sealing of floor joints.
- Sealing and bonding of natural stone (marble, granite, etc.).



Colour	Size	Code
Concrete Grey	600 ml	800-010
White	600 ml	800-011

ADHESIVES - FLOORING, TIMBER, CARPET & VINYL

Bostik Ultraset HP



One part solvent and isocyanate free MS polymer based elastomeric adhesive formulated to adhere most types of wood, parquet, solid strip, engineered, bamboo and sheet timber flooring systems to flat concrete and timber subfloors, or over existing floors.

- Meets requirements EN 14293:2006 "Adhesives for bonding parquet to subfloor"
- NON Hazardous, Solvent and Isocyanate free formula.
- Very low VOC, qualifies under GEV-EMICODE as EC I (very low emissions).
- Non flammable.
- One component, no mixing and ready to use.
- Easy to spread while maintaining stable peak.
- Will not re-emulsify when in contact with moisture.
- Tested to ASTM C794 for peel adhesion to various species of Australian Hardwood.
- Remains flexible.
- Excellent initial grab and final bond strength, also excellent acoustic properties.
- Suitable over radiant heating.
- Australian made.

Recommended Uses:

- Adhering parquet, solid strip softwood and hardwood flooring, engineered flooring and bamboo flooring to concrete or timber subfloors.
- Adhering recommended acoustic underlays as an intermediate layer between subfloor and flooring system.

Colour	Size	Code
Brown	600 ml sausage	711-562
Brown	1.5 litre pail	711-561

Bostik Ultraset SF



Bostik Ultraset SF is a one part solvent free, polyurethane, elastomeric adhesive formulated to adhere most types of wood, parquet, solid strip, engineered, bamboo and sheet timber flooring systems to flat concrete and timber subfloors, or over existing floors.

- Solvent free formulation.
- One component.
- Easy to spread.
- Will not re-emulsify when in contact with moisture.
- Tested to ASTM C794 for peel adhesion to various species of Australian hardwood.
- Recommended adhesive by major timber manufacturers.
- Excellent acoustic properties.
- Zero VOC.

Colour	Size	Code
Brown	600 ml sausage	700-450
Brown	1.5 litre pail	711-560

ADHESIVES - FLOORING, TIMBER, CARPET & VINYL

Eco-Silent Mat Water Based Adhesive

- Single pack water based, trowelable adhesive for bonding Eco Silent Mat and Acoustamat acoustic underlay to suitable substrates.
- Not suitable for use in areas of constant emersion.



Colour	Size	Code
-	15 litre drum	711-856

Eco-Silent Mat Adhesive PU

- A single component, solvent free, elastomeric, moisture cured polyurethane adhesive designed for bonding Eco-Silent mat and the Acoustamat acoustic underlay to a range of substrates. Eco-Silent Mat Adhesive PU can be used for both internal and external areas.
- Eco-Silent mat adhesive PU exhibits excellent water resistance and provides high bond strength to Eco-Silent Mat and Acoustamat Acoustic underlay, fleece-backed underlay, geotextile sheeting and a range of woven and non-woven reinforcement sheet products.



Colour	Size	Code
-	10 litre drum	711-855

Mapei Ultrabond P990 1K

Single component, solvent free, ready to use flexible polyurethane adhesive with an extremely low emission level of volatile organic compounds (VOC), for all types of wooded flooring. Use to bond prefinished and traditional solid wood parquet, pre-assembled worktops and all shapes of multi-layered elements.

- Ready to use single component product, does not require catalyser and successive mixing. If stored correctly, leftover quantities.
- Suitable to floor layers allergic to epoxy-polyurethane products.
- Easy to apply, even at low temperatures. 30% higher yield compared with conventional two-component products when applied by trowel.
- Excellent straight line hold and excellent buttering on the back of tiles.
- Extremely low expansion, parquet remains flat after laying.
- Low environmental impact.

Colour	Size	Code
Brown	900 g sausage	711-536
Brown	15 kg pail	711-591



ADHESIVES - FLOORING, TIMBER, CARPET & VINYL

Mapei Ultrabond Eco™ 350



- Ultrabond ECO 350 is a superior solvent free adhesive with a Mapei proprietary acrylic polymer.
- It offers the unique flexibility of installing floor coverings after a short flash time or once the adhesive exhibits pressure-sensitive characteristics.
- This universal adhesive has extensive compatibility characteristics with floor coverings and offers superior performance on high-end commercial installations.
- It will never stain vinyl flooring.

Colour	Size	Code
Off White	15 litre	711-558

Sika SikaBond T55J



- A one part polyurethane adhesive for direct elastic bonding of timber floors.
- Features excellent elasticity, sound dampening and bead stability with a quick tack free time.
- Parquetry floors can be sanded after 12 hours.

Colour	Size	Code
Ochre	600 ml sausage	711-852
Ochre	2 kg sausage	711-583
Ochre	16 kg pail	711-584

ADHESIVES - CONSTRUCTION ADHESIVES & ANCHORS

Bostik No More Nails



A versatile general purpose construction adhesive suitable for bonding a wide variety of building materials. Bostik No More Nails is a gunnable, synthetic rubber based adhesive which exhibits excellency green strength, flexibility, good temperature resistance and good slump resistance for both interior and exterior use.

- No More Nails conforms to AS2329-Mastic Adhesive for fixing and wallboards.
- Versatile-multiple uses. Fast initial grab, easy clean up-use water.
- Ideal for use with under floor heating systems, one part without mixing.
- High bond strength and heat resistance when cured.
- No fumes water based. Strong adhesion to metal when other surface is porous.
- Bridges gaps up to 5mm - effective when used on uneven surfaces.
- Reduces squeaking associated with nail ride in floors, also reduces number of mechanical fasteners required to install floors or walls.

Colour	Size	Code
Brown	320 g cartridge	711-654

ADHESIVES - CONSTRUCTION ADHESIVES & ANCHORS

HB Fuller Max Bond Fast Grip Construction Adhesive

- A water based adhesive that is easy to use and provides strong initial grab.
- Versatile-multiple uses, fast initial grab, easy clean up use water.
- Ideal for use with under floor heating systems, high bond strength and heat resistance when cured.
- One part without mixing.
- No fumes water based.
- Strong adhesion to metal when other surface is porous.
- Bridges gaps up to 5mm - effective when used on uneven surfaces.
- Reduces squeaking associated with nail ride in floors.
- Reduces number of mechanical fasteners required to install floors or walls.



Colour	Size	Code
Pale Brown	600 ml sausage	710-241

Sika AnchorFix - 1 Fast Cure Anchoring Adhesive

Designed for standard applications with low to medium loads. A two component cartridge system, consisting of a 2 chamber laminate film capsule inside a standard cartridge with a static mixer. This ensures consistent mixing quality with no hand mixing required.

- Apply with a standard application guns.
- Very fast curing.
- Ideal for anchoring rebars and threaded rods.
- Can be used for overhead applications without temporary fixing of anchor.



Colour	Size	Code
Light Grey	300 ml cartridge	204-053

Sika Anchorfix - 3 Epoxy Resin-Based Anchoring Mortar

No shrinkage epoxy mortar for anchoring into damp and wooden substrates and for large holes.

- Shrinkage free hardening.
- Ideal for filling and anchoring in big holes.
- Can be used for wood anchoring.
- Use with a standard cartridge gun.
- Non-sag.



Colour	Size	Code
Grey	250 ml cartridge	204-052

ADHESIVES - CONSTRUCTION ADHESIVES & ANCHORS

Sika Anchorfix Sleeves



- For use with Sika Anchorfix range of products.

Description	Size	Code
Sika Anchorfix Sleeves	12mm x 50mm	902-250
Sika Anchorfix Sleeves	15mm x 85mm	902-251

ADHESIVES - GENERAL ADHESIVES

Mapei® Adesilex PG4



Two- component, thixotropic, epoxy adhesive with modified rheology for bonding Mapeiband and Mapeiband TPE, PVC braces, Hypalon and for structural bonding.

- Adesilex PG4 is particularly recommended both for bonding synthetic braces used in waterproofing applications and for repairing, sealing and bonding elements in concrete, reinforced concrete, metal and natural stone.
- Waterproofing wide joints by bonding pre-formed straps (PVC, Hypalon, Mapeiband and Mapeiband TPE) to the concrete.
- Sealing large cracks in industrial floors subject to traffic.
- Bonding slabs and pipes in concrete and fibre-reinforced concrete.
- Rigid structural bonding of prefabricated concrete elements.

Colour	Size	Code
Grey	6 kg kit	204-061

FIRE RATED SEALANTS

Bostik Fireban One



Bostik Fireban One is a fire rated intumescent, low modulus, one component, and Class-A polyurethane sealant.

- When cured it will form a tough, flexible fire rated seal capable of cyclic expansion and compression movement of 50% ($\pm 25\%$) of the original installed joint width.
- Bostik Fireban One is resistant to normal weathering conditions such as rain, sunlight, snow, sleet, ozone, atmospheric contamination and pollution. Its excellent weather ability enables it to retain its original properties after years of exposure.
- Fire Rated up to 4 hrs (1530.4-2005), low modulus 50 % ($\pm 25\%$).
- Acoustic rated, excellent durability.
- One component, no mixing required. Paintable (refer limitations), non staining.
- Does not support fungal growth.

Colour	Size	Code
Limestone	600 ml	700-404

FIRE SOUND

FIRE RATED ACOUSTIC SEALANT



- ✓ **IDEAL FOR SEALING EXPANSION JOINTS & SERVICE PENETRATIONS IN FIRE RATED WALL & FLOOR SYSTEMS**
- ✓ **METAL, CONCRETE, AERATED CONCRETE & MASONRY, PLASTERBOARD & CABLE COVERINGS**
- ✓ **UP TO 4 HOUR RATING (AS1530.4-1990)**
- ✓ **ACOUSTIC RATED (STC 65)**
- ✓ **ISOCYANATE FREE**
- ✓ **LOW ODOUR**
- ✓ **LOW VOC 31G/LTR**
- ✓ **PAINTABLE**
- ✓ **INTERIOR / EXTERIOR**
- ✓ **AVAILABLE IN GREY & WHITE**
- 450G CTG, 600ML SSG & 10L BUCKET (GREY ONLY)**

FIRE RATED SEALANTS

Bostik Firecaulk



- Single component, non-sag, fire rated acrylic based gunnable sealant.
- A general purpose product for construction joints and the sealing of service penetrations in plasterboard, concrete floors and masonry wall constructions.
- Specifically manufactured for sealing low movement interior joints (less than 5%).

Colour	Size	Code
Limestone	600 ml sausage	710-240

H.B. Fuller Firesound



A fire and acoustic, one part, water based construction sealant for sealing joints and penetrations where fire resistance is required, or where an acoustic rated sealant is required.

- Fire rating for gaps up to 50mm.
- Intumescent, expands when exposed to fire or heat above 90°C.
- +/- 20% joint movement capability.
- Water clean up, isocyanate free.
- Non toxic, contains no heavy metals such as antimony, cadmium, lead or mercury.
- Excellent acoustic properties, UV stability and weather resistance.
- Low odour, paintable, also can be applied to damp surfaces.

Colour	Size	Code
Grey	600 ml sausage	710-360
Grey	10 litre pail	710-243

Sika Boom® FR



Sika Boom® FR is a one part, high yield, fire rated, polyurethane foam.

Used for:

- Filling gaps and voids.
- Blocking out dust, noise and draft.
- Thermal installation of window and door frames.
- Thermal insulation of pipes.
- High yield, easy application.
- Resistant to temperatures ranging from -40°C to +100°C.
- Suitable for application at lower temperatures (+5°C).
- Fast curing, age resistant.
- CFC/HFC free.


Colour	Size	Code
Light Red	750ml can	711-500

BACKING ROD

Open & Closed Cell Backing Rod







- All rolls of Open and Closed Cell Backing Rod can be bought by the meter.

Colour	Type	Size	Code
Orange	Open	10mm x 210 metre	750-010
Orange	Open	10mm x 1 metre	750-010-CUT
Orange	Open	16mm x 150 metre	750-016
Orange	Open	16mm x 1 metre	750-016-CUT
Orange	Open	22mm x 100 metre	750-022
Orange	Open	22mm x 1 metre	750-022-CUT
Orange	Open	29mm x 60 metre	750-029
Orange	Open	29mm x 1 metre	750-029-CUT
Orange	Open	38mm x 30 metre	750-038
Orange	Open	38mm x 1 metre	750-038-CUT
Yellow	Open	20mm x 20mm x 2 metre	750-254
Yellow	Open	30mm x 30mm x 2 metre	750-253
White	Closed	6mm x 250 metre	750-106
White	Closed	6mm x 1 metre	750-106-CUT
White	Closed	10mm x 250 metre	750-110
White	Closed	10mm x 1 metre	750-110-CUT
White	Closed	13mm x 50mm	750-112
White	Closed	13mm x 1 metre	750-112-CUT
White	Closed	15mm x 50 metre	750-115
White	Closed	15mm x 1 metre	750-115-CUT
White	Closed	20mm x 50 metre	750-120
White	Closed	20mm x 1 metre	750-120-CUT
White	Closed	25mm x 50 metre	750-125
White	Closed	25mm x 1 metre	750-125-CUT
White	Closed	30mm x 50 metre	750-130
White	Closed	30mm x 1 metre	750-130-CUT
White	Closed	40mm x 2 metre	750-251
White	Closed	50mm x 2 metre	750-252

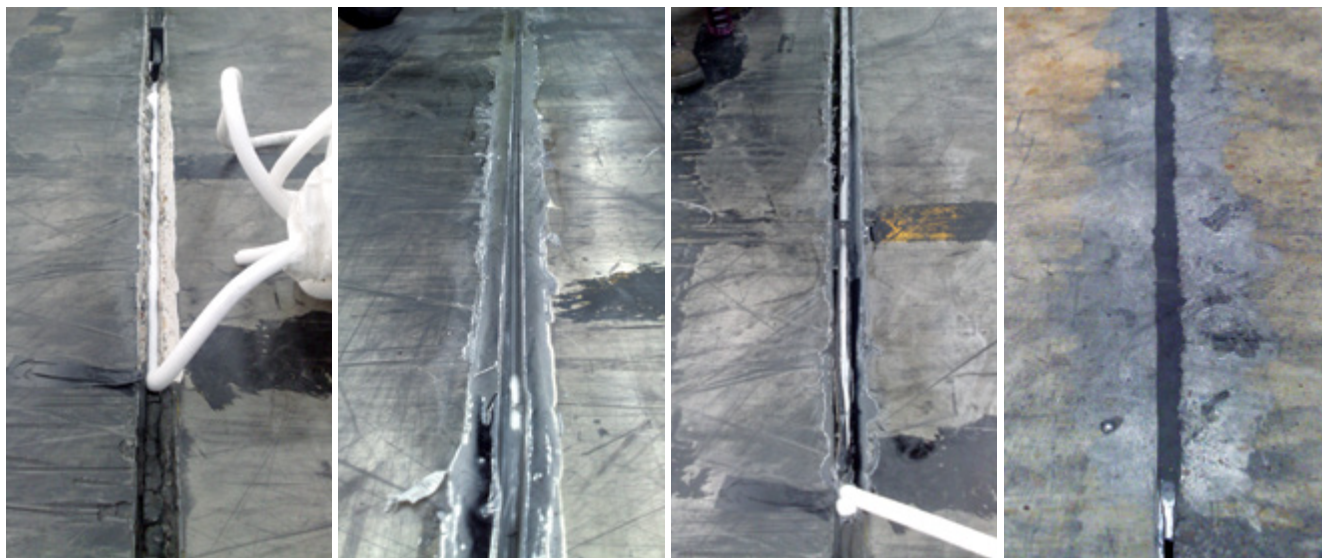

ULTIMATE FLOOR WASTE

Grate **screws flat to flange** significantly reducing tile bed height requirements
Advanced **pivoting mechanism** for a superior fit on uneven tile beds

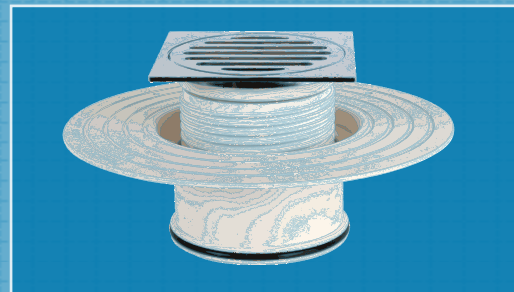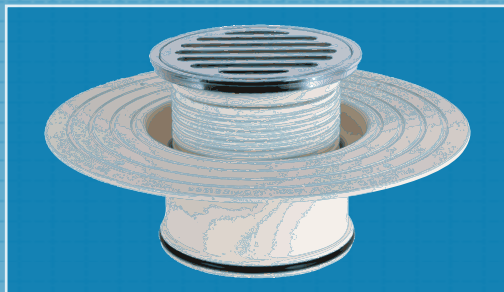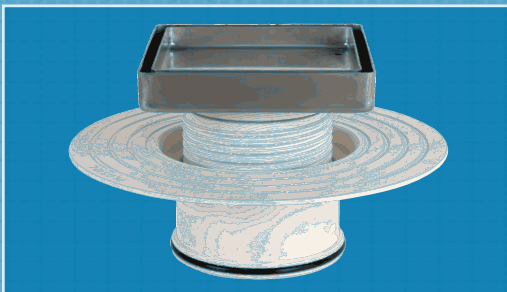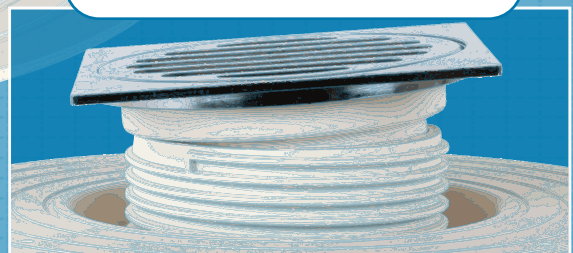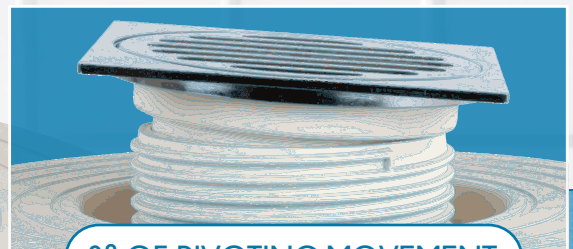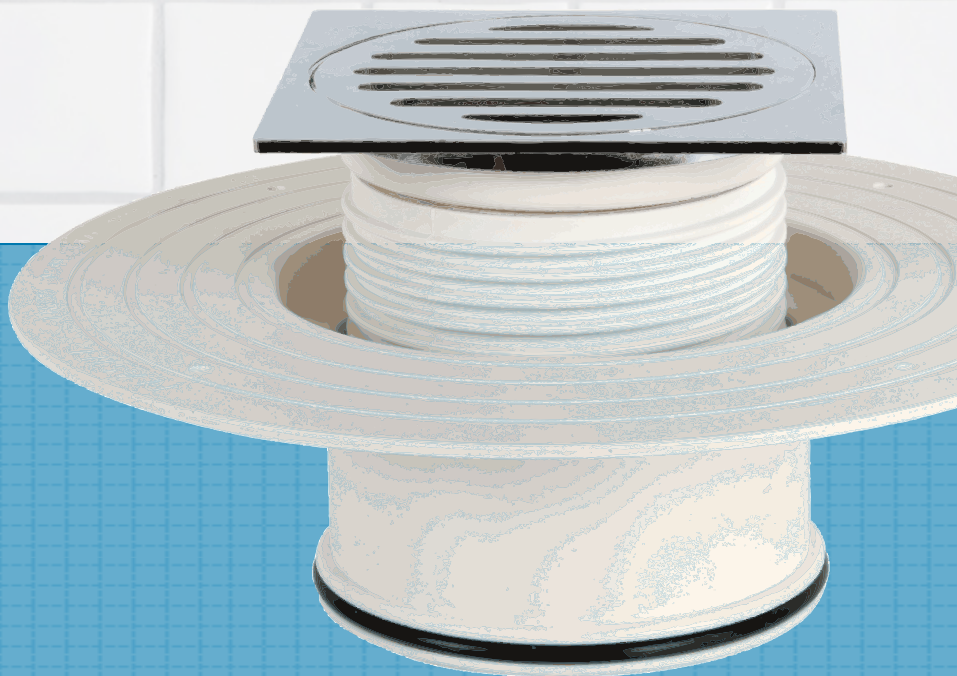

AVAILABLE NOW IN ALL BAYSET BRANCHES

WWW.PLASTEC.COM.AU

LIKE US ON FACEBOOK

