



Silicon Dual Schottky Diode

- DBS mixer applications up to 12 GHz
- Low noise figure
- Low barrier type

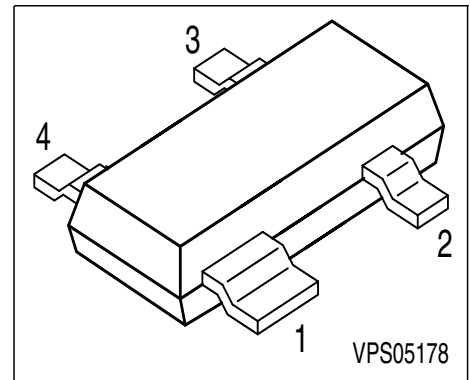

ESD: Electrostatic discharge sensitive device, observe handling precaution!

Type	Marking	Pin Configuration				Package
BAT 15-099	S5s	1 = C1	2 = A2	3 = C2	4 = A1	SOT-143

Maximum Ratings

Parameter	Symbol	Value	Unit
Diode reverse voltage	V_R	4	V
Forward current	I_F	110	mA
Total power dissipation, $T_S \leq 55^\circ\text{C}$	P_{tot}	100	mW
Operating temperature range	T_{op}	-55 ... 150	$^\circ\text{C}$
Storage temperature	T_{stg}	-55 ... 150	$^\circ\text{C}$

Thermal Resistance

Junction - ambient ¹⁾	R_{thJA}	≤ 1090	K/W
Junction - soldering point	R_{thJS}	≤ 930	


1) Package mounted on alumina 15mm x 16.7mm x 0.7mm

Electrical Characteristics at $T_A = 25\text{ }^{\circ}\text{C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC characteristics					
Breakdown voltage $I_{(BR)} = 5\text{ }\mu\text{A}$	$V_{(BR)}$	4	-	-	V
Forward voltage $I_F = 1\text{ mA}$	V_F	-	0.23	-	
$I_F = 10\text{ mA}$		-	0.32	-	
Forward voltage matching $I_F = 10\text{ mA}$	ΔV_F	-	-	20	mV
AC characteristics (per diode)					
Diode capacitance $V_R = 0\text{ V}$, $f = 1\text{ MHz}$	C_T	-	-	0.35	pF
Forward resistance $I_F = 10\text{mA} / 50\text{mA}$	R_F	-	5.5	-	Ω


Forward current $I_F = f(V_F)$

T_A = Parameter

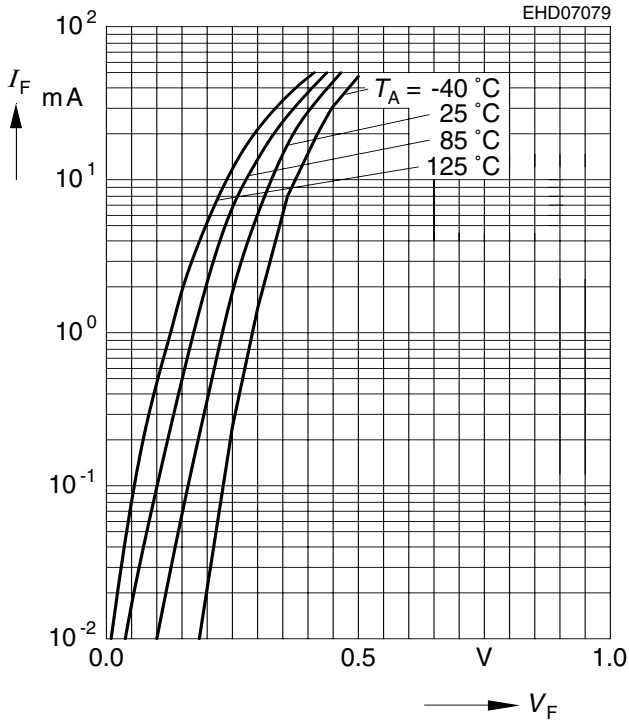


Forward current $I_F = f(T_A^*; T_S)$

* Package mounted on alumina

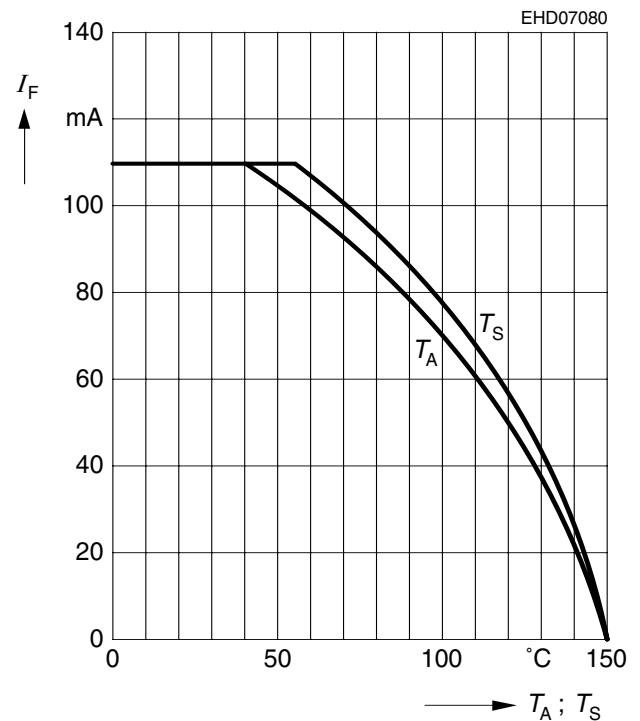


Reverse current $I_R = f(V_R)$

T_A = Parameter

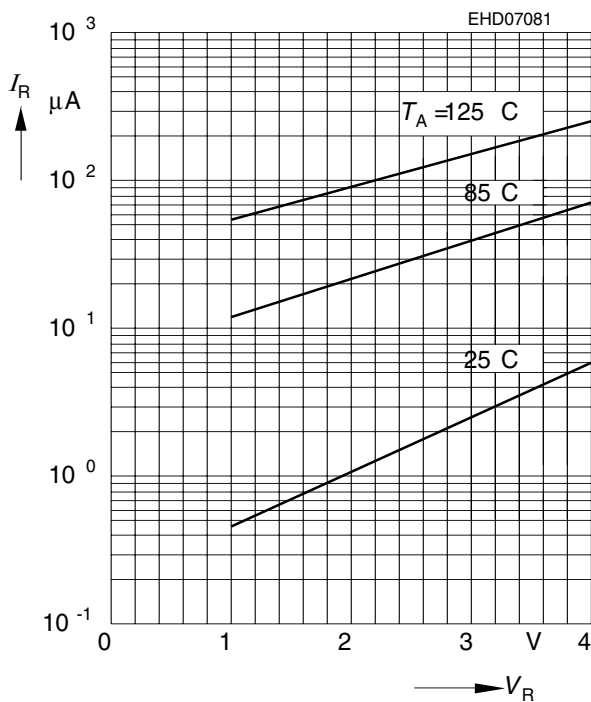

Diode capacitance $C_T = f(V_R)$

$f = 1\text{MHz}$

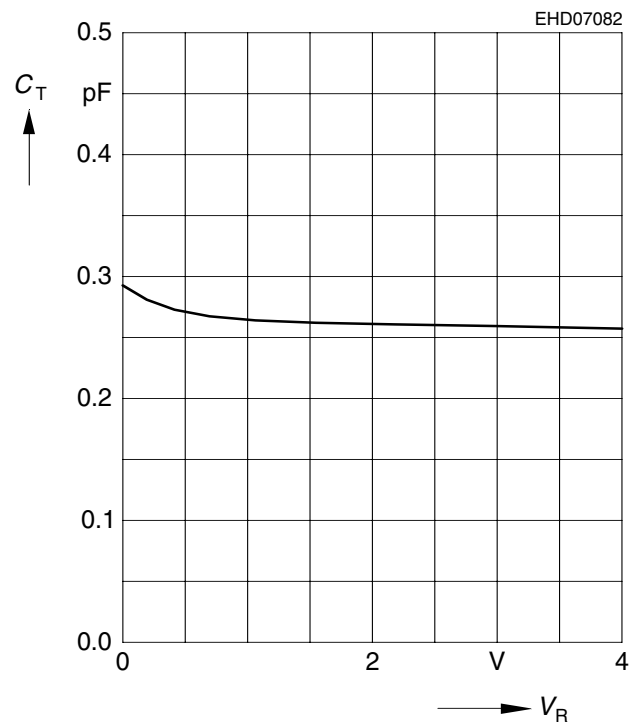

S₁₁-Parameters

Typical impedance characteristics (with external bias I and $Z_0 = 50\Omega$)

f	$I = 0.02 \text{ mA}$		$I = 0.05 \text{ mA}$		$I = 0.1 \text{ mA}$		$I = 0.2 \text{ mA}$		$I = 0.5 \text{ mA}$	
GHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
1	0.94	-16.4	0.87	-16.6	0.77	-16.4	0.59	-17.2	0.19	-16.7
2	0.93	-33.8	0.88	-33.8	0.77	-34.5	0.58	-35.2	0.15	-36.1
3	0.92	-53.8	0.86	-54.5	0.75	-54.1	0.58	-56.1	0.13	-64.8
4	0.91	-74.3	0.84	-75.3	0.72	-76.4	0.51	-78.4	0.11	-104.8
5	0.91	-96.6	0.84	-97.6	0.72	-99.1	0.53	-102.3	0.15	-135.7
6	0.91	-115.4	0.84	-116.7	0.73	-118.7	0.53	-122.9	0.18	-160.9
7	0.91	-131	0.84	-132.3	0.73	-134.1	0.54	-138.1	0.2	-168.8
8	0.91	-143	0.84	-144.5	0.73	-146.8	0.55	-150.5	0.81	179.4
9	0.91	-155.6	0.83	-150.2	0.71	-159.7	0.53	-163.9	0.18	179.4
10	0.9	-167.3	0.83	-169.7	0.71	-178.8	0.51	-175.8	0.14	151.2
11	0.89	175.5	0.8	172.6	0.7	170	0.45	164.9	0.09	105.5
12	0.88	175.5	0.76	146.5	0.62	142.8	0.39	134.2	0.14	43.6

$$S_{11} = f(f, I)$$

