


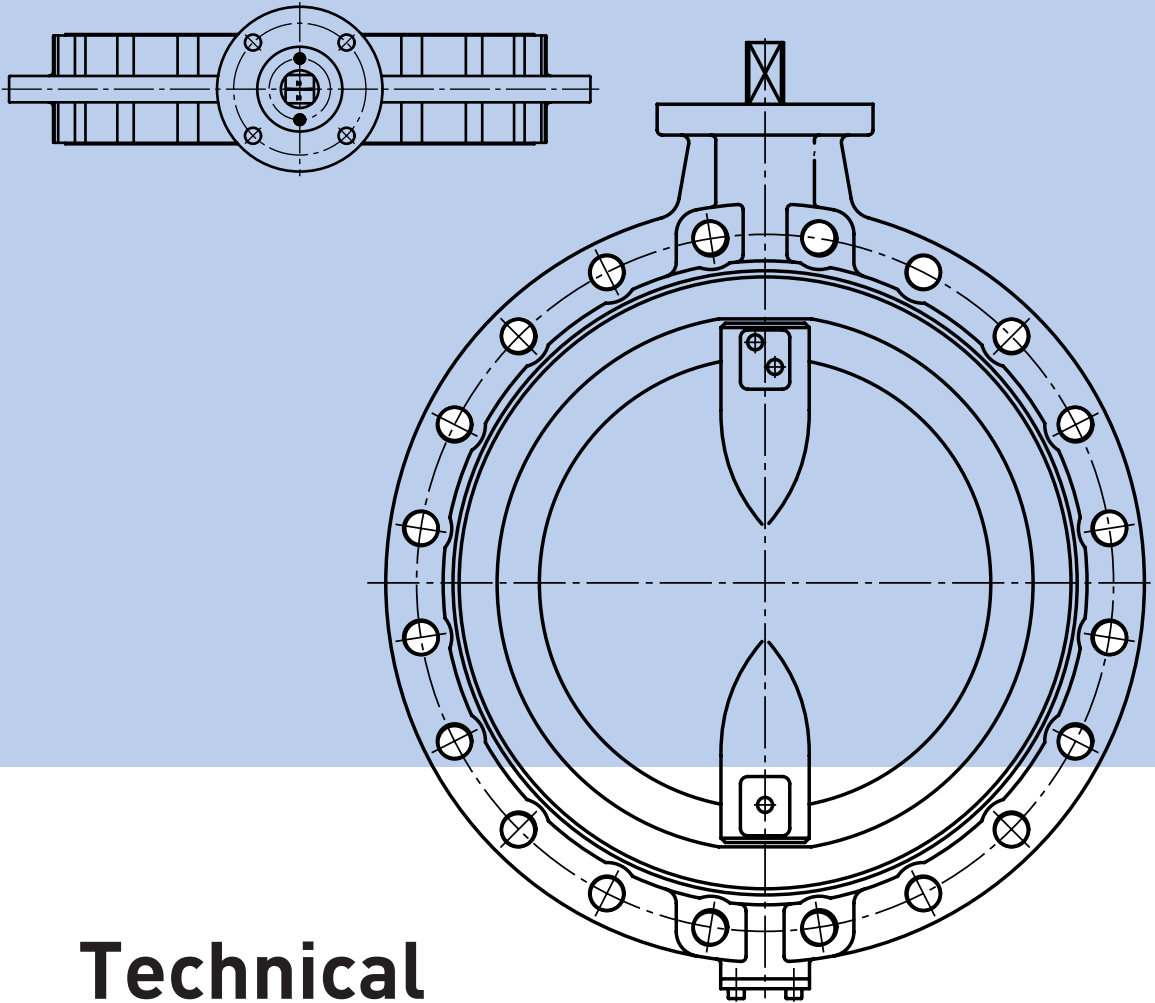

Chemical 	Petrochemical 
Sugar 	Food & Beverages 
Paper 	Water 
Cement 	HVAC 
District Heating 	Ship Building 
Oil & Gas Processing 	Tank Store 
Energy & Power Supply 	On-Off Shore 

Technical Documentation

Centric Rubberlined Butterfly Valves
Manual Operations
Check Valves

Contents

3	1	WOUTER WITZEL EUROVALVE COMPANY INFO
3	1.1	General
3	1.2	Sales and distribution
4	1.3	Product philosophy
4	2	QUALITY ASSURANCE
4	2.1	Quality assurance system
4	2.2	Type approvals
5	2.3	PED Qualification
5	2.3.1	Certificate
6	2.3.2	Classification of valves
7	2.3.3	Material inspection certificates
7	2.4	Testing inspection certificates
8	3	PRODUCT LINES
8	3.1	Centric butterfly valves
8	3.1.1	Flangeless wafer valves
8	3.1.2	Lugged and U-section wafer valves
9	3.1.3	Double flanged valves
10	3.2	Manual operators
11	3.3	Power actuators
12	3.4	Check valves
13	4	GENERAL TECHNICAL INFORMATION
13	4.1	Face to face dimensions
14	4.2	Seat tightness rates
15	4.3	Flow calculations
16	4.4	Mating flanges
16	4.4.1	Flange types
16	4.4.2	ISO PN flanges
17	4.4.3	ASME flanges
18	4.4.4	JIS flanges
19	4.4.5	Flange bolting length
20	4.5	Conversion units
21	5	CENTRIC BUTTERFLY VALVES: Product information
21	5.1	How to use a Wouter Witzel butterfly valve
22	5.2	Installation possibilities
23	5.3	Butterfly valve design
23	5.3.1	The concept
23	5.3.2	Design description
24	5.3.3	Design benefits and features
25	5.4	Materials and coatings
25	5.4.1	Body materials
25	5.4.2	External body coating
26	5.4.3	Body lining materials
27	5.4.4	Disc materials
27	5.4.5	Shaft and pin materials
28	5.5	Maximum allowable pressure (PS)
29	5.6	Valve operating torques

30	6 PRODUCT SHEETS
30	6.1 Centric butterfly valves
31	6.1.1 Flangeless wafer valves
31	6.1.1.1 EVS 50 – 600
33	6.1.1.2 EVS 700 – 1400
35	6.1.1.3 EVL 50 – 300
37	6.1.1.4 EVCS 50 – 300
39	6.1.2 Lugged and U-section valves
39	6.1.2.1 EVBS 50 – 300
41	6.1.2.2 EVBLS 50 – 200
43	6.1.2.3 EVTLS 50 – 1200
45	6.1.2.4 EVUS 700 – 1600
47	6.1.3 Flanged valves
47	6.1.3.1 EVML 80 – 800
49	6.1.3.2 EVMS 350 – 1000
51	6.1.3.3 EVFS 40 – 1000
53	6.1.3.4 EVFS 1200 – 2000
55	6.1.3.5 EVFL 50 – 1000
57	6.1.3.6 EVFL 1200 – 1500
59	6.2 Special executions and accessories
59	6.2.1 Halar coated disc
59	6.2.2 Ductile iron disc with corrosion resistant rim
60	6.2.3 Polished stainless steel disc
60	6.2.4 Silicone free valve
60	6.2.5 Copper free materials
61	6.2.6 Support legs
61	6.2.7 Leakage detection
61	6.2.8 ATEX approved valves
62	6.2.9 Mounting kit for actuators
63	6.3 Manual operators
63	6.3.1 General
64	6.3.2 Lever, type L
65	6.3.3 Gearbox, aluminium casing
66	6.3.4 Gearbox, cast iron casing
67	6.3.5 Gearbox for buried service
68	6.3.6 Gearbox extensions
69	6.4 Check valves ECV 50 – 600
69	6.4.1 General
69	6.4.2 Design
71	6.4.3 Installation
72	6.4.4 Materials
73	6.4.5 Flow characteristics (Kv)
74	7 INFORMATION TO BE GIVEN WHEN ORDERING
	Checklist

1 PCC EUROVALVE COMPANY INFO

1.1 GENERAL

Wouter Witzel EuroValve located in Losser, The Netherlands, develops, designs, manufactures and distributes a wide range of industrial valve types: centric and High Performance butterfly valves, check valves, remote controlled hydraulic, pneumatic and electric actuators and accessories. From standard designs that are available from stock to custom-made products for specific applications.

Wouter Witzel EuroValve BV
Industrieterrein De Pol 12
NL-7581 CZ Losser
Tel.: +31 (0)53 536 95 36
Fax: +31 (0)53 536 95 00
e-mail: info@wweurovalve.nl
www.wweurovalve.nl

1.2 SALES AND DISTRIBUTION

In the Netherlands and Germany, Wouter Witzel EuroValve products are supplied to the end user through own sales offices. In other countries Wouter Witzel EuroValve is represented by selected distributors and stock keeping agents. Wouter Witzel EuroValve is a member of the AVK Group.

1.3 PRODUCT PHILOSOPHY

The Wouter Witzel product philosophy is based on the principle objective of having the possibility to offer, out of a wide spectrum of industrial valves and actuators, the optimum solution for each specific market segment and application.

The above principles have been at the core of Wouter Witzel EuroValve business development over the years and is the basis of the company's high reputation and global expansion.

2 QUALITY ASSURANCE

2.1 QUALITY ASSURANCE SYSTEM

All valves are designed, manufactured and sold in accordance with ISO 9001/EN 29001 and Module H of the European legislation for Pressure Equipment (PED).

BSI-QA has certified the company's QA system at an early stage (no. FM 2200).



2.2 TYPE APPROVALS

Wouter Witzel® centric butterfly valves are approved for application in a number of market areas by many international type approvals. The most important ones are listed in the following table.

MARKET AREA	TYPE APPROVALS
Water supply	KIWA – The Netherlands DVGW – Germany WRAS – United Kingdom SVGW – Switzerland
Gas supply	DVGW – Germany British Gas – United Kingdom
Shipbuilding	LRS – United Kingdom DNV – Norway ABS – USA BV – The Netherlands GL – Germany RINA – Italy NKK – Japan RMR – Russia CCS – China CRS – Croatia
Fire protection systems	FM – USA UL – USA VdS – Germany APSAD – France
(Petro)chemical industries, steel works and mining	RWTÜV – Germany (TA-Luft) Bergbau Amt – Germany (anti-static) Stoomwezen – The Netherlands GOSST – Russia KNPC(KSC) – Kuwait Petrobas – Brazil
General approval confirming for standard compliance	Kitemark Licence acc. BS 5155 – United Kingdom CSTB-France for hevac applications
Europe (general)	Pressure Equipment Directive certification Atex 95 approval

2.3 PED QUALIFICATION

2.3.1 CERTIFICATE

In the European Economic Area the Pressure Equipment Directive (PED) 97/23/EC is mandatory. Therefore Wouter Witzel Eurovalve has been PED (Module H) certified by BSI on January 2006.

EC Certificate	
of Conformity  No. CE 57126 Issued to: Wouter Witzel EuroValve B.V Industrieterrein De Pol 12 NL-7581 CZ Losser Netherlands  In respect of: Pressure Accessories On the basis of our examination under the requirements of Council Directive 97/23/EC <u>Module H</u> of the Pressure Equipment Directive, as transposed into UK law by the Pressure Equipment Regulations SI 1999 2001. For and on behalf of the British Standards Institution, a Notified Body for the above Directive (Notified Body Number 0086):  Anne Boyd, Managing Director, BSI Product Services First Issued: 6 Dec 2001 Date: 25 Jan 2006 Page: 1 of 2 Products produced outside the scope of this certificate will not be covered by the requirements of the Directive and the application of the BSI Notified Body, Number 0086, will be illegal. BSI must be informed without delay if the said products are required to be included in the scope. This certificate remains valid as long as compliance with the requirements of the Directive are maintained.  Product Services BSI Product Services Maylands Avenue, Hemel Hempstead, Hertfordshire HP2 4SQ United Kingdom Tel +44 (0)1442 230442 www.bsi-global.com BSI Group Headquarters: 389 Chiswick High Road, London W4 4AL Tel: (0)208 996 9000 P5089/0205/EP	

2.3.2 CLASSIFICATION OF VALVES

Outside the European Union	Inside the European Union	
Valves brought on the market outside the European Union do not need a PED certification	Low hazardous applications: Pressure $\leq$ 0,5 bar. Small product: sizes x pressure Excluded applications (eg. Shipbuilding)	More hazardous applications: Different classifications determined by: • Valve size • Allowable pressure • Type of fluid
Valves without CE certification	Valves without CE certification	Valves with PED certification (categories I, II, III).
No CE marking	No CE marking	CE marking mandatory

According to the PED regulations valves can be classified for safety reasons on their size DN, allowable pressure PS and hazard of the fluid. This classification is the basis for material selection, material inspection documentation and manufacturing quality system.

Types of fluid:

- G1: Dangerous gas (explosive, flammable, toxic, oxidizing).
- G2: Non dangerous gas.
- L1: Dangerous liquids (explosive, flammable, toxic, oxidizing).
- L2: Non dangerous liquids.

A purchaser should indicate when ordering the required category with help of the following table:

Classification table of valve categories:

Fluid:	PS 2,5 bar				PS 6 bar				PS 10 bar				PS 16 bar			
	G1	G2	L1	L2	G1	G2	L1	L2	G1	G2	L1	L2	G1	G2	L1	L2
DN	CATEGORY															
50													I	S	S	S
65													II	I	S	S
80													II	I	S	S
100													II	I	S	S
125													II	I	S	S
150													II	I	II	S
200									II	I	S	S	II	I	II	S
250					II	I	S	S	II	I	I	S	III	II	II	S
300					II	I	S	S	II	I	I	S	III	II	II	S
350					II	I	I	S	II	I	I	S	III	III	II	I
400					III	I	I	S	III	II	I	S	III	III	II	I
450	III	I	S	S	III	I	I	S	III	II	I	S	III	III	II	I
500	III	I	S	S	III	I	I	S	III	II	I	S	III	III	II	I
600	III	I	S	S	III	II	I	S	III	III	I	S	III	III	II	I
700	III	I	S	S	III	II	I	S	III	III	I	S	III	III	II	I
750	III	I	S	S	III	II	I	S	III	III	I	S	III	III	II	I
800	III	I	S	S	III	II	I	S	III	III	I	S	III	III	II	I
900	III	I	I	S	III	III	I	S	III	III	I	S	III	III	II	I
1000	III	I	I	S	III	III	I	S	III	III	I	S	III	III	II	I
1100	III	I	I	S	III	III	I	S	III	III	I	S	III	III	II	I
1200	III	I	I	S	III	III	I	S	III	III	I	S	III	III	II	I
1400	III	I	I	S	III	III	I	S	III	III	I	S	III	III	II	I
1500	III	II	I	S	III	III	I	S	III	III	I	S	III	III	II	I
1600	III	II	I	S	III	III	I	S	III	III	I	S	III	III	II	I
1800	III	II	I	S	III	III	I	S	III	III	I	S				
2000	III	II	I	S	III	III	I	S	III	III	I	S				

Note: S: Sound Engineering Practice without CE marking.

2.3.3 MATERIAL INSPECTION CERTIFICATES

All (main) pressure bearing parts of the valves are manufactured with the following inspection documentation for material traceability (in accordance with the PED regulations).

EN 10204: 2000 Metallic materials – Types of inspection certificates		
Category 0 (no CE marking)	Category I	Category II and III
Non-Specific Inspection & test	Non-Specific Inspection & test	Product-Specific Inspection & test
2.2	2.2	3.1B

Copies of the material inspection certificates of the main pressure bearing parts, eg body castings, can be ordered on request.

2.4 TESTING INSPECTION CERTIFICATES

All valves are pressure and functional tested after assembly according to internal quality procedures which comply with international standards. Testing inspection certificates according ISO 10474/EN 10204, 2.3, 3.1B, 3.1C can be submitted on request.

3 PRODUCT LINES

Industrial centric butterfly valves up to DN 2000 (80"), actuators and check valves are listed in the product survey below.

Detailed product leaflets are available on our website:
www.wweurovalve.nl.

3.1 CENTRIC RUBBERLINED BUTTERFLY VALVES

Wouter Witzel® centric butterfly valves incorporate important differences, aimed at achieving excellent product performance, high reliability, and low whole life cost.

- For use as isolating or regulating valve in a wide spectrum of industrial processes, eg: water supply (water works and transport pipelines), ship-building, (petro)chemical industries, hevac, gas systems, fire fighting systems, environment control etc.
- The Wouter Witzel range of centric butterfly valves has integral bonded rubber linings and is bi-directional tight shut off.
- Approved by different international certification bodies (e.g. WRC, BSI, DVGW see chap. 2).
- Installation in flanged piping systems: PN6, 10, 16, 20, ANSI Class 150, JIS etc.
- With manual or automatic operation.
- PN25 on request.

3.1.1 FLANGELESS WAFER VALVES



In line installation
 Design pressure max. 16 bar.
 DN 50 - 1400 (2" - 56").



In line installation
 Design pressure max. 16 bar.
 DN 80 - 300 (3" - 12").



In line installation
 Design pressure max. 16 bar.
 DN 50 - 300 (2" - 12").

3.1.2 LUGGED AND U-SECTION WAFER VALVES

RANGE EVBS

Semi-lug wafer type



In line and dead end installation
Design pressure max. 16 bar.
DN 50 - 300 (2" - 12").

RANGE EVBLS


Semi-lug wafer type
with long neck



In line and dead end installation
Design pressure max. 16 bar.
DN 50 - 200 (2" - 8").
Long neck for insulation.

RANGE EVTLS


Tapped lug wafer type

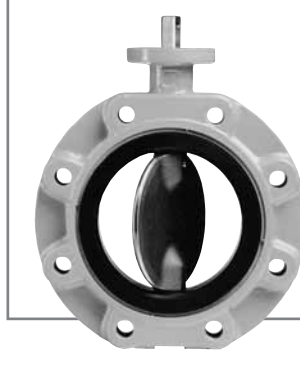

In line and dead end installation
Design pressure max. 16 bar.
(25 bar on request)
DN 50 - 1200 (2" - 48").

RANGE EVUS

U-section wafer type
(with flanges)

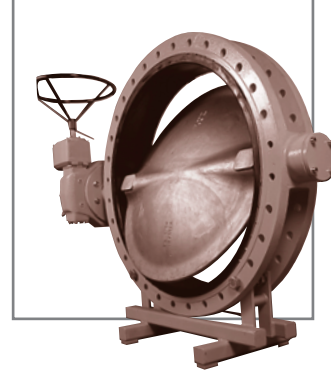


In line and dead end installation
Design pressure max. 10 bar.
DN 700 - 1600 (28" - 64").

3.1.3 FLANGED VALVES

RANGE EVML


Single flanged wafer type
(long)



In line and dead end installation
Design pressure max. 16 bar.
(25 bar on request)
DN 80 - 800 (3" - 32").

RANGE EVMS


Single flanged wafer

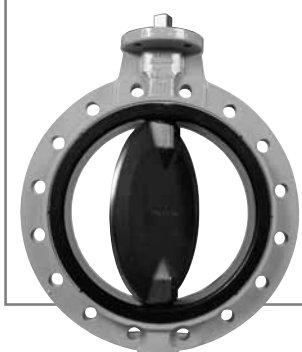

In line and dead end installation
Design pressure max. 16 bar.
Bi-directional tight shut-off.
DN 350 - 1000 (14" - 40").

RANGE EVFS

Double flanged type



In line and dead end installation
Design pressure max. 16 bar.
(25 bar on request)
DN 40 - 2000 (2" - 80").

RANGE EVFL

Double flanged type (long)



In line and dead end installation
Design pressure max. 16 bar.
DN 50 - 1500 (2" - 60").


3.2 MANUAL OPERATORS

For manual operation of butterfly valves. Mounting possibilities on all types of Wouter Witzel butterfly valves for use in isolating or regulating duty in different environmental circumstances.

LEVER AND WORMGEAR

LEVER

Quick manual valve operation

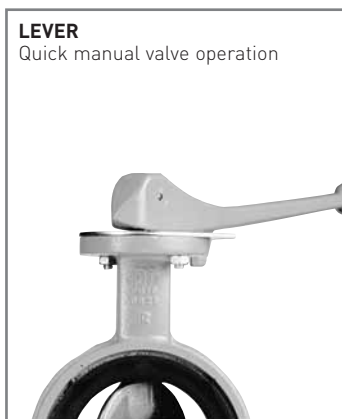

Design:
Lift and turn operation.
Spring activated locking.
Lever parallel to disc.
Notch plate for 10 positions.
Valve sizes up to DN 300 (12").

WORMGEAR

Easy manual valve operation



Design:
Self locking wormgearing.
Handwheel or T-Key operation.
Adjustable end stops.
Position indicator.
Valve sizes up to DN 2000 (80").
Different options available.

Note for sizes <DN 400:

When wormgears are mounted by third parties, an intermediate flange plate should be used between mounting flange and wormgear. These plates can be supplied by Wouter Witzel Eurovalve®.

3.3 POWER ACTUATORS

Different pneumatic, electric and hydraulic actuators can be supplied on request. Ask the special actuation catalogue.

Mounting possibilities on all types of butterfly valves for use in isolating or regulating service.


Different makes and options available for most environmental and/or hazardous duties.

PNEUMATIC ACTUATOR

Double acting or spring return




ELECTRIC ACTUATOR

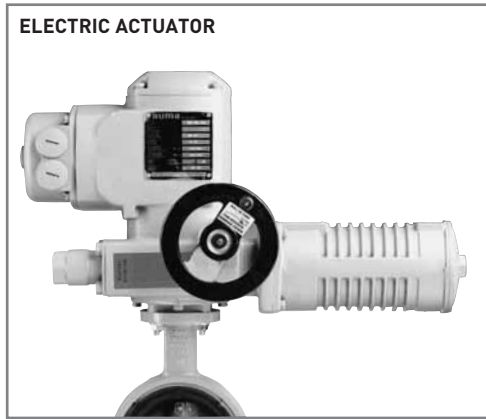

HYDRAULIC ACTUATOR

Double acting or spring return

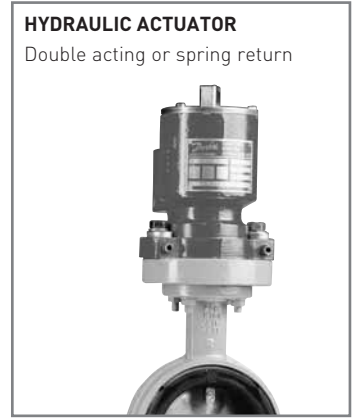

Design:

Different types available.

* Rack and pinion construction, compact and short stroke

* Heavy duty execution with long stroke rack and pinion construction.

Available as double acting, spring to close or spring to open executions.

Included position indication.

Ideal for on/off as well as modulating duties.

Design:

Electrical AC or DC motor with gear unit (self locking).

Limit switches for open and close stroke adjustment.

Position indicator.

Emergency operation by handwheel.

Note:

Most actuators require an external relay box

Remark applicable to valve sizes up to DN 400:

When actuators are mounted by third parties, an intermediate plate should be clamped between mounting flange and actuator. These plates can be supplied by Wouter Witzel Eurovalve®

Design:

Compact designs. Not self locking. Rotary type or linear type depending on the make.

Two way stroke adjustment.

Position indicator.

3.4 CHECK VALVES

For use as a back flow prevention device in water supply systems, irrigation, heating systems, ship building, industrial processes.

Installation in flanged piping systems: PN6, 10, 16, ANSI Class 150.

Approved by different international certification bodies eg DVGW, Lloyds.

RANGE ECV

Flangeless wafer type



Design:

Bonded rubberseat in body.

Self acting pivoting double disc.

Design pressure 16 bar.

Uni-directional tight shut-off.

DN 50 - 600 (2" - 24").

4 GENERAL TECHNICAL INFORMATION

4.1 FACE TO FACE DIMENSIONS (MM)

Butterfly valves are designed with face to face dimensions according international standards.

		Wafer valve types PN 6 / 10 / 16 / 25			Double flanged valves	
		Basic series 20	Basic series 25	Basic series 16	Basic series 13	Basic series 14
		EN 558 / 20 ISO 5752 / 20 DIN 3202, K1 API 609 ASME B 16.10, tab. 9, col.3/4	EN 558 / 25 ISO 5752 / 25 DIN 3202, K2 BS 2080, tab 1, col. 64	EN 558 / 16 ISO 5752 / 16 DIN 3202, K3 BS 2080, tab 1, series 16	EN 558 / 13 ISO 5752 / 13 DIN 3202/1, F16 BS 2080, Tab. 1, series 13	EN 558 / 14 ISO 5752 / 14 DIN 3202/1, F4
DN	NPS					
32	1 1/4	–	–	–	–	–
40	1 1/2	33		33	106	140
50	2	43		43	108	150
65	2 1/2	46		46	112	170
80	3	46	49	64	114	180
100	4	52	56	64	127	190
125	5	56	64	70	140	200
150	6	56	70	76	140	210
200	8	60	71	89	152	230
250	10	68	76	114	165	250
300	12	78	83	114	178	270
350	14	78 (92*)	92	127	199	290
400	16	102	102*	140	216	310
450	18	114	114*	152	222	330
500	20	127	127*	152	229	350
600	24	154	154*	178	267	390
700	28	165		229	292	430
750	30	–		–	–	–
800	32	190		241	318	470
900	36	203		241	330	510
1000	40	216		300	410	550
1200	48	254		350	470	630
1400	56	279		390	530	710
1600	64	318		440	600	790
1800	72	356		490	670	870
2000	80	406		540	760	950
Corresponding Wouter Witzel valve types:		EVS, EVBS, EVCS, EVBLS, EVTLS, EVUS, EVMS	*400 – 600: equal to series 20	EVL, ECV, EVML	EVFS	EVFL

* EN 558, 20.

4.2 SEAT TIGHTNESS RATES

Wouter Witzel rubberlined butterfly valves are designed to have a bi-directional 100 % seat tightness in accordance with the following standard rates:

- EN 12266-1, Rate A
- ISO 5208, Rate A
- DIN 3230, B0 and BN, Leakage rate 1.
- API 598

Standardized leakage rates [Drops/min] or [Bubbles/min]								
Standard	Test fluid	Rate A	Rate B	Rate C	Rate D	Rate E	Rate F	Rate G
EN 12266-1	Liquid	Tight shut off	0,01 x DN	0,03 x DN	0,1 x DN	0,3 x DN	1,0 x DN	2,0 x DN
	Gas	Tight shut off	0,3 x DN	3,0 x DN	30 x DN	300 x DN	3000 x DN	6000 x DN
ISO 5208	Liquid	Tight shut off	0,01 x DN	0,03 x DN	0,1 x DN			
	Gas	Tight shut off	0,3 x DN	3,0 x DN	30 x DN			
DIN 3230	Seat tightness test with water (BN)			Seat tightness test with air (B0)				
DN	Leakage rate 1 (tight) Drops/min	Leakage rate 2 Drops/min	Leakage rate 3 Drops/min	Leakage rate 1 (tight) Bubbles/min	Leakage rate 2 (low leakage) Bubbles/min	Leakage rate 3 Leaking cc/min.		
0 – 40	0	1	5	0	2	25		
40 – 100	0	1	10	0	6	63		
100 – 150	0	2	15	0	9	94		
150 – 200	0	2	20	0	12	125		
200 – 250	0	3	25	0	15	157		
250 – 300	0	3	30	0	18	188		
300 – 350	0	4	35	0	21	220		
350 – 400	0	4	40	0	24	252		
400 – 500	0	5	50	0	30	314		
500 – 600	0	6	60	1	36	376		

4.3 FLOW CALCULATIONS

ISOLATING VALVES (ON-OFF)

Flow data of isolating valves is normally used within the calculations for pipework sizing and system pressure losses when the valve is in the fully open position. Many on/off isolating valves spend most of the time in the fully open position and therefore these valves should have high K_v figures to reduce pressure drops, increase plant efficiency and contribute to reducing energy costs. Wouter Witzel Eurovalve has developed valves with a lot of attention being paid to achieving excellent flow characteristics. (see table)

Table: Flow coefficient K_v at fully open valve position

DN	NPS	Valves with stainless steel disc (K_v)	Valves with aluminium bronze disc (K_v)	Valves with ductile iron disc (K_v)
50	2	95	95	–
65	2 1/2	231	231	–
80	3	491	491	–
100	4	690	690	–
125	5	1450	1450	–
150	6	1945	1945	–
200	8	4095	4095	–
250	10	6085	4260	4260
300	12	9570	6360	6360
350	14	13500	8975	8975
400	16	16350	10130	10130
450	18	21550	12730	12730
500	20	27700	17000	17000
600	24	37200	24810	24810
700	28	34470	34470	34470
800	32	45540	45540	45540
900	36	58290	58290	58290
1000	40	73510	73510	73510

Note: $C_v = 1,16 K_v$

Flow sizing formulae:

Incompressible fluid flow (liquids): $\Delta p = \frac{\rho}{\rho_0} \frac{Q^2}{K_v^2}$ $K_v = Q \sqrt{\frac{\rho/\rho_0}{\Delta p}}$ $Q = K_v \sqrt{\frac{\Delta p}{\rho/\rho_0}}$

Flow velocity: $v = \frac{354 Q}{DN^2}$

The maximum recommended flow velocity, avoiding cavitation, vibration, noise etc is: – for liquids: 5 m/sec
– for gases: 50 m/sec

Nomenclature: K_v = Valve flow coefficient in m³/h water (5 – 30 °C) at pressure drop of 1 bar across the valve.
 Q = Flow capacity (m³/h).
 Δp = Pressure drop across the valve (bar).
 ρ = Density of fluid (kg/m³).
 ρ_0 = Density of water at 288 K = 1000 (kg/m³).
 v = Flow velocity based upon nominal pipe size (m/s).
DN = Nominal valve size (mm)

For more information (eg gas calculation) please ask Wouter Witzel Eurovalve® for advice or ask for our Technical Data sheet regarding flow through butterfly valves for on-off applications. Also available is a method to calculate energy losses of valves.

REGULATING VALVES

The sizing of regulating valves requires detailed calculations for each case, taking into account eg noise and cavitation. Please ask Wouter Witzel Eurovalve® for advice or ask for our special Technical Data Sheet for the selection and sizing of butterfly valves for control applications.

4.4 MATING FLANGES

4.4.1 TYPES OF STEEL FLANGES

The Wouter Witzel butterfly valves are designed for installation between flat or raised faced flanges with preference of the welding neck type according the following standards (flanges between brackets are of the slip-on type).

International flange standard						
	DIN	EN	BS	ISO	ASME	JIS
PN 6	2631 [2573]	1092/1, type 11 [01]	4504, type 111 [101]	7005/1, type 11		
PN 10	2632 [2576]	1092/1, type 11 [01]	4504, type 111 [101]	7005/1, type 11		
PN 16	2633	1092/1, type 11 [01]	4504, type 111 [101]	7005/1, type 11		
Class 150				7005/1, type 11	B16.5, B16.47	
JIS 5K						B 2211
JIS 10K						B 2212

NOTE: It is important to specify the right PN number and flange standard when ordering.

Other flange types:

To guarantee the compatibility of the valve with other non standard types of flanges it is recommended to check the following points:

- Valves installed between slip-on flanges shall be accurately centered to ensure gasket sealing
- Sealing area between valve and flange eg. for lapped pipe ends (specific Technical Data sheet available)
- Protrusion of the disc to avoid interference between disc and pipe or flange bore (see the Valve Product sheets)
- Stability of plastic flanges and resistance against bolt forces
- Centering of the valve in the pipe axis to guarantee proper gasket sealing

Ask Wouter Witzel Eurovalve for detailed advice.

4.4.2 ISO PN STEEL FLANGES

DN	NPS	PIPE OD	FLANGE ISO PN 6			FLANGE ISO PN 10			FLANGE ISO PN 16		
			OD	Pcd	Bolts	OD	Pcd	Bolts	OD	Pcd	Bolts
32	1 1/4	42,4	120	90	4 x M12			Use PN 40			Use PN 40
40	1 1/2	48,3	130	100	4 x M12			Use PN 40			Use PN 40
50	2	60,3	140	110	4 x M12			Use PN 16	165	125	4 x M16
65	2 1/2	76,1	160	130	4 x M12			Use PN 16	185	145	4/8* x M16
80	3	88,9	190	150	4 x M16			Use PN 16	200	160	8 x M16
100	4	114,3	210	170	4 x M16			Use PN 16	220	180	8 x M16
125	5	139,7	240	200	8 x M16			Use PN 16	250	210	8 x M16
150	6	168,3	265	225	8 x M16			Use PN 16	285	240	8 x M20
200	8	219,1	320	280	8 x M16	340	295	8 x M20	340	295	12 x M20
250	10	273	375	335	12 x M16	395	350	12 x M20	405	355	12 x M24
300	12	323,9	440	395	12 x M20	445	400	12 x M20	460	410	12 x M24
350	14	355,6	490	445	12 x M20	505	460	16 x M20	520	470	16 x M24
400	16	406,4	540	495	16 x M20	565	515	16 x M24	580	525	16 x M27
450	18	457	595	550	16 x M20	615	565	20 x M24	640	585	20 x M27
500	20	508	645	600	20 x M20	670	620	20 x M24	715	650	20 x M30
600	24	610	755	705	20 x M24	780	725	20 x M27	840	770	20 x M33
700	28	711	860	810	24 x M24	895	840	24 x M27	910	840	24 x M33
800	32	813	975	920	24 x M27	1015	950	24 x M30	1025	950	24 x M36
900	36	914	1075	1020	24 x M27	1115	1050	28 x M30	1125	1050	28 x M36
1000	40	1016	1175	1120	28 x M27	1230	1160	28 x M33	1255	1170	28 x M39
1200	48	1219	1405	1340	32 x M30	1455	1380	32 x M36	1485	1390	32 x M45
1400	56	1422	1630	1560	36 x M33	1675	1590	36 x M39	1685	1590	36 x M45
1600	64	1626	1830	1760	40 x M33	1915	1820	40 x M45	1930	1820	40 x M52
1800	72	1829	2045	1970	44 x M36	2115	2020	44 x M45	2130	2020	44 x M52
2000	80	2032	2265	2180	48 x M39	2325	2230	48 x M45	2345	2230	48 x M56

* Valves, suitable for 8 bolts on request.

4.4.3 ASME STEEL FLANGES

DN	NPS	Pipe		= < NPS 24: Flange ASME B16.5, Class 150.		Flange ASME B16.47 Class 150, Series B		
		OD	OD	> NPS 24: ASME B16.47 Class 150 Series A.		OD	Pcd	Bolts
				OD	Pcd			
32	1 1/4	42,2	117	88,9	4 x 1/2			
40	1 1/2	48,3	127	98,6	4 x 1/2			
50	2	60,3	152	120,6	4 x 5/8			
65	2 1/2	73,0	178	139,7	4 x 5/8			
80	3	88,9	190	152,4	4 x 5/8			
90	3 1/2	101,6	216	177,8	8 x 5/8			
100	4	114,3	229	190,5	8 x 5/8			
125	5	141,3	254	215,9	8 x 3/4			
150	6	168,3	279	241,3	8 x 3/4			
200	8	219,1	343	298,4	8 x 3/4			
250	10	273,0	406	362,0	12 x 7/8			
300	12	323,8	483	431,8	12 x 7/8			
350	14	355,6	535	476,2	12 x 1			
400	16	406,4	595	539,8	16 x 1			
450	18	457	635	577,8	16 x 1 1/8			
500	20	508	700	635,0	20 x 1 1/8			
600	24	610	815	749,3	20 x 1 1/4			
650	26	660	870	806,4	24 x 1 1/4	785	744,5	36 x 3/4
700	28	711	925	863,6	28 x 1 1/4	835	795,3	40 x 3/4
750	30	762	985	914,4	28 x 1 1/4	885	846,1	44 x 3/4
800	32	813	1060	977,9	28 x 1 1/2	940	900,2	48 x 3/4
850	34	864	1110	1028,7	32 x 1 1/2	1005	957,3	40 x 7/8
900	36	914	1170	1085,8	32 x 1 1/2	1055	1009,6	44 x 7/8
950	38	965	1240	1149,4	32 x 1 1/2	1125	1069,8	40 x 1
1000	40	1016	1290	1200,2	36 x 1 1/2	1175	1120,6	44 x 1
1050	42	1067	1345	1257,3	36 x 1 1/2	1225	1171,4	48 x 1
1100	44	1118	1405	1314,4	40 x 1 1/2	1275	1222,2	52 x 1
1150	46	1168	1455	1365,2	40 x 1 1/2	1340	1284,2	40 x 1 1/8
1200	48	1219	1510	1422,4	44 x 1 1/2	1390	1335,0	44 x 1 1/8
1250	50		1570	1479,6	44 x 1 3/4	1445	1385,8	48 x 1 1/8
1300	52	1321	1625	1536,7	44 x 1 3/4	1495	1436,6	52 x 1 1/8
1350	54		1685	1593,8	44 x 1 3/4	1550	1402,2	56 x 1 1/8
1400	56	1422	1745	1651,0	48 x 1 3/4	1600	1543,0	60 x 1 1/8
1450	58		1805	1708,2	48 x 1 3/4	1675	1611,4	48 x 1 1/4
1500	60	1524	1855	1759,0	48 x 1 3/4	1725	1662,2	52 x 1 1/4
1650	66		2032	1930,4	52 x 1 3/4			
1800	72		2197	2095,5	60 x 1 3/4			
1950	78		2362	2260,6	64 x 2			
2000	80		-	-	-			
Equal bolt circles:		AWWA C207, Class B (6 bar) AWWA C207, Class D (10 bar) AWWA C207, Class E (20 bar)						

Nominal pipe sizes printed not bold are non standard valve sizes.

Important note regarding type of thread of flange bolts:

Butterfly valves with threaded body flange holes for bolts 1 inch or less are drilled and tapped in accordance with ASME B1.1, UNC course thread series, Class 2B.

Body flange holes for bolts 1 1/8 inch and larger are drilled and tapped in accordance with ASME B1.1, UN 8 eight thread series, Class 2B.

4.4.4 JIS STEEL FLANGES

DN (A)	NPS	PIPE OD	FLANGE JIS 5K			FLANGE JIS 10 K			FLANGE JIS 16 K		
			OD	Pcd	Bolts	OD	Pcd	Bolts	OD	Pcd	Bolts
32	1 1/4	42,7	115	90	4 x M12	135	100	4 x M16	135	100	4 x M16
40	1 1/2	48,6	120	95	4 x M12	140	105	4 x M16	140	105	4 x M16
50	2	60,5	130	105	4 x M12	155	120	4 x M16	155	120	8 x M16
65	2 1/2	76,3	155	130	4 x M12	175	140	4 x M16	175	140	8 x M16
80	3	89,1	180	145	4 x M16	185	150	8 x M16	200	160	8 x M20
90	3 1/2	101,6	190	155	4 x M16	195	160	8 x M16	210	170	8 x M20
100	4	114,3	200	165	8 x M16	210	175	8 x M16	225	185	8 x M20
125	5	139,8	235	200	8 x M16	250	210	8 x M20	270	225	8 x M22
150	6	165,2	265	230	8 x M16	280	240	8 x M20	305	260	12 x M22
175	7	190,7	300	260	8 x M20	305	265	12 x M20	–	–	–
200	8	216,3	320	280	8 x M20	330	290	12 x M20	350	305	12 x M22
225	9	241,8	345	305	12 x M20	350	310	12 x M20	–	–	–
250	10	267,4	385	345	12 x M20	400	355	12 x M22	430	380	12 x M24
300	12	318,5	430	390	12 x M20	445	400	16 x M22	480	430	16 x M24
350	14	355,6	480	435	12 x M22	490	445	16 x M22	540	480	16 x M30x3
400	16	406,4	540	495	16 x M22	560	510	16 x M24	605	540	16 x M30x3
450	18	457,2	605	555	16 x M22	620	565	20 x M24	675	605	20 x M30x3
500	20	508,0	655	605	20 x M22	675	620	20 x M24	730	660	20 x M30x3
550	22	558,8	720	665	20 x M24	745	680	20 x M30	795	720	20 x M36x3
600	24	609,6	770	715	20 x M24	795	730	24 x M30	845	770	24 x M36x3
650	26	660,4	825	770	24 x M24	845	780	24 x M30			
700	28	711,2	875	820	24 x M24	905	840	24 x M30	960	875	24 x M30x3
750	30	762,0	945	880	24 x M30	970	900	24 x M30	1020	935	24 x M30x3
800	32	812,8	995	930	24 x M30	1020	950	28 x M30	1085	990	24 x M45x3
850	34	863,6	1045	980	24 x M30	1070	1000	28 x M30			
900	36	914,4	1095	1030	24 x M30	1120	1050	28 x M30	1185	1090	28 x M45x3
1000	40	1016,0	1195	1130	28 x M30	1235	1160	28 x M36	1320	1210	28 x M52x3
1100	44	1117,6	1305	1240	28 x M30	1345	1270	28 x M36	1420	1310	32 x M52x3
1200	48	1219,2	1420	1350	32 x M30	1465	1380	32 x M36	1530	1420	32 x M52x3
1350	54	1371,6	1575	1505	32 x M30	1630	1540	36 x M42			
1500	60	1524,0	1730	1660	36 x M30	1795	1700	40 x M42			

DN sizes printed not bold are non standard valve sizes

4.4.5 FLANGE BOLTING LENGTH


The minimum bolting length for installation of a wafer type valve between flanges with through bolting can be calculated with the formula:

$$L_{min} = FtF + 2 \times \text{flange thickness} + H_{nut} + 2 \times H_{spacer}$$

The following tables show the calculated bolt lengths for ISO PN and ASME flanges, based on the following assumptions:

- Flange thickness of a steel welding neck flange according EN 1092 and ASME B16.5.
- Use of hex head cap screws and two spacers
- Standard available L dimensions.

Important: Any deviation may require recalculation of the L dimension.



F-EXA024-A

BOLTING LENGTH: INSTALLATION BETWEEN ISO PN STEEL FLANGES (only as a guideline)

DN	NPS	Bolt length L (mm)					Bolt length L (mm)				
		Flanges PN 10					Flanges PN 16				
		Flange thickness*	EVS EVB(L)S EVMS	EVL EVML ECV	EVTLS	EVFS EVFL	Flange thickness*	EVS EVB(L)S EVMS	EVL EVML ECV	EVTLS	EVFS EVFL
40	1 1/2			See columns PN 16				110			60
50	2	18		See columns PN 16			18	110		35	65
65	2 1/2	18		See columns PN 16			18	110		35	70
80	3	20		See columns PN 16			20	110	130	40	70
100	4	20		See columns PN 16			20	120	130	40	70
125	5	22		See columns PN 16			22	130	140	45	75
150	6	22		See columns PN 16			22	130	150	45	75
200	8	24	140	180	50	80	24	140	180	50	80
250	10	26	150	200	55	90	26	160	200	55	90
300	12	26	160	200	60	90	28	180	220	65	100
350	14	26	160	220	60	90	30	180	240	65	100
400	16	26	200	240	75	100	32	220	260	80	110
450	18	28	220	260	80	100	40	220	260	80	110
500	20	28	220	260	80	100	44	240	260	90	110
600	24	28	260	280	100	110	54	280	300	110	120
700	28	30	280	340	100	110	36	300/100	360/130	110	130
800	32	32	300	360	120	120	38	320	380	120	140
900	36	34	320/90		130	130	40	340/100		130	140
1000	40	34	340/90		130	140	42	360/100		140	150

Note: Where 2 length dimensions are given, the short one is not-through bolting at the shaft passages (8 bolts/valve)

* Acc. EN 1092

BOLTING LENGTH: INSTALLATION BETWEEN ASME STEEL FLANGES

(only as a guideline)

DN	NPS	Bolt length L (inch)			
		ASME B 16.5, Class 150			
		Flange thickness*	EVS EVCS	EVTLS	EVFS
40	1 1/2	17,6	4"	-	-
50	2	19,1	4"	1 1/2"	2 1/2"
65	2 1/2	22,4	4 1/2"	1 3/4"	2 1/2"
80	3	23,9	5"	1 3/4"	2 3/4"
100	4	23,9	5"	2"	2 3/4"
125	5	23,9	5 1/2"	2"	3"
150	6	25,4	5 1/2"	2"	3"
200	8	28,5	6"	2 1/4"	3 1/4"
250	10	30,3	6 1/2"	2 1/2"	3 1/2"
300	12	31,8	6 1/2"	2 1/2"	4"
350	14	35,1	7"	3"	
400	16	36,6	8 1/2"	3 1/2"	
450	18	39,7	9 1/2"	4"	
500	20	43,0	10"	4"	
600	24	47,8	12"	5"	

* Acc. ASME B 16.5

Important note:

Butterfly valves with threaded body flange holes for bolts 1 inch or less are drilled and tapped in accordance with ASME B1.1, UNC course thread series, Class 2B. Body flange holes for bolts 1 1/8 inch and larger are drilled and tapped in accordance with ASME B1.1, UN 8 eight thread series, Class 2B.

4.5 CONVERSION UNITS

ITEM	UNIT	SYMBOL	VALUE	
Pressure	Pascal	Pa	1 Pa	= 1 N/m ² = 0.00001 bar
	Mega Pascal	MPa	1 MPa	= 10 bar
	Kilo Pascal	KPa	1 KPa	= 0,01 bar
	Pounds per square inch	psi	1 psi	= 0.069 bar
	Atmosphere (phys.)	atm.	1 atm.	= 1.013 bar
	Atmosphere (techn.)	at.	1 at.	= 1 kgf/cm ² = 0.98 bar
	Metre of mercury	mHg	1 mHg	= 1.33 bar
	Torr (Vacuum)	Torr	1 Torr	= 1 mmHg = 0.0013 bar (abs.)
	Inch of mercury	in Hg	1 in Hg	= 0.00339 bar
	Metre water gauge	mwg	1 mwg	= 0.098 bar
	Inch water gauge	in wg	1 in wg	= 0.00249 bar
Length	Metre	m	1 m	= 1000 mm
	Micrometer (micron)	µm	1 µm	= 0.001 mm
	Inch	in (")	1 in	= 25.4 mm
	Foot (= 12 inch)	ft	1 ft	= 304.8 mm
	Yard (= 3 feet)	yd	1 yd	= 914.4 mm
Volume	Liter	l	1 l	= 1 dm ³
	Cubic inch	cu in	1 cu in	= 0.016 l
	Cubic feet	cu ft	1 cu ft	= 28.32 l
	Cubic yard	cu yd	1 cu yd	= 746.6 l
	US-gallon	US-gallon	1 US-gallon	= 3.785 l
	Imp-gallon	Imp-gallon	1 Imp-gallon	= 4.546 l
	US-barrel (Oil)	US-barrel (Oil)	1 US-barrel	= 159 l
Temperatures	Grade Fahrenheit	°F	°C	= (°F-32) x 5/9
	Grade Kelvin	K	°C	= K - 273
Torque	Foot pound	ft lb	1 ft lb	= 1.356 Nm
	Kilogram metre, kilopond metre	kgm, kpm	1 kgm	= 9.81 Nm
Capacity	Cubic metre per second	m ³ /s	1 m ³ /S	= $\frac{1}{3600}$ m ³ /h
	Cubic feet per hour	cu ft/h	1 cu ft/h	= 0.0283 m ³ /h
	Gallons per minute	gall/min.	1 gall/min.	= 0.227 m ³ /h
	Torr litre/second (Vacuum)	Torr l/s	1 Torr l/s	= 1.33 mbar l/s
Viscosity	Centistokes (kinemat. Viscosit.)	cSt	1 cSt	= 1 mm ² /s
	Poise (dynam. Viscosit.)	P	1 P	= 0.1 Pa.s
Nomenclature	Mega	M	1,000,000	= 10 ⁶
	Kilo	K	1,000	= 10 ³
	Deca	da	10	= 10
	Deci	d	0,1	= 10 ⁻¹
	Centi	c	0,01	= 10 ⁻²
	Milli	m	0,001	= 10 ⁻³
	Micro	µ	0,00001	= 10 ⁻⁶

5 CENTRIC BUTTERFLY VALVES: PRODUCT DATA


5.1 HOW TO USE A WOUTER WITZEL® BUTTERFLY VALVE

The Wouter Witzel® range is specially designed for the following process functions:

1. Isolating (100% tight shut off; zero leakage) and/or
2. Flow control, regulation or modulating duties.


ISOLATING, STOP OR SHUT OFF VALVE (ON/OFF)

The butterfly valve is used in the fully open or in the closed position. With an isolating valve a part of a piping system can be isolated by closing the valve. It prevents flow or leakage into the downstream conduit. The advantage of a Wouter Witzel® butterfly valve compared with other butterfly valves for this application is the low flow resistance when the valve is open. The design of slim and streamlined disc shapes results in low pressure losses and reduced energy costs for the end user. The saving of energy costs may be several times the initial price of the valve. Ask for our Technical Data sheet regarding flow through on/off valves.

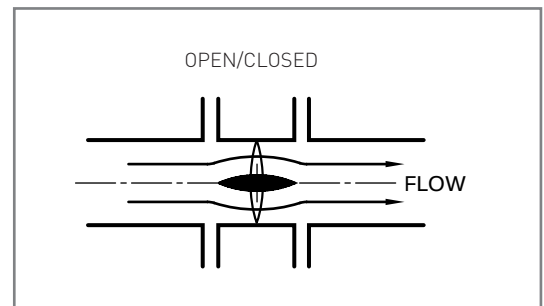


REGULATING VALVE

The butterfly valve is used in a partly open position to regulate the pressure, the capacity, level or temperature of a process. The Wouter Witzel® range finds more and more application as regulating or commissioning valves due to their good linear flow characteristic. Ask for our Technical Data sheet regarding flow control.

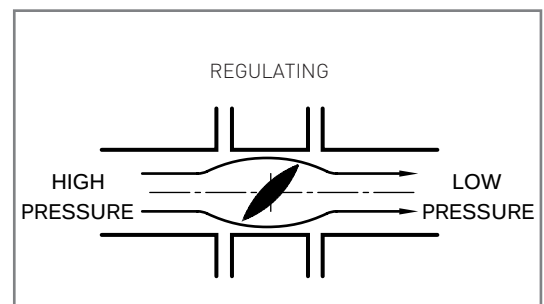

COMBINED REGULATING AND ISOLATING VALVE

The Wouter Witzel® range can also be used for a combined function because the valves are 100 % tight shut off in the closed position as well as being suitable for regulating duties in the partly open position. Ask for our Technical Data sheets regarding flow control.

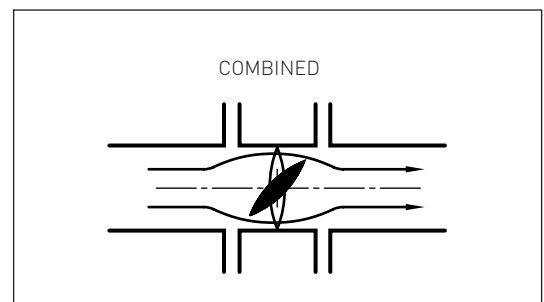

5.2 INSTALLATION POSSIBILITIES

The Eurovalve® ranges are intended for installation in flanged piping systems. They are easy to install or to remove from the pipeline, being bolted between the mating pipe flanges. A selection can be made from different body types eg wafer, lugged or flanged. The correct body type of the valve should be selected on the basis of installation requirements.

The valves can be installed for in line service and depending on the valve type for end of line service. (see table below)

In line installation: In line service is the condition where the valve is installed between two pipe flanges


End of line service.

End of line service ist the condition that occurs when the downstream side of the valve is open to atmosphere.

Caution: End of line installation is not allowed when the fluid is a hazardous gas or liquid unless adequate precautions have to be taken for safety reasons.

Valve type		Valve design is suitable for in line installation	Valve design is suitable for end of line installation
EVS / EVL / EVCS	Flangeless wafer types	Yes	No
EVTLS	Lugged wafer type with through holes	Yes	No
	Lugged wafer type with tapped holes	Yes	Yes
EVBS / EVBLS	Semi lug wafer type	Yes	Yes
EVMS / EVML	Single flanged wafer type	Yes	Yes
EVFS / EVFL / EVUS	Double flanged type	Yes	Yes

CHARACTERISTIC INSTALLATION SITUATIONS FOR DIFFERENT BODY TYPES

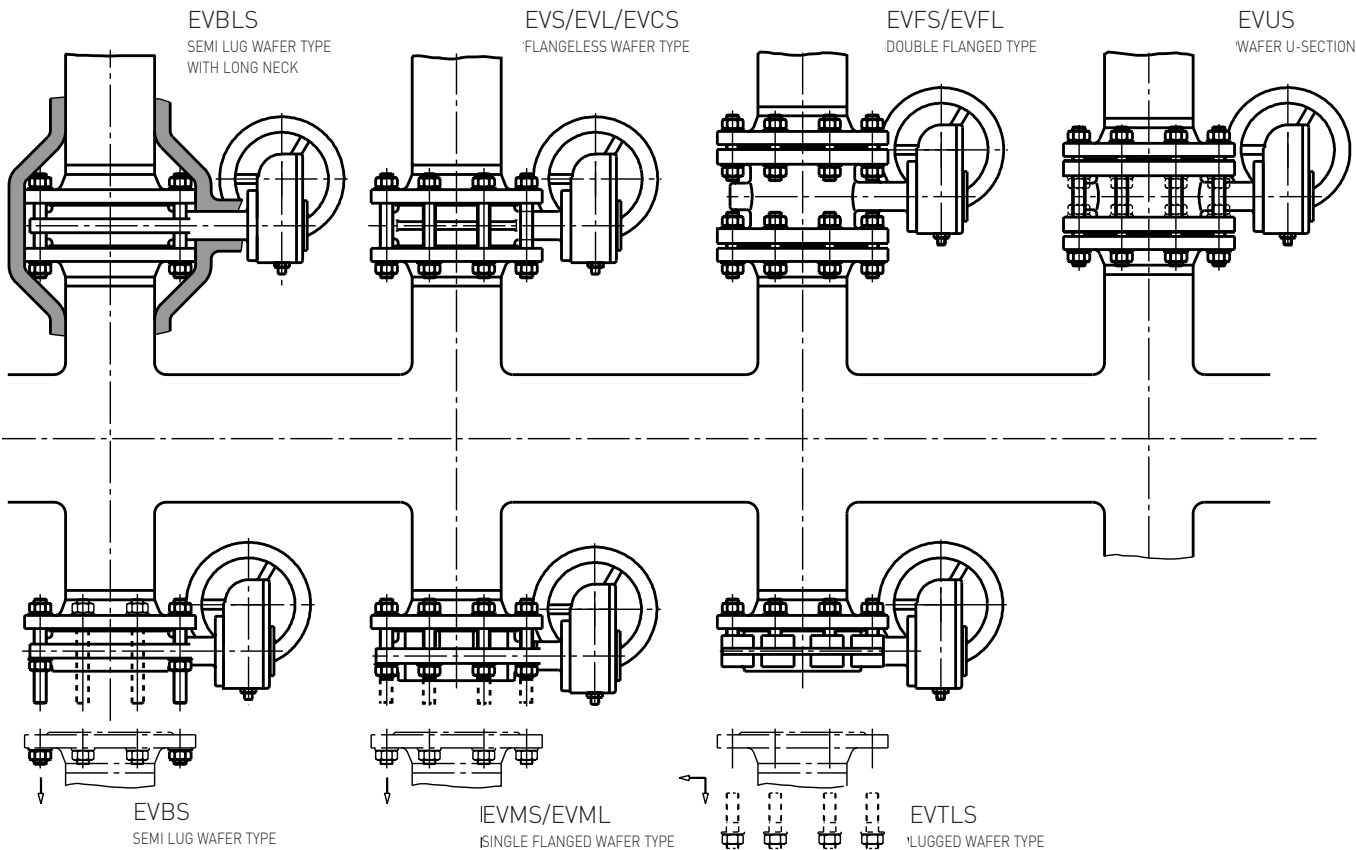

5.3 BUTTERFLY VALVE DESIGN

5.3.1 THE CONCEPT

Years of innovation, manufacturing and experience have created a complete range of centric rubberlined butterfly valves. Up-to-date design and state of the art materials tailored to market needs and wishes such as no maintenance and long service life. The design philosophy is based on the principle objectives of achieving high reliability, high efficiency and to also be highly cost effective. High reliability by an excellent disc sealing concept with a bonded rubber lining reducing maintenance and downtime. High efficiency by excellent flow performance reducing energy losses. The diameter range is from DN 50 - 2000 (2" - 80") and a wide variety of materials is available for many applications. The valves are designed according to the latest international standards and meet environmental requirements.

5.3.2 DESIGN DESCRIPTION

The valve body is principally a cylindrical shape designed as a pressure containing part. The body is fully rubberlined inside for sealing and corrosion protection. The body has flanges, lugs, or end connections for mounting between pipe flanges and two necks for holding the shafts. The upper shaft extends out of the body and is used to operate the disc by the actuation device, mounted on a standardized interface flange.

The disc is basically a circular part, which can rotate 90° on the axis of the shaft. The outer edge of the disc seals against the lining in the closed position of the valve. When the disc is perpendicular to the pipeline, the valve is shut. When the disc is parallel with the pipe, the valve is fully open. The orientation of the disc is indicated by a groove at the shaft end that is in line with the disc. Additionally the lever position or position indicator of the actuator shows the disc orientation.

HIGH RELIABILITY BY BONDED LINING

One of the most significant steps forward in butterfly valve reliability has been development of bonded-to-body rubber linings. The most resilient of all types since the manufacturing process, akin to injection moulding or transfer moulding, bonds the rubber directly onto the valve body forming a permanent bond to body.


This process also ensures a perfect inner lining profile for sealing of the disc and integral flange gaskets. The benefits include increased operational life since scuffing resulting from liner distortion is eliminated. This concept is proving to be the most reliable and cost effective for many applications.

High efficiency by low profiled and streamlined discs Wouter Witzel Eurovalve® has developed full bore butterfly valves with special low profiled and streamlined discs which result in a low flow resistance when the valve is open and reduced energy costs for the end user. It is obvious that under full-flow conditions the shape of the valve disc and the diameter of the valve bore has a considerable effect on the fluid flow. Badly shaped discs or reduced bore valves create pressure drop, turbulence, as well as other potential side effects such as valve vibration resulting in reduced plant efficiency. Attention paid to the streamlining of the disc profile is paramount if good flow characteristics are to be achieved. The saving of energy costs by selecting a Eurovalve® may be several times the initial cost of the valve (ask Wouter Witzel Eurovalve® for an energy calculation).

HIGH RELIABILITY BY EXCELLENT SEATING CONCEPT

Wouter Witzel Eurovalve® has developed a special seating concept for its Eurovalve® ranges. The disc has a profiled sealing edge with the geometry of a centric located toroid. This accurate and smooth-machined profile of the disc edge requires minimal deformation of the resilient rubber lining to achieve a positive sealing. The low deformation results in less wear of the lining, a low seating angle and low operating torques.

This excellent seating concept together with a lining which is bonded to the valve body forms the heart of the valve performance, making these valves very reliable and suitable for high cycling frequencies and a long lifetime. These features also make the Eurovalve® range particularly suitable for actuated duties.

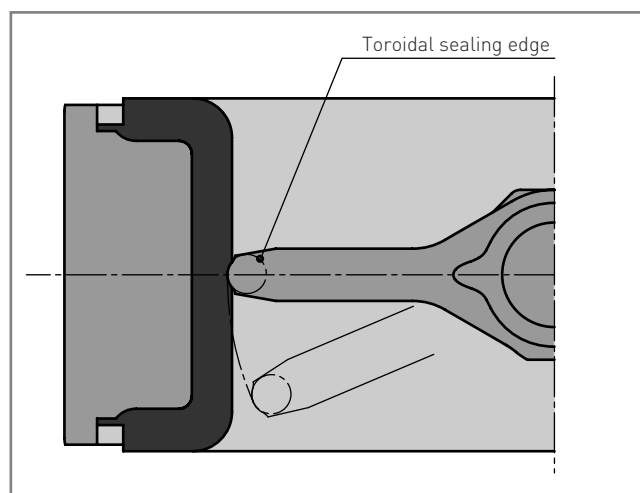

Note: On clean duties tests carried out by a major German chemical company demonstrated that the zero leakage tight shut off rating was the same after 500.000 operations as when new

5.3.3 DESIGN FEATURES AND BENEFITS:

CENTRIC SHAFT POSITION

100 % bi-directional tight shut off.
Installation without restriction in direction of flow.

STREAMLINED AND SLIM DISC SHAPE; FULL BORE BODY

Low pressure loss and reduced energy costs.
High Kv / Cv values.

NO CAVITIES IN THE FLOW PASSAGE

Easy to clean and disinfect for
potable water systems etc.
Self cleaning (no residue will be trapped).

FEW PROCESS WETTED PARTS

Good resistance to corrosion.
High reliability.

COMPACT CONSTRUCTION; LOW WEIGHT

Easy to handle and to install.
Less space in storage and installation.

BODY INTERNALLY RUBBERLINED

Fluid does not contact the body (no corrosion).
No flange gaskets required.
Insulation of noise and heat transfer.

LINING BONDED TO THE BODY

No corrosion between body and lining.
Suitable for vacuum service, eg at the suction
side of the pump.
Longer life time.
No distortion of lining.
Excellent performance in dry duties.
Valve can be installed with the disc fully closed.
Particularly suited for actuated duties.
Suitable for end of line use (depending on type).

STANDARDIZED ACTUATION FLANGE


Easy automation.
Retrofitting of actuator is possible.
Actuator position can be changed on site.

LOW OPERATING TORQUES

Easy to operate.
Economical actuator selection.

BOTH SHAFTS CARRIED IN PTFE LINED BEARINGS

Low shaft friction (operating torque) and wear.
No lubrication required.

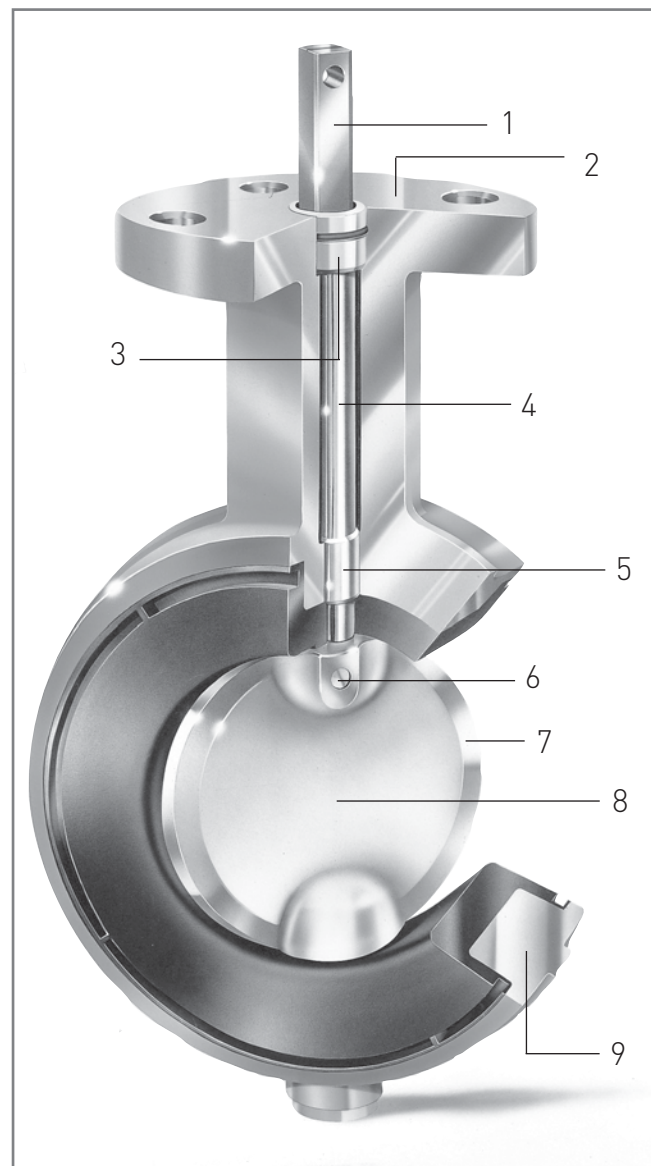

- (1) Shaft square with groove, indicating disc orientation
- (2) Topflange ISO 5211
- (3) O-ring / O-ring bush
- (4) Shaft (concentric)
- (5) Bearing
- (6) Conical pin
- (7) Toroidal disc edge
- (8) Centric valve disc
- (9) Rubberlined valve body

5.4 MATERIALS AND COATINGS

5.4.1 BODY MATERIALS

Bodies are fully corrosion protected inside by the rubber lining and outside by a coating (bronze bodies are uncoated).

Type of material	Typical applications	Material designation		PED category	PCC material code
		EN / DIN	Comparable ASTM:		
Ductile cast iron (GGG 40)	Normal applications	JS 1030, EN 1563	A 395, 60-40-18	I, II, III	M03
Ductile cast iron (GGG 40.3)	Heavy duties Cold applications (Petro-)chemical industries	GJS-400-18U-LT, EN1563	–	II, III	M85
Grey cast iron (GG25)	Light applications Not suitable for pressure shocks or rapid closing valves	JL 1040, EN 1561	A 126, Class B.	I	M01
Carbon steel	Heavy duties (Petro-)chemical industries	1019, EN 10213	A216, WCB	II, III	M22
Bronze casting (RG 10)	Shipbuilding/Marine applications	C-CuSn10Zn, DIN 1705	B584, C90500	I	M29

5.4.2 EXTERNAL BODY COATINGS

Type of coating	Colour	Typical environments/applications acc. ISO 12944-2		PCC code
		Exterior	Interior	
Polyurethane coating	Orange, RAL 2000 (80 µm) Options: • PUR Blue, RAL 5017 • PUR Red, RAL 3000 • PUR Grey, RAL 7000 • PUR1 (120 µm)	Urban and industrial atmospheres, moderate sulphur dioxide pollution. Coastal areas with low salinity	Production rooms with high humidity and some air pollution, e.g. food-processing plants, laundries, breweries	PUR (Option PUR 1)
Epoxy coating	Black, RAL 9011 (200 µm) Options: • With extra polyurethane toplayer for other colour requirements • Black, RAL 9011 (350 µm)	Industrial areas with high humidity and aggressive atmosphere. Coastal and offshore areas with high salinity*	Buildings or areas with almost permanent condensation and with high pollution	EP 1
		Buried in soil. Immersed in water	–	EP 2
Epoxy primer	Grey, RAL 7002 (50 µm)	As primer for further coating by the end user		EP

- Other coating systems on request.
- A Rilsan coating (blue) is available on some valve types.

5.4.3 BODY LINING MATERIALS

Wouter Witzel Eurovalve has invested heavily in research into formulation of rubber types and so developed 'in-house' expertise in rubber technology. The quality of rubber compounds is fundamental to the performance and reliability of the Wouter Witzel® valve ranges.

The rubber lining has 3 important functions:

- Protection of the body against corrosion and erosion by the fluid
- Resilient seating material
- Flange gasket sealing

Important: It is essential that for each individual case the selection of the type of rubber complies with the fluid characteristics and available experience.

A wrong selection may cause failure of the valve. The given temperature limits shall be used as guide lines. The suitability of a type of rubber depends on the actual service conditions such as working pressure, peak temperatures and the nature of both the process fluids and any cleaning medium etc. In case of doubt please contact Wouter Witzel Eurovalve for advice.

5.4.3 RUBBER TYPES			
Material Standard	Grade of material	Examples of application	PCC Material Code
ISO 1629			
NBR	Standard grade Type approvals: • GERMANY: KTW-D1	• Aliphatic hydrocarbons (low aromatic containing fuels, oils and gases) • Animal fats • Seawater • Compressed air, powder and granulars convey Temperature indication: 0 ↔ 90 °C	M80
NBR	Special grade (with improved ozone resistance) Type approvals: • GERMANY: DVGW-gas	• Gas supply Temperature indication: 0 ↔ 50 °C	M46
EPDM	Standard grade (with potable water approval) Type approvals: • UNITED KINGDOM: BS6920, WRAS (for potable water supply)	• Water in general (hot-, cold-, sea-, ozone-, swimming-, glycolized-, industrial-) • Potable water • Foodstuffs (including vegetable oils and fats) • Weak acids, weak salt solutions, alcohols, ketones, sour gases Temperature indication: -20 ↔ 110 °C	M16
EPDM	Special grade (with potable water approval) Type approvals: • GERMANY: DVGW/KTW – D1 and D2/W270.	• Potable water • Foodstuffs • Open water systems • Unchlorinated drinking water Temperature indication: -10 ↔ 70 °C	M74
EPDM	Special grade (with a wide temperature range) Type approvals: • GERMANY: KTW – D1, BGA XX1, cat 4 • USA: FDA par. 177.2600	• HEVAC (hot water service) • Chilled water • Food stuffs & Sugar juice Temperature indication: -30 ↔ 120 °C	M23
FPM	Standard grade (B type)	• Many aliphatic, aromatic, and halogen hydrocarbons when EPDM or NBR is not suitable • Hot gases (Not for aqueous fluids) Temperature indication: 0 ↔ 200 °C	M113
FPM	Special grade (GF type) with high chemical resistance	• Concentrated acids Temperature indication: 0 ↔ 130 °C	M56

5.4.4 DISC MATERIALS

As the disc is a process wetted part the material should be carefully selected.
Wouter Witzel Eurovalve can supply the following materials:

Type of material	Typical applications	Material designation		PED category	WW material code
		EN / DIN	Comparable ASTM:		
Austenitic stainless steel > DN 600 (> 24")	Potable water, cooling water, sea water, demineralized water, solvents, foodstuff	1.4408, EN 10213	A351, CF8M	II, III	M14
Duplex stainless steel DN 50 – 1600 (2" – 64")	Potable water, cooling water, sea water, demineralized water, solvents, foodstuff	1.4462, EN 10088 >600: 1.4517, EN 10213	A181, Grade F51	II, III	M50 M97
Martensitic stainless steel DN 50 – 600 (2" – 24")	Non corrosive hot or cold water, solvents, fuels, air, abrasive duties (slurries, dry powders, granulates)	1.4057, EN 10088	A276, Grade 431	I	M52
Ductile cast iron with Rilsan coating (GGG 40) DN 250 – 2000 (2" – 80")	Water incl. potable water, KIWA, BGA, KTW, FDA, WRAS approved Up to 70 °C	JS 1030, EN 1563	A395, 60-40-18	I	M03
Aluminium bronze AB2 DN 50 – 2000 (2" – 80")	Sea water, potable water, gas	G-CuAl10Ni, DIN 1714	B148, C95800	I	M20/M21
Hastelloy-C® DN 50 – 600 (2" – 24")	Phosphoric, hypochloric, acetic, formic, sulfurous acids	–	A494, CW-12MW	II, III	M77

Note: Other materials (eg Uranus B6) are available on request.

5.4.5 SHAFTS AND PIN MATERIALS

Materials for shafts and tapered pins are selected on the basis of disc materials.

Type of material	in combination with disc material	Material designation		PED category	WW material code
		EN / DIN	Comparable ASTM:		
Duplex stainless steel DN 50 – 1600 (2" – 64")	Duplex stainless steel or austenitic stainless steel	1.4462, EN 10088	A276, S31803	II, III	M50/81
Martensitic stainless steel DN 50 – 2000 (2" – 80")	Martensitic stainless steel Ductile cast iron	1.4057, EN 10088	A276, Grade 431	I	M52
Aluminium bronze DN 50 – 2000 (2" – 80")	Aluminium bronze	CuAl10Ni5Fe4 / EN DIN 17665	B150, C63000	I	M20/M21
Monel K500®	Aluminium bronze (high pressures)	NA 18, BS 3076		I	
Hastelloy C276® DN 50 – 600 (2" – 24")	Hastelloy C®	–	B547, N10276	II, III	M77

5.5 MAXIMUM ALLOWABLE PRESSURE (PS)

In line installation

The maximum allowable pressure of the valve (PS) is depending on the flange connection and the disc shut off pressure (Δp max).

Flange connection	Δp max options			
	Δp max 2,5 bar (> DN 400)	Δp max 6 bar (250 – 2000)	Δp max 10 bar (> DN 150)	Δp max 16 bar (50 – 2000)
PN 6	PS 2,5 bar	PS 6 bar	–	–
PN 10 (→ DN 150)	PS 2,5 bar	PS 6 bar	PS 10 bar	–
PN 16	PS 2,5 bar	PS 6 bar	PS 10 bar	PS 16 bar*
ANSI CL 150 (> DN 600)	PS 2,5 bar	PS 6 bar	PS 10 bar	PS 16 bar*

* Only in combination with lining materials EPDM and NBR. Higher pressures on request.

The Δp max (bar) is related to the seat tightness pressure of the disc as a result of the interference between disc diameter and rubber lining.

For a specific application with a defined working pressure, the nearest higher Δp max should be chosen in order to minimize the operating torque.

Vacuum service

The valves are suitable for vacuum service up to the following absolute pressure : $1,3 \times 10^{-6}$ mbar = 10^{-6} Torr (high vacuum)

End of line installation

The maximum allowable pressure of the valve in end of line installation is equal to the minimum of PS and the pressure given in the following table:

DN	Δp max of the valve	Maximum pressure in end of line installation	
		Semi lugged	Tapped lug, single or double flanged
50 – 200	16	10 bar	16*
250 – 400	16	10 bar	10
> 400		On request	

* With stainless steel disc (see table 5.4.4 and 5.4.5)

For other product (configurations) ask Wouter Witzel Eurovalve for advice.

5.6 VALVE OPERATING TORQUES

The operating torque of a butterfly valve is in general the result of four partial torques:

- 1. Seating torque:** Torque to overcome the rubberseat friction.
- 2. Bearing friction torque:** Torque to overcome the friction between shaft and bearing.
- 3. Dynamic torque:** Torque developed by pressure differences across a partly opened valve as a result of high flow velocities.
- 4. Hydrostatic torque:** Torque caused by the difference in static head of liquid on the valve disc above and below the valve shaft in a horizontal position.
(Only important for large valve sizes > DN 1000).

The operating torque of a valve under operating conditions may vary depending on different fluid aspects.

When no information is available Wouter Witzel Eurovalve takes the normal operating conditions as a basis for actuator sizing:

Normal operating conditions:

- The fluid is water (without solid particles) in the temperature range of +1 up to 80 °C.
- The fluid does not include chemicals or contamination that may increase the friction between the seating surfaces.
- At least one operation cycle per month.
- Flow velocity in the pipe not more than 4 m/s.

Operating torques (Nm) at differential pressures under above normal operating conditions:

DN	NPS	6 BAR	10 BAR	16 BAR
50	2"	10	10	11
65	2 1/2"	13	14	15
80	3"	18	19	21
100	4"	30	32	36
125	5"	42	46	52
150	6"	67	75	86
200	8"	130	140	160
250	10"	220	250	400
300	12"	310	350	560

Notes: DN 50 – 200 (2" – 8") are 16 bar rated valves. Bigger sizes on request.

Severe operating conditions:

When other field conditions (eg: dry gas or air, slurries, low temperatures, infrequent cycling, high flow velocities) are expected please contact Wouter Witzel Eurovalve for detailed advice regarding severe operating torques and actuator selection.

6 PRODUCT SHEETS

6.1 CENTRIC BUTTERFLY VALVES

The following pages give the product sheets with information of every valve type.

- Customer specification and tailor made design are possible on request.
- Drawings in this catalogue are butterfly valves with free shaft.

On request we can supply project drawings completed with manual or power actuators in accordance with customer's specification.

PRODUCT SHEET

6.1.1 FLANGELESS WAFER VALVES

6.1.1.1 BUTTERFLY VALVE - RANGE EVS DN 50 - 600 (2" - 24")

General specification, construction details, parts list and dimensions


GENERAL SPECIFICATION:

Body type	Flangeless wafer short type
Valve function*	Isolating valve (on/off) and/or regulating valve
Installation	Clamping between two flanges with through bolting
Flange connections*	PN 6 / 10 / 16 / Class 150 / JIS 5 / 10 / 16
Valve shut off pressure*	dp max 2,5 / 6 / 10 / 16 / 20 bar
Seat tightness	Bi-directional tight shut off acc. ISO 5208, Rate A
Face to face dimension	ISO 5752 / EN 558, basic series 20 (wafer short)
Available type approvals*	PED, Kitemark, KIWA, DVGW gas & water, SVGW, WRAS, LRS, DNV, ABS, BV, GL, RINa, NKK, RMRS, CCS, CRS, UL, FM, GOSST, Stoomwezen
Actuation possibilities*	Manuel, electric, pneumatic or hydraulic

* Needs to be specified when ordering. Contact Wouter Witzel Eurovalve for detailed advice.


CONSTRUCTION DETAILS:

DN 50 - 350

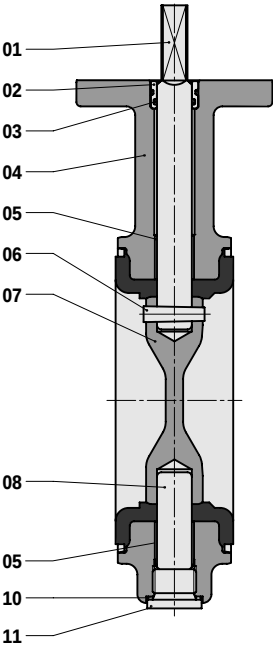

PARTS LIST:	
ITEM	DESCRIPTION
01	shaft
02	bush
03	o-ring
04	body rubber lined
05	bearing
06	conical pin
07	disc
08	shaft
10	sealing ring
11	plug



DN 400 - 600

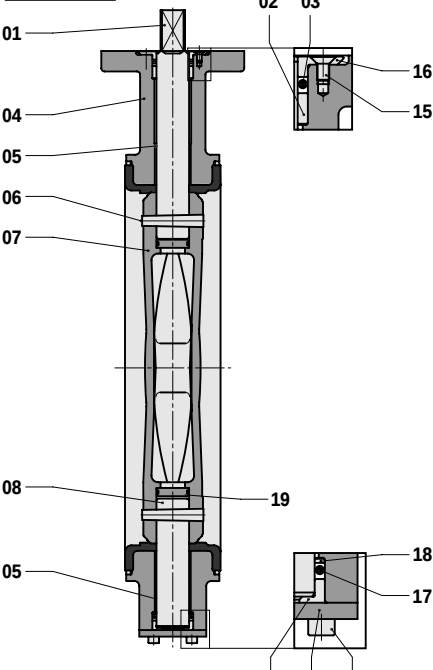


PARTS LIST:			
ITEM	DESCRIPTION	ITEM	DESCRIPTION
01	shaft	12	axial bearing
02	bush	13	cover plate
03	o-ring	14	screw
04	body rubber lined	15	screw
05	bearing	16	flanged bush
06	conical pin	17	o-ring
07	disc	18	ring
08	shaft	19	sealing plate

RANGE EVS DN 50 - 600 (2" - 24")

DN 50 - 300

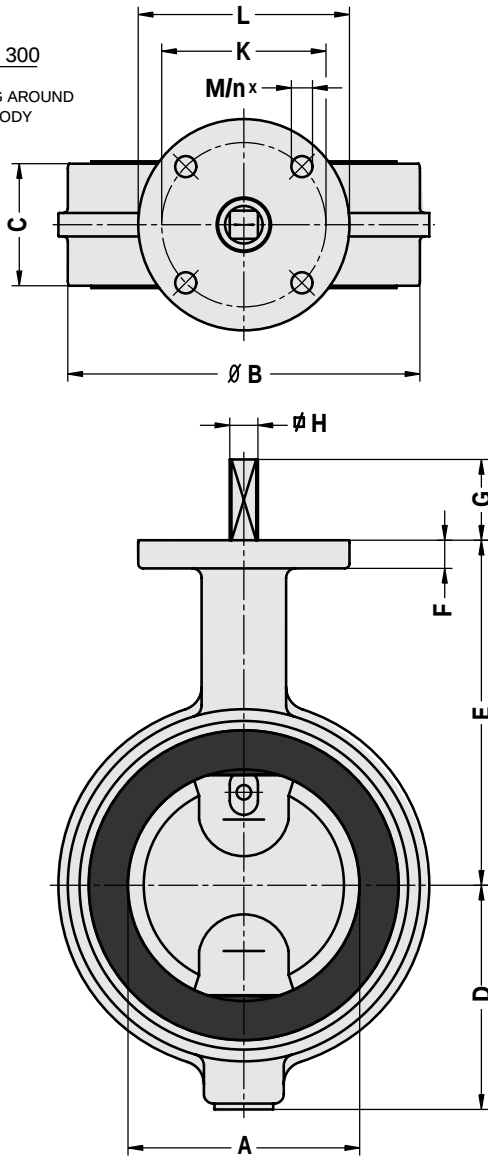
CENTRING AROUND
THE BODYPREFERRED POSITION
WHEN INSTALLED IN
HORIZONTAL PIPELINE

IN LINE INSTALLATION



DN 350 - 600

WITH CENTRING HOLES

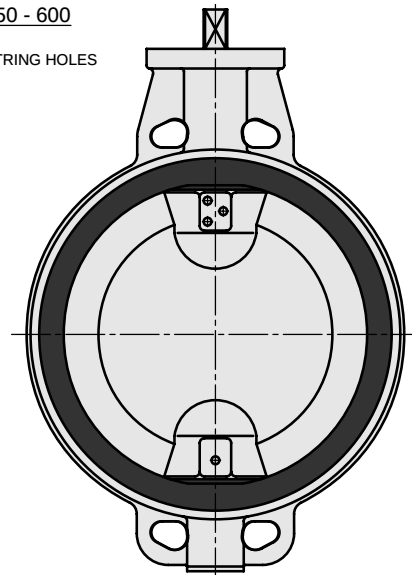

DIMENSIONS:

DN	NPS	A	B	C	D	E	F	G	H	K	L	M	n	ISO 5211	X	Y	±kg
40	1½	50	*100	**43	63	118	12	34	10	70	90	9	4	F07	25	4	2.6
50	2	50	100	43	63	118	12	34	10	70	90	9	4	F07	25	4	2.6
65	2½	65	115	46	71	126	12	34	10	70	90	9	4	F07	46	10	3.2
80	3	80	130	46	78	133	12	34	10	70	90	9	4	F07	66	17	3.5
100	4	100	150	52	98	147	12	34	12	70	90	9	4	F07	86	24	4.5
125	5	125	182	56	109	160	12	34	12	70	90	9	4	F07	112	35	6.3
150	6	150	210	56	133	180	14	34	16	70	90	9	4	F07	140	47	8.8
200	8	200	262	60	158	204	14	34	16	70	90	9	4	F07	191	70	13.2
250	10	250	315	68	194	245	15	45	24	102	125	11	4	F10	241	91	22
300	12	300	371	78	219	270	15	45	24	102	125	11	4	F10	290	111	32
350	14	336	405	78	256	315	15	45	24	102	125	11	4	F10	327	129	40
400	16	386	470	102	308	363	25	50	30	140	175	17	4	F14	373	142	75
450	18	436	522	114	334	388	25	50	30	140	175	17	4	F14	421	161	90
500	20	486	576	127	360	413	25	50	30	140	175	17	4	F14	470	180	120
600	24	586	672	154	426	510	25	50	40	140	175	17	4	F14	566	216	180

Note. Intermediate sizes (eg DN 175/7" or DN 550/22") are available on request. * Notched body ** Works standard

PRODUCT SHEET

6.1.1.2 BUTTERFLY VALVE - RANGE EVS DN 700 - 1400 (28" - 56")


General specification, construction details, parts list and dimensions

GENERAL SPECIFICATION:

Body type	Flangeless wafer short type with drilled or tapped holes
Valve function*	Isolating valve (on/off) and/or regulating valve
Installation	Clamping between two flanges
Flange connections*	PN 6 / 10 / 16 / ASME Class 150 / JIS 5 / 10 / 16
Valve shut off pressure*	2,5 / 6 / 10 / 16 bar
Seat tightness	Bi-directional tight shut off acc. ISO 5208, Rate A
Face to face dimension	ISO 5752 / EN 558, basic series 20 (wafer short). NB: DN 1400: Works standard
Available type approvals*	PED, KIWA, DVGW gas & Water, SVGW, WRAS, LRS, DNV, ABS, BV, GL, RINa, NKK, RMRS, CCS, CRS, GOSST, Stoomwezen
Actuation possibilities*	Manuel, electric, pneumatic or hydraulic

* Needs to be specified when ordering. Contact Wouter Witzel Eurovalve for detailed advice.


CONSTRUCTION DETAILS:

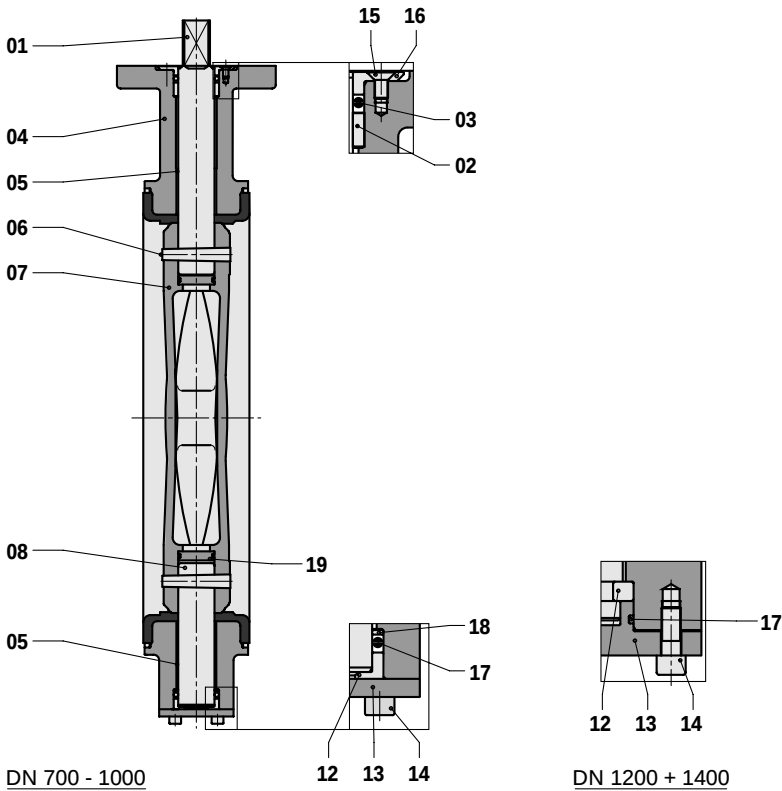



PARTS LIST:

ITEM	DESCRIPTION	ITEM	DESCRIPTION
01	shaft	12	axial bearing
02	bush	13	cover plate
03	o-ring	14	screw
04	body rubber lined	15	screw
05	bearing	16	flanged bush
06	conical pin	17	o-ring
07	disc	18	ring
08	shaft	19	sealing plate


RANGE EVS DN 700 - 1400 (28" - 56")

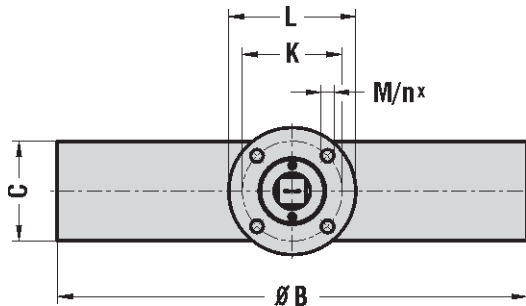

PREFERRED POSITION
WHEN INSTALLED IN
HORIZONTAL PIPELINE

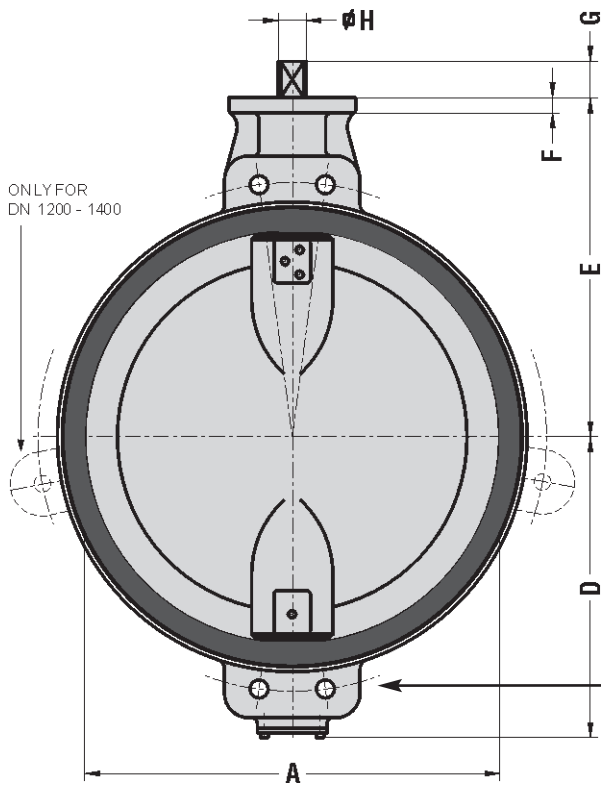

IN LINE INSTALLATION

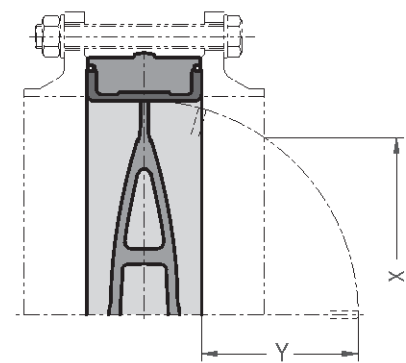

Holes drilled through or blind tapped, depending on
flange connection. (see page 19)

DIMENSIONS:

DN	NPS	ΔPmax	A	B	C	D	E	F	G	H	K	L	M	n	ISO 5211	X	Y	±kg
700	28	16 bar	686	776	165	480	560	25	60	46	165	210	21	4	F16	666	261	295
750	30	16 bar	736	826	190	520	585	25	60	46	165	210	21	4	F16	711	278	295
800	32	16 bar	786	880	190	525	610	25	60	46	165	210	21	4	F16	763	298	345
900	36	16 bar	868	980	203	635	690	30	90	60	254	300	17	8	F25	863	342	475
1000	40	10 bar	986	1085	216	685	740	30	90	60	254	350	17	8	F25	973	390	635
1000	40	16 bar	986	1085	216	685	740	30	90	60	298	350	21	8	F30	973	390	635
1200	48	10 bar	1168	1300	254	870	855	35	85	75	298	415	21	8	F30	1159	466	1500
1200	48	16 bar	1168	1300	254	870	855	35	85	75	298	415	21	8	F35	1159	466	1500
1400	56	10 bar	1386	1500	*250	980	955	35	85	75	356	415	31	8	F35	1364	568	1900
1400	56	16 bar	1386	1500	*250	980	955	35	85	90	356	415	31	8	F35	1364	568	1900

Note: Intermediate sizes (eg DN 650/26", DN 850/34", DN 1100/44") are available on request * Works standard dimension

PRODUCT SHEET

6.1.1.3 BUTTERFLY VALVE - RANGE EVL DN 80 - 300 (3" - 12")


General specification, construction details, parts list and dimensions

GENERAL SPECIFICATION:

Body type	Flangeless wafer long type
Valve function*	Isolating valve (on/off) or regulating valve
Installation	Clamping between two flanges with through bolting.
Flange connections*	PN 6 / 10 / 16 / ANSI Class 150 / JIS 5 / 10 / 16
Valve shut off pressure*	6 / 10 / 16 / 20 bar
Seat tightness	Bi-directional tight shut off acc. ISO 5208, Rate A
Face to face dimension	ISO 5752 / EN 558, basic series 16 (wafer long) (DN 50,65 = EVS series 20)
Available type approvals*	PED, KIWA, DVGW gas & water, SVGW, WRAS, LRS, ABS, GL, RINa, NKK, RMRS, CCS, CRS, Stoomwezen
Actuation possibilities*	Manual, electric, pneumatic or hydraulic

* Needs to be specified when ordering. Contact Wouter Witzel Eurovalve for detailed advice


CONSTRUCTION DETAILS:

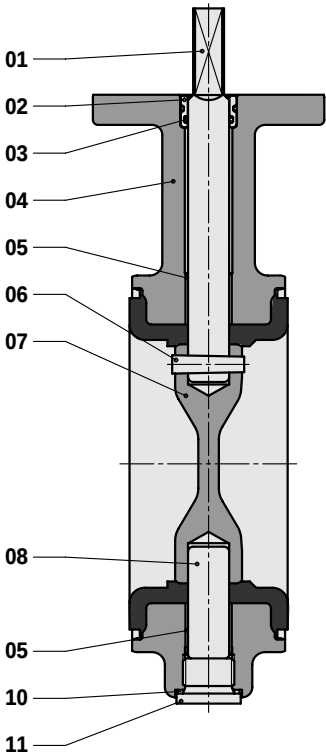


PARTS LIST:

ITEM	DESCRIPTION
01	shaft
02	bush
03	o-ring
04	body rubber lined
05	bearing
06	conical pin
07	disc
08	shaft
10	sealing ring
11	plug


RANGE EVL DN 80 - 300 (3" - 12")

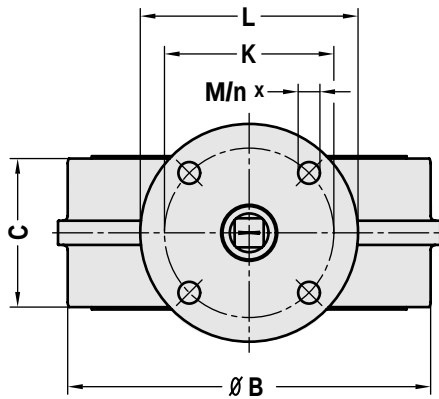


PREFERRED POSITION
WHEN INSTALLED IN
HORIZONTAL PIPELINE



IN LINE INSTALLATION



for bolt lengths see pag. 19

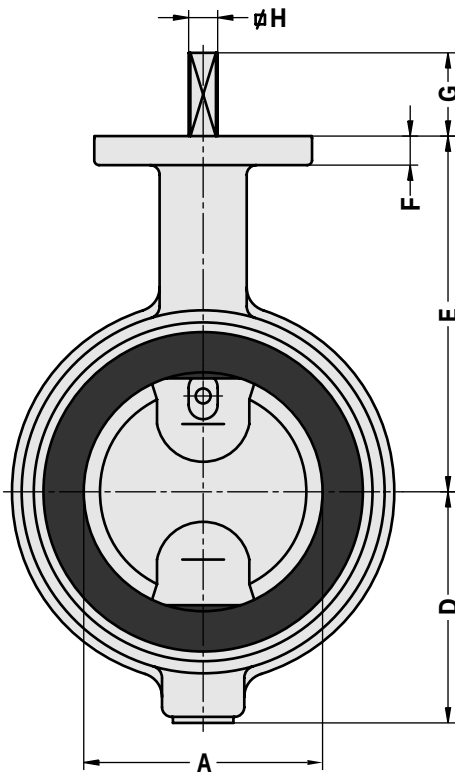

DIMENSIONS:

DN	NPS	A	B	C	D	E	F	G	H	K	L	M	n	ISO 5211	X	Y	±kg
50	2	EQUAL TO EVS															
65	2 1/2	EQUAL TO EVS															
80	3	80	130	64	78	133	12	34	10	70	90	9	4	F07	48	8	5.5
100	4	100	150	64	98	147	12	34	12	70	90	9	4	F07	77	18	6.5
125	5	125	182	70	109	160	12	34	12	70	90	9	4	F07	104	28	10
150	6	150	210	76	133	180	14	34	16	70	90	9	4	F07	130	37	12
200	8	200	262	89	158	204	14	34	16	70	90	9	4	F07	179	56	18
250	10	250	315	114	194	245	15	45	24	102	125	11	4	F10	223	68	26
300	12	300	371	114	219	270	15	45	24	102	125	11	4	F10	278	93	26

PRODUCT SHEET

6.1.1.4 BUTTERFLY VALVE - RANGE EVCS DN 50 - 300 (2" - 12")


General specification, construction details, parts list and dimensions

General Specification:

Body type	Flangeless wafer short type with alignment lugs, centric, rubberlined
Valve function*	Isolating valve (on/off) or regulating valve
Installation	Clamping between two flanges with through bolting
Flange connections*	PN 6 / ANSI Class 150
Valve shut off pressure*	6 / 10 / 16 / 20 bar
Seat tightness	Bi-directional tight shut off acc. ISO 5208, Rate A
Face to face dimension	ISO 5752 / EN 558, basic series 20 (wafer short)
Available type approvals*	PED, WRAS, GOSST, Stoomwezen, FM
Actuation possibilities*	Manual, electric, pneumatic or hydraulic

* Needs to be specified when ordering. Contact Wouter Witzel Eurovalve for detailed advice


CONSTRUCTION DETAILS:

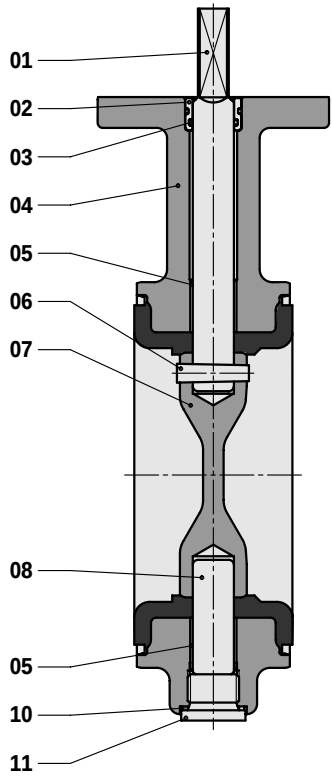


PARTS LIST:

ITEM	DESCRIPTION
01	shaft
02	bush
03	o-ring
04	body rubber lined
05	bearing
06	conical pin
07	disc
08	shaft
10	sealing ring
11	plug


RANGE EVCS DN 50 - 300 (2" - 12")

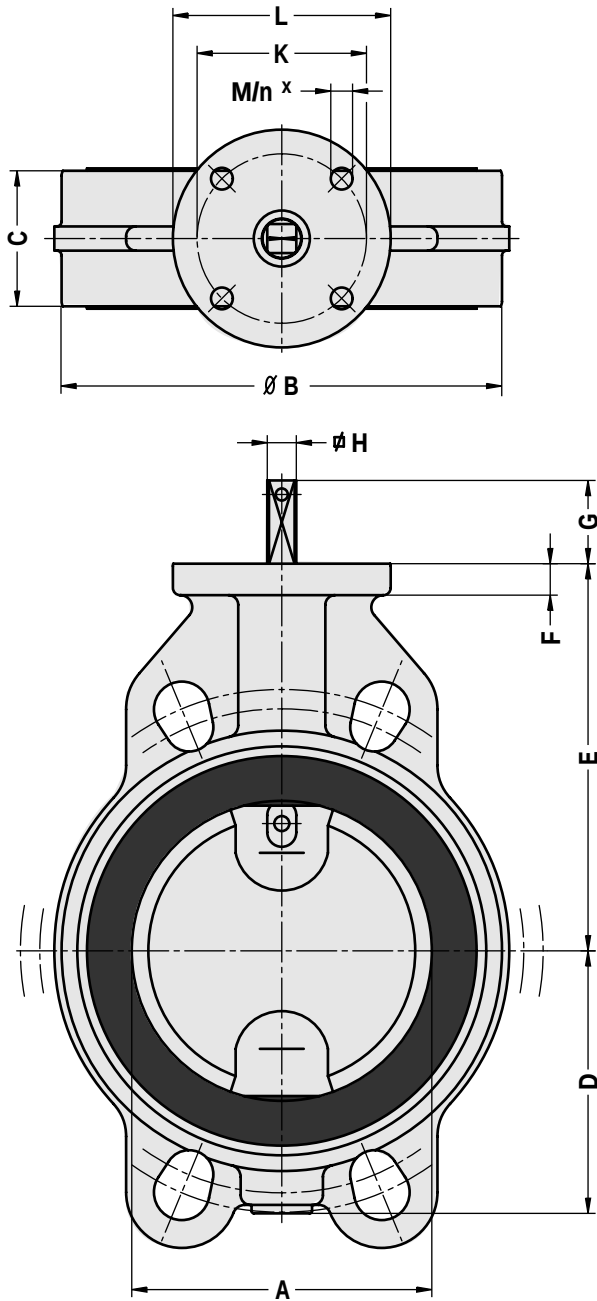

PREFERRED POSITION
WHEN INSTALLED IN
HORIZONTAL PIPELINE



IN LINE INSTALLATION



for bolt lengths see pag. 19

DIMENSIONS:

DN	NPS	A	B	C	D	E	F	G	H	K	L	M	n	ISO 5211	X	Y	±kg
50	2	50	100	43	63	118	12	34	10	70	90	9	4	F07	25	4	2.8
65	2 1/2	65	115	46	71	126	12	34	10	70	90	9	4	F07	46	10	3.6
80	3	80	130	46	78	133	12	34	10	70	90	9	4	F07	66	17	3.9
100	4	100	150	52	98	147	12	34	12	70	90	9	4	F07	86	24	5.1
125	5	125	182	56	109	160	12	34	12	70	90	9	4	F07	112	35	7.0
150	6	150	210	56	133	180	14	34	16	70	90	9	4	F07	140	47	9.5
200	8	200	262	60	158	204	14	34	16	70	90	9	4	F07	191	70	14
250	10	250	315	68	194	245	15	45	24	102	125	11	4	F10	241	91	24
300	12	300	371	78	219	270	15	45	24	102	125	11	4	F10	290	111	36

PRODUCT SHEET

6.1.2 LUGGED AND V-SECTION VALVES

6.1.2.1 BUTTERFLY VALVE - RANGE EVBS DN 50 - 300 (2" - 12")


General specification, construction details, parts list and dimensions

General Specification:

Body type	Semi-lug wafer short type
Valve function*	Isolating valve (on/off) and/or regulating valve
Installation	Clamping between flanges with through bolting. As end of line valve
Flange connections*	PN 10 / 16
Valve shut off pressure*	6 / 10 / 16 bar. As end of the line valve max. 10 bar
Seat tightness	Bi-directional tight shut off acc. ISO 5208, Rate A
Face to face dimension	ISO 5752 / EN 558, basic series 20 (wafer short)
Available type approvals*	PED, Kitemark, KIWA, DVGW gas & water, SVGW, WRAS, LRS, DNV, ABS, BV, RINa, NKK, RMRS, CCS, CRS, GOSST, Stoomwezen, FM, UL, VdS, CSTB
Actuation possibilities*	Manual, electric, pneumatic or hydraulic

* Needs to be specified when ordering. Contact Wouter Witzel Eurovalve for detailed advice



CONSTRUCTION DETAILS:

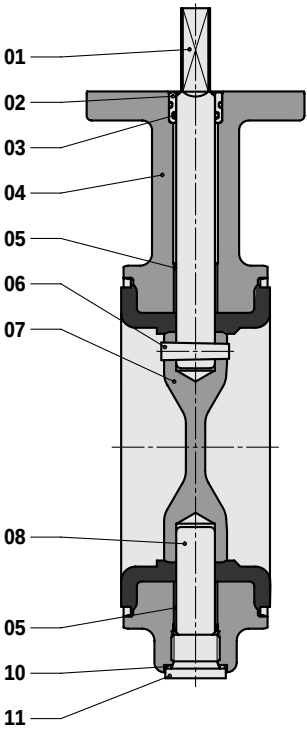


PARTS LIST:

ITEM	DESCRIPTION
01	shaft
02	bush
03	o-ring
04	body rubber lined
05	bearing
06	conical pin
07	disc
08	shaft
10	sealing ring
11	plug


RANGE EVBS DN 50 - 300 (2" - 12")

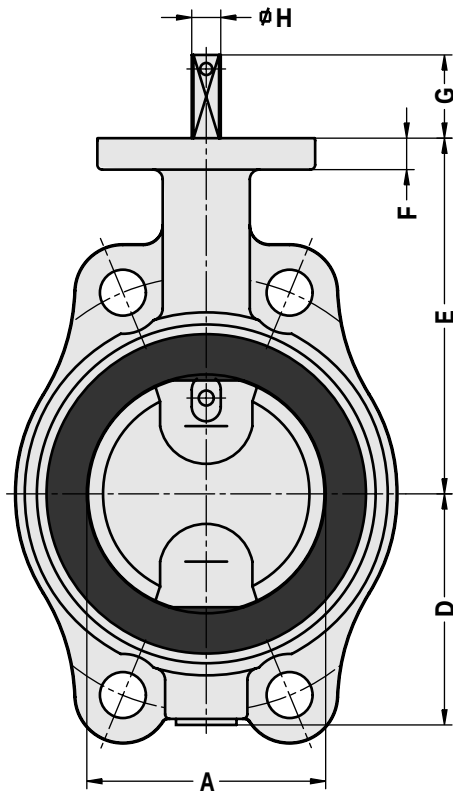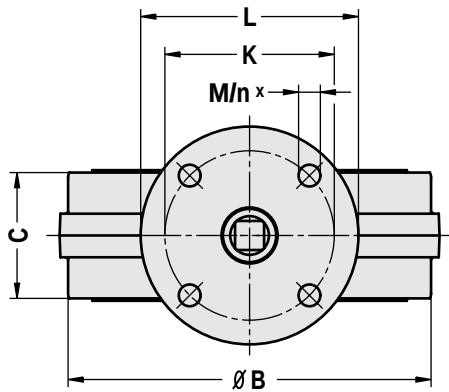


PREFERRED POSITION
WHEN INSTALLED IN
HORIZONTAL PIPELINE



IN LINE INSTALLATION

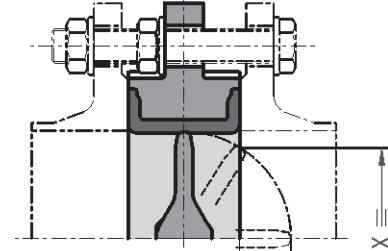

END OF LINE SERVICE

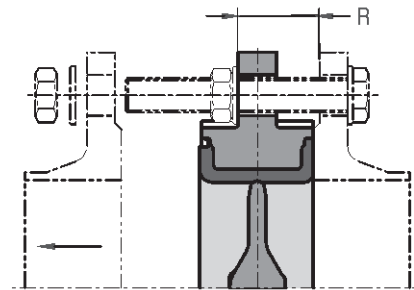

for bolt lengths see pag. 19

Max. torque to tighten the
flange bolts

- M16: 45 Nm
- M20: 90 Nm

DIMENSIONS:

DN	NPS	A	B	C	D	E	F	G	H	K	L	M	n	R	ISO 5211	X	Y	±kg
50	2	50	100	43	63	118	12	34	10	70	90	9	4	30	F07	25	4	2.8
65	2½	65	115	46	71	126	12	34	10	70	90	9	4	32	F07	46	10	3.6
80	3	80	130	46	78	133	12	34	10	70	90	9	4	32	F07	66	17	3.9
100	4	100	150	52	98	147	12	34	12	70	90	9	4	35	F07	86	24	5.1
125	5	125	182	56	109	160	12	34	12	70	90	9	4	35	F07	112	35	7.0
150	6	150	210	56	133	180	14	34	16	70	90	9	4	39	F07	140	47	9.5
200	8	200	262	60	158	204	14	34	16	70	90	9	4	44	F07	191	70	14
250	10	250	315	68	194	245	15	45	24	102	125	11	4	47	F10	241	91	24
300	12	300	371	78	219	270	15	45	24	102	125	11	4	53	F10	290	111	36

PRODUCT SHEET

6.1.2.2 BUTTERFLY VALVE - RANGE EVBLS DN 50 - 200 (2" - 8")


General specification, construction details, parts list and dimensions

General Specification:

Body type	Semi-lug wafer short type with long neck for insulation
Valve function*	Isolating valve (on/off) and/or regulating valve
Installation	Clamping between flanges with through bolting. As end of line valve
Flange connections*	PN 10 / 16
Valve shut off pressure*	6 / 10 / 16 bar. As end of the line valve max. 10 bar
Seat tightness	Bi-directional tight shut off acc. ISO 5208, Rate A
Face to face dimension	ISO 5752 / EN 558, basic series 20 (wafer short)
Available type approvals*	PED, Kitemark, BV, CCS, CRS, LRS, NKK, RMRS, DVGW water, SVGW, WRAS, GOSST, Stoomwezen, FM
Actuation possibilities*	Manual, electric, pneumatic or hydraulic

* Needs to be specified when ordering. Contact Wouter Witzel Eurovalve for detailed advice


CONSTRUCTION DETAILS:

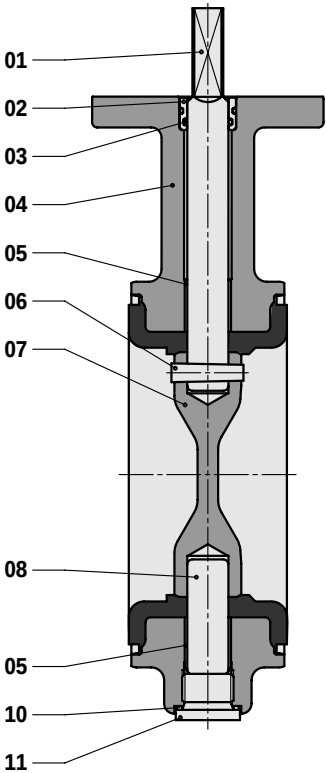



PARTS LIST:

ITEM	DESCRIPTION
01	shaft
02	bush
03	o-ring
04	body rubber lined
05	bearing
06	conical pin
07	disc
08	shaft
10	sealing ring
11	plug


RANGE EVBLS DN 50 - 200 (2" - 8")

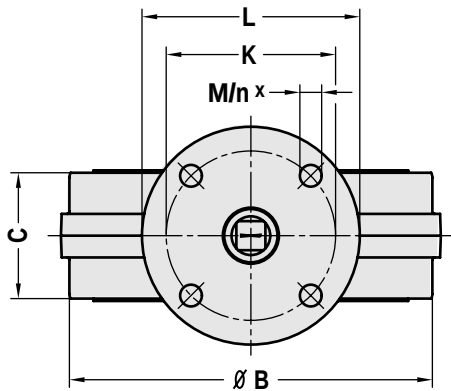


PREFERRED POSITION
WHEN INSTALLED IN
HORIZONTAL PIPELINE

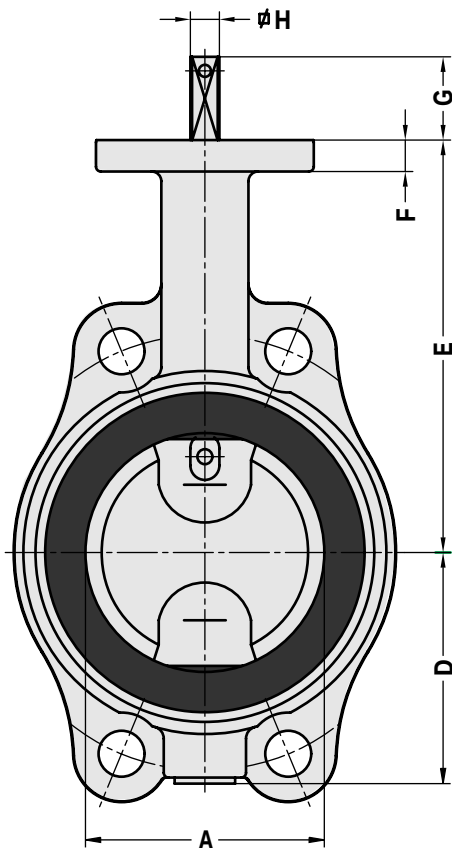

IN LINE INSTALLATION

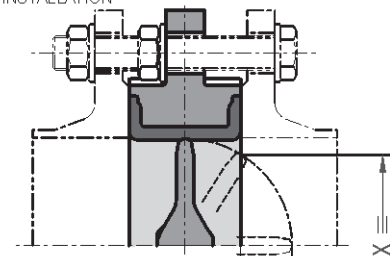

END OF LINE SERVICE

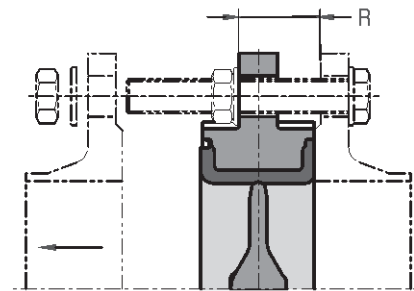

for bolt lengths see pag. 19

Max. torque to tighten the flange bolts

- M16: 45 Nm
- M20: 90 Nm

DIMENSIONS:

DN	NPS	A	B	C	D	E	F	G	H	K	L	M	n	R	ISO 5211	X	Y	±kg
50	2	50	100	43	63	152	12	34	10	70	90	9	4	30	F07	25	4	3.1
65	2½	65	115	46	71	160	12	34	10	70	90	9	4	32	F07	46	10	3.9
80	3	80	130	46	78	167	12	34	10	70	90	9	4	32	F07	66	17	4.2
100	4	100	150	52	98	189	12	34	12	70	90	9	4	35	F07	86	24	5.5
125	5	125	182	56	109	202	12	34	12	70	90	9	4	39	F07	112	35	7.5
150	6	150	210	56	133	224	14	34	16	70	90	9	4	39	F07	140	47	10
200	8	200	262	60	158	248	14	34	16	70	90	9	4	44	F07	191	70	15

PRODUCT SHEET

6.1.2.3 BUTTERFLY VALVE - RANGE EVTLS DN 50 - 1200 (2" - 48")

General specification, construction details, parts list and dimensions


General Specification:

Body type	Lugged wafer short type with tapped or through flange holes
Valve function*	Isolating valve (on/off) and/or regulating valve
Installation	Bolting between flanges. As end of line valve when holes are tapped
Flange connections*	PN 6 / 10 / 16 / ANSI Class 150 (JIS 5/10 on request)
Valve shut off pressure*	2,5 / 6 / 10 / 16 / 20 bar
Leakage rate	ISO 5208, Rate A (Bi-directional tight shut off)
Face to Face dimension	ISO 5752 / EN 558, basic series 20 (wafer short)
Available type approvals*	PED, Kitemark, KIWA, DVGW water, SVGW, WRAS, DNV, ABS, BV, CCS, CRS, GL, LRS, RiNa, NKK, RMRS, UL, FM, GOSST, Stoomwezen
Actuation possibilities*	Manual, electric, pneumatic or hydraulic

* Needs to be specified when ordering. Contact Wouter Witzel Eurovalve for detailed advice


CONSTRUCTION DETAILS:

DN 50 - 350

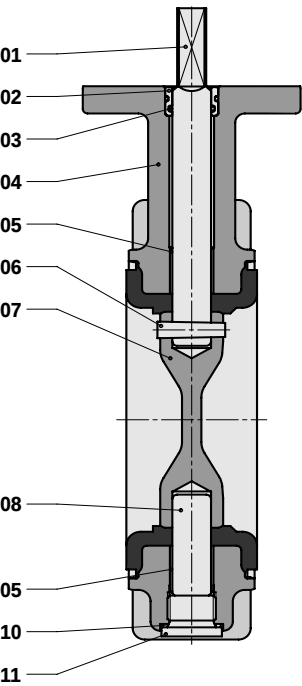


PARTS LIST:	
ITEM	DESCRIPTION
01	shaft
02	bush
03	o-ring
04	body rubber lined
05	bearing
06	conical pin
07	disc
08	shaft
09	sealing ring
10	plug

DN 400 - 1000

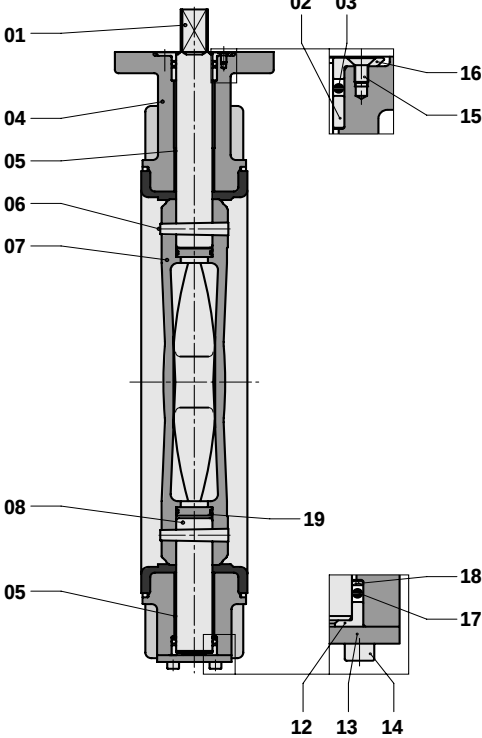


PARTS LIST:			
ITEM	DESCRIPTION	ITEM	DESCRIPTION
01	shaft	12	axial bearing
02	bush	13	cover plate
03	o-ring	14	screw
04	body rubber lined	15	screw
05	bearing	16	flanged bush
06	conical pin	17	o-ring
07	disc	18	ring
08	shaft	19	sealing plate


RANGE EVTLS DN 50 - 1200 (2" - 48")

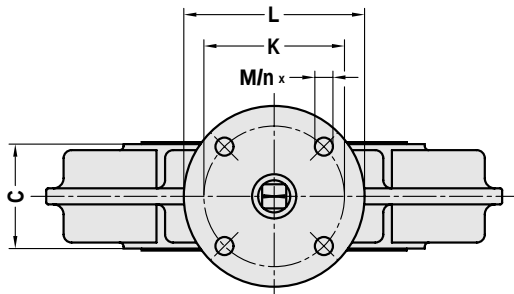


PREFERRED POSITION
WHEN INSTALLED IN
HORIZONTAL PIPELINE




DEAD END SERVICE

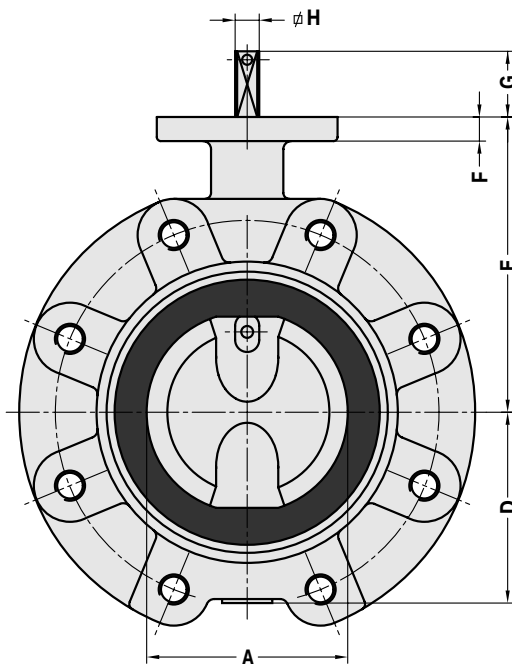

IN LINE INSTALLATION



BOLTING BY HEXAGON HEAD BOLTS,
STUDS OR THREADED ENDS

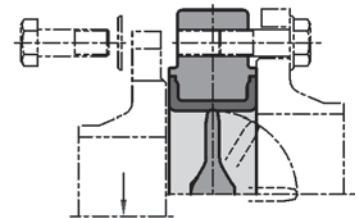

for bolt lengths see pag. 19

* F30 (Pcd. 298 - 8 x Ø 21) at Δp max = 16 bar

** F35 (Pcd. 356 - 8 x Ø 31) at Δp max = 16 bar

DIMENSIONS:

DN	NPS	A	C	D	E	F	G	H	K	L	M	n	ISO 5211	X	Y	±kg
50	2	50	43	63	118	12	34	10	70	90	9	4	F07	25	4	8
65	2½	65	46	71	126	12	34	10	70	90	9	4	F07	46	10	9
80	3	80	46	78	133	12	34	10	70	90	9	4	F07	66	17	10
100	4	100	52	98	147	12	34	12	70	90	9	4	F07	86	24	12
125	5	125	56	109	160	12	34	12	70	90	9	4	F07	112	35	16
150	6	150	56	133	180	14	34	16	70	90	9	4	F07	140	47	20
200	8	200	60	158	204	14	34	16	70	90	9	4	F07	191	70	25
250	10	250	68	194	245	15	45	24	102	125	11	4	F10	241	91	28
300	12	300	78	219	270	15	45	24	102	125	11	4	F10	290	111	36
350	14	336	78	256	315	15	45	24	102	125	11	4	F10	327	129	50
400	16	386	102	308	363	25	50	30	140	175	17	4	F14	373	142	85
450	18	436	114	334	388	25	50	30	140	175	17	4	F14	421	161	105
500	20	486	127	360	413	25	50	30	140	175	17	4	F14	470	180	130
600	24	586	154	426	510	25	50	40	140	175	17	4	F14	566	216	205
700	28	686	165	480	560	25	60	46	165	210	21	4	F16	666	261	325
750	30	736	190	526	585	25	60	46	165	210	21	4	F16	712	273	385
800	32	786	190	525	610	25	60	46	165	210	21	4	F16	863	342	625
900	36	886	203	635	690	30	90	60	254	300	17	8	F25	863	342	625
1000	40	986	216	685	740	30	90	60	*254	350	*17	8	*F25	973	390	950
1200	48	1186	254	870	855	35	85	75	**298	415	**21	8	**F30	1159	466	1400

PRODUCT SHEET

6.1.2.4 BUTTERFLY VALVE - RANGE EVUS DN 700 - 1600 (28" - 64")


General specification, construction details, parts list and dimensions

General Specification:

Body type	U-section wafer short type with drilled and tapped flange holes
Valve function*	Isolating valve (on/off) and/or regulating valve
Installation	Clamping between flanges with through bolting and with possibility for end of line service.
Flange connections*	PN 10 / ASME Cl 150 (casting PN10)
Valve shut off pressure*	2,5 / 6 / 10 bar
Seat tightness	Bi-directional tight shut off acc. ISO 5208, Rate A
Face to face dimension	ISO 5752 / EN 558, basic series 20 (wafer short)
Available type approvals*	PED, CCS, CRS, LRS, WRAS, GOSST, Stoomwezen
Actuation possibilities*	Manual, electric, pneumatic or hydraulic

* Needs to be specified when ordering. Contact Wouter Witzel Eurovalve for detailed advice.


CONSTRUCTION DETAILS:

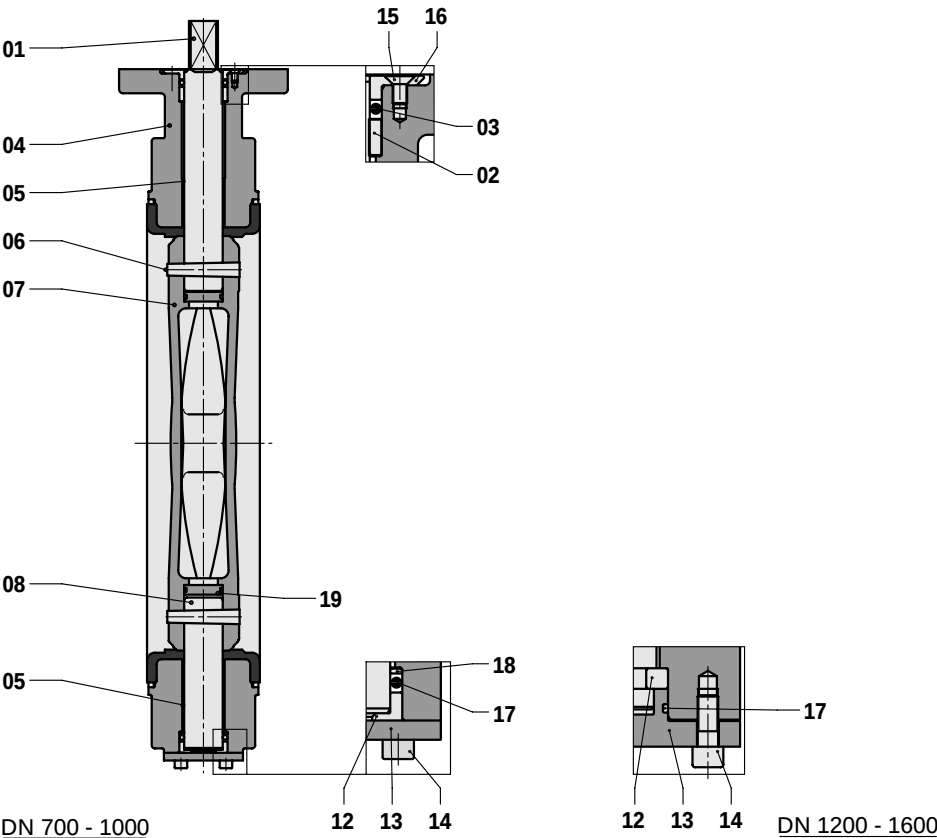



PARTS LIST:

ITEM	DESCRIPTION	ITEM	DESCRIPTION
01	shaft	12	axial bearing
02	bush	13	cover plate
03	o-ring	14	screw
04	body rubber lined	15	screw
05	bearing	16	flanged bush
06	conical pin	17	o-ring
07	disc	18	ring
08	shaft	19	sealing plate


RANGE EVUS DN 700 - 1600 (28" - 64")

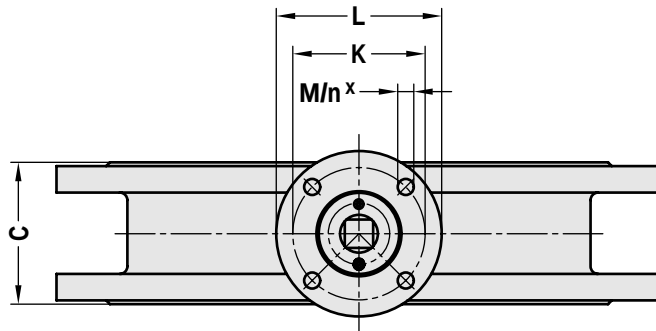


PREFERRED POSITION
WHEN INSTALLED IN
HORIZONTAL PIPELINE

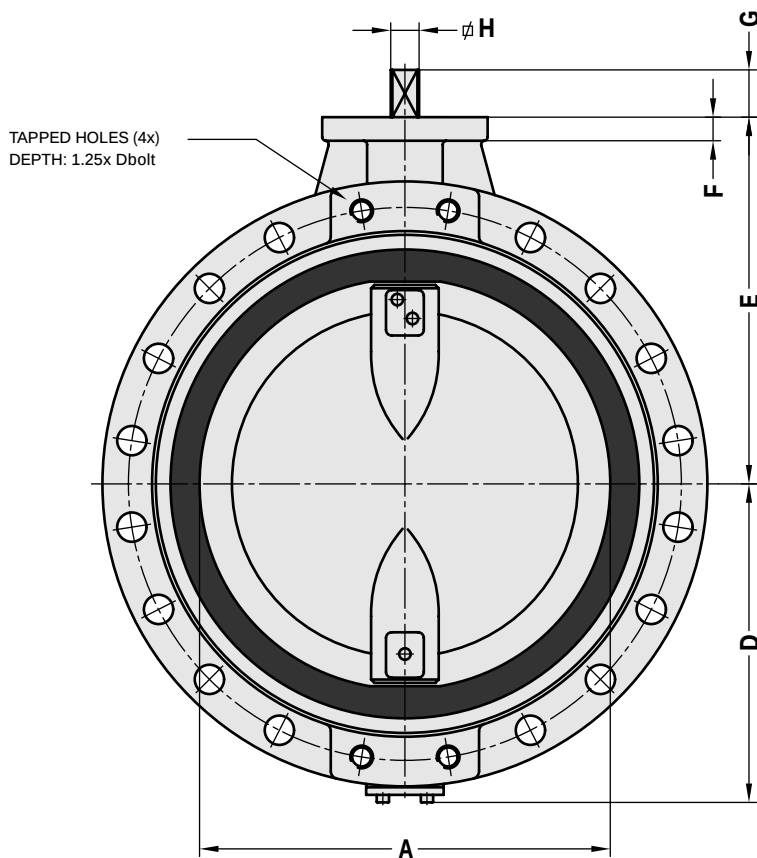

IN LINE INSTALLATION

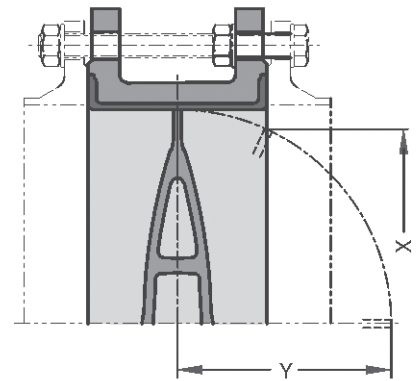

DEAD END SERVICE

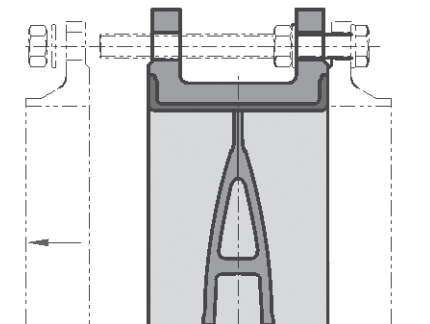

for bolt lengths see pag. 19

DIMENSIONS:

DN	NPS	ΔP_{max}	A	C	D	E	F	G	H	K	L	M	n	ISO 5211	X	Y	±kg
700	28	10 bar	686	165	480	560	25	60	46	165	210	21	4	F16	666	261	323
800	32	10 bar	786	190	525	610	25	60	46	165	210	21	4	F16	763	298	425
900	36	10 bar	886	203	635	690	30	90	60	254	300	17	8	F25	863	342	560
1000	40	10 bar	986	216	685	740	30	90	60	254	350	17	8	F25	973	390	760
1200	48	10 bar	1186	254	870	855	35	85	75	298	350	21	8	F30	1159	466	1100
1400	56	6 bar	1386	279	980	955	35	85	75	298	415	21	8	F30	1364	568	1800
1400	56	10 bar	1386	279	980	955	35	100	75	356	415	31	8	F35	1364	568	1800
1600	64	6 bar	1586	318	1096	1079	50	100	90	298	415	21	8	F35	1554	643	2400
1600	64	10 bar	1586	318	1096	1079	50	100	90	356	415	31	8	F35	1554	643	2400

PRODUCT SHEET

6.1.3. FLANGED VALVES

6.1.3.1 BUTTERFLY VALVE - RANGE EVML DN 80 - 800 (3" - 32")


General specification, construction details, parts list and dimensions

General Specification:


Body type	Single flange wafer long type
Valve function*	Isolating valve (on/off) and/or regulating valve
Installation	Clamping between flanges with through bolting and with possibility for end of line service
Flange connections*	PN 10 / PN 16
Valve shut off pressure*	2,5 / 6 / 10 / 16 bar
Seat tightness	Bi-directional tight shut off acc. ISO 5208, Rate A
Face to face dimension	ISO 5752 / EN 558, basic series 16 (wafer long), DIN 3202 k3
Available type approvals*	PED, KIWA, DVGW gas & water, SVGW, WRAS, LRS, DNV, ABS, BV, CCS, CRS, GL, NKK, RINa, RMRS, GOSST, Stoomwezen, FM
Actuation possibilities*	Manual, electric, pneumatic or hydraulic

* Needs to be specified when ordering. Contact Wouter Witzel Eurovalve for detailed advice

CONSTRUCTION DETAILS:

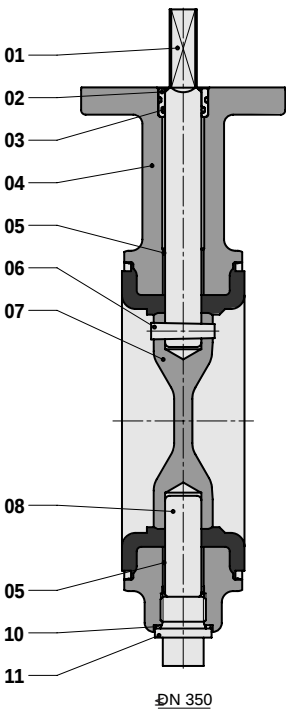


PARTS LIST:	
ITEM	DESCRIPTION
01	shaft
02	bush
03	o-ring
04	body rubber lined
05	bearing
06	conical pin
07	disc
08	shaft
10	sealing ring
11	plug

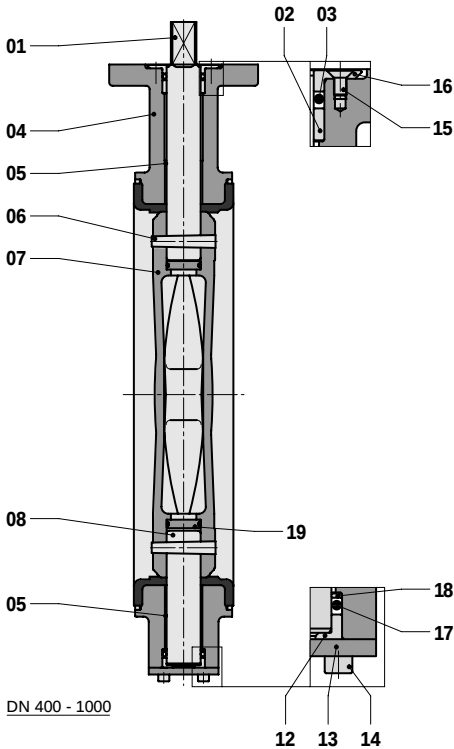


PARTS LIST:			
ITEM	DESCRIPTION	ITEM	DESCRIPTION
01	shaft	12	axial bearing
02	bush	13	cover plate
03	o-ring	14	screw
04	body rubber lined	15	screw
05	bearing	16	flanged bush
06	conical pin	17	o-ring
07	disc	18	ring
08	shaft	19	sealing plate


RANGE EVML DN 80 - 800 (3" - 32")

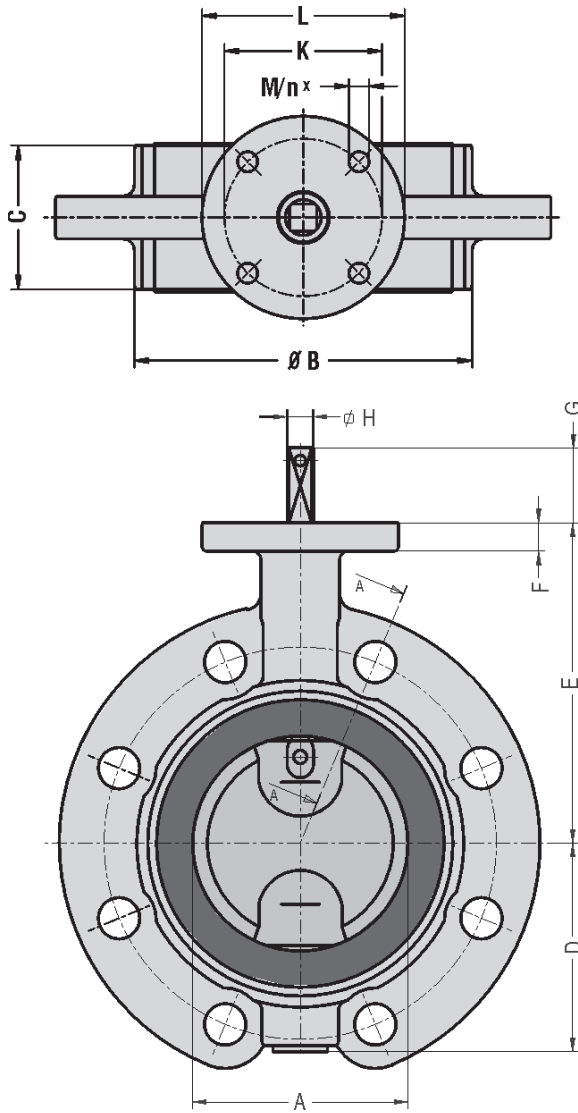



PREFERRED POSITION
WHEN INSTALLED IN
HORIZONTAL PIPELINE




END OF LINE SERVICE

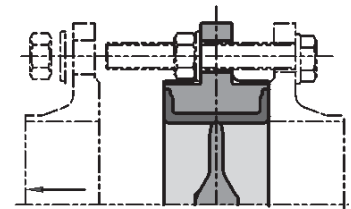

IN LINE INSTALLATION



for bolt lengths see pag. 19

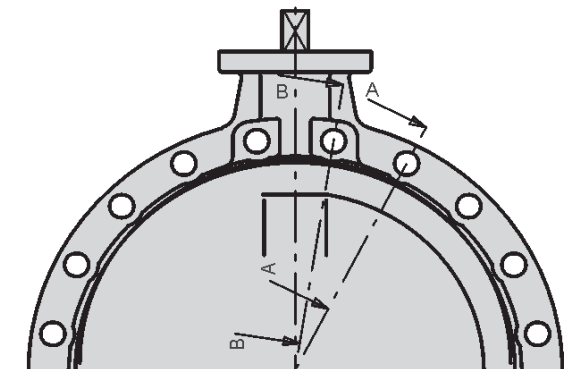

DIMENSIONS:

DN	NPS	A	B	C	D	E	F	G	H	K	L	M	n	ISO 5211	S	T	X	Y	±kg
50	2														-	-	-	-	-
65	2½														-	-	-	-	-
80	3	80	130	64	78	133	12	34	10	70	90	9	4	F07	19	-	48	8	6.5
100	4	100	150	64	98	147	12	34	12	70	90	9	4	F07	19	-	77	18	7.5
125	5	125	182	70	109	160	12	34	12	70	90	9	4	F07	20	-	104	28	11
150	6	150	210	76	133	180	14	34	16	70	90	9	4	F07	20	-	130	37	14
200	8	200	262	89	158	204	14	34	16	70	90	9	4	F07	21	-	179	56	18
250	10	250	315	114	194	245	15	45	24	102	125	11	4	F10	23	-	223	68	28
300	12	300	371	114	219	270	15	45	24	102	125	11	4	F10	24	-	278	93	39
350	14	336	405	127	256	315	15	45	24	102	125	11	4	F10	26	-	311	105	50
400	16	386	470	140	308	363	25	50	30	140	175	17	4	F14	28	43	360	123	95
450	18	436	522	152	334	388	25	50	30	140	175	17	4	F14	28	54	409	142	115
500	20	486	576	152	360	413	25	50	30	140	175	17	4	F14	32	60	462	167	155
600	24	586	672	178	426	510	25	50	40	140	175	17	4	F14	35	76	559	204	230
700	28	686	776	229	480	560	25	60	46	165	210	21	4	F16	37	115	647	229	330
750	30	763	826	229	520	585	25	60	46	165	210	21	4	F16	37	115	699	253	380
800	32	786	880	241	525	610	25	60	46	165	210	21	4	F16	40	115	749	273	430

PRODUCT SHEET

6.1.3.2 BUTTERFLY VALVE - RANGE EVMS DN 350 - 1000 (14" - 40")


General specification, construction details, parts list and dimensions

General Specification:

Body type	Single flange wafer short type
Valve function*	Isolating valve (on/off) and/or regulating valve
Installation	Clamping between flanges with possibility for end of line service.
Flange connections*	PN 10 / 16
Valve shut off pressure*	2,5 / 6 / 10 / 16 bar
Seat tightness	Bi-directional tight shut off acc. ISO 5208, Rate A
Face to face dimension	ISO 5752 / EN 558, basic series 20 (wafer short)
Available type approvals*	PED, BV, CCS, CRS, DNV, ABS, LRS, NKK, RiNa, NKK, RMRS, DVGW gas & water, SVGW, WRAS, GOSST, Stoomwezen, FM
Actuation possibilities*	Manual, electric, pneumatic or hydraulic

* Needs to be specified when ordering. Contact Wouter Witzel Eurovalve for detailed advice


CONSTRUCTION DETAILS:

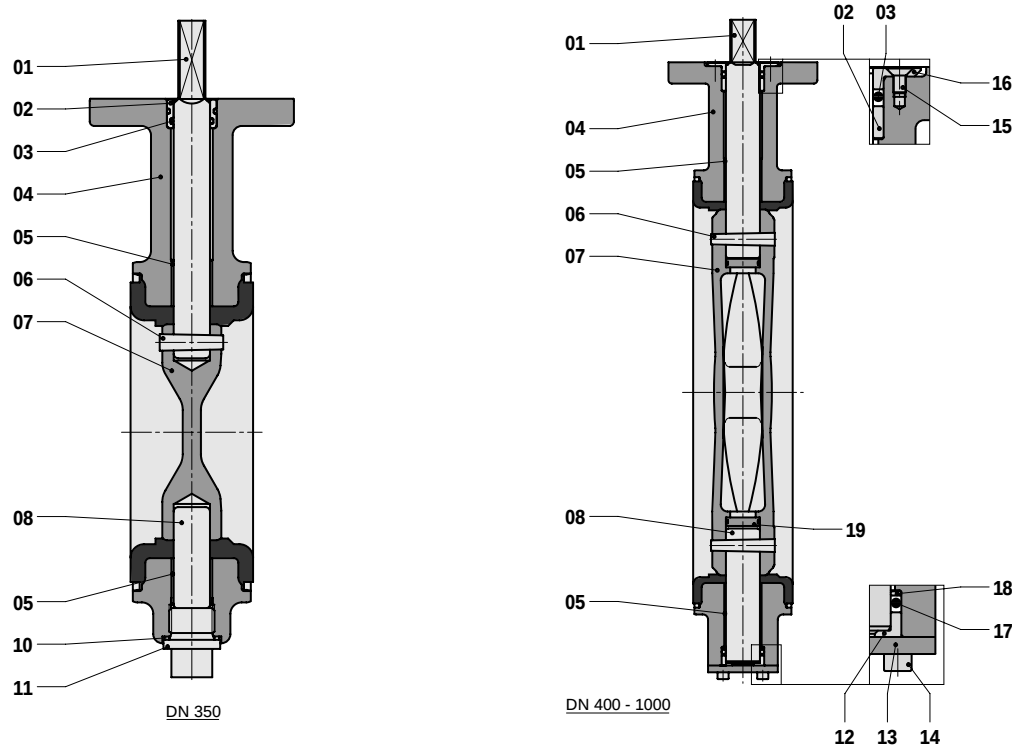


PARTS LIST:	
ITEM	DESCRIPTION
01	shaft
02	bush
03	o-ring
04	body rubber lined
05	bearing
06	conical pin
07	disc
08	shaft
10	sealing ring
11	plug

PARTS LIST:			
ITEM	DESCRIPTION	ITEM	DESCRIPTION
01	shaft	12	axial bearing
02	bush	13	cover plate
03	o-ring	14	screw
04	body rubber lined	15	screw
05	bearing	16	flanged bush
06	conical pin	17	o-ring
07	disc	18	ring
08	shaft	19	sealing plate



RANGE EVMS DN 350 - 1000 (14" - 40")

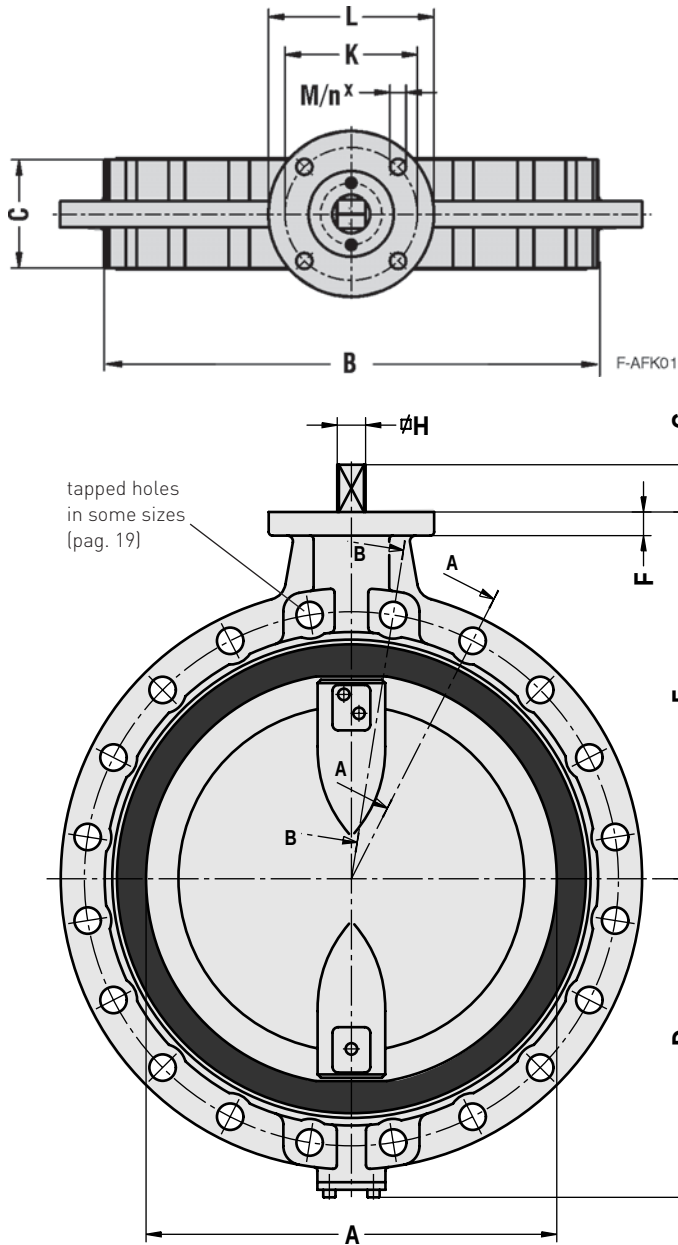


PREFERRED POSITION
WHEN INSTALLED IN
HORIZONTAL PIPELINE



IN LINE INSTALLATION



DEAD END SERVICE

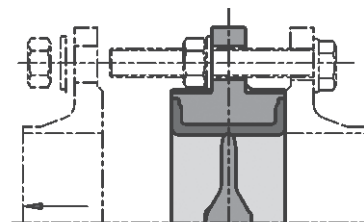

DIMENSIONS:

DN	NPS	A	B	C	D	E	F	G	H	K	L	M	n	ISO 5211	S	T	X	Y	±kg
350	14	336	405	78	256	315	15	45	24	102	125	11	4	F10	26	-	327	129	45
400	16	386	470	102	308	363	25	50	30	140	175	17	4	F14	28	43	373	142	85
450	18	436	522	114	334	388	25	50	30	140	175	17	4	F14	28	54	421	161	100
500	20	486	576	127	360	413	25	50	30	140	175	17	4	F14	32	60	470	180	135
600	24	586	672	154	426	510	25	50	40	140	175	17	4	F14	35	76	566	216	200
700	28	686	776	165	480	560	25	60	46	165	210	21	4	F16	37	115	666	261	315
800	32	786	880	190	525	610	25	60	46	165	210	21	4	F16	40	115	763	298	365
900	36	886	980	203	635	690	30	90	60	254	300	17	8	F25	40	190	863	342	500
1000	40	986	1085	216	685	740	30	90	60	*254	350	*17	8	*F25	50	200	973	390	670

*) F30 [pcd 298.8 x Ø 21] at $\Delta P_{max} = 16$ bar

PRODUCT SHEET

6.1.3.3 BUTTERFLY VALVE - RANGE EVFS DN 40 - 1000 (1 1/2" - 40")


General specification, construction details, parts list and dimensions

General Specification:


Body type	Double flanged short type
Valve function*	Isolating valve (on/off) and/or regulating valve
Installation	Installation between flanges and with possibility for end of line service.
Flange connections*	PN 6 / 10 / 16 / ANSI Class 150 / JIS 5 / 10 / 16
Valve shut off pressure*	2,5 / 6 / 10 / 16 / 20 bar
Seat tightness	Bi-directional tight shut off acc. ISO 5208, Rate A
Face to face dimension	ISO 5752 / EN 558, basic series 13 (double flanged short)
Available type approvals*	PED, Kitemark, KIWA, DVGW, WRAS, DNGW gas & water, SVGW, LRS, DNV, ABS, BV, CCS, CRS, GL, RINa, NKK, RMRS, GOSST, Stoomwezen, FM
Actuation possibilities*	Manual, electric, pneumatic or hydraulic

* Needs to be specified when ordering. Contact Wouter Witzel Eurovalve for detailed advice

CONSTRUCTION DETAILS:

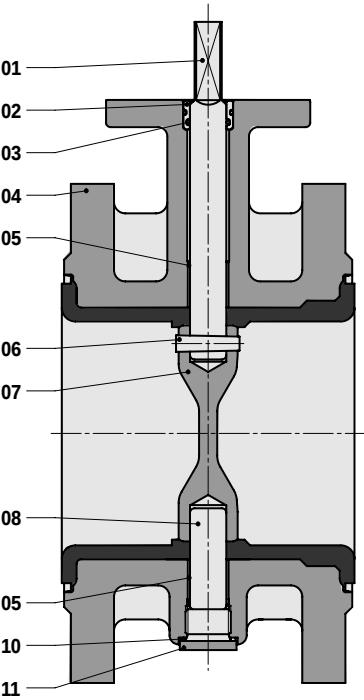

DN 40 - 350

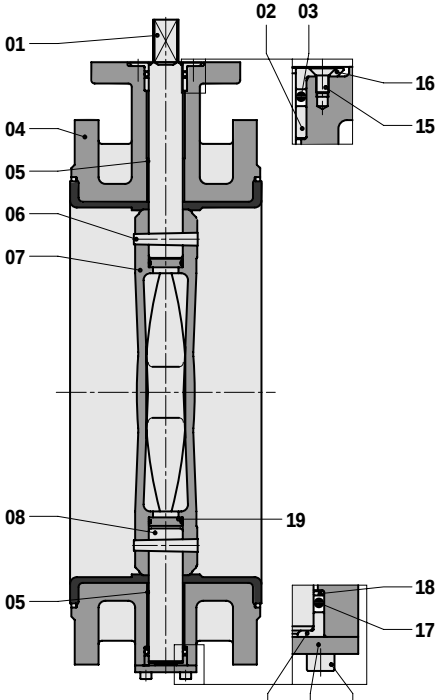

DN 400 - 1000


PARTS LIST:

ITEM	DESCRIPTION
01	shaft
02	bush
03	o-ring
04	body rubber lined
05	bearing
06	conical pin
07	disc
08	shaft
10	sealing ring
11	plug


PARTS LIST:

ITEM	DESCRIPTION	ITEM	DESCRIPTION
01	shaft	12	axial bearing
02	bush	13	cover plate
03	o-ring	14	screw
04	body rubber lined	15	screw
05	bearing	16	flanged bush
06	conical pin	17	o-ring
07	disc	18	ring
08	shaft	19	sealing plate


RANGE EVFS DN 40 - 1000 (1½" - 40")

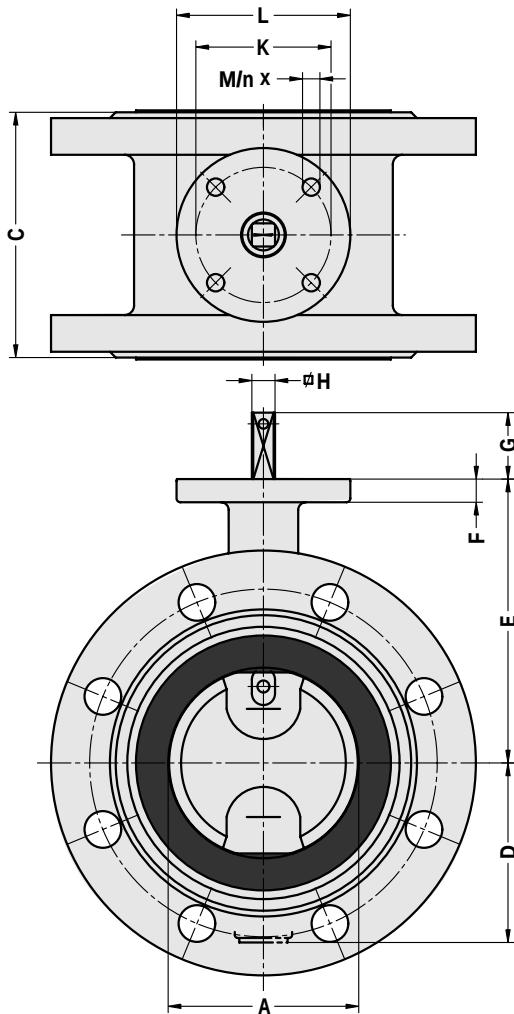


PREFERRED POSITION
WHEN INSTALLED IN
HORIZONTAL PIPELINE



IN LINE INSTALLATION

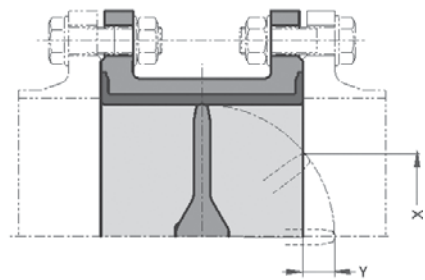

DEAD END SERVICE

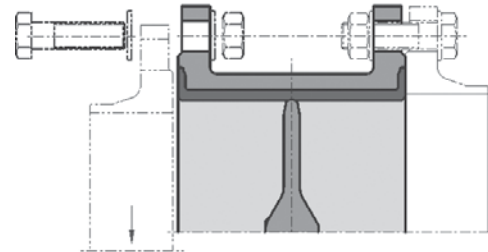

for bolt lengths see pag. 19

DIMENSIONS:

DN	NPS	A	C	D	E	F	G	H	K	L	M	n	ISO 5211	X	Y	±kg
40	1½	40	106	58	113	12	34	10	70	90	9	4	F07	-	-	7
50	2	50	108	63	118	12	34	10	70	90	9	4	F07	-	-	8
65	2½	65	112	71	126	12	34	10	70	90	9	4	F07	-	-	9
80	3	80	114	78	133	12	34	10	70	90	9	4	F07	-	-	11
100	4	100	127	98	147	12	34	12	70	90	9	4	F07	-	-	13
125	5	125	140	109	160	12	34	12	70	90	9	4	F07	-	-	17
150	6	150	140	133	180	14	34	16	70	90	9	4	F07	53	5	23
200	8	200	152	158	204	14	34	16	70	90	9	4	F07	130	24	32
250	10	250	165	194	245	15	45	24	102	125	11	4	F10	188	43	50
300	12	300	178	219	270	15	45	24	102	125	11	4	F10	242	61	65
350	14	336	190	256	315	15	45	24	102	125	11	4	F10	277	73	95
400	16	386	216	308	363	25	50	30	140	175	17	4	F14	320	85	130
450	18	436	222	334	388	25	50	30	140	175	17	4	F14	376	107	150
500	20	486	229	360	413	25	50	30	140	175	17	4	F14	429	129	200
550	22	536	267	395	485	25	50	40	140	175	17	4	F14	480	145	260
600	24	586	267	426	510	25	50	40	140	175	17	4	F14	522	160	300
650	26	636	292	456	535	25	60	46	165	210	21	4	F16	575	180	350
700	28	686	292	480	560	25	60	46	165	210	21	4	F16	621	197	380
750	30	736	318	520	585	25	60	46	165	210	21	4	F16	665	210	440
800	32	786	318	525	610	25	60	46	165	210	21	4	F16	719	234	500
900	36	886	330	635	690	30	90	60	254	300	17	8	F25	823	278	660
1000	40	986	410	685	740	30	90	60	*254	350	*17	8	*F25	897	288	900

*) F30 [pcd 298.8 x Ø 21] at ΔPmax = 16 bar

PRODUCT SHEET

6.1.3.4 BUTTERFLY VALVE - RANGE EVFS DN 1200 - 2000 (48" - 80")


General specification, construction details, parts list and dimensions

General Specification:

Body type	Double flanged short type, centric, rubberlined
Valve function*	Isolating valve (on/off) and/or regulating valve
Installation	Installation between flanges and with possibility for dead end service.
Flange connections*	PN 6 / 10 / 16 / ANSI Class 150 / JIS 5 / 10 / 16
Valve shut off pressure*	2,5 / 6 / 10 / 16 bar
Seat tightness	Bi-directional tight shut off acc. ISO 5208, Rate A
Face to face dimension	ISO 5752 / EN 558, basic series 13 (double flanged short)
Available type approvals*	PED, KIWA, DVGW gas & water, SVGW, WRAS, CCS, CRS, LRS, DNV, ABS, BV, GL, RINa, NKK, RMRS, GOSST, Stoomwezen
Actuation possibilities*	Manual, electric, pneumatic or hydraulic


* Needs to be specified when ordering. Contact Wouter Witzel Eurovalve for detailed advice

CONSTRUCTION:


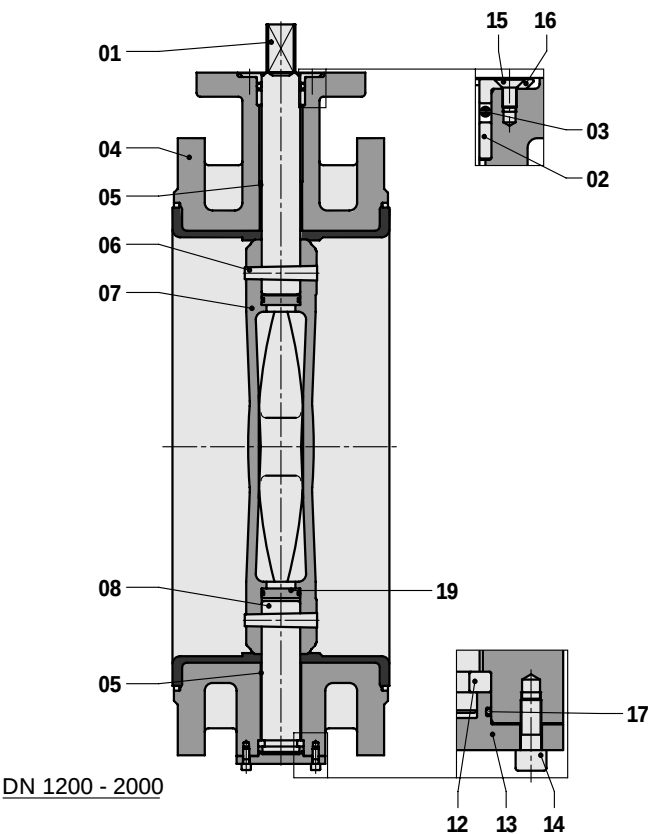


PARTS LIST:			
ITEM	DESCRIPTION	ITEM	DESCRIPTION
01	shaft	12	axial bearing
02	bush	13	cover plate
03	o-ring	14	screw
04	body rubber lined	15	screw
05	bearing	16	flanged bush
06	conical pin	17	o-ring
07	disc	18	ring
08	shaft	19	sealing plate


RANGE EVFS DN 1200 - 2000 (48" - 80")

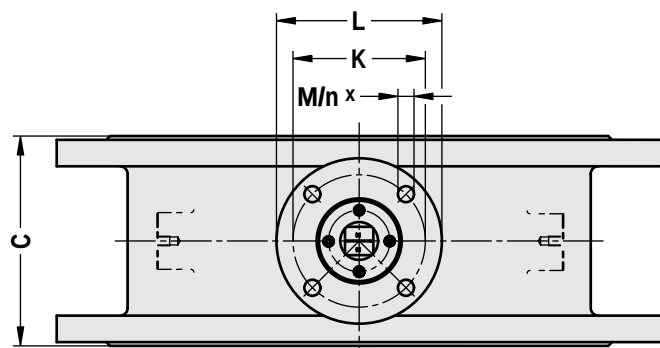


PREFERRED POSITION
WHEN INSTALLED IN
HORIZONTAL PIPELINE

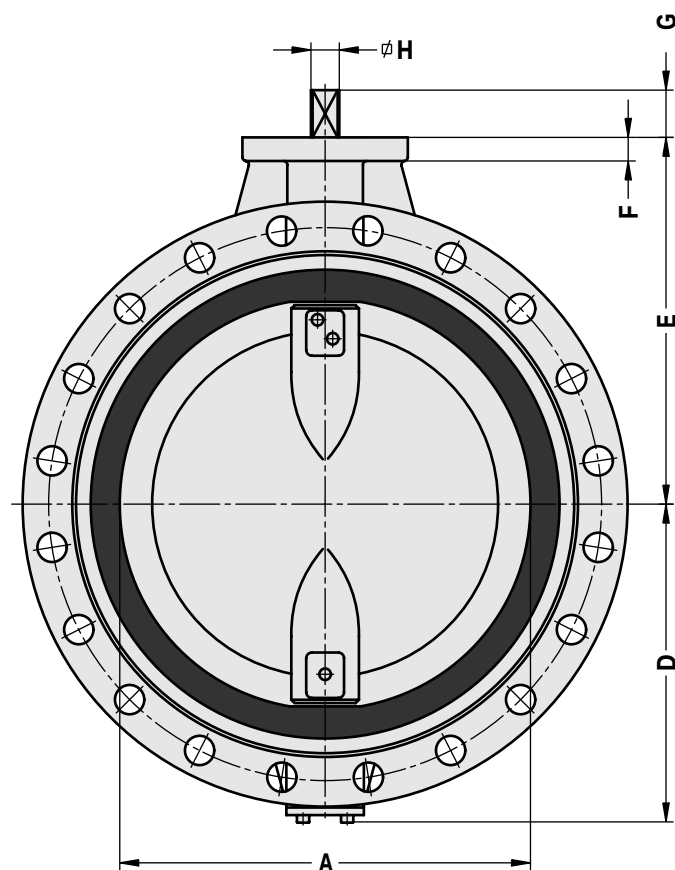

IN LINE INSTALLATION

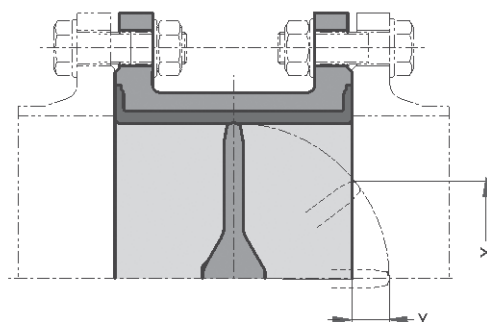

DEAD END SERVICE

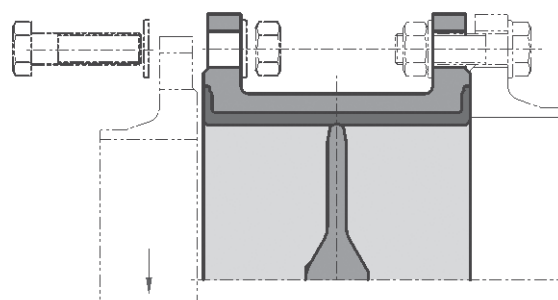

DIMENSIONS:

DN	NPS	ΔP_{max}	A	C	D	E	F	G	H	K	L	M	n	ISO 5211	X	Y	±kg
1200	48	10 bar	1186	470	870	855	35	85	75	298	415	21	8	F30	1089	358	1300
1200	48	16 bar	1186	470	870	855	35	85	75	356	415	31	8	F35	1089	358	1300
1400	56	6 bar	1386	530	970	955	35	85	75	298	415	21	8	F30	1281	428	1700
1400	56	10 bar	1386	530	970	955	35	85	75	356	415	31	8	F35	1281	428	1700
1400	56	16 bar	1386	530	980	955	35	100	90	356	415	31	8	F35	1281	428	1700
1500	60	10 bar	1484	600	1037	1029	50	100	90	356	475	31	8	F35	1360	443	2100
1500	60	16 bar	1484	600	1037	1029	50	120	105	406	475	37	8	F40	1360	443	2100
1600	64	10 bar	1586	600	1096	1079	50	100	90	356	475	31	8	F35	1469	493	2500
1600	64	16 bar	1586	600	1096	1079	50	120	105	406	475	37	8	F40	1469	493	2500
1800	72	6 bar	1776	670	1187	1176	50	100	90	356	415	31	8	F35	1642	550	3500
1800	72	10 bar	1776	670	1187	1176	50	120	105	406	475	37	8	F40	1642	550	3500
2000	80	6 bar	1976	760	1287	1276	50	120	105	356	475	31	8	F35	1822	606	4000
2000	80	10 bar	1976	760	1287	1276	50	140	120	406	475	37	8	F40	1822	606	4000

PRODUCT SHEET

6.1.3.5 BUTTERFLY VALVE - RANGE EVFL DN 50 - 1000 (2" - 40")



General specification, construction details, parts list and dimensions

General Specification:

Body type	Double flanged long type, centric, rubberlined
Valve function*	Isolating valve (on/off) and/or regulating valve
Installation	Installation between flanges and with possibility for dead end service.
Flange connections*	PN 10 (PN 16 on some sizes)
Valve shut off pressure*	2.5 / 6 / 10 bar
Seat tightness	Bi-directional tight shut off acc. ISO 5208, Rate A
Face to face dimension	ISO 5752 / EN 558, basic series 14 (double flanged long)
Available type approvals*	PED, KIWA, DVGW gas & water, SVGW, WRAS, LRS, ABS, BV, CCS, CRS, NKK, GL, RINa, RMRS, GOSST, Stoomwezen, FM
Actuation possibilities*	Manual, electric, pneumatic or hydraulic

* Needs to be specified when ordering. Contact Wouter Witzel Eurovalve for detailed advice.


CONSTRUCTION DETAILS:

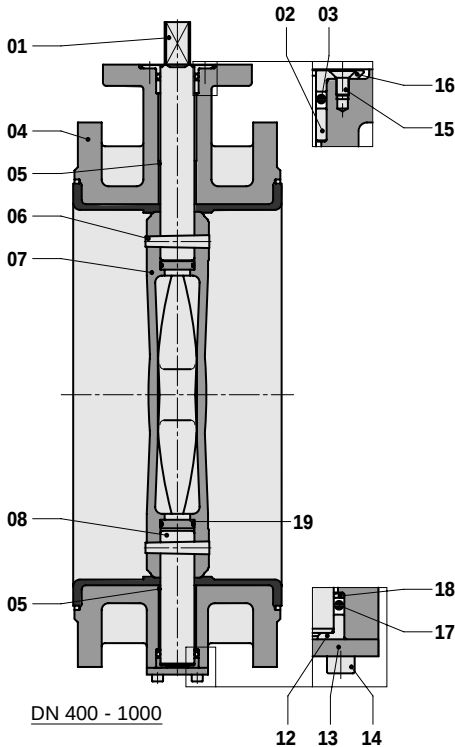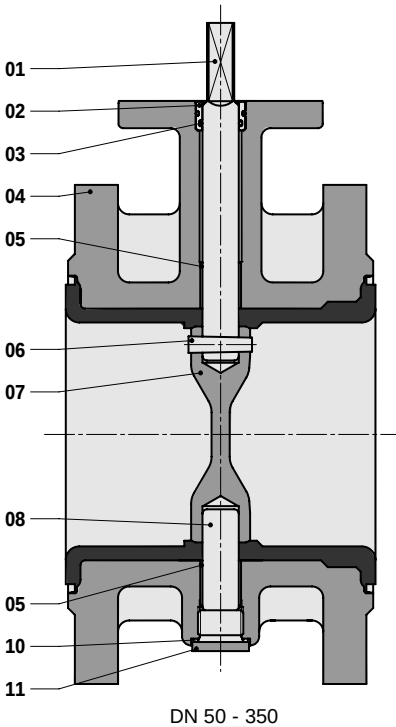



PARTS LIST:	
ITEM	DESCRIPTION
01	shaft
02	bush
03	o-ring
04	body rubber lined
05	bearing
06	conical pin
07	disc
08	shaft
10	sealing ring
11	plug

PARTS LIST:			
ITEM	DESCRIPTION	ITEM	DESCRIPTION
01	shaft	12	axial bearing
02	bush	13	cover plate
03	o-ring	14	screw
04	body rubber lined	15	screw
05	bearing	16	flanged bush
06	conical pin	17	o-ring
07	disc	18	ring
08	shaft	19	sealing plate

RANGE EVFL DN 50 - 1000 (2" - 40")

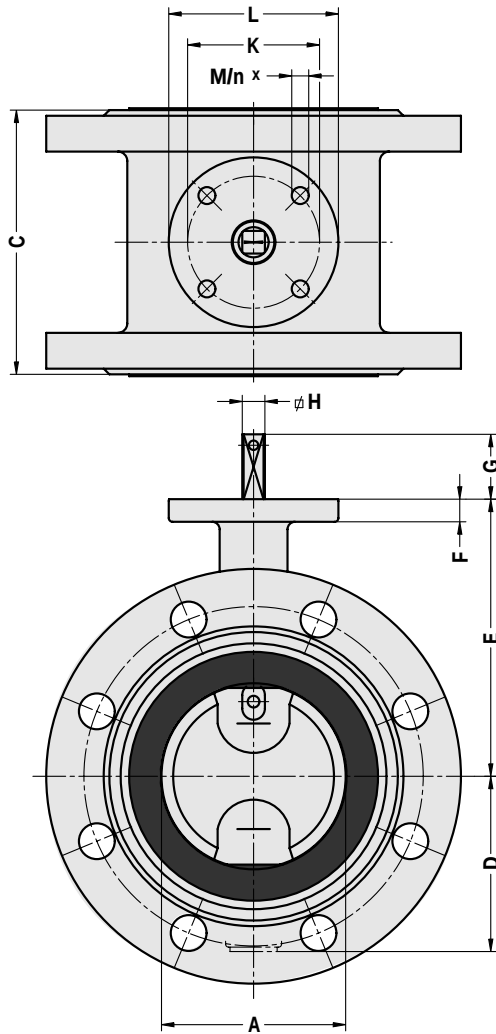

PREFERRED POSITION
WHEN INSTALLED IN
HORIZONTAL PIPELINE

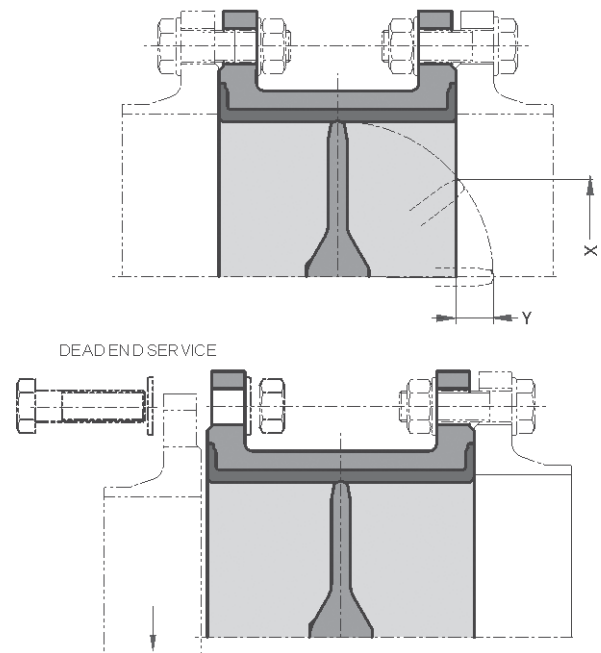

for bolt lengths see pag. 19

DIMENSIONS:

DN	NPS	A	C	D	E	F	G	H	K	L	M	n	ISO 5211	X	Y	±kg
50	2	50	150	63	118	12	34	10	70	90	9	4	F07	-	-	11
65	2½	65	170	71	126	12	34	10	70	90	9	4	F07	-	-	13
80	3	80	180	78	133	12	34	10	70	90	9	4	F07	-	-	17
100	4	100	190	98	147	12	34	12	70	90	9	4	F07	-	-	20
125	5	125	200	109	160	12	34	12	70	90	9	4	F07	-	-	26
150	6	150	210	133	180	14	34	16	70	90	9	4	F07	-	-	31
200	8	200	230	158	204	14	34	16	70	90	9	4	F07	-	-	45
250	10	250	250	194	245	15	45	24	102	125	11	4	F10	-	-	70
300	12	300	270	219	270	15	45	24	102	125	11	4	F10	131	15	90
350	14	336	290	256	315	15	45	24	102	125	11	4	F10	170	23	120
400	16	386	310	308	363	25	50	30	140	175	17	4	F14	230	38	165
450	18	436	330	334	388	25	50	30	140	175	17	4	F14	285	53	200
500	20	486	350	360	413	25	50	30	140	175	17	4	F14	337	68	230
600	24	586	390	426	510	25	50	40	140	175	17	4	F14	438	98	320
700	28	686	430	480	560	25	60	46	165	210	21	4	F16	535	128	420
800	32	786	470	525	610	25	60	46	165	210	21	4	F16	630	158	610
900	36	886	510	635	690	30	90	60	254	300	17	8	F25	725	188	820
1000	40	986	550	685	740	30	90	60	*254	350	*17	8	*F25	819	218	1130

*) F30 [pcd 298.8 x Ø 21] at $\Delta P_{max} = 16$ bar]

PRODUCT SHEET

6.1.3.6 BUTTERFLY VALVE - RANGE EVFL DN 1200 - 1500 (48" - 60")


General specification, construction details, parts list and dimensions

General Specification:

Body type	Double flanged long type, centric, rubberlined
Valve function*	Isolating valve (on/off) and/or regulating valve
Installation	Installation between flanges and with possibility for end of line service
Flange connections*	PN 10 / 16
Valve shut off pressure*	2,5 / 6 / 10 bar
Seat tightness	Bi-directional tight shut off acc. ISO 5208, Rate A
Face to face dimension	ISO 5752 / EN 558, basic series 14 (double flanged long)
Available type approvals*	PED, KIWA, DVGW gas & water, SVGW, WRAS, LRS, ABS, BV, CCS, CRS, GL, NKK, RINa, RMRS, GOSST, Stoomwezen
Actuation possibilities*	Manual, electric, pneumatic or hydraulic

* Needs to be specified when ordering. Contact Wouter Witzel Eurovalve for detailed advice


CONSTRUCTION DETAILS:

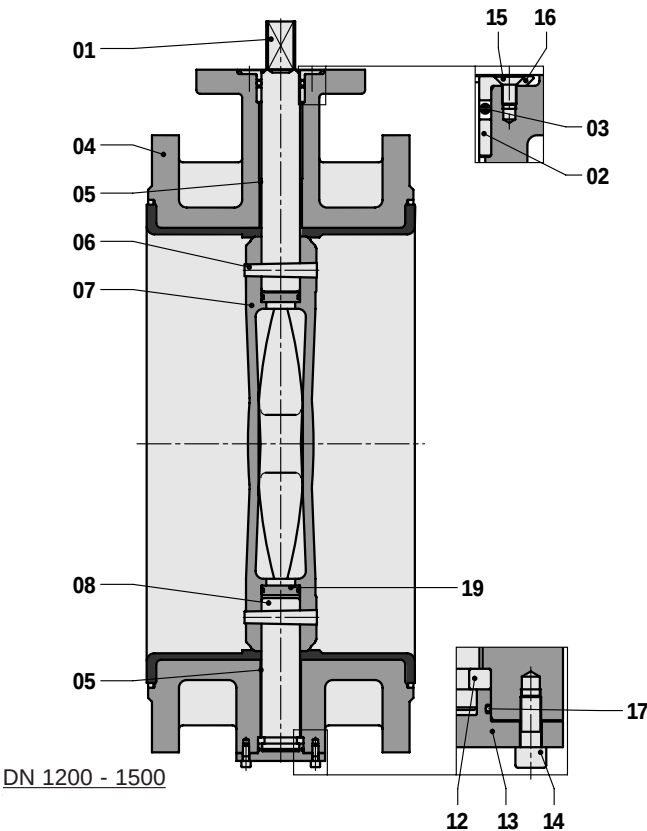



PARTS LIST:

ITEM	DESCRIPTION	ITEM	DESCRIPTION
01	shaft	12	axial bearing
02	bush	13	cover plate
03	o-ring	14	screw
04	body rubber lined	15	screw
05	bearing	16	flanged bush
06	conical pin	17	o-ring
07	disc	18	ring
08	shaft	19	sealing plate


RANGE EVFL DN 1200 - 1500 (48" - 60")

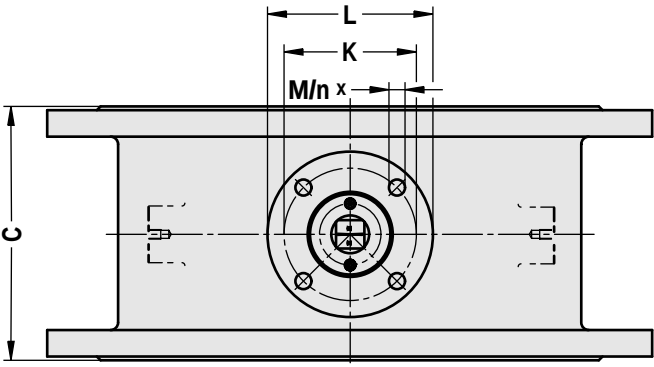


PREFERRED POSITION
WHEN INSTALLED IN
HORIZONTAL PIPELINE

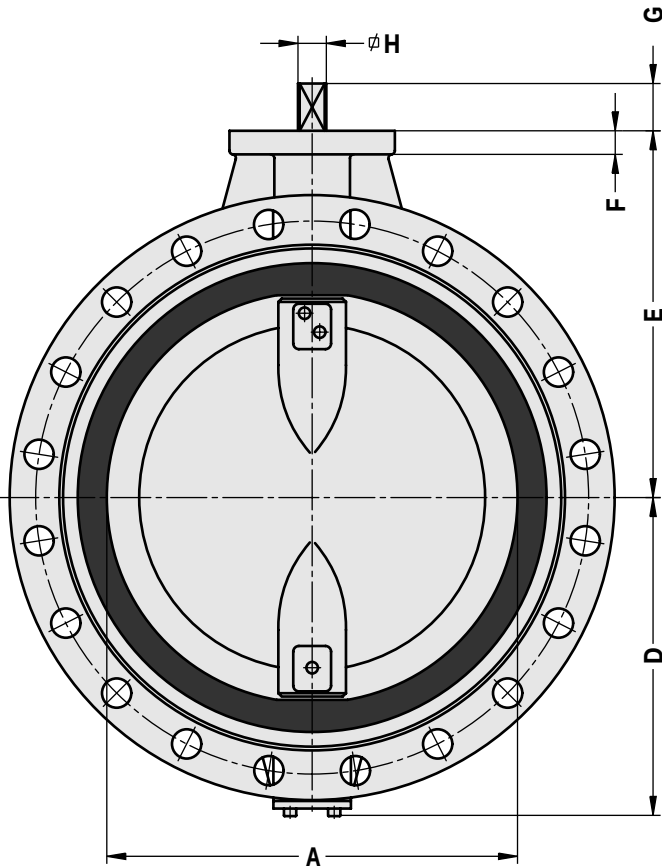

IN LINE INSTALLATION

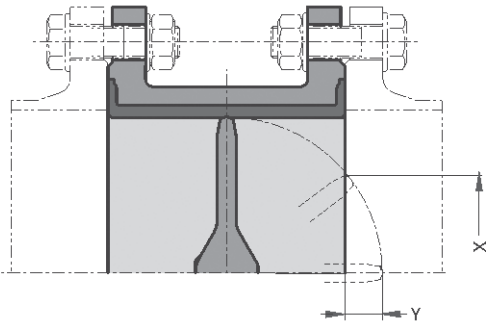

DEAD END SERVICE

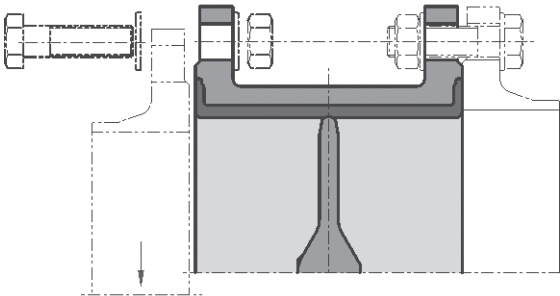

DIMENSIONS:																	
DN	NPS	ΔP _{max}	A	C	D	E	F	G	H	K	L	M	n	ISO 5211	X	Y	±kg
1200	48	10 bar	1186	630	870	855	35	85	75	298	415	21	8	F30	1005	315	1600
1200	48	16 bar	1186	630	870	855	35	85	75	356	415	31	8	F35	1005	315	1600
1400	56	6 bar	1386	530	970	955	35	85	75	298	415	21	8	F30	1184	330	2100
1400	56	10 bar	1386	710	970	955	35	85	75	356	415	31	8	F35	1184	330	2100
1400	56	16 bar	1386	710	980	955	35	100	90	356	415	31	8	F35	1184	330	2100
1500	60	10 bar	1484	750	1037	1029	50	100	90	356	475	81	8	F35	1283	368	2500
1500	60	16 bar	1484	750	1037	1029	50	120	105	406	475	37	8	F40	1283	368	2500

6.2 SPECIAL EXECUTIONS AND ACCESSORIES


The following special butterfly valves executions and accessories are available on request:

6.2.1 VALVE WITH HALAR® COATED DISC FOR CORROSIVE FLUIDS

Specification

Application	In extremely corrosive fluids e.g. most technical acids, alkalies and organic solvents where stainless steel discs are not resistant. Also for sticky fluids. Max. temperature: 90 °C.
Description	The disc surface is fully coated with Halar® (ECTFE). The disc/shaft connection is by inner hexagon or square. Only the disc and body lining are wetted by the process fluid.
Available on	All Wouter Witzel product lines. DN 50 - 350 (2" - 14"): Max. 10 bar working pressure. Disc stainless steel. DN 400 - 1000 (16" - 40"): Max. 6 bar working pressure. Disc ductile iron.


Note: Shaft square may be different from standard

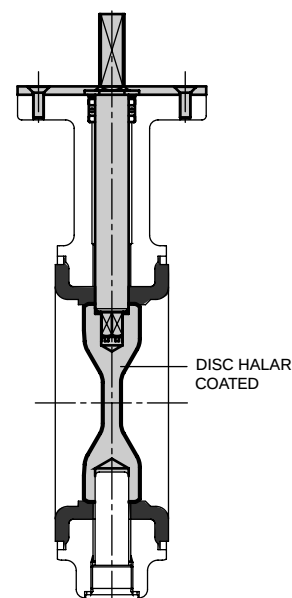

6.2.2 DUCTILE IRON DISC WITH A FACING OF CORROSION FREE NI-WELD METAL

Specification


Application	Erosive and corrosive fluids with high flow velocities where ductile cast iron discs are specified.
Description	The disc edge in contact with the rubber lining is faced with a corrosion resistant nickel-chromium alloy (Inconel applied) by welding and finish machined.
Available on	Valves with ductile iron discs, sizes $\geq$ DN 600 (24").

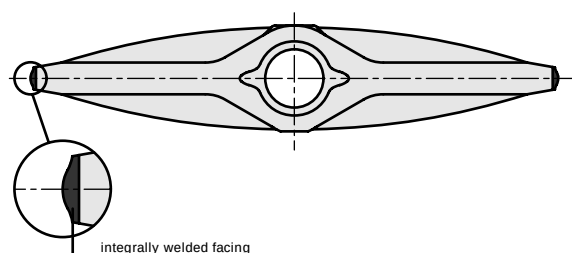

6.2.3 POLISHED STAINLESS STEEL DISC FOR CLEAN SERVICES

Specification

Application	Valves used in the pharmaceutical, chemical and food industry.
Description	The disc surface has been polished to avoid contamination and bacterial growth.
Available on	Valves with duplex steel discs in all Wouter Witzel product lines DN 50 - 1600 (2" - 64").



6.2.4 SILICONE FREE VALVES FOR COATING INSTALLATIONS


Specification

Application	Valves used in silicone free processes e.g. coating systems for car manufacturers
Description	All valve parts are cleaned before assembly in the clean room where no grease is used. Valves are marked with the letter 'R' and specially packed in sealed plastic bags.
Available on	All Wouter Witzel product lines DN 50 - 600 (2" - 24").

6.2.5 COPPER FREE MATERIAL EXECUTION FOR AMMONIA CONTAINING FLUIDS

Specification


Application	For use in fluids containing ammonia.
Description	All valve parts made from non copper containing materials.
Available on	All Wouter Witzel product lines and sizes.

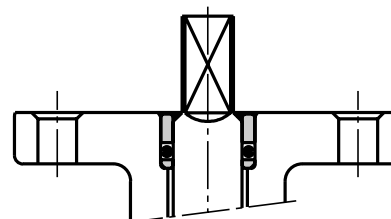

6.2.6 SUPPORT LEGS (ACCESSORY)

Specification


Application	When the valve is to be set on a fixed base to support the valve. Note: not intended as pipeline support.
Description	Steel welded structure, connected to the valve body by bolting; tailor made.
Available on	EVFS DN 1200 - 2000 (48" - 80") Other sizes and types on request.

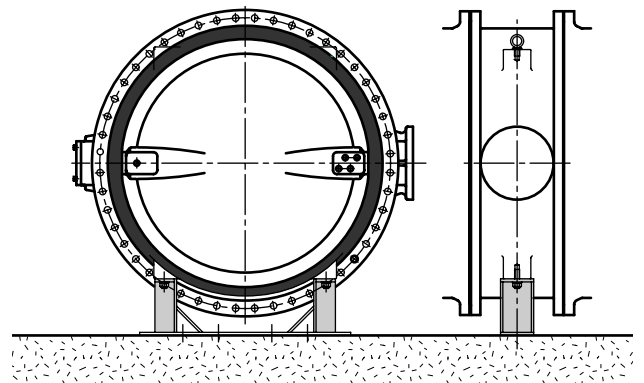

6.2.7 LEAKAGE DETECTION/PROTECTION (ACCESSORY)

Specification


Application	– Extra environmental protection of the shaft passage out of the pressure containing cavity in case of harmful pipe fluids (additional to German TA-Luft). – In case of requirement for exceptional high valve performance reliability.
Description	Additional intermediate part on the valve head with internal R1/4 threaded connection for detection, draining or emergency sealing of leakage. TÜV approved.
Available on	All Wouter Witzel product lines. Extended shaft necessary.

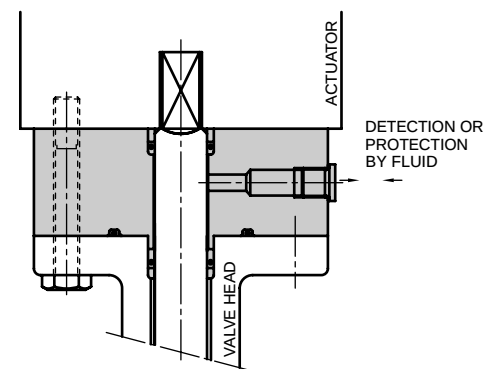

6.2.8 VALVES AND ACTUATORS WITH ATEX 95 APPROVAL FOR APPLICATION IN POTENTIALLY EXPLOSIVE ATMOSPHERES.

Specification

Application	In potentially explosive atmospheres.
Description	Valves are provided with a connection device for earthing (see fig). The end user should make and test this earth connection after installation of the valve. Actuators (when applied) are delivered with the appropriate Atex Zone certification.
Available on	All Wouter Witzel product lines. The appropriate Atex zone should be specified when ordering.

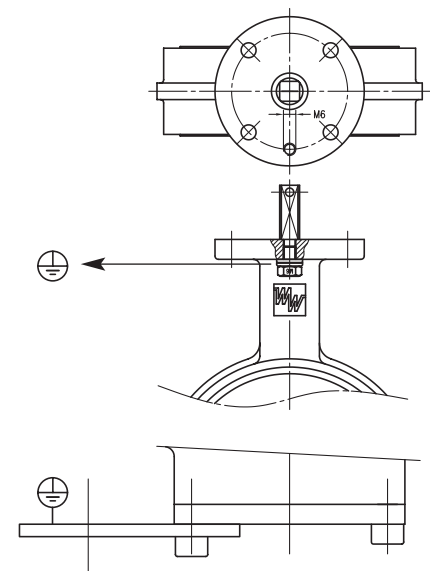


6.2.9 INDIRECT MOUNTING KIT FOR ACTUATORS

Specification

Application	• As intermediate parts for mounting an actuator with another flange type. • To protect the actuator against heat from high temperature valves. • Where direct mounting of actuators is not allowed eg. in the chemical industries
Description	Bracket for actuator mounting. Shaft coupling for torque transmission and with position indicator. Spigot on valve for centring the bracket. Materials: • Bracket: (stainless) steel • Shaft coupling: stainless steel
Available on	All Wouter Witzel product lines.

Valve flange	Actuator flange and (diagonaal) square					
	F05 Sq.14	F07 Sq.17	F10 Sq.22	F12 Sq.27	F14 Sq.36	F16 Sq.46
F05						
F07	•	•	•			
F10			•	•	•	
F12						
F14			•	•	•	
F16						•
H (mm)	60	60	80	80	90	

- Standardized options

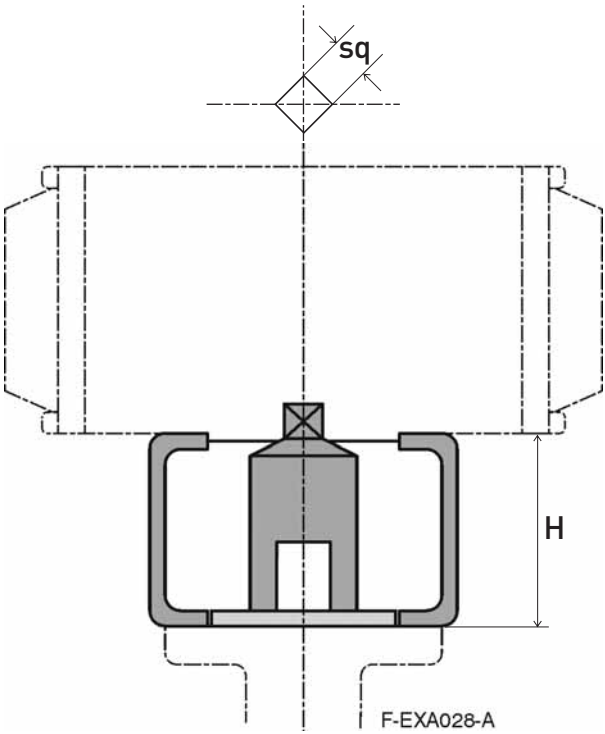

6.3 MANUAL OPERATORS

6.3.1 GENERAL

Wouter Witzel Eurovalve supplies a wide selection of manual operators: lever and wormgear in different executions. Shaft extensions and other options are available.


Lever

The basic manual operator for Wouter Witzel valves up to DN 200 (8") is the 10 position spring loaded lever with notch plate which provides quick operation, economy and simplicity. When the lever is not in manual control it always returns to a latched position. It is designed to open or close the valve or to regulate the flow. The lever is also designed to serve as valve disc position indicator. When the lever is positioned parallel to the pipeline the valve is open.


Wormgear

To reduce the required manual effort applied or to minimize the pressure shocks a wormgear is preferred. A wormgear allows greater ease of operation and gives a better protection against system damage caused by waterhammer due to quick closing.


For regulating valves with a wormgear the system can be properly balanced by fine manual control. Casing materials are aluminium or cast iron. The available operating devices for wormgear are handwheels, tee caps for buried service or chainwheels for overhead installations.

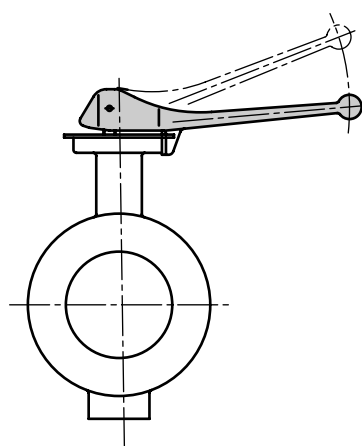

LEVER

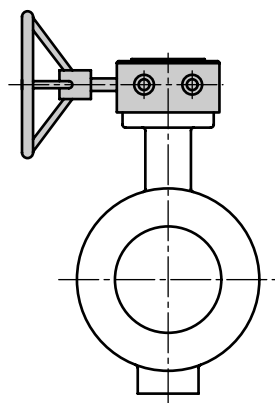

WORMGEAR

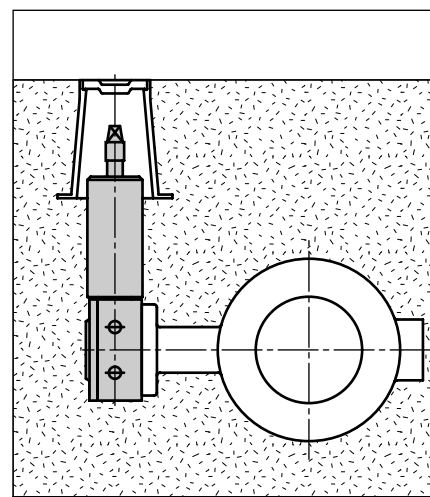

EXTENSIONS

Technical data is given in the following product data sheets

PRODUCT SHEET

6.3.2 LEVER, TYPE L

Application:

For the quick manual operation of Wouter Witzel valves up to and including DN 300 (12"). For open/close or regulating purposes.

Product description:

- Fits to all Wouter Witzel valves up to and including DN 300 (above DN 200 for low pressure applications only)
- Length depending on valve size
- Easy operating
- Lever made of malleable cast iron (bending on site is possible by heating)
- Notch plate made of zinc plated steel
- Notch plate with 10 positions

Options:

- Various padlock facilities (figure 1)
- Limit switches for position monitoring (figure 2)
- Special notch plate for regulating purposes (figure 3)
- Stainless steel notch plate
- L-short, extra short execution (only L1 and L2)

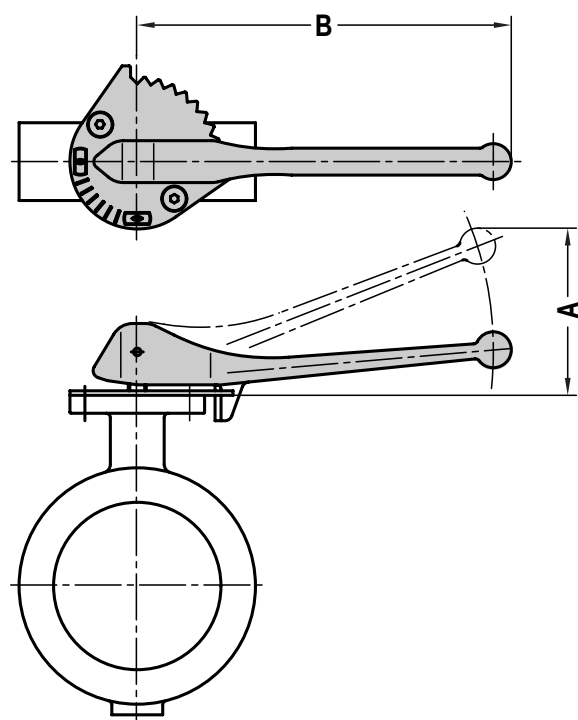

Figure:**Options:**

FIG. 1: LEVER + PADLOCK FACILITY




FIG. 2: LEVER + SWITCHES




FIG. 3: LEVER FOR REGULATING

Dimensions:

Lever	A	B	KG
L1	112	250	1
L2	112	250	1
L3	121	315	1,4
L4	184	500	3,2

Selection of lever, type L:

DN	2,5 bar	6 bar	10 bar	16 bar
50 - 80 (2"-3")	L1	L1	L1	L1
100 - 125 (4"-5")	L2	L2	L2	L2
150 - 200 (6"-8")	L3	L3	L3	L3
250 (10")	L4	-	-	-
300 (12")	L4	-	-	-

PRODUCT SHEET

6.3.3 GEARBOX, ALUMINIUM CASING

Application:

For the manual operation of Wouter Witzel valves up to and including DN 500 (20"). General purpose applications.

Product description:

- Body of (polyurethane coated) light weight aluminium
- Self-locking
- Suitable for fine control service
- Adjustable end stops
- Visual position indicator
- Life time lubrication
- Replaceable stem drive bush
- Steel handwheel


Technical data:

- Stroke : 90° with ±5° adjustment
- Rotation : Clockwise closing
- Enclosure : IP 64 according DIN 40050 /IEC 529
- Temperature : -20° to 80 °C

Options:

- Handwheel in line with pipeline (figure 1)
- Approved gearboxes eg UL, VdS, Apsad

Figure:

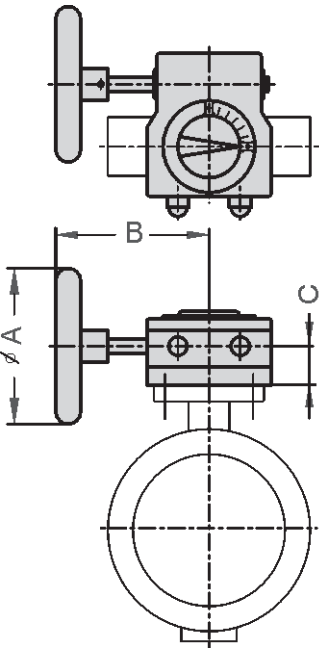

Available types and dimensions:				
Wormgear type	A	B	C	KG
WK 232 - 05 M100	100	104	21	1
WK 232 - 07 M125	125	118	29	2
WK 232 - 10 M315	315	203	37	5
WK 232 - 12 M400	400	252	40	8

Option:




FIG.1: HANDWHEEL IN LINE WITH PIPELINE

PRODUCT SHEET

6.3.4 GEARBOX, CAST IRON CASING


Application:

For the manual operation of Wouter Witzel valves up to and including DN 600 (24"). Heavy duty applications. Bigger sizes on request.

Product description:

- Body of polyurethane coated cast iron
- Self-locking
- Suitable for fine control service
- Adjustable end stops
- Visual position indicator
- Life time lubrication
- Handwheel operation

Figure:

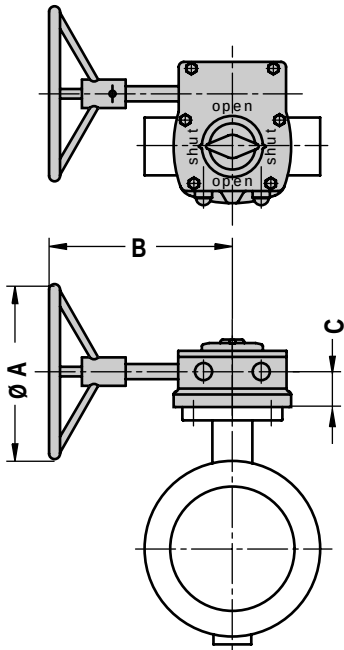

Technical data:

- Stroke : 90° with ±5° adjustment
- Rotation : Clockwise closing
- Enclosure : GSH: IP68; M: IP67
acc. to DIN 40050 / IEC 529 / EN 60529
- Temperature : -20° to 80 °C

Options:

- Body of ductile cast iron
- IP68 executions for buried or immersed exposure
- Limit switches (figure 1)
- Vane position indicator (figure 2)
- Various locking possibilities
- Shaft extension possibilities
- Memory stop
- FM approved wormgear (special execution)
- Handwheel in line with pipeline (figure 3)

Available types and dimensions:

Wormgear type	A	B	C	KG
WK M10 SG 200	200	202	35	4
WK M10 SG 300	300	262	35	4
WK M12 SG 400	400	348	42	8
WK M14 SG 500	500	375	50	15
WK M15 SG 500	500	427	50	28
Non standard gear box:				
WK AB 210 M200	200	238	27	4
WK AB 550 M300	300	295	41	11
WK AB 880 M400	400	383	42	18
WK AB 1250 SG 500	500	428	48	27

Options:




FIG. 1: LIMITSWITCHES




FIG. 2: VANE POSITION INDICATOR




FIG. 3: HANDWHEEL IN LINE WITH PIPELINE

PRODUCT SHEET

6.3.5 GEARBOX FOR BURIED SERVICE WITH INPUT SHAFT EXTENSION

Application:

For the manual operation (open/close) by T-key of Wouter Witzel valves butterfly valves in buried service.

Product description:

- Body of epoxy coated cast iron
- Clockwise closing is standard
- Self-locking
- Adjustable end stops
- Life time lubrication
- Option: body ductile iron (type E $\geq$ 1950 standard)
- Option: anti clockwise closing

Technical data:

- Stroke : 90° with $\pm 5^\circ$ adjustment
- Enclosure : IP68 according IEC 529 / EN 60529
- Temperature: -20° to 80 °C
- Input : max. 250 Nm (EN 1074)

Product description extension type B3T


- Square (30 mm) for T-key operation (DIN 3223)
- In 5 sizes with telescopic length adjustment
- Plastic (polythene) protection pipe
- Internal fracture pin against overloading of wormgear
- Options: position indicator, position indicator with limit switches

Wormgear types E and GS with B3T extension						
Wormgear type	A (mm)	B (mm)	X min* (m)	X max* (m)	Turns to close	KG
E 550 G	41	71	0,8	4,7	8,5	11
E 880 G	42	86	0,8	4,7	9,5	15
E 1250 G	48	105	0,8	4,7	13,7	22
E 1950 G	55	130	0,8	4,7	13	37
E 1950 G / SP2.4	55	211	1,0	4,9	31	46
E 6800 G / SP4	59	263	1,0	4,9	78	71
E 250 G / SP9	88	431	1,1	5,0	176	226
GSM 63.3	42	63	0,8	4,7	13	12
GSM 80.3	57	80	0,8	4,7	13	18
GSM 100.3	75	100	0,8	4,7	13	32
GSM 125.3 / VZ2.3	75	125	0,8	4,8	31,5	45
GS160 / GZ14 (4:1)	76	150	1,1	5,0	54	160
GS200 / GZ16 (6:1)	101	200	1,2	5,1	79,5	180

* The B3T extension is available in 5 different successive units of lengths. By stating X Wouter Witzel Eurovalve will select the most suitable unit of length, taking into consideration with the sizes of the wormgear. Surface Box is not included.

Figure:

EXTENSION B3T

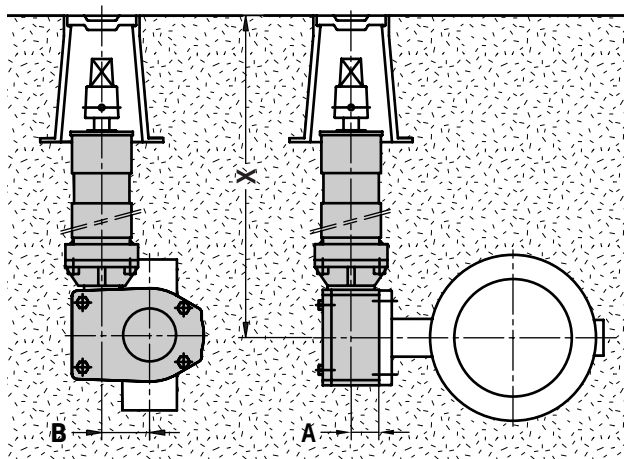

PRODUCT SHEET


6.3.6 EXTENSIONS FOR GEARBOXES

Wouter Witzel Eurovalve supplies different types of wormgear extensions for remote operation of butterfly valves.


- a - Shaft extension between valve head and actuator eg the type B3E.
- b - Stem extension of the operating device, eg the types B3D and B3F.

Extension type B3E for remote operation.


A steel extension to extend the valve shaft to fit a lever, any type of wormgear or power actuator.
Maximum length 3 m.

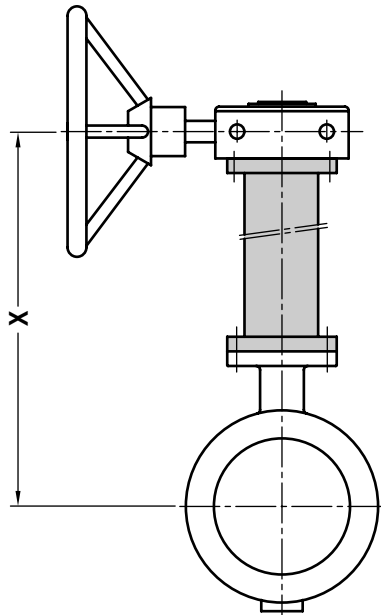**Extension type B3D for overhead installations.**

Execution with a chainwheel and chain.

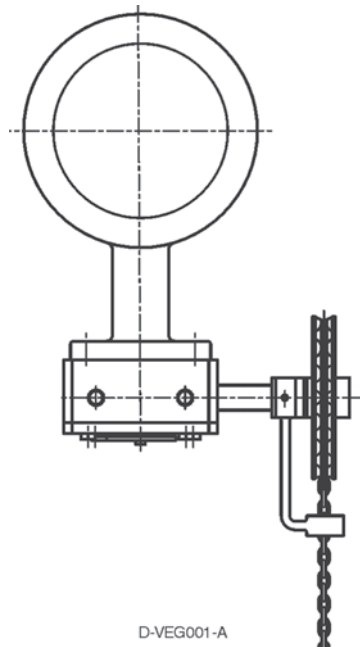**Extension type B3F for operation from another floor level.**

Extension arrangement which allows up to 35° misalignment of the universal coupling.

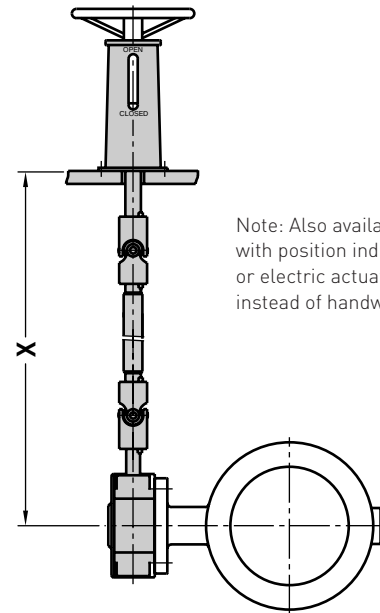

6.4 CHECK VALVES ECV 50 - 600

6.4.1 GENERAL

Function

The ECV is a check valve to avoid unwanted back flow in a pipe.

Applications


In water supply systems (distribution, treatment etc.), irrigation, heating systems, ship building, industrial processes (liquids and gases).

Temperature indication: EPDM to 110 °C
 NBR to 90 °C

Pipe connection

The ECV check valve has been designed for installation in flanged piping systems (PN 10, PN 16, etc.). Other flange connections on request.

The flangeless wafer type body shall be clamped between two flanges with flat or raised faces (welding neck or slip on flanges). Suitable gaskets shall be used for sealing between valve and flanges.

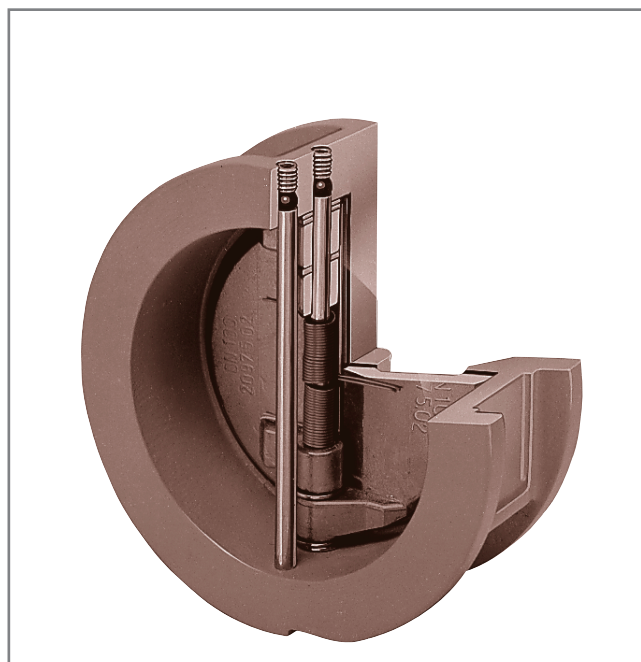

6.4.2 DESIGN

The ECV is a self acting pivoting check valve of the double disc wafer type. The valve is maintenance free. The design is compact and space saving.

The ECV check valve has a superior closing response prior to flow reversal. The corrosion resistant springs are designed to quickly close the valve at zero flow to prevent undesirable pressure surges. In the closed position the valve is tight shut off. It opens automatically when the flow starts again.

The elastomer seat is bonded to the body casting. It is out of the flow path thus ensuring extended seal life. Spherical profiling of the seat ensures positive shut-off even at low pressures and the area adjacent to the seat is also protected by the same elastomer material.

Attention paid to the streamlining of the flow path is paramount if good flow characteristics are to be achieved.

The saving of energy costs by selecting a Wouter Witzel Eurovalve check valve may be several times the initial cost of the valve (ask Wouter Witzel Eurovalve for an energy calculation).


The use of these design features together with careful material selection makes the ECV a product with a high reliability and a low operating costs.

Specification:


Body type	Flangeless wafer
Function	Back flow prevention
Installation	Clamping between flanges
Flange connections*	PN 10 / 16 / ANSI Class 150 (other connections on request)
Valve shut off pressure	Between 0,2 and 16 bar
Pressure differential to open	0,02 bar minimum
Leakage rate	ISO 5208, Rate A (uni-directional tight shut off)
Face to Face dimension	ISO 5752 / EN 558, basis series 16 (wafer long)
Available type approvals*	PED, BV, CSS, CRS, LRS, GL, NKK, RINa, RMRS, GOSST, Stoomwezen
Body and trim materials*	See material table

* Needs to be specified when ordering

CONSTRUCTION DETAILS:

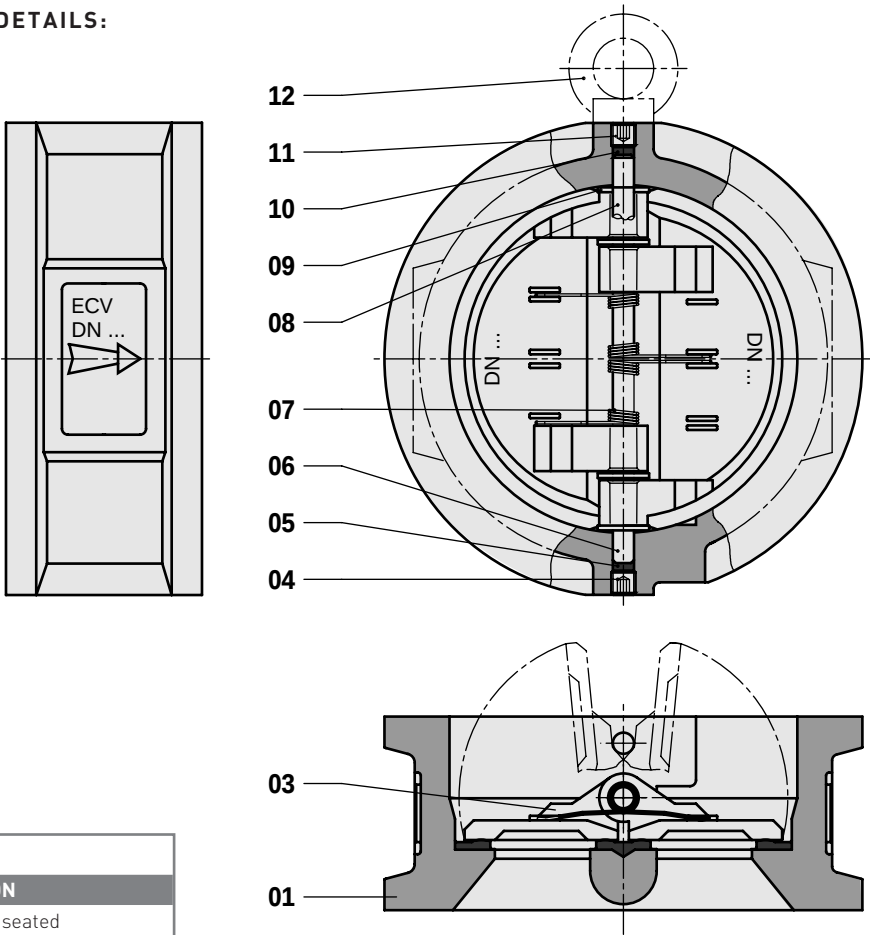

PARTS LIST:	
ITEM	DESCRIPTION
01	body rubber seated
03	disc
04	plug
05	sealing ring
06	shaft
07	spring
08	stop pin
09	ring
10	seal
11	plug
12	lifting eye bolt (≥ DN 250/10")

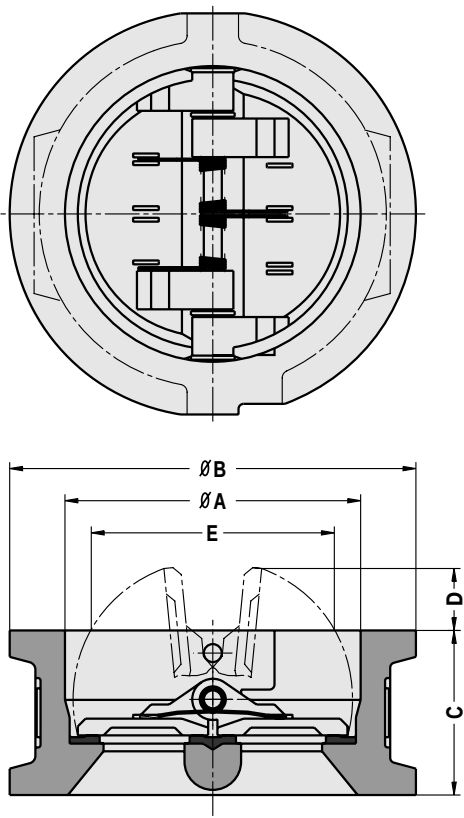


DIMENSIONS:							
DN	NPS	A	B*	C	D	E	±kg
50	2	67	100	43	8	41	1.3
65	2½	84	118	46	14	59	1.8
80	3	100	140	64	16	69	3.5
100	4	115	158	64	25	90	4.5
125	5	135	188	70	34	110	6.5
150	6	160	212	76	43	136	8.5
200	8	210	268	89	61	185	13
250	10	256	325	114	72	225	24
300	12	306	375	114	97	278	36
350	14	356	430	127	122	331	45
400	16	406	475	140	147	381	60
450	18	466	554	152	152	428	85
500	20	486	620	152	159	428	105
600	24	600	733	178	216	570	150

*) Note: Dimension B is given for PN 16 flanges and may be different for other flange connections.

6.4.3 INSTALLATION


The ECV check valve has been designed for steady flow conditions and can be installed in horizontal and vertical pipelines.
The valve must not be installed in pipelines with pulsating flow or near to reciprocating pumps.
The instructions shown below must be adhered to.

Installation in a horizontal pipeline:

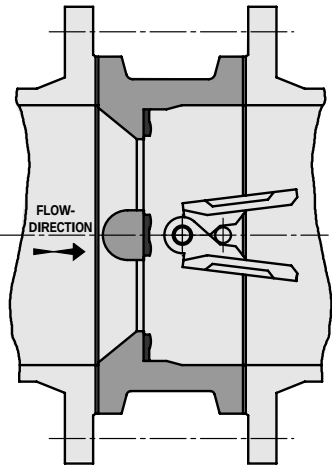

The disc shaft must be in the **vertical** position.
Note: Additional pressure drop can be expected due to the weight of the discs.

Installation in a vertical pipeline:

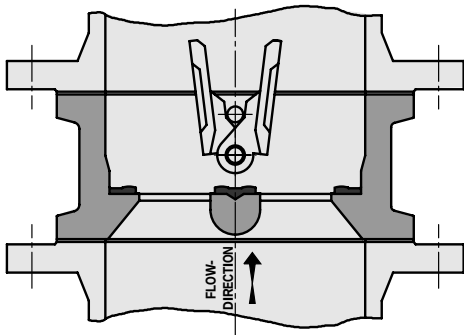

As standard the valve must be installed with flow up.

6.4.4 MATERIALS

The ECV is available in different materials as shown in the following tables. The selection is mainly based on the corrosive properties of the fluid(s). Inconel springs have a longer life time specially in chloride containing fluids eg sea water.

Part	Material	Material standards		
Body	Cast iron (DN 50 - 200/2"-8")	GG 25, DIN 1691	<i>cl., ASTM A126</i>	<i>GJL 250, EN 1561</i>
	Ductile cast iron ($\geq 250/10''$)	GGG 40, DIN 1693	<i>60-40-18, ASTM A395</i>	<i>GJS 400-15, EN 1563</i>
	Aluminium bronze:	G-CuAl10Ni, DIN 1714	<i>C95800, ASTM B148</i>	<i>AB2, BS 1400</i>
Disc	Aluminium bronze:	G-CuAl10Ni, DIN 1714	<i>C95800, ASTM B148</i>	<i>AB2, BS 1400</i>
Shaft / stop pin	Stainless steel:	X5CrNiMo 17 12 2	<i>AISI 316</i>	<i>316S16, BS 970</i>
Spring	Stainless steel:	X5CrNiMo 17 12 2	<i>AISI 316</i>	<i>316S16, BS 970</i>
	Inconel:	<i>NiCrMo9Nb, DIN 17744</i>	UNS N06625, ASTM B446	<i>NA 21, BS 3076</i>
Seat	Rubber:	EPDM, NBR, FPM		

Note: The material standards printed in italics are comparable with the supplied materials.

External and internal coating for grey and ductile cast iron bodies:			
Code	Coating	Colour	Use
PUR	Polyurethane coating	Orange	Indoor and outside exposure. Light and normal circumstances
	Thickness 80 µm	RAL 2000	
EP-W-2	Epoxy coating	Grey	Potable water systems
	Thickness 350 µm	RAL 7038	

Remark: Polyurethane coating is also available in the colours: blue / RAL 5017, red / RAL 3000 or grey / RAL 7000. Other coatings on request.

6.4.5 FLOW CHARACTERISTICS

Flow resistance

As a check valve is permanently open in normal service the flow resistance is a very important feature of a check valve with regard to the energy loss per year which can mount up to many times the initial cost of the valve. Wouter Witzel Eurovalve has reduced the pressure loss of the ECV design to very low levels. This is indicated by high Kv values as stated in the following table determined by flow testing.

Flow coefficient Kv		
DN	NPS	Kv values
50	2	55
65	2½	150
80	3	180
100	4	280
125	5	420
150	6	750
200	8	1800
250	10	2800
300	12	4500
350	14	6300
400	16	8200
450	18	9000
500	20	10000
600	24	18000

Note: $C_v = 1,16 K_v$

Flow size formulae:

Incompressible fluid flow (liquids):

$$\Delta p = \frac{\rho}{\rho_0} \frac{Q^2}{K_v^2} \quad K_v = Q \sqrt{\frac{\rho/\rho_0}{\Delta p}} \quad Q = K_v \sqrt{\frac{\Delta p}{\rho/\rho_0}}$$

Flow velocity:
$$v = \frac{354 Q}{DN^2}$$

The maximum recommended flow velocity, avoiding cavitation, vibration, noise etc is for liquids: 5 m/sec

Nomenclature:	Kv	=	Valve flow coefficient in m³/h water (5 – 30 °C) at pressure drop of 1 bar across the valve.
	Q	=	Flow capacity (m³/h).
	Δp	=	Pressure drop across the valve (bar).
	ρ	=	Density of fluid (kg/m³).
	ρ_0	=	Density of water at 288 K = 1000 (kg/m³).
	v	=	Flow velocity based upon nominal pipe size (m/s).
	DN	=	Nominal valve size (mm)

For more information (eg about gas flow) please ask Wouter Witzel Eurovalve for advice or ask for our special Technical Data sheet regarding flow through check valves. Also available is a method to calculate energy losses by flow through valves.

CHECKLIST

7 INFORMATION TO BE GIVEN WHEN ORDERING

Checklist centric butterfly valves with minimum information to be given when ordering:

Valve:

- Valve type
- Valve size
- Flange connection (PN / Class / JIS)
- Fluid handling
- Materials (body, lining, disc)
- Required shut off pressure (bar)
- PED category (when applicable)

Options:

- Inspection certificates (material or pressure test)
- Polished stainless steel disc
- Silicone free assembly
- Special coating
- Copper free materials
- etc.

Operation:

- Type of actuator (lever, wormgear, pneumatic, electric, hydraulic)
- Power supply (AC/DC – V/Hz/Ph) or supply pressure (bar)

Options:

- Actuator sizing based on severe valve torque (eg. Dry or contaminating fluid)
- Spring return actuator
- Non standard IP protection class
- Indirect mounting kit
- Stainless steel bolting
- Explosion proof
- Limit switches
- Position transmitter
- Positioner (signal valve open:.....mA/bar; valve closed:..... mA/bar)
- Wormgear with body of cast iron
- Wormgear with square for T-key operation
- Wormgear chainwheel operation
- Extensions

Note: Depending on type of valve or actuator more options may be available. See the product data sheets.

NOTICES

NOTICES

EUROPEAN HEADQUARTERS & DISTRIBUTION CENTRE**Wouter Witzel EuroValve BV****Industrieterrein De Pol 12****7581 CZ Losser****Netherlands****P.O. Box 54****7580 AB Losser****Tel: +31 (0)53 5369 536****Fax: +31 (0)53 5369 500****E-mail: info@wweurovalve.nl****Web: www.wweurovalve.nl**