


Manual Chainsaw Sharpener 9586 Instructions

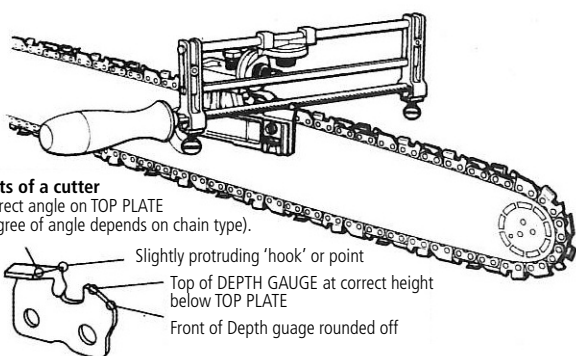


SAFETY INFORMATION!

- Always wear gloves
- Always work on a clean, flat working surface.
- Check components on file guide regularly for wear and general condition.
- Make certain that file guide has been mounted securely to chainsaw guide bar before sharpening.


WARNING: Follow all instructions for cutter filing angles and depth gauge settings. Incorrect sharpening angles, excessive depth gauge settings or incorrectly shaped depth gauges may increase the risk of chainsaw kickback. Kickback can result in severe injury to the saw operator or to bystanders.

MOUNTING & SET-UP INSTRUCTIONS:


A. Select the proper file size for the chain to be sharpened (see chain chart to the right).




B. Push file handle (11) onto the file. Insert the file into the file holder (3) and tighten down both locking thumb screws (4).




C. Mount file guide assembly on the guide bar so that the chain guide T-bars (5) are flush with the top of the chain rivets. Tighten assembly with locking thumb screw (8).



D. Position cutter against chain stop (7).




E. Secure the T-bars (5), by using thumb screw (6) and opposing slotted screw, to centre the chain and stabilise cutter for sharpening.



ASSEMBLY INSTRUCTIONS:

File Guide comes fully assembled, excluding file.
A round chainsaw file 5/32" (4mm) is included.

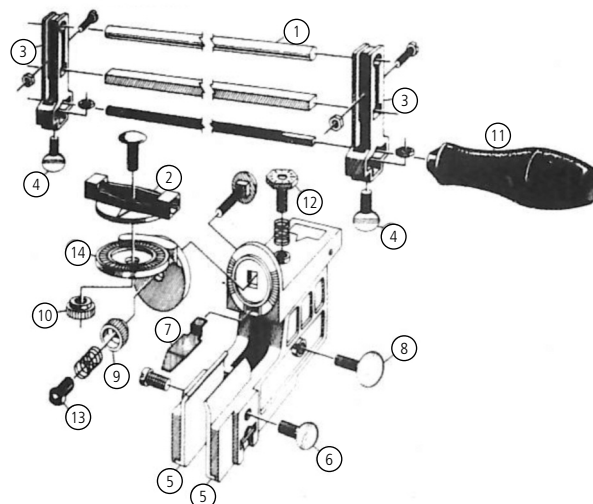


CHAIN CHART:


IF YOU HAVE THIS CODE CHAIN	RECOMMENDED FILING ANGLES	DEPTH GAUGE SETTINGS	FILE SIZE
S (91VG)	FILING DIRECTION 90° 30°	0.25 DEPTH GAUGE SETTING	5/32"
H (33SL)	FILING DIRECTION 90° 25°	0.25 DEPTH GAUGE SETTING	5/32"

OPERATING INSTRUCTIONS:


A. Set the tilt and swivel base (14) to either the 0° (for 90°) or 10° angle marks (see chain chart above).




Lock into place using swivel knob (9).



B. Set top swivel (2) to correct angle mark (see chain chart above).




Lock into position with swivel knob (10).




Please read carefully before use and retain for future reference.

Victor Tools


C. Insert file into the cutter, making sure file assembly is positioned at 90° to the T-bars (5).




Place back of cutter against chain stop (7).



D. Set file height by turning the depth adjustment screw (12) so that 1/5th of file diameter is above the top plate of the cutter.




E. Adjust the stop screw (13) to control the amount of cutter to be filed.




FILING:

A. File all cutters from inside to the outside. File one side of the chain at a time.

NOTE: File performance is greatly reduced if you file from the outside against the chrome plating.




B. To sharpen cutters on the opposite side of the chain. Unlock swivel knob (10) and rotate swivel guide (2) to the similar setting on the opposite side.



Reset angles shown in steps A-E or operating instructions - and repeat filing process.


HINT: Oil slide rod at guide swivel for better movement of guide assembly.





DEPTH GAUGE FILING:

NOTE: Every 2 to 3 chain sharpenings it is necessary to file the depth gauges.


A. Remove round file and replace handle on flat file. Re-insert into file holder and secure.



B. Set both filing angles to 0° so that the file is 90° to the guide bar.




C. Turn adjusting screw (12) and lower file until it rests on the top plate of the cutter.




D. Move cutter backwards until file is directly above the depth gauge.

Position file approximately 1/16" (1.6mm) away from cutting edge of the cutter so as to protect the edge from damage during this step.




E. Rest chain stop (7) on the top plate of the cutter during the filing operation.




F. Rotate adjusting screw (12) anti-clockwise to the recommended depth gauge setting (see chain chart).

NOTE: Each increment mark on adjusting screw (12) equals .010" of file travel.



G. Always file depth gauges so filing stroke is from the inside of the cutter to the outside.

File all depth gauges on one side of the chain, then rotate swivel guide (2) 180°. Reset same angles for opposite side of chain and repeat filing process.



H. After each depth gauge has been filed to the recommended height, round off front corner to original shape.

