

2SC1360, 2SC1360A

Silicon NPN epitaxial planer type

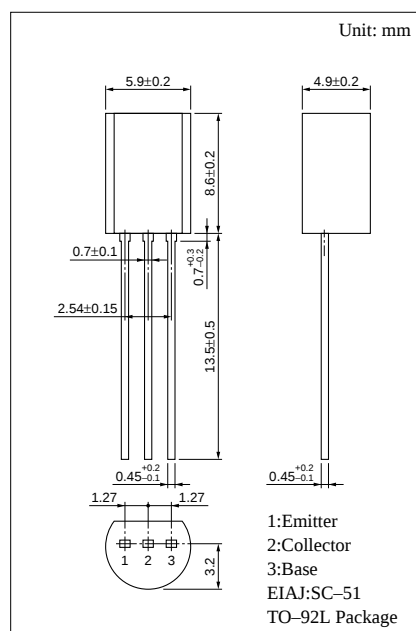
For intermediate frequency amplification of TV image

■ Features

- High transition frequency f_T .
- Large collector power dissipation P_C .

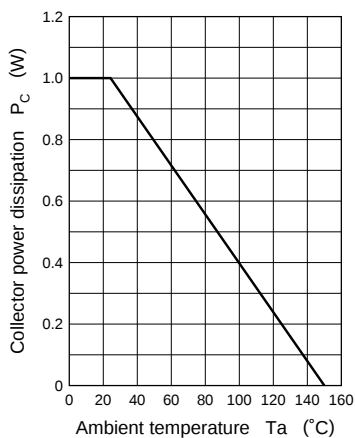
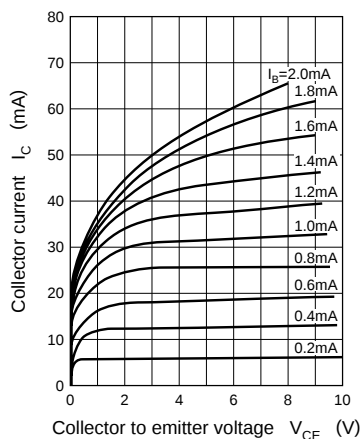
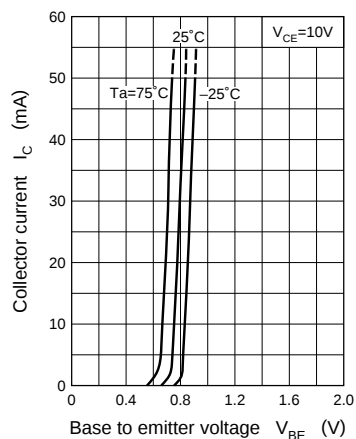
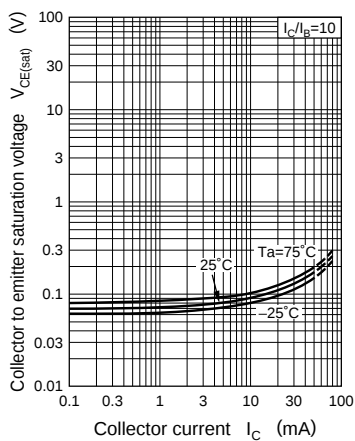
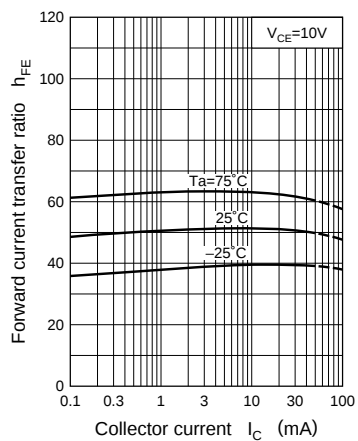
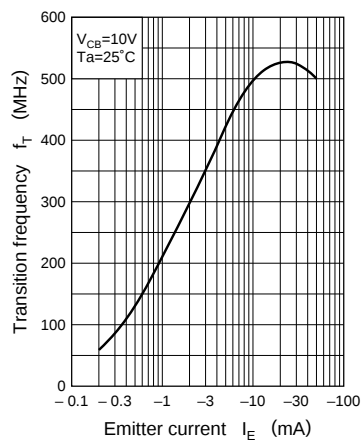
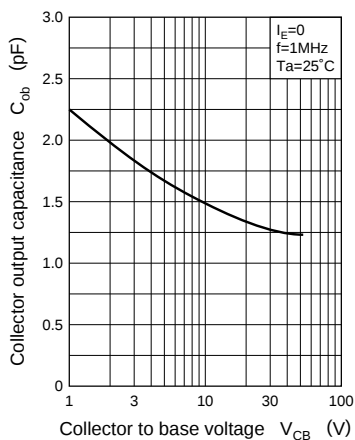
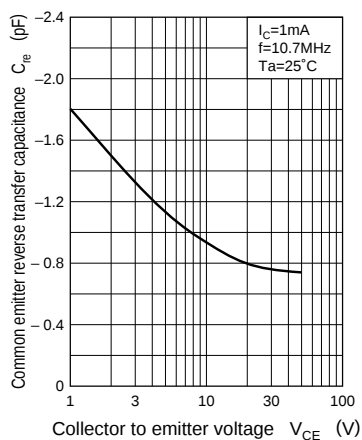
■ Absolute Maximum Ratings (Ta=25°C)

Parameter		Symbol	Ratings	Unit
Collector to base voltage	2SC1360	V_{CBO}	50	V
	2SC1360A		60	
Collector to emitter voltage	2SC1360	V_{CEO}	45	V
	2SC1360A		60	
Emitter to base voltage		V_{EBO}	4	V
Collector current		I_C	50	mA
Collector power dissipation		P_C	1	W
Junction temperature		T_j	150	°C
Storage temperature		T_{stg}	-55 ~ +150	°C



■ Electrical Characteristics (Ta=25°C)

Parameter		Symbol	Conditions	min	typ	max	Unit
Collector cutoff current		I_{CBO}	$V_{CB} = 20V, I_E = 0$			100	nA
Collector to base voltage	2SC1360	V_{CBO}	$I_C = 100\mu A, I_E = 0$	50			V
	2SC1360A			60			
Collector to emitter voltage	2SC1360	V_{CEO}	$I_C = 1mA, I_B = 0$	45			V
	2SC1360A			60			
Emitter to base voltage		V_{EBO}	$I_E = 100\mu A, I_C = 0$	4			V
Forward current transfer ratio		h_{FE}	$V_{CB} = 10V, I_E = -10mA$	20		100	
Collector to emitter saturation voltage		$V_{CE(sat)}$	$I_C = 20mA, I_B = 2mA$			0.4	V
Transition frequency		f_T	$V_{CB} = 10V, I_E = -10mA, f = 100MHz$	300			MHz
Common emitter reverse transfer capacitance		C_{re}	$V_{CE} = 10V, I_C = 1mA, f = 10.7MHz$			1.5	pF
Power gain		PG	$V_{CB} = 10V, I_E = -10mA, f = 58MHz$	22		30	dB

$P_C - T_a$  $I_C - V_{CE}$  $I_C - V_{BE}$  $V_{CE(sat)} - I_C$  $h_{FE} - I_C$  $f_T - I_E$  $C_{ob} - V_{CB}$  $C_{re} - V_{CE}$  $PG - I_E$ 