

## 3-MODE 150mA LDO REGULATOR with the Reverse Current Protection

NO.EA-118-111027

### OUTLINE

The R1163x Series consist of CMOS-based voltage regulator ICs with high output voltage accuracy and low supply current. These ICs perform with the chip enable function and realize a standby mode with ultra low supply current. To prevent the destruction by over current, the current limit circuit is included. The R1163x Series have 3-mode. One is standby mode with CE or standby control pin. Other two modes are realized with ECO pin. Fast Transient Mode (FT mode) and Low Power Mode (LP mode) are alternative with ECO pin. Consumption current is reduced at Low Power Mode compared with Fast Transient Mode. The output voltage is maintained between FT mode and LP mode.

Further, the reverse current protection circuit is built-in. Therefore, if a higher voltage than  $V_{DD}$  pin is forced to the output pin, the reverse current to  $V_{DD}$  pin is very small (Max.  $0.1\mu A$ ), so it is suitable for backup circuit.

Since the packages for these ICs are SOT-23-5, SON-6, and DFN(PLP)1616-6 packages, high density mounting of the ICs on boards is possible.




### FEATURES

- Supply Current..... Typ.  $6.0\mu A$  (Low Power Mode),  
Typ.  $70\mu A$  (Fast Transient Mode)
- Standby Mode..... Typ.  $0.6\mu A$
- Reverse Current..... Max.  $0.1\mu A$
- Input Voltage Range ..... 2.0V to 6.0V
- Output Voltage Range..... 1.5V to 5.0V (0.1V steps)  
(For other voltages, please refer to MARK INFORMATION.)
- Output Voltage Accuracy.....  $\pm 1.5\%$  ( $\pm 2.5\%$  at Low Power Mode)
- Temperature-Drift Coefficient of Output Voltage .. Typ.  $\pm 100\text{ppm}/^\circ\text{C}$
- Dropout Voltage ..... Typ. 0.25V ( $I_{OUT}=150\text{mA}$ ,  $V_{OUT}=2.8\text{V}$ )
- Ripple Rejection..... Typ. 70dB ( $f=1\text{kHz}$ , Fast Transient Mode)
- Line Regulation ..... Typ. 0.02%/V (Fast Transient Mode)
- Packages ..... DFN(PLP)1616-6, SOT-23-5, SON-6
- Built-in fold-back protection circuit..... Typ. 40mA (Current at short mode)
- Performs with Ceramic Capacitors .....  $C_{IN}=\text{Ceramic } 1.0\mu\text{F}$ ,  $C_{OUT}=\text{Ceramic } 0.47\mu\text{F}$

### APPLICATIONS

- Precision Voltage References.
- Power source for electrical appliances such as cameras, VCRs and hand-held communication equipment.
- Power source for battery-powered equipment.

## BLOCK DIAGRAM

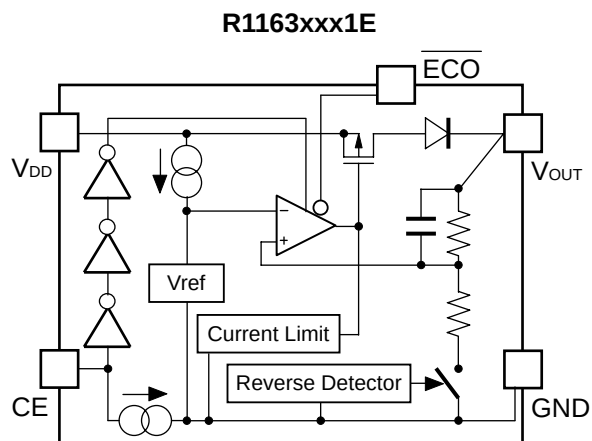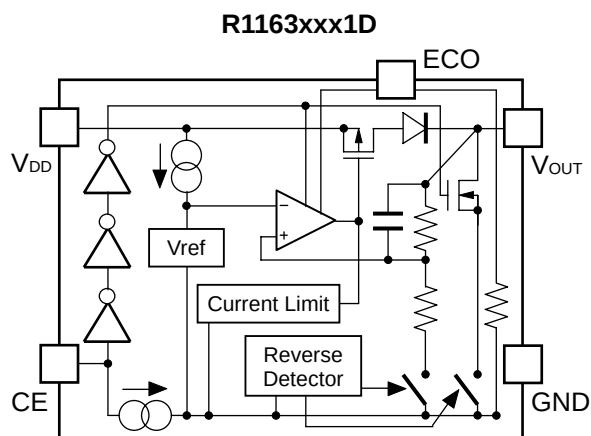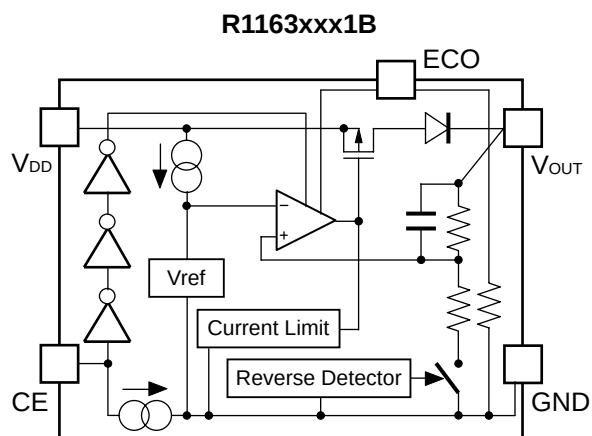


## SELECTION GUIDE

The output voltage, auto discharge function, and package, etc. for the ICs can be selected at the user's request.


| Product Name                                                                                                                                                                                                                                                                                                                                                                                                                                       | Package        | Quantity per Reel | Pb Free | Halogen Free |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-------------------|---------|--------------|
| R1163Kxx1*-TR                                                                                                                                                                                                                                                                                                                                                                                                                                      | DFN(PLP)1616-6 | 5,000 pcs         | Yes     | Yes          |
| R1163Nxx1*-TR-FE                                                                                                                                                                                                                                                                                                                                                                                                                                   | SOT-23-5       | 3,000 pcs         | Yes     | Yes          |
| R1163Dxx1*-TR-FE                                                                                                                                                                                                                                                                                                                                                                                                                                   | SON-6          | 3,000 pcs         | Yes     | Yes          |
| xx: The output voltage can be designated in the range from 1.5V(15) to 5.0V(50) in 0.1V steps.<br>(For other voltages, please refer to MARK INFORMATION.)<br><br>* : The auto discharge function at off state are options as follows.<br>(B) without auto discharge function at off state<br>(D) with auto discharge function at off state<br>(E) without auto discharge function at off state, ECO logic reverse type (Low Power mode at ECO="H") |                |                   |         |              |

## PIN CONFIGURATIONS


### • DFN(PLP)1616-6

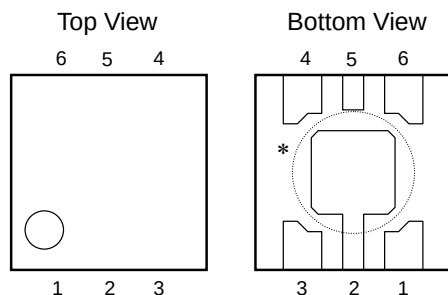

### • SOT-23-5



### • SON-6

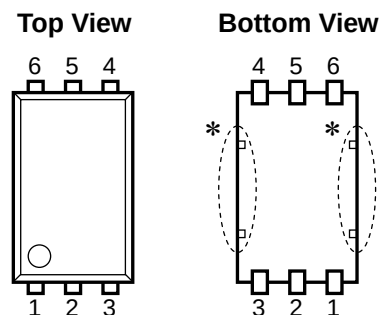

## PIN DISCRIPTIONS

### • DFN(PLP)1616-6

| Pin No | Symbol               | Pin Description              |
|--------|----------------------|------------------------------|
| 1      | $V_{OUT}$            | Output pin                   |
| 2      | GND                  | Ground Pin                   |
| 3      | $ECO/\overline{ECO}$ | MODE alternative pin         |
| 4      | CE                   | Chip Enable pin ("H" Active) |
| 5      | NC                   | No Connection                |
| 6      | $V_{DD}$             | Input Pin                    |

\*) Tab is GND level. (They are connected to the reverse side of this IC.)

The tab is better to be connected to the GND, but leaving it open is also acceptable.

### • SOT-23-5

| Pin No | Symbol               | Pin Description              |
|--------|----------------------|------------------------------|
| 1      | $V_{DD}$             | Input Pin                    |
| 2      | GND                  | Ground Pin                   |
| 3      | CE                   | Chip Enable Pin ("H" Active) |
| 4      | $ECO/\overline{ECO}$ | MODE alternative pin         |
| 5      | $V_{OUT}$            | Output pin                   |

### • SON-6

| Pin No | Symbol               | Pin Description              |
|--------|----------------------|------------------------------|
| 1      | $V_{DD}$             | Input Pin                    |
| 2      | NC                   | No Connection                |
| 3      | $V_{OUT}$            | Output pin                   |
| 4      | $ECO/\overline{ECO}$ | MODE alternative pin         |
| 5      | GND                  | Ground Pin                   |
| 6      | CE                   | Chip Enable Pin ("H" Active) |

\*) Tab suspension leads are GND level. (They are connected to the reverse side of this IC.)

The tab suspension leads should be open and do not connect to other wires or land patterns.

## ABSOLUTE MAXIMUM RATINGS

| Symbol    | Item                                      | Rating     | Unit |
|-----------|-------------------------------------------|------------|------|
| $V_{IN}$  | Input Voltage                             | 6.5        | V    |
| $V_{ECO}$ | Input Voltage (ECO/ $\overline{ECO}$ Pin) | -0.3 ~ 6.5 | V    |
| $V_{CE}$  | Input Voltage (CE Pin)                    | -0.3 ~ 6.5 | V    |
| $V_{OUT}$ | Output Voltage                            | -0.3 ~ 6.5 | V    |
| $I_{OUT}$ | Output Current                            | 180        | mA   |
| $P_D$     | Power Dissipation (DFN(PLP)1616-6)*       | 560        | mW   |
|           | Power Dissipation (SOT-23-5) *            | 420        |      |
|           | Power Dissipation (SON-6) *               | 500        |      |
| $T_{opt}$ | Operating Temperature Range               | -40 ~ 85   | °C   |
| $T_{stg}$ | Storage Temperature Range                 | -55 ~ 125  | °C   |

\*) For Power Dissipation, please refer to PACKAGE INFORMATION.

### ABSOLUTE MAXIMUM RATINGS

Electronic and mechanical stress momentarily exceeded absolute maximum ratings may cause the permanent damages and may degrade the life time and safety for both device and system using the device in the field.

The functional operation at or over these absolute maximum ratings is not assured.

### RECOMMENDED OPERATING CONDITIONS (ELECTRICAL CHARACTERISTICS)

All of electronic equipment should be designed that the mounted semiconductor devices operate within the recommended operating conditions. The semiconductor devices cannot operate normally over the recommended operating conditions, even if when they are used over such conditions by momentary electronic noise or surge. And the semiconductor devices may receive serious damage when they continue to operate over the recommended operating conditions.

## ELECTRICAL CHARACTERISTICS

R1163xxx1B/D

T<sub>opt</sub>=25°C

| Symbol                                   | Item                                                 |         | Conditions                                                                                                                                                                                                    |                         | Min.   | Typ. | Max.   | Unit    |
|------------------------------------------|------------------------------------------------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|--------|------|--------|---------|
| V <sub>OUT</sub>                         | Output Voltage                                       | FT Mode | V <sub>IN</sub> =Set V <sub>OUT</sub> +1V, V <sub>ECO</sub> =V <sub>IN</sub><br>1mA ≤ I <sub>OUT</sub> ≤ 30mA                                                                                                 |                         | ×0.985 |      | ×1.015 | V       |
|                                          |                                                      | LP Mode | V <sub>IN</sub> =Set V <sub>OUT</sub> + 1V, V <sub>ECO</sub> =GND<br>1mA ≤ I <sub>OUT</sub> ≤ 30mA                                                                                                            |                         | ×0.975 |      | ×1.025 |         |
| ΔV <sub>OUT</sub>                        | Output Voltage Deviation between FT Mode and LP Mode |         | V <sub>IN</sub> =Set V <sub>OUT</sub> +1V,<br>I <sub>OUT</sub> =30mA                                                                                                                                          | V <sub>OUT</sub> > 2.0V | −1.2   | 0    | 1.2    | %       |
|                                          |                                                      |         |                                                                                                                                                                                                               | V <sub>OUT</sub> ≤ 2.0V | −24    | 0    | 24     | mV      |
| I <sub>OUT</sub>                         | Output Current                                       |         | V <sub>IN</sub> −V <sub>OUT</sub> =1.0V                                                                                                                                                                       |                         | 150    |      |        | mA      |
| ΔV <sub>OUT</sub> /<br>ΔI <sub>OUT</sub> | Load Regulation                                      | FT Mode | V <sub>IN</sub> =Set V <sub>OUT</sub> +1V, V <sub>ECO</sub> =V <sub>IN</sub><br>1mA ≤ I <sub>OUT</sub> ≤ 150mA                                                                                                |                         |        | 20   | 40     | mV      |
|                                          |                                                      | LP Mode | V <sub>IN</sub> =Set V <sub>OUT</sub> +1V, V <sub>ECO</sub> =GND<br>1mA ≤ I <sub>OUT</sub> ≤ 150mA                                                                                                            |                         |        | 20   | 45     |         |
| V <sub>DIF</sub>                         | Dropout Voltage                                      |         | Refer to the following table                                                                                                                                                                                  |                         |        |      |        |         |
| I <sub>SS1</sub>                         | Supply Current (FT Mode)                             |         | V <sub>IN</sub> =Set V <sub>OUT</sub> +1V<br>V <sub>ECO</sub> =V <sub>IN</sub>                                                                                                                                |                         |        | 70   | 100    | μA      |
| I <sub>SS2</sub>                         | Supply Current (LP Mode)                             |         | V <sub>IN</sub> =Set V <sub>OUT</sub> +1V<br>V <sub>ECO</sub> =GND                                                                                                                                            |                         |        | 6.0  | 10.0   | μA      |
| I <sub>standby</sub>                     | Supply Current (Standby)                             |         | V <sub>IN</sub> =Set V <sub>OUT</sub> +1V, V <sub>CE</sub> =GND<br>V <sub>ECO</sub> =GND or V <sub>IN</sub>                                                                                                   |                         |        | 0.6  | 1.0    | μA      |
| ΔV <sub>OUT</sub> /<br>ΔV <sub>IN</sub>  | Line Regulation                                      | FT Mode | Set V <sub>OUT</sub> +0.5V ≤ V <sub>IN</sub> ≤ 6.0V<br>I <sub>OUT</sub> =30mA, V <sub>ECO</sub> =V <sub>IN</sub><br>If V <sub>OUT</sub> ≤ 1.6V,<br>then 2.2V ≤ V <sub>IN</sub> ≤ 6.0V                         |                         |        | 0.02 | 0.10   | %V      |
|                                          |                                                      | LP Mode | Set V <sub>OUT</sub> + 0.5V ≤ V <sub>IN</sub> ≤ 6.0V<br>I <sub>OUT</sub> =30mA, V <sub>ECO</sub> =GND<br>If V <sub>OUT</sub> ≤ 1.6V,<br>then 2.2V ≤ V <sub>IN</sub> ≤ 6.0V                                    |                         |        | 0.05 | 0.20   |         |
| RR                                       | Ripple Rejection (FT Mode)                           |         | Ripple 0.2Vp-p,<br>V <sub>IN</sub> =Set V <sub>OUT</sub> +1V,<br>I <sub>OUT</sub> =30mA, V <sub>ECO</sub> =V <sub>IN</sub><br>If V <sub>OUT</sub> ≤ 1.7V, then<br>V <sub>IN</sub> =Set V <sub>OUT</sub> +1.2V | f=1kHz                  |        | 70   |        | dB      |
|                                          |                                                      |         |                                                                                                                                                                                                               | f=10kHz                 |        | 60   |        |         |
| V <sub>IN</sub>                          | Input Voltage                                        |         |                                                                                                                                                                                                               |                         | 2.0    |      | 6.0    | V       |
| ΔV <sub>OUT</sub> /<br>ΔT <sub>opt</sub> | Output Voltage Temperature Coefficient               |         | I <sub>OUT</sub> =30mA<br>−40°C ≤ T <sub>opt</sub> ≤ 85°C                                                                                                                                                     |                         |        | ±100 |        | ppm /°C |
| I <sub>SC</sub>                          | Short Current Limit                                  |         | V <sub>OUT</sub> =0V                                                                                                                                                                                          |                         |        | 40   |        | mA      |
| I <sub>PD</sub>                          | CE Pull-down Current                                 |         |                                                                                                                                                                                                               |                         |        | 0.3  | 0.6    | μA      |
| R <sub>PDE</sub>                         | ECO Pull-down Resistance                             |         |                                                                                                                                                                                                               |                         | 2      | 5    | 30     | MΩ      |
| V <sub>CEH</sub>                         | CE, ECO Input Voltage "H"                            |         |                                                                                                                                                                                                               |                         | 1.0    |      | 6.0    | V       |
| V <sub>CEL</sub>                         | CE, ECO Input Voltage "L"                            |         |                                                                                                                                                                                                               |                         | 0      |      | 0.35   | V       |
| en                                       | Output Noise "H" (FT Mode)                           |         | BW=10Hz to 100kHz                                                                                                                                                                                             |                         |        | 30   |        | μVrms   |
|                                          | Output Noise "L" (LP Mode)                           |         | BW=10Hz to 100kHz                                                                                                                                                                                             |                         |        | 40   |        |         |
| R <sub>LOW</sub>                         | Low Output Nch Tr. ON Resistance (of D version)      |         | V <sub>CE</sub> =0V                                                                                                                                                                                           |                         |        | 60   |        | Ω       |
| I <sub>REV</sub>                         | Reverse Current                                      |         | V <sub>OUT</sub> >0.5V, 0V ≤ V <sub>IN</sub> ≤ 6V                                                                                                                                                             |                         |        | 0    | 0.1    | μA      |

## R1163xxx1E

T<sub>opt</sub>=25°C


| Symbol                                   | Item                                                 |         | Conditions                                                                                                                                                                            |                         | Min.   | Typ. | Max.   | Unit   |
|------------------------------------------|------------------------------------------------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|--------|------|--------|--------|
| V <sub>OUT</sub>                         | Output Voltage                                       | FT Mode | V <sub>IN</sub> =Set V <sub>OUT</sub> +1V, V <sub>ECO</sub> =GND<br>1mA ≤ I <sub>OUT</sub> ≤ 30mA                                                                                     |                         | ×0.985 |      | ×1.015 | V      |
|                                          |                                                      | LP Mode | V <sub>IN</sub> =Set V <sub>OUT</sub> +1V, V <sub>ECO</sub> =V <sub>IN</sub><br>1mA ≤ I <sub>OUT</sub> ≤ 30mA                                                                         |                         | ×0.975 |      | ×1.025 |        |
| ΔV <sub>OUT</sub>                        | Output Voltage Deviation between FT Mode and LP Mode |         | V <sub>IN</sub> =Set V <sub>OUT</sub> +1V, I <sub>OUT</sub> =30mA                                                                                                                     | V <sub>OUT</sub> > 2.0V | -1.2   | 0    | 1.2    | %      |
|                                          |                                                      |         |                                                                                                                                                                                       | V <sub>OUT</sub> ≤ 2.0V | -24    | 0    | 24     | mV     |
| I <sub>OUT</sub>                         | Output Current                                       |         | V <sub>IN</sub> -V <sub>OUT</sub> =1.0V                                                                                                                                               |                         | 150    |      |        | mA     |
| ΔV <sub>OUT</sub> /<br>ΔI <sub>OUT</sub> | Load Regulation                                      | FT Mode | V <sub>IN</sub> =Set V <sub>OUT</sub> +1V, V <sub>ECO</sub> =GND<br>1mA ≤ I <sub>OUT</sub> ≤ 150mA                                                                                    |                         |        | 20   | 40     | mV     |
|                                          |                                                      | LP Mode | V <sub>IN</sub> =Set V <sub>OUT</sub> +1V, V <sub>ECO</sub> =V <sub>IN</sub><br>1mA ≤ I <sub>OUT</sub> ≤ 150mA                                                                        |                         |        | 20   | 45     |        |
| V <sub>DIF</sub>                         | Dropout Voltage                                      |         | Refer to the following table                                                                                                                                                          |                         |        |      |        |        |
| I <sub>SS1</sub>                         | Supply Current (FT Mode)                             |         | V <sub>IN</sub> =Set V <sub>OUT</sub> +1V<br>V <sub>ECO</sub> =GND                                                                                                                    |                         |        | 70   | 100    | μA     |
| I <sub>SS2</sub>                         | Supply Current (LP Mode)                             |         | V <sub>IN</sub> =Set V <sub>OUT</sub> +1V<br>V <sub>ECO</sub> =V <sub>IN</sub>                                                                                                        |                         |        | 6.0  | 10.0   | μA     |
| I <sub>standby</sub>                     | Supply Current (Standby)                             |         | V <sub>IN</sub> =Set V <sub>OUT</sub> +1V, V <sub>CE</sub> =GND<br>V <sub>ECO</sub> =GND or V <sub>IN</sub>                                                                           |                         |        | 0.6  | 1.0    | μA     |
| ΔV <sub>OUT</sub> /<br>ΔV <sub>IN</sub>  | Line Regulation                                      | FT Mode | Set V <sub>OUT</sub> +0.5V ≤ V <sub>IN</sub> ≤ 6.0V<br>I <sub>OUT</sub> =30mA, V <sub>ECO</sub> =GND<br>If V <sub>OUT</sub> ≤ 1.6V,<br>then 2.2V ≤ V <sub>IN</sub> ≤ 6.0V             |                         |        | 0.02 | 0.10   | %V     |
|                                          |                                                      | LP Mode | Set V <sub>OUT</sub> +0.5V ≤ V <sub>IN</sub> ≤ 6.0V<br>I <sub>OUT</sub> =30mA, V <sub>ECO</sub> =V <sub>IN</sub><br>If V <sub>OUT</sub> ≤ 1.6V,<br>then 2.2V ≤ V <sub>IN</sub> ≤ 6.0V |                         |        | 0.05 | 0.20   |        |
| RR                                       | Ripple Rejection (FT Mode)                           |         | V <sub>IN</sub> =Set V <sub>OUT</sub> +1V, I <sub>OUT</sub> =30mA, V <sub>ECO</sub> =GND<br>If V <sub>OUT</sub> ≤ 1.7V, then V <sub>IN</sub> =Set V <sub>OUT</sub> +1.2V              | f = 1kHz                |        | 70   |        | dB     |
|                                          |                                                      |         |                                                                                                                                                                                       | f = 10kHz               |        | 60   |        |        |
| V <sub>IN</sub>                          | Input Voltage                                        |         |                                                                                                                                                                                       |                         | 2.0    |      | 6.0    | V      |
| ΔV <sub>OUT</sub> /<br>ΔT <sub>opt</sub> | Output Voltage Temperature Coefficient               |         | I <sub>OUT</sub> = 30mA<br>-40°C ≤ T <sub>opt</sub> ≤ 85°C                                                                                                                            |                         |        | ±100 |        | ppm/°C |
| I <sub>SC</sub>                          | Short Current Limit                                  |         | V <sub>OUT</sub> = 0V                                                                                                                                                                 |                         |        | 40   |        | mA     |
| I <sub>PD</sub>                          | CE Pull-down Current                                 |         |                                                                                                                                                                                       |                         |        | 0.3  | 0.6    | μA     |
| V <sub>CEH</sub>                         | CE, $\overline{\text{ECO}}$ Input Voltage "H"        |         |                                                                                                                                                                                       |                         | 1.0    |      | 6.0    | V      |
| V <sub>CEL</sub>                         | CE, $\overline{\text{ECO}}$ Input Voltage "L"        |         |                                                                                                                                                                                       |                         | 0      |      | 0.4    | V      |
| en                                       | Output Noise "H" (FT Mode)                           |         | BW = 10Hz to 100kHz                                                                                                                                                                   |                         |        | 30   |        | μVrms  |
|                                          | Output Noise "L" (LP Mode)                           |         | BW = 10Hz to 100kHz                                                                                                                                                                   |                         |        | 40   |        |        |
| I <sub>REV</sub>                         | Reverse Current                                      |         | V <sub>OUT</sub> >0.5V, 0V ≤ V <sub>IN</sub> ≤ 6V                                                                                                                                     |                         |        | 0    | 0.1    | μA     |

ELECTRICAL CHARACTERISTICS by OUTPUT VOLTAGE

T<sub>opt</sub>=25°C

| Output Voltage<br>V <sub>OUT</sub> (V) | Dropout Voltage (mV)    |                          |      |                          |      |
|----------------------------------------|-------------------------|--------------------------|------|--------------------------|------|
|                                        | Condition               | V <sub>DIF</sub> (ECO=H) |      | V <sub>DIF</sub> (ECO=L) |      |
|                                        |                         | Typ.                     | Max. | Typ.                     | Max. |
| 1.5 ≤ V <sub>OUT</sub> < 1.6           | I <sub>OUT</sub> =150mA | 400                      | 680  | 420                      | 680  |
| 1.6 ≤ V <sub>OUT</sub> < 1.7           |                         | 380                      | 550  | 390                      | 550  |
| 1.7 ≤ V <sub>OUT</sub> < 1.8           |                         | 350                      | 520  | 370                      | 520  |
| 1.8 ≤ V <sub>OUT</sub> < 2.0           |                         | 340                      | 490  | 350                      | 490  |
| 2.0 ≤ V <sub>OUT</sub> < 2.8           |                         | 290                      | 425  | 300                      | 430  |
| 2.8 ≤ V <sub>OUT</sub> ≤ 5.0           |                         | 250                      | 350  | 250                      | 350  |

TYPICAL APPLICATION

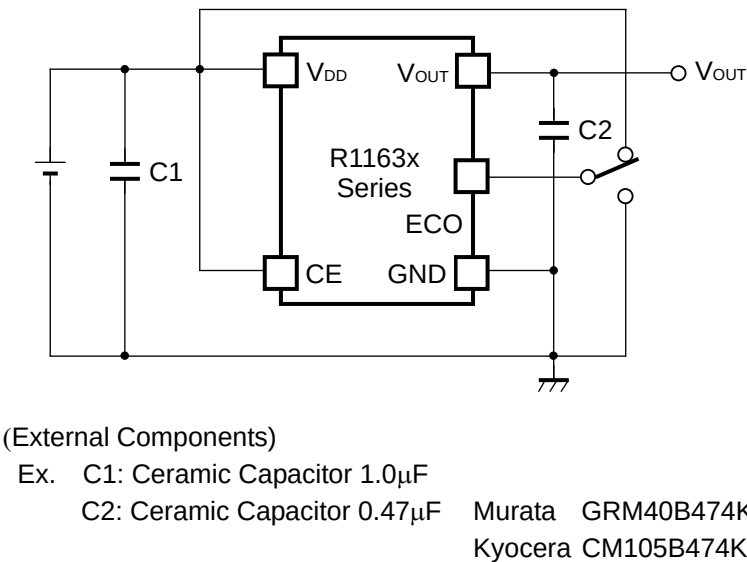

TECHNICAL NOTES

When using these ICs, consider the following points:

**Phase Compensation**

In these ICs, phase compensation is made for securing stable operation even if the load current is varied. For this purpose, be sure to use a 0.47μF or more ceramic capacitor C2.

(Test these ICs with as same external components as ones to be used on the PCB.)

When a tantalum capacitor is used with this IC, if the equivalent series resistor (ESR) of the capacitor is large, output voltage may be unstable.


**PCB Layout**

Make V<sub>DD</sub> and GND lines sufficient. If their impedance is high, noise pickup or unstable operation may result. Connect a capacitor C1 with as much as 1.0μF capacitor between V<sub>DD</sub> and GND pin as close as possible.


Set external components such as an output capacitor C2, as close as possible to the ICs and make wiring as short as possible.




## TEST CIRCUITS

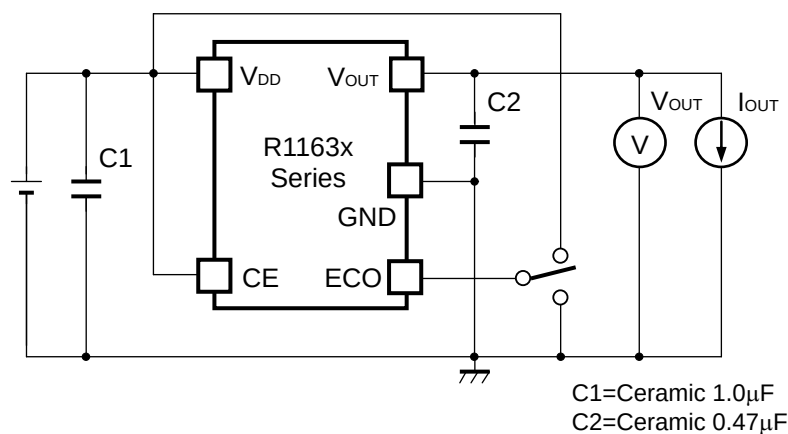


**Basic Test Circuit**

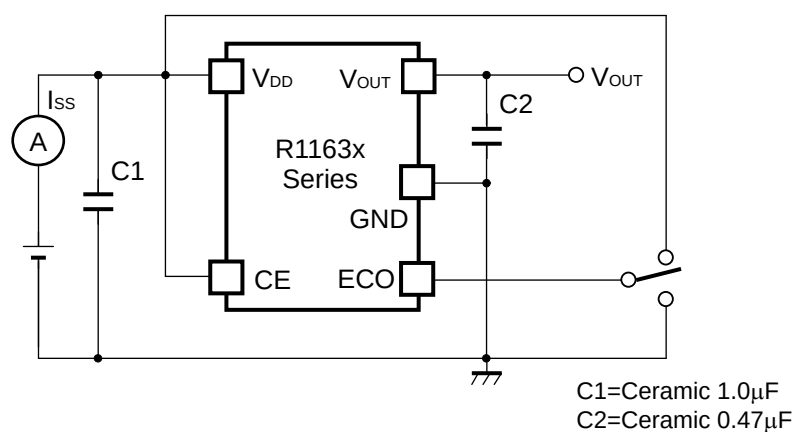


**Test Circuit for Supply Current**

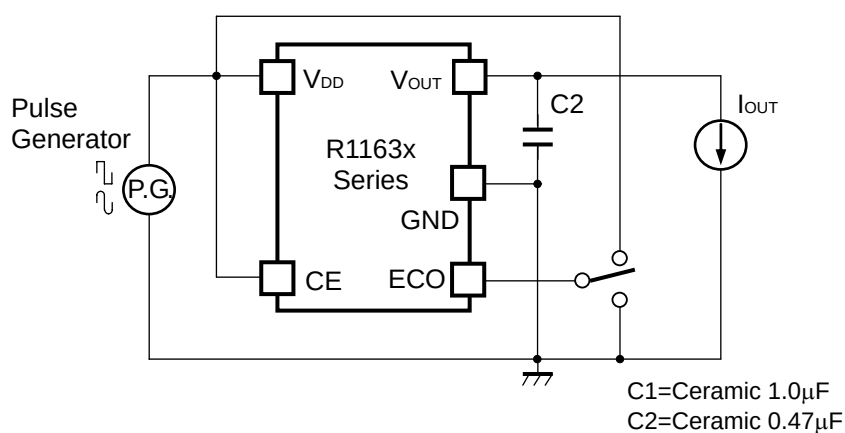


**Test Circuit for Ripple Rejection, Line Transient Response**

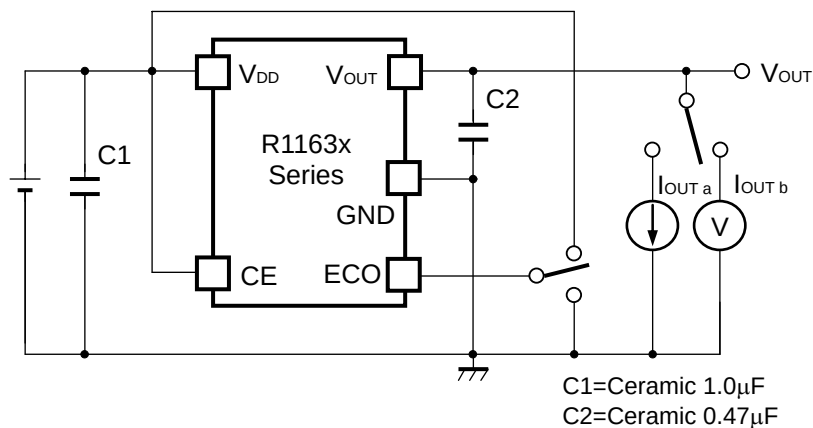

**Test Circuit for Load Transient Response**

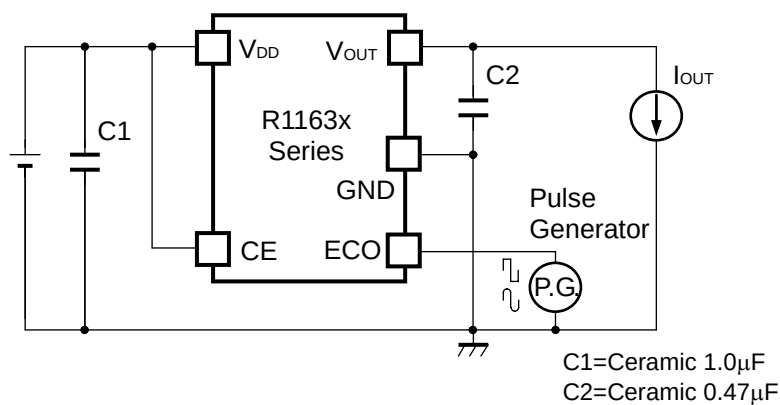

**Test Circuit for Output Voltage at Mode alternative point**

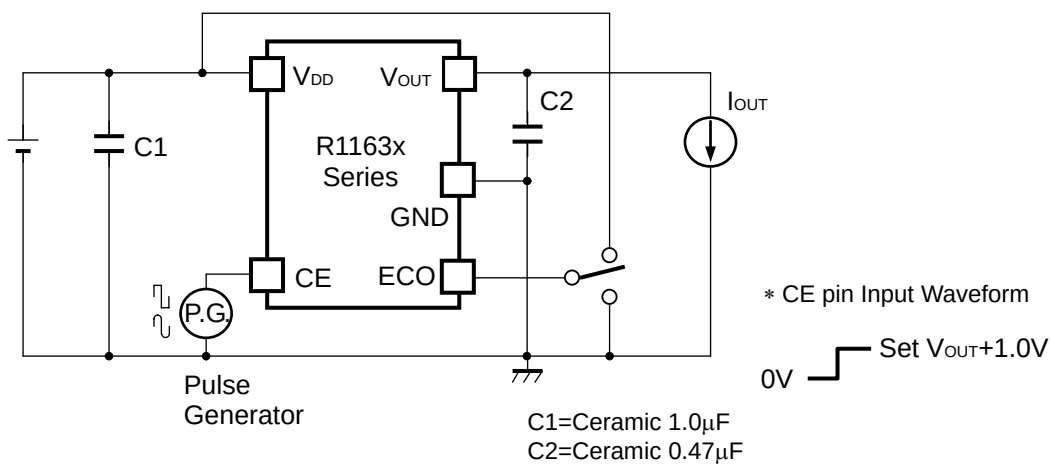


**Test Circuit for Turn On Speed with CE pin**

## TYPICAL CHARACTERISTICS


Unless otherwise provided, capacitors are ceramic type.

### 1) Output Voltage vs. Output Current


**R1163x151x ECO=H**

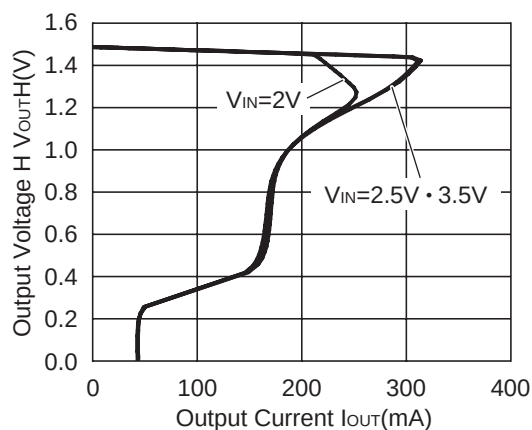


**R1163x151x ECO=L**

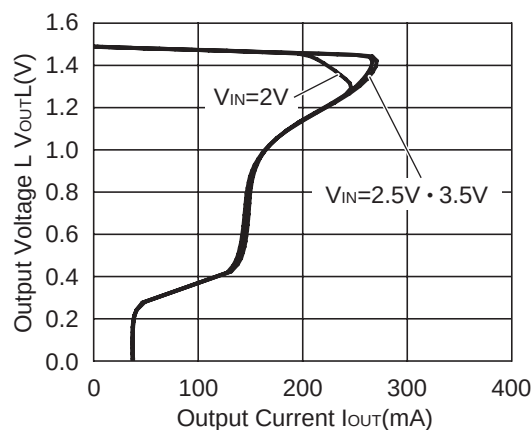


**R1163x281x ECO=H**

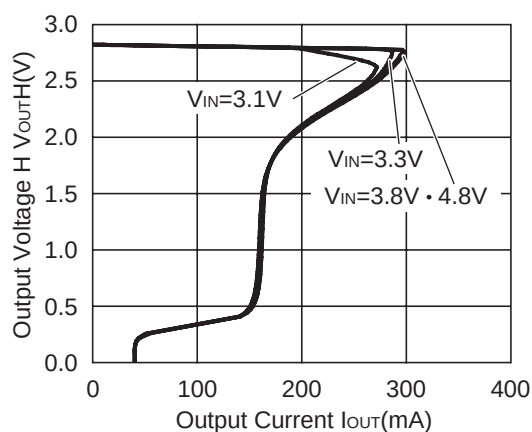


**R1163x281x ECO=L**

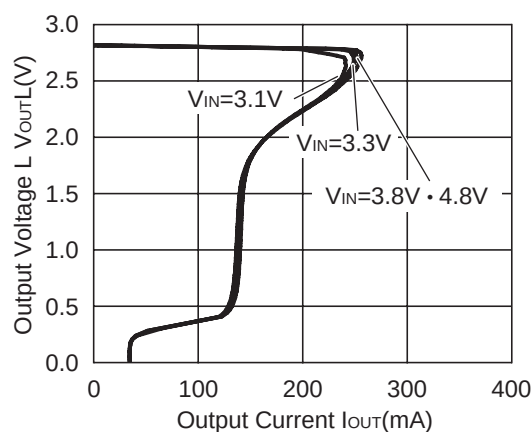







**R1163x40x ECO=H**

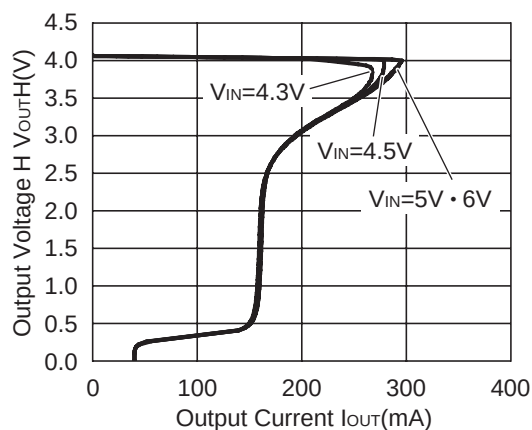







**R1163x40x ECO=L**

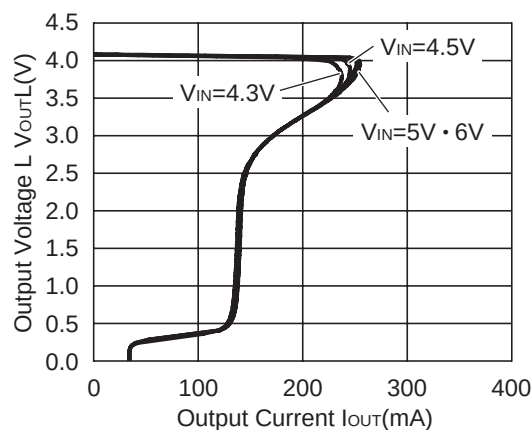

2) Output Voltage vs. Input Voltage

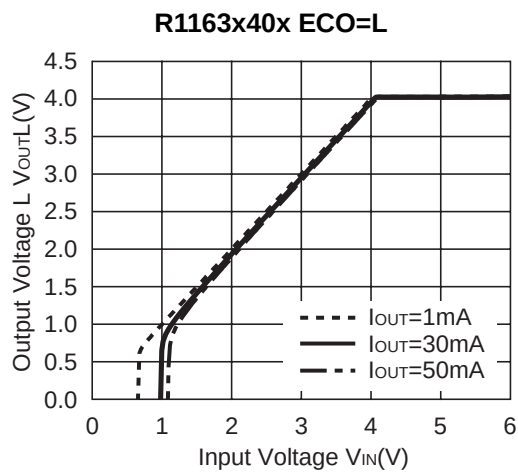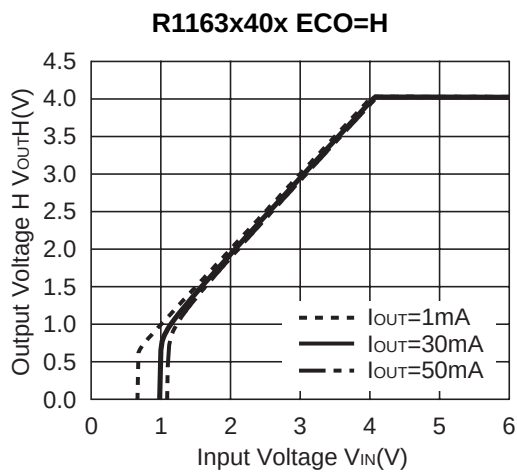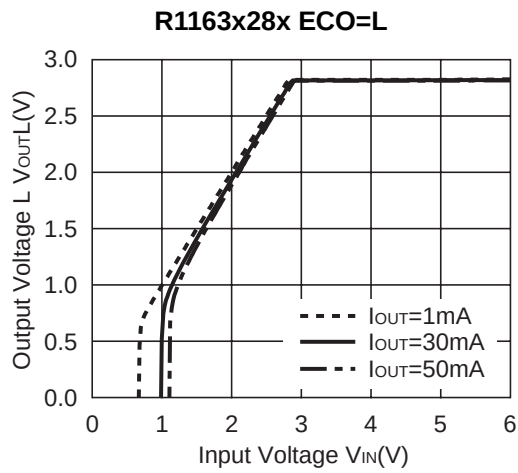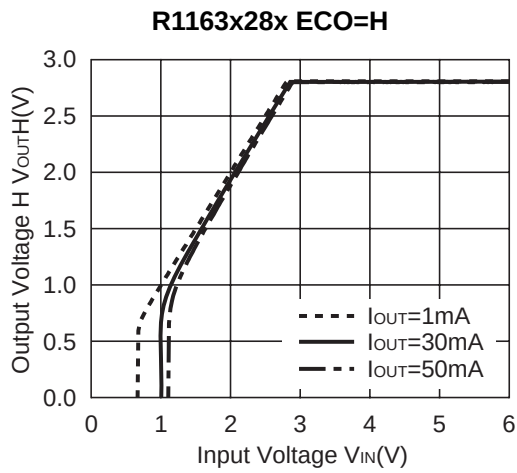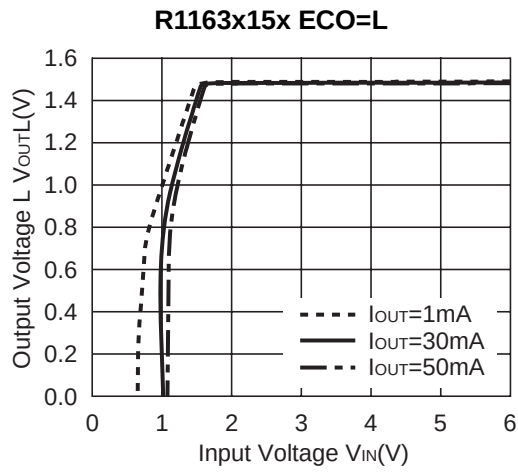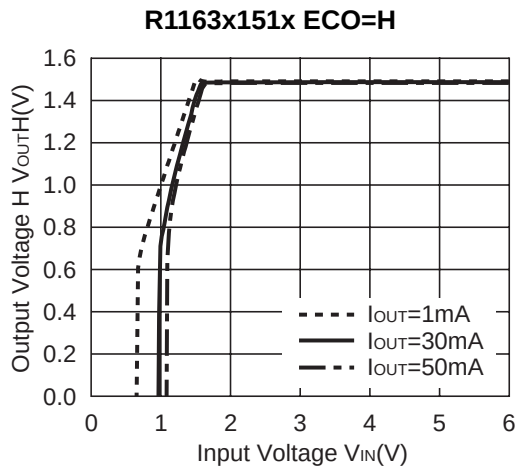


### 3) Supply Current vs. Input Voltage

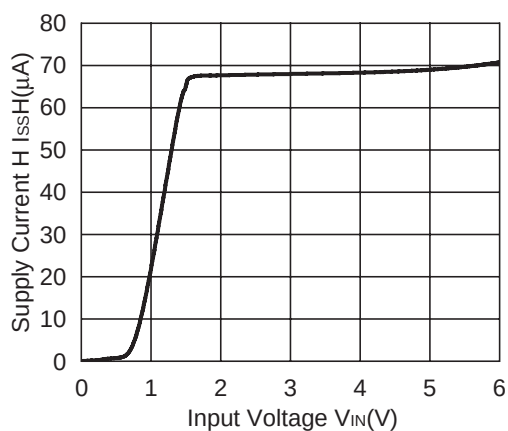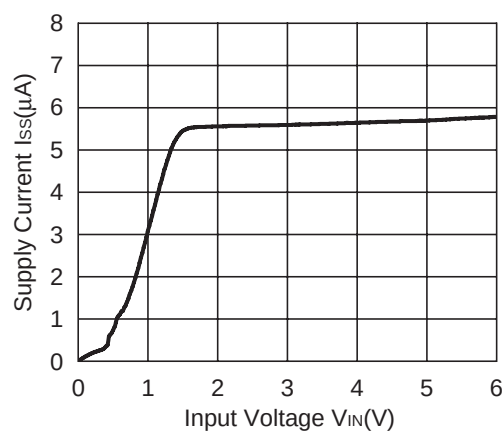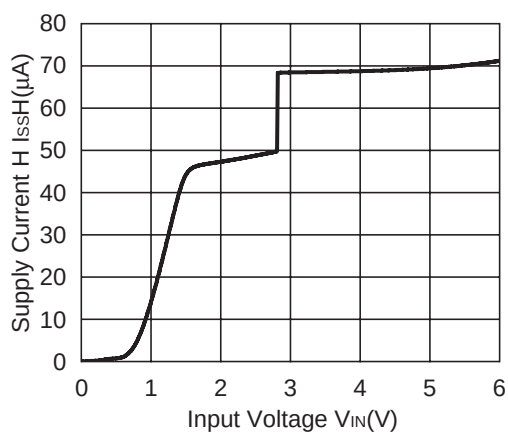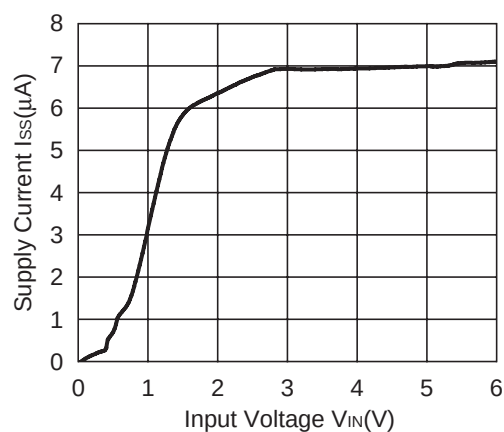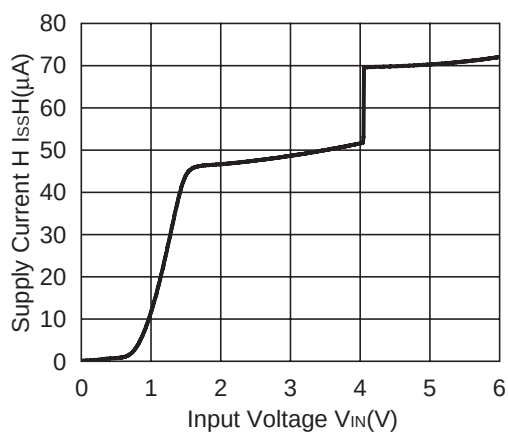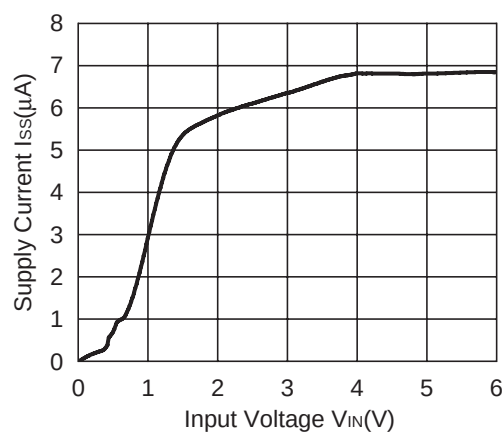
**R1163x151x ECO=H****R1163x151x ECO=L****R1163x281x ECO=H****R1163x281x ECO=L****R1163x401x ECO=H****R1163x401x ECO=L**

4) Output Voltage vs. Temperature


R1163x151x ECO=H

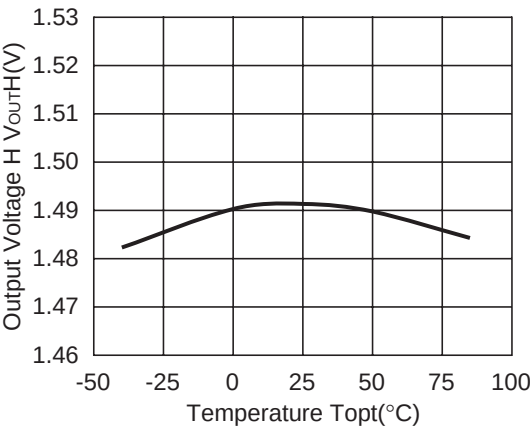


R1163x151x ECO=L

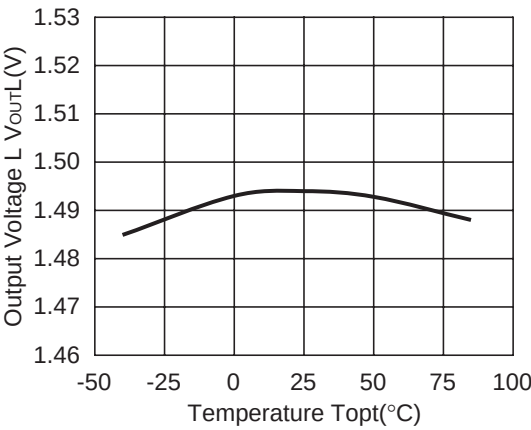


R1163x281x ECO=H

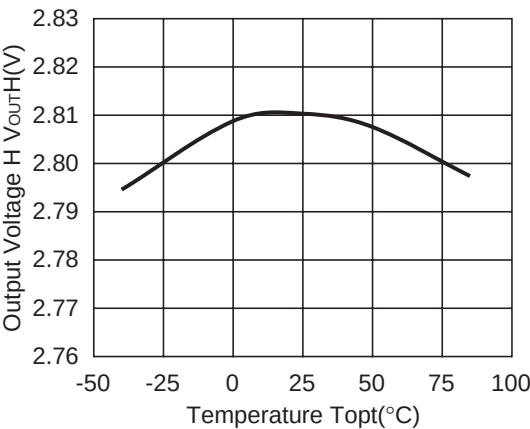


R1163x281x ECO=L

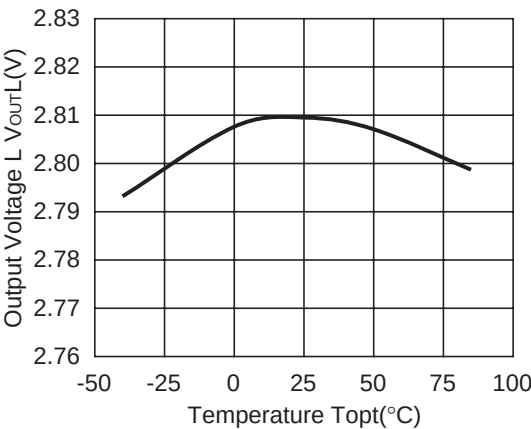

R1163x401x ECO=H

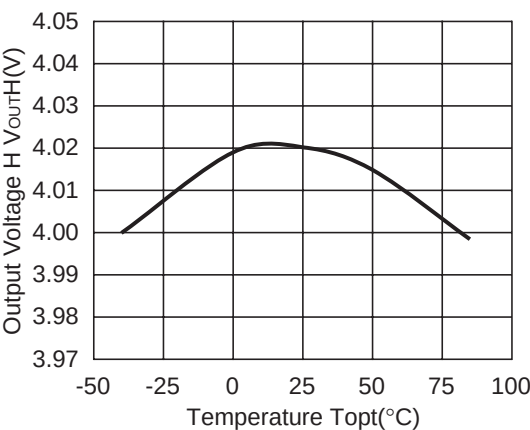


R1163x401x ECO=L

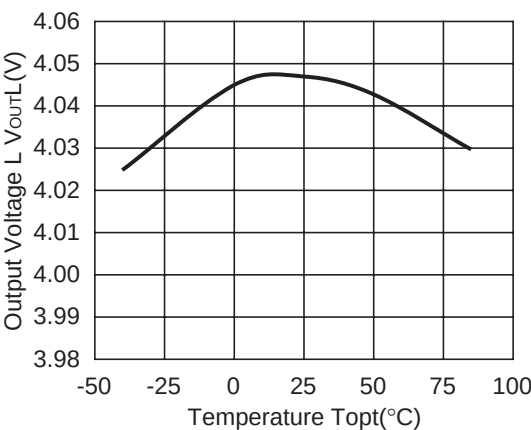


## 5) Supply Current vs. Temperature


R1163x151x ECO=H

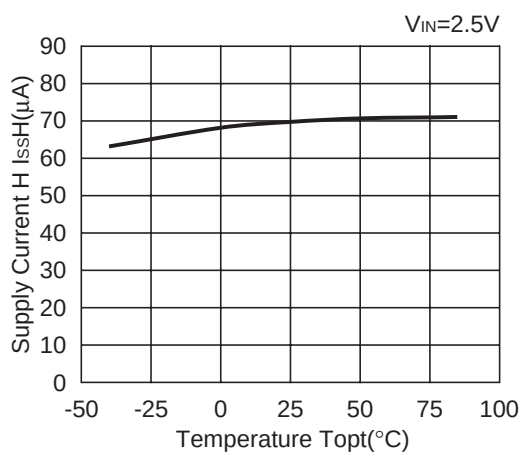


R1163x151x ECO=L

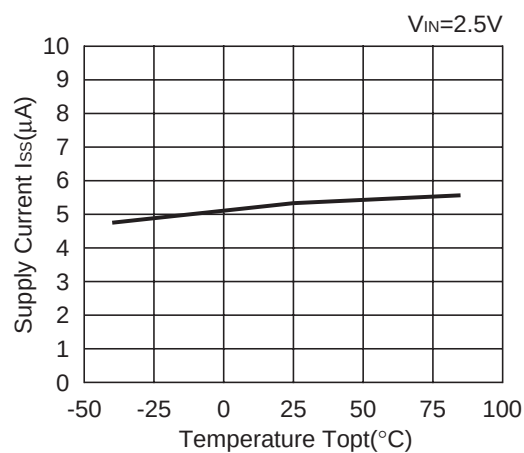


R1163x281x ECO=H

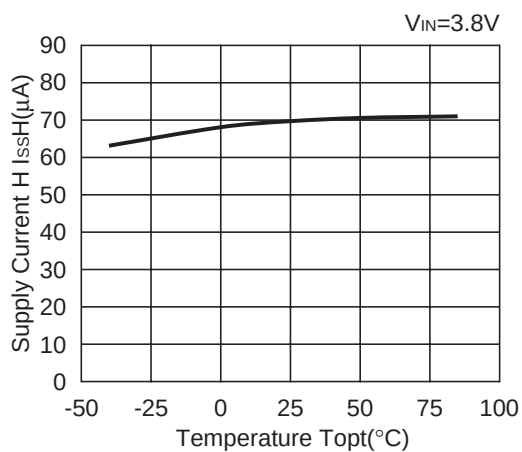


R1163x281x ECO=L

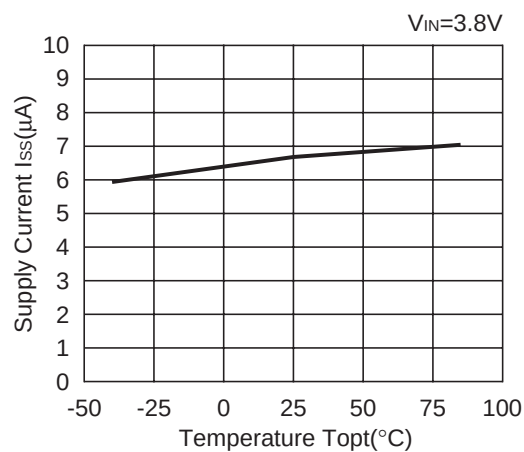


R1163x401x ECO=H

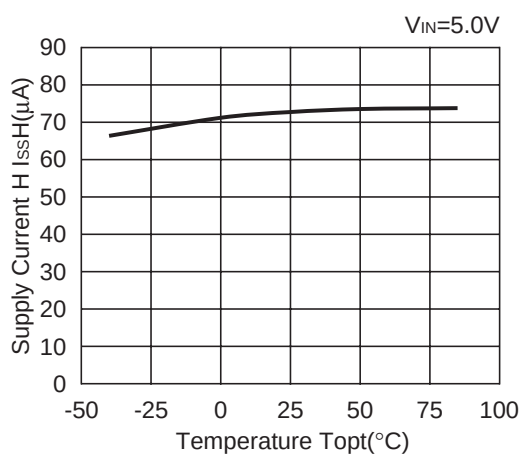



R1163x401x ECO=L

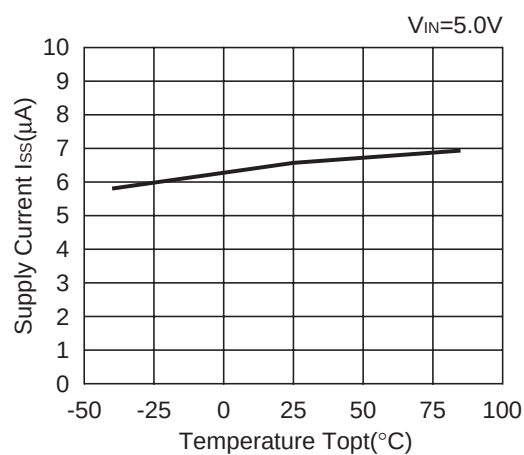



## 6) Standby Current vs. Input Voltage

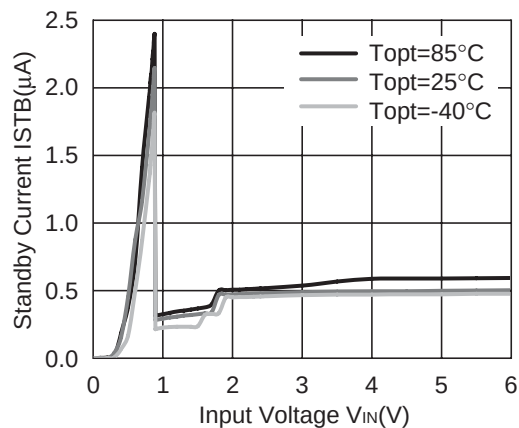

## 7) Reverse Current vs. Output Voltage

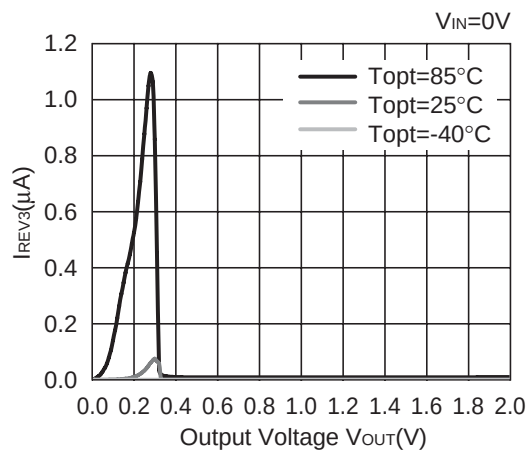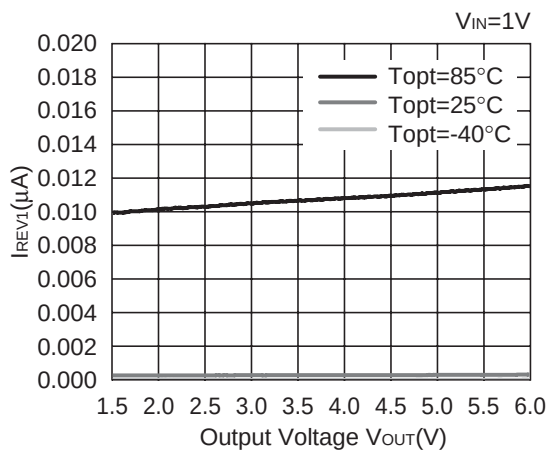


## 8) Dropout Voltage vs. Output Current

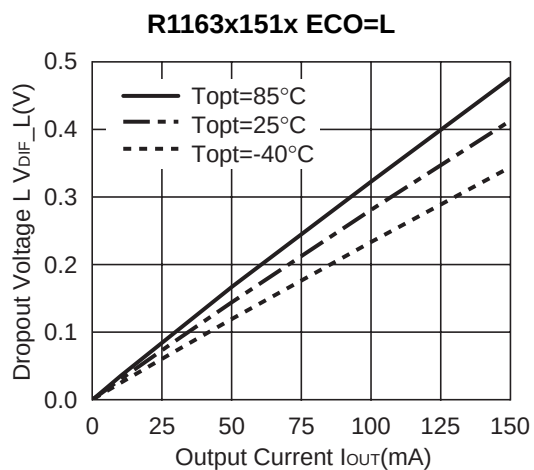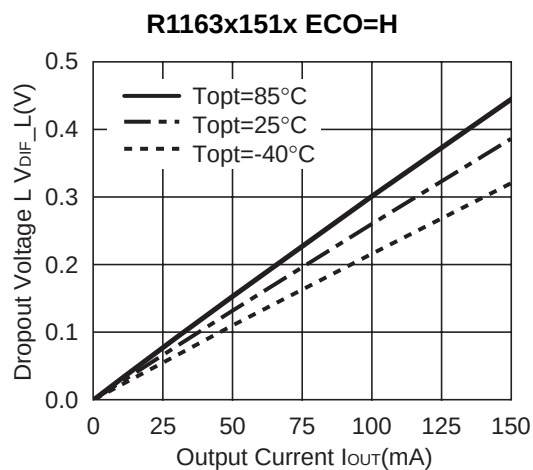





R1163x161x ECO=H

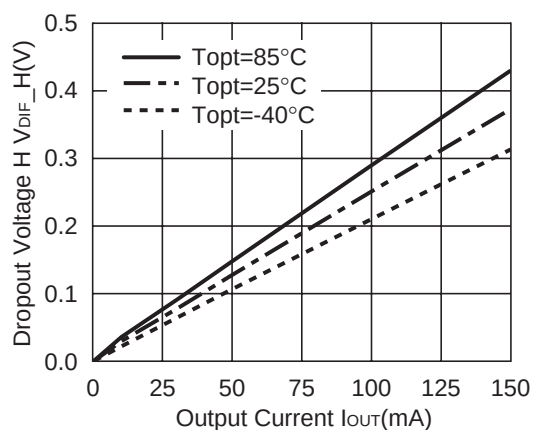


R1163x161x ECO=L

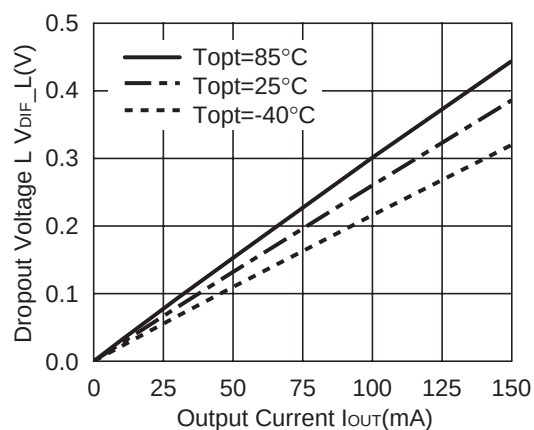


R1163x171x ECO=H

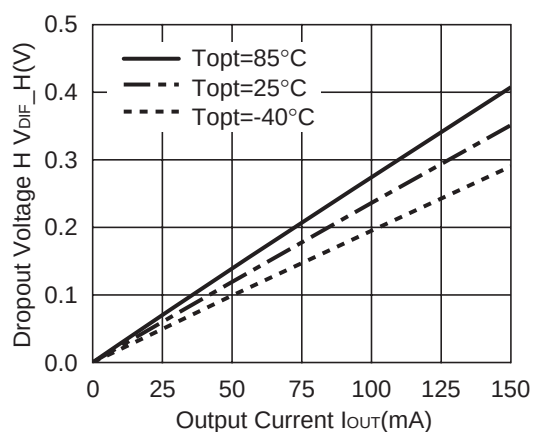


R1163x171x ECO=L






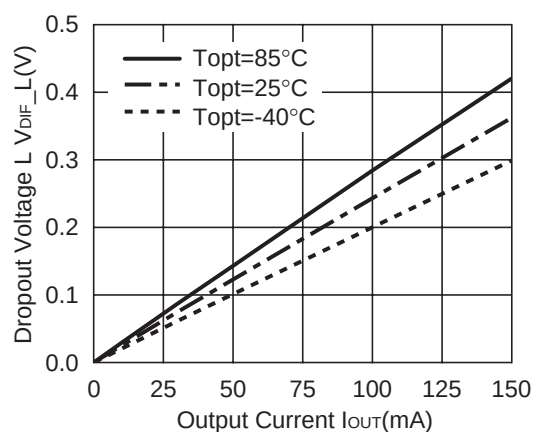


R1163x181x ECO=H

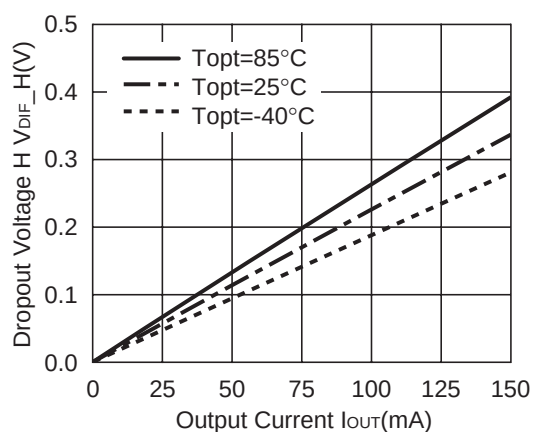


R1163x181x ECO=L

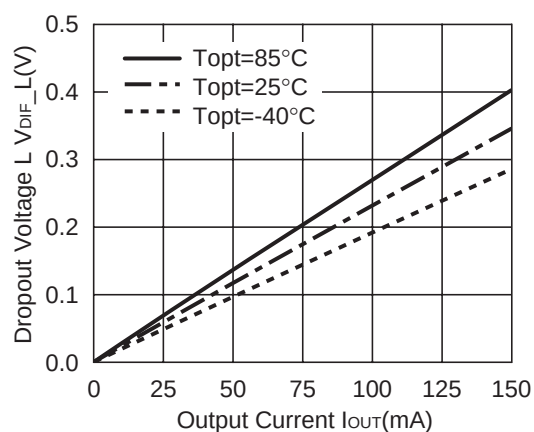

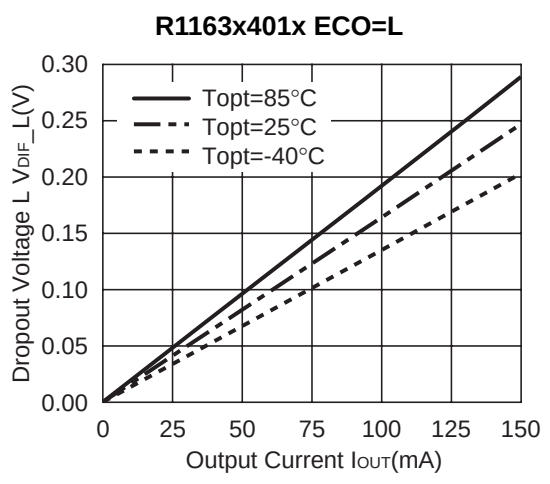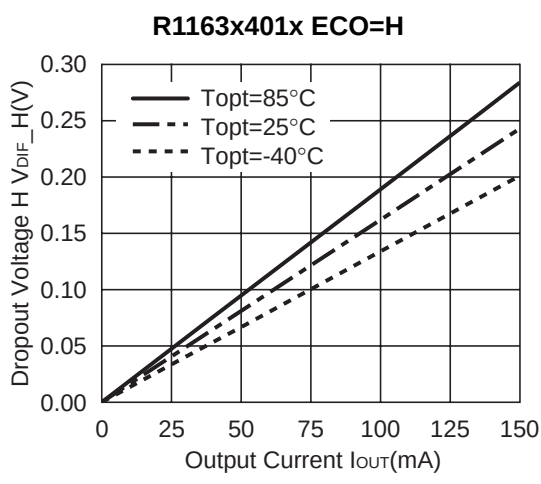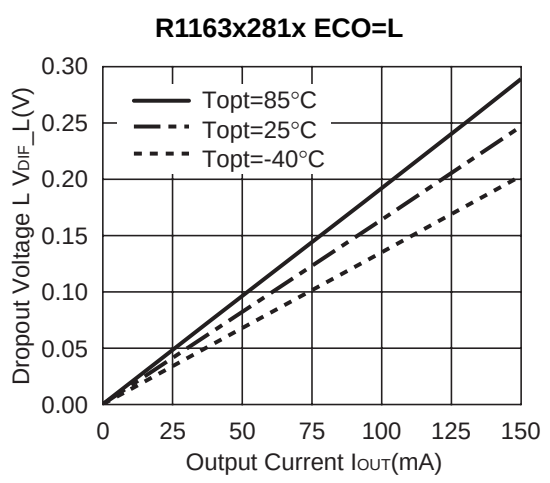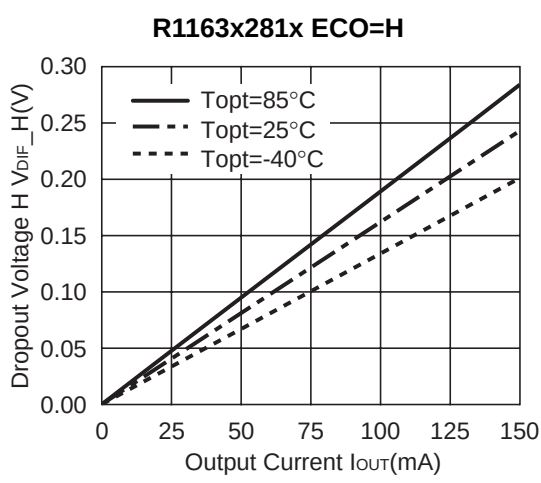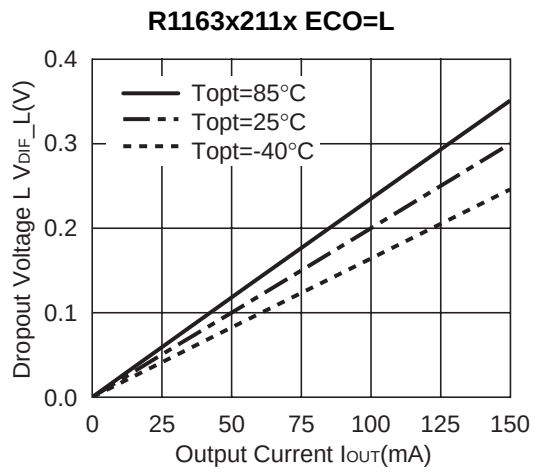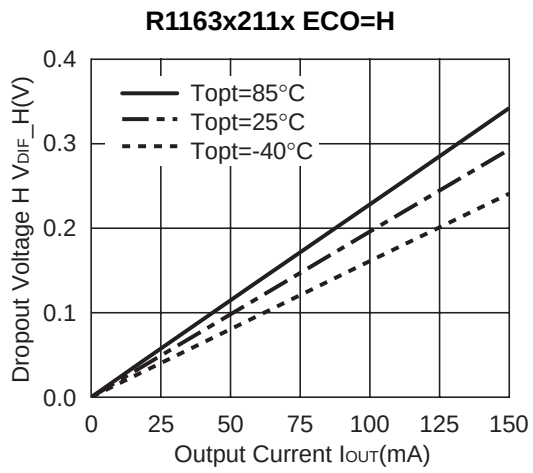


## 9) Dropout Voltage vs. Set Output Voltage

R1163x ECO=H

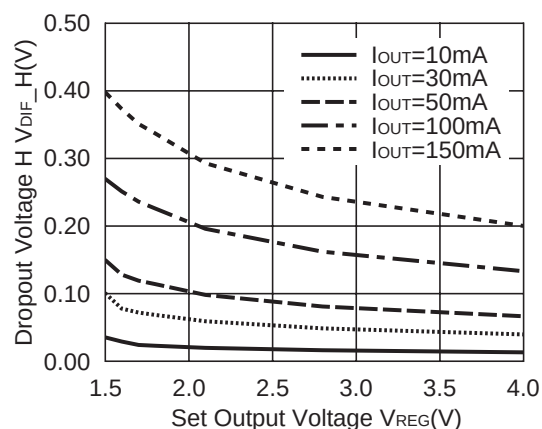


R1163x ECO=L

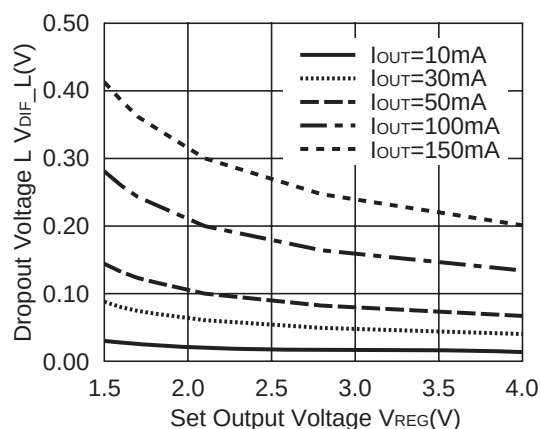

## 10) Ripple Rejection vs. Input Bias Voltage


R1163x281x ECO=H

$C_{IN}=none$ ,  $C_{OUT}=0.47\mu F$ ,  
 $I_{OUT}=1mA$  Ripple=0.2Vp-p

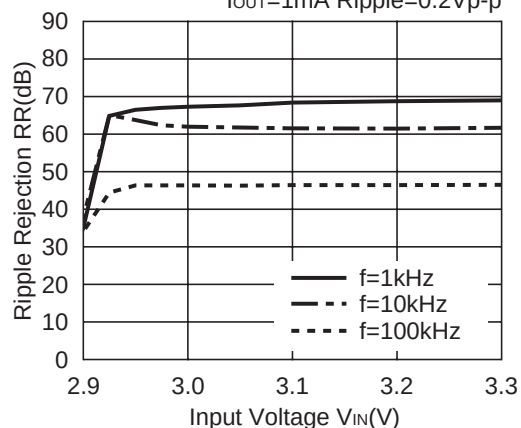


R1163x281x ECO=L

$C_{IN}=none$ ,  $C_{OUT}=0.47\mu F$ ,  
 $I_{OUT}=1mA$  Ripple=0.5Vp-p

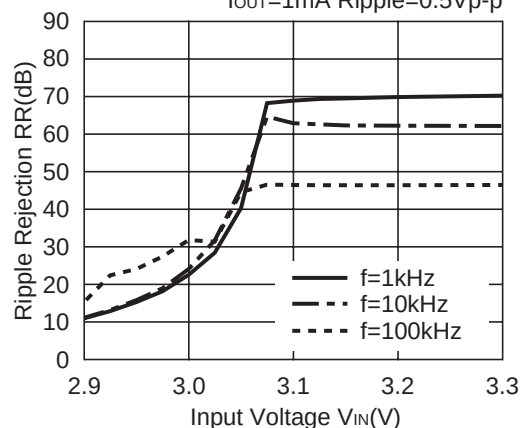


R1162x281x ECO=H



$C_{IN}=none$ ,  $C_{OUT}=0.47\mu F$ ,  
 $I_{OUT}=30mA$  Ripple=0.2Vp-p

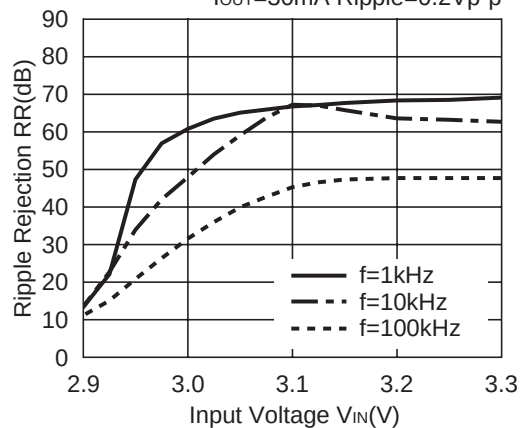





R1162x281x ECO=L

$C_{IN}=none$ ,  $C_{OUT}=0.47\mu F$ ,  
 $I_{OUT}=30mA$  Ripple=0.5Vp-p

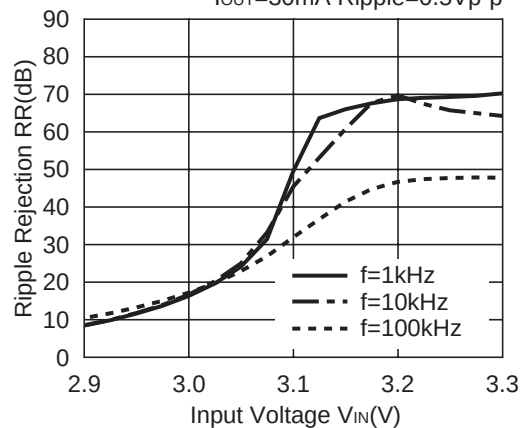

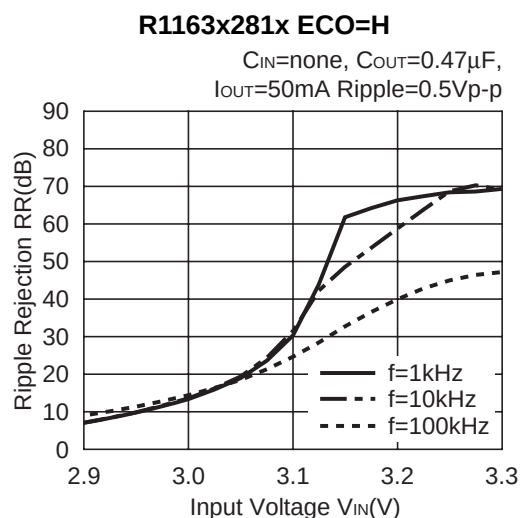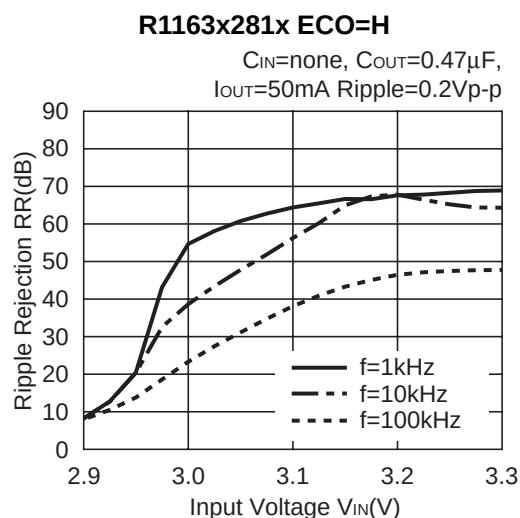


## 11) Ripple Rejection vs. Frequency

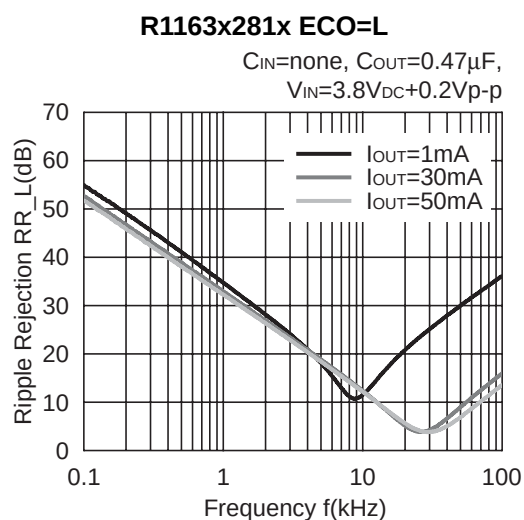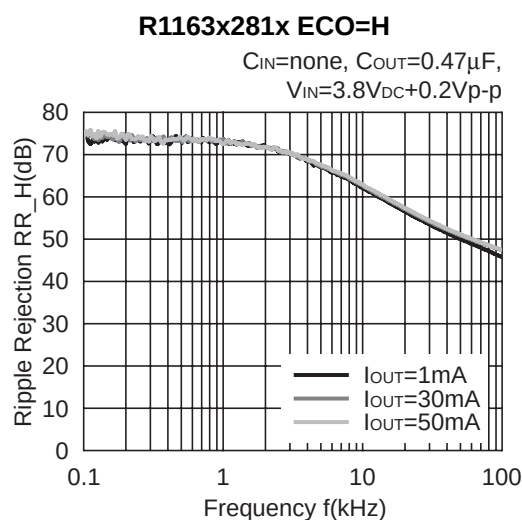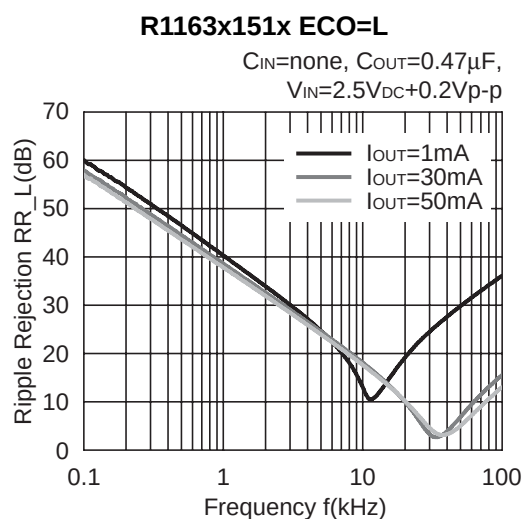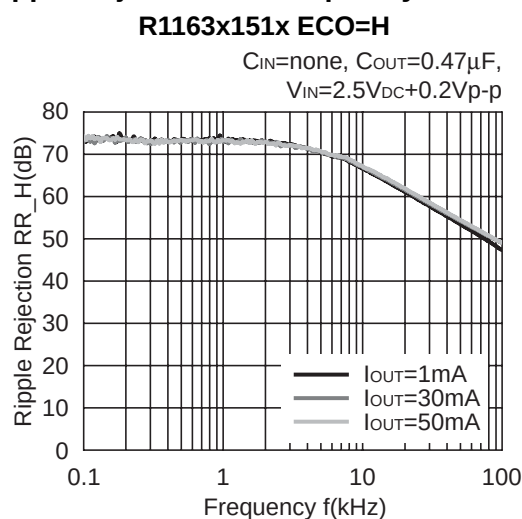


**R1163x401x ECO=H**

$C_{IN}=none$ ,  $C_{OUT}=0.47\mu F$ ,  
 $V_{IN}=5.0V_{DC}+0.2V_{p-p}$

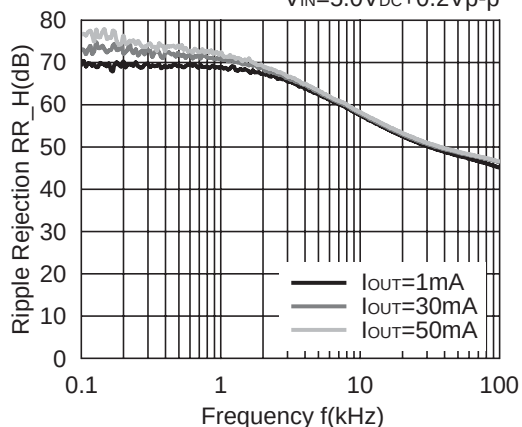**R1163x401x ECO=L**


$C_{IN}=none$ ,  $C_{OUT}=0.47\mu F$ ,  
 $V_{IN}=5.0V_{DC}+0.2V_{p-p}$

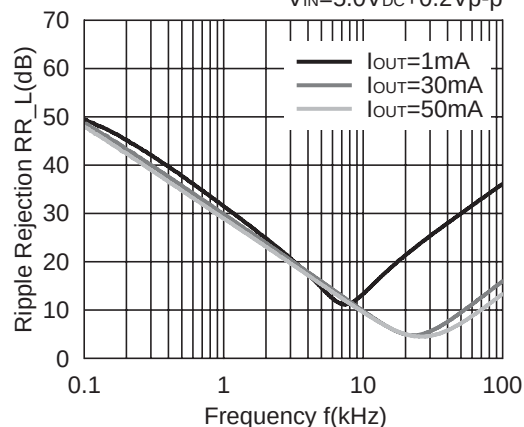


## 12) Input Transient Response

**R1163x151x ECO=H**


$C_{IN}=none$ ,  $C_{OUT}=0.47\mu F$   $I_{OUT}=30mA$

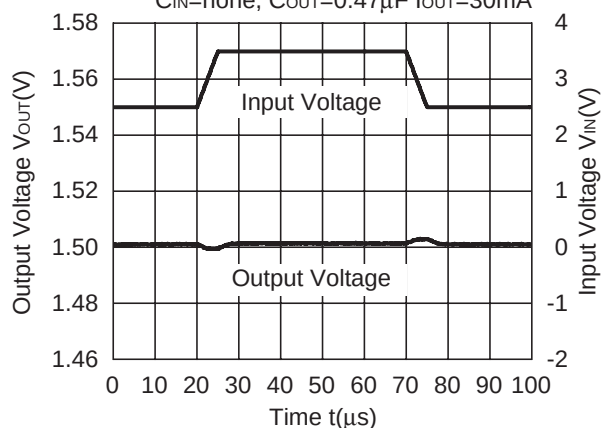**R1163x151x ECO=L**


$C_{IN}=none$ ,  $C_{OUT}=0.47\mu F$   $I_{OUT}=10mA$

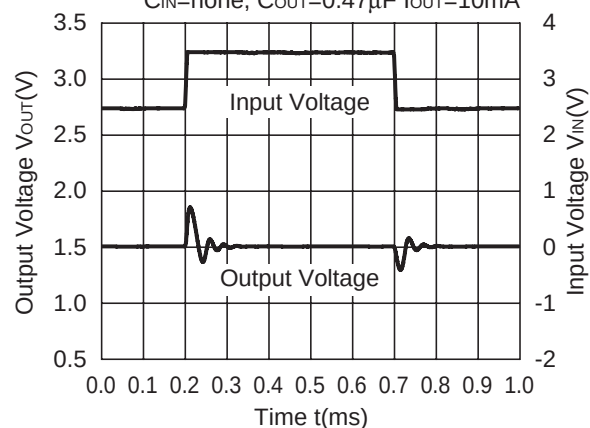
**R1163x151x ECO=L**

$C_{IN}=none$ ,  $C_{OUT}=1\mu F$   $I_{OUT}=10mA$




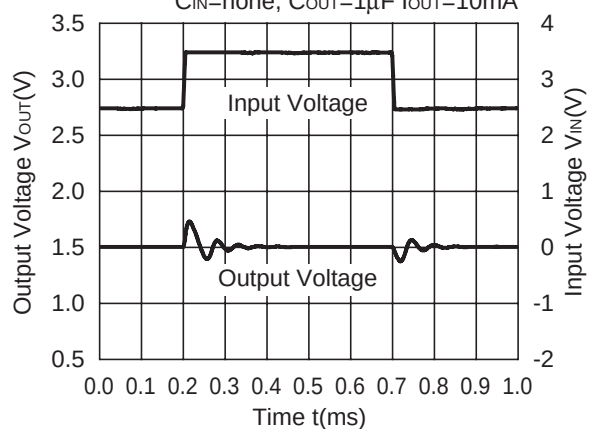
**R1163x281x ECO=H**







$C_{IN}=none$ ,  $C_{OUT}=1\mu F$   $I_{OUT}=30mA$


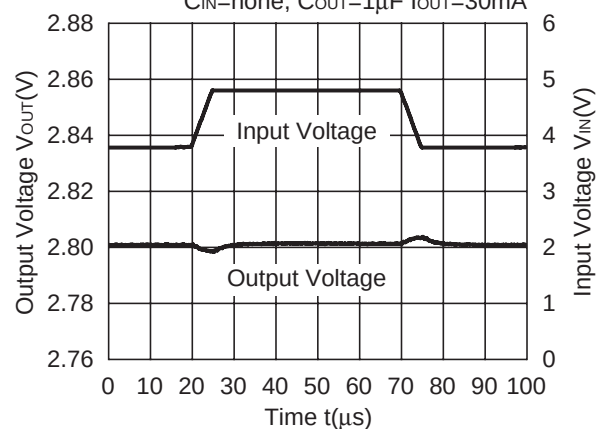


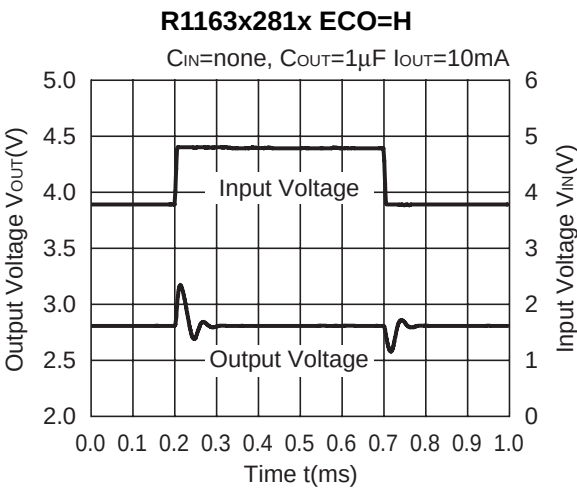





**13) Load Transient Response**

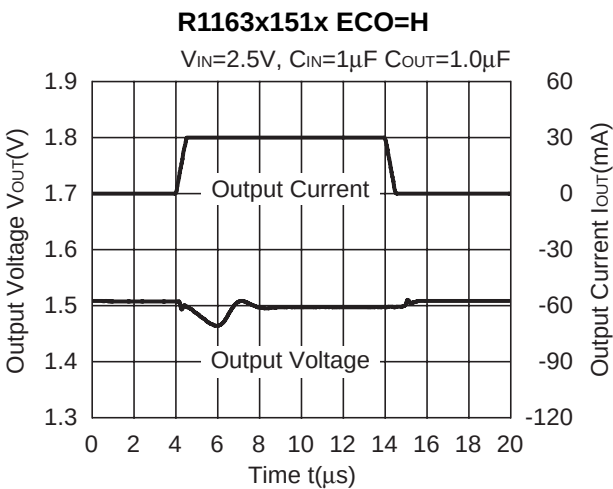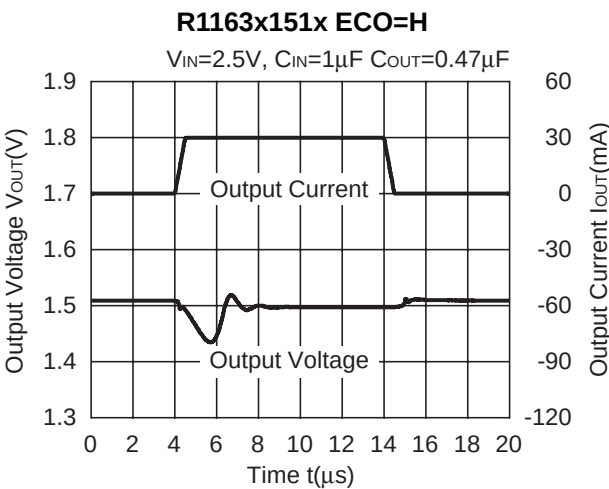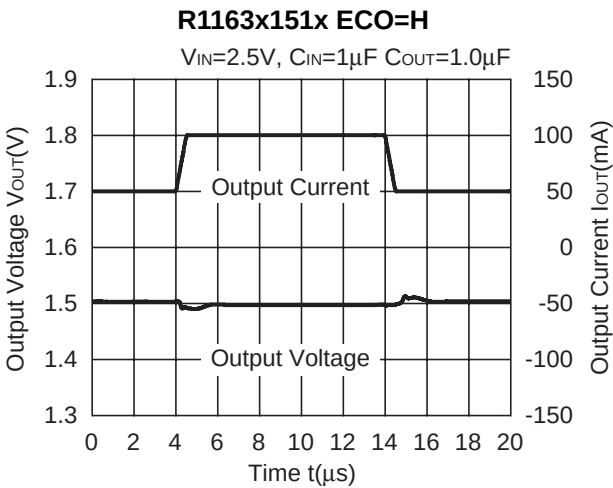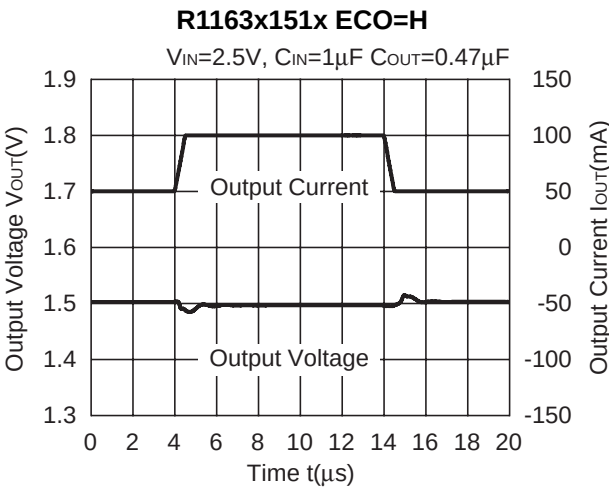

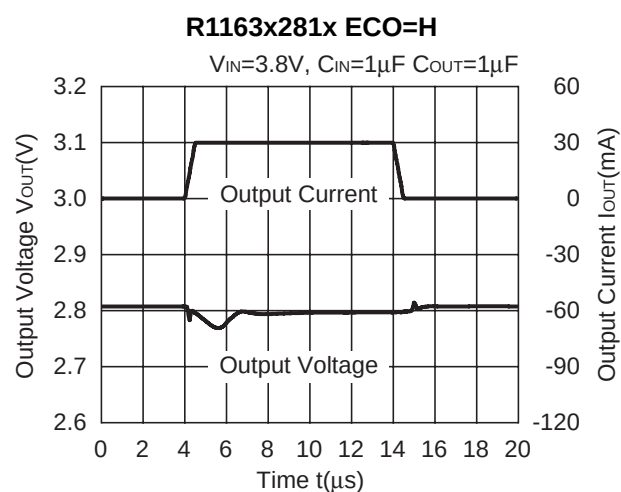
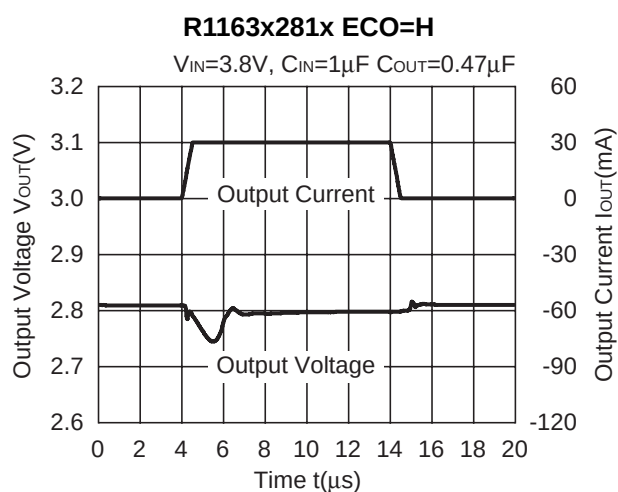
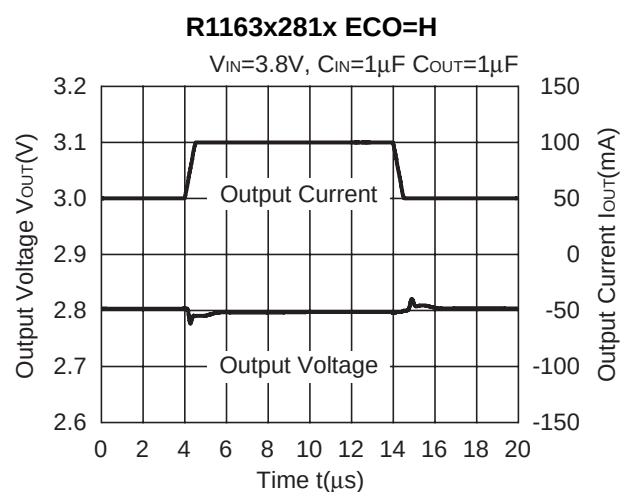
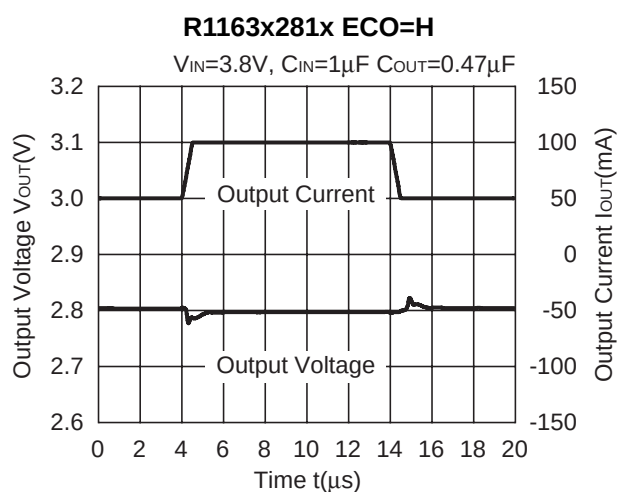
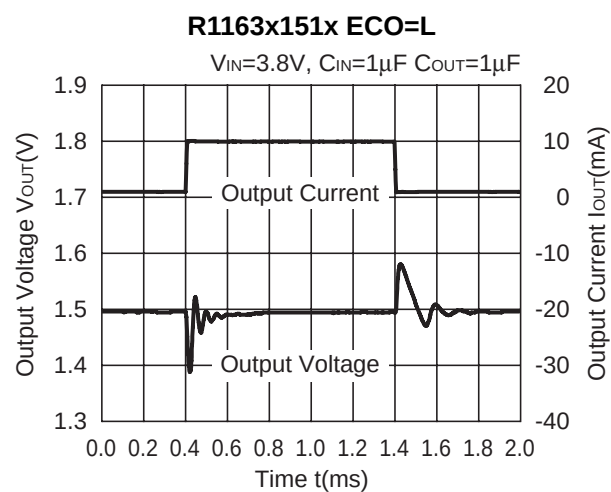
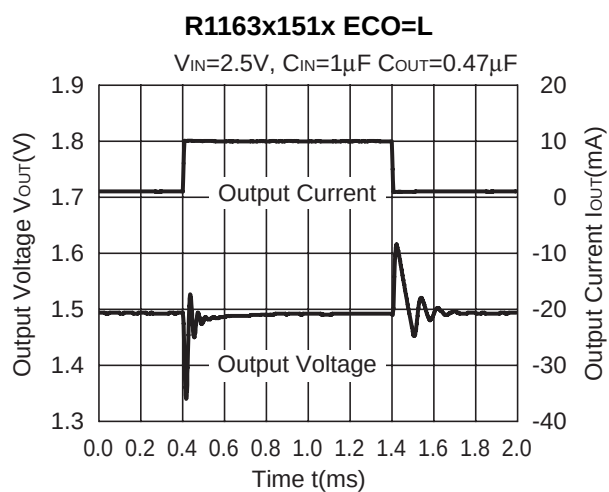






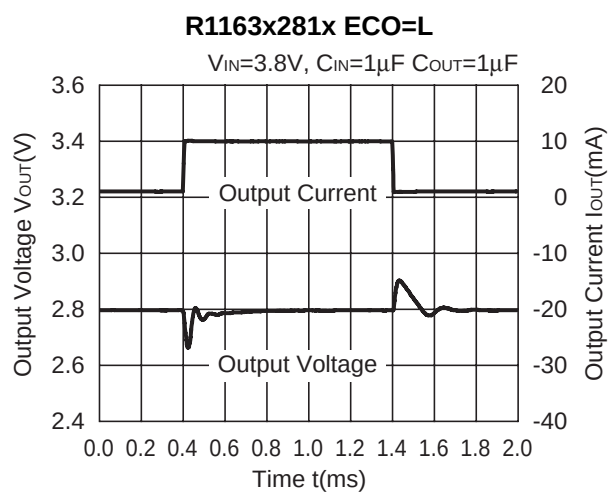
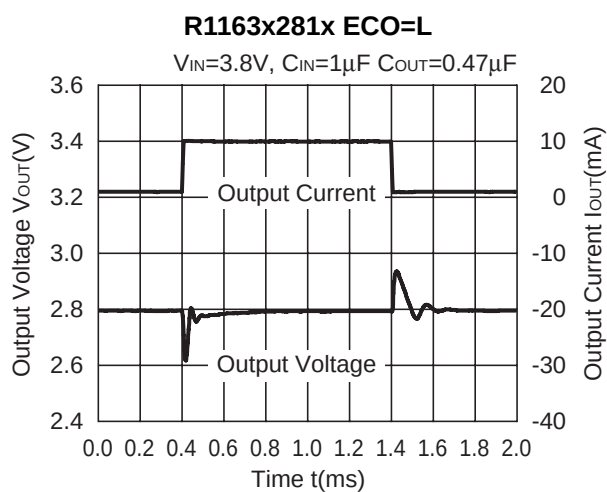







#### 14) Turn on speed with CE pin

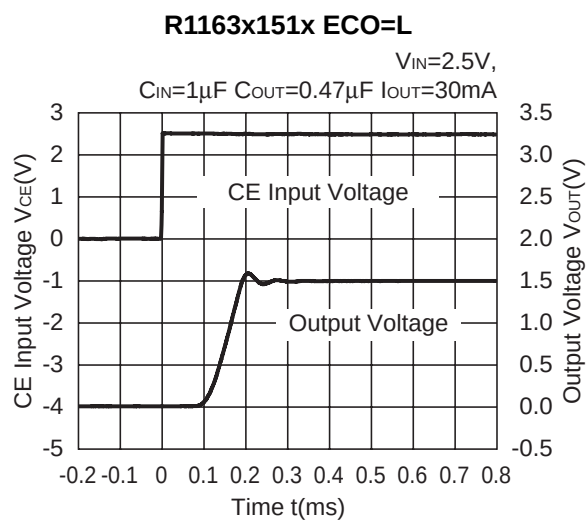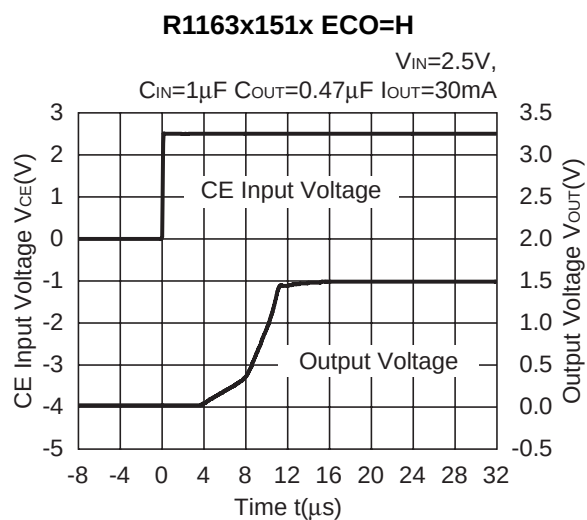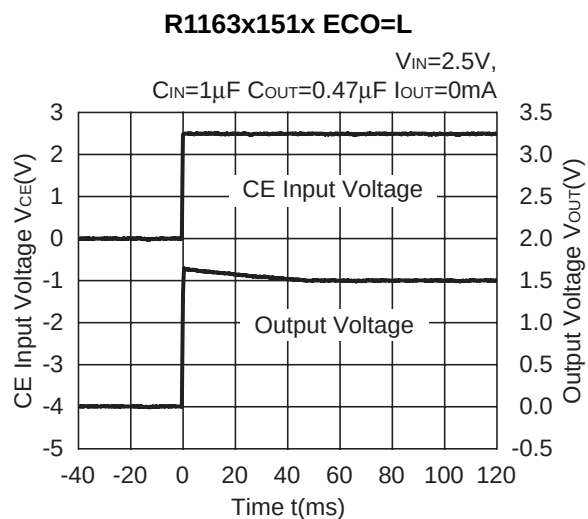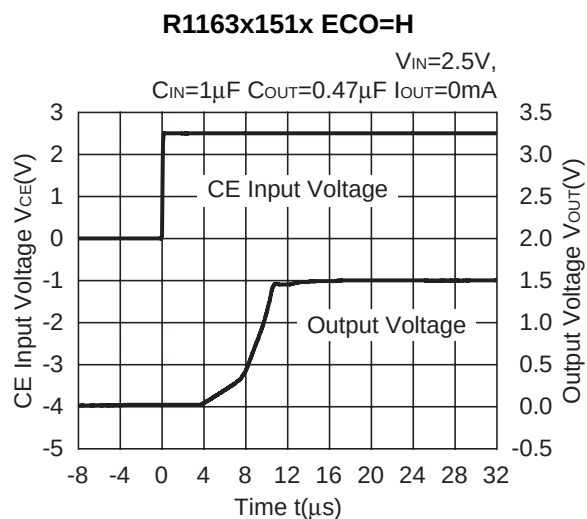

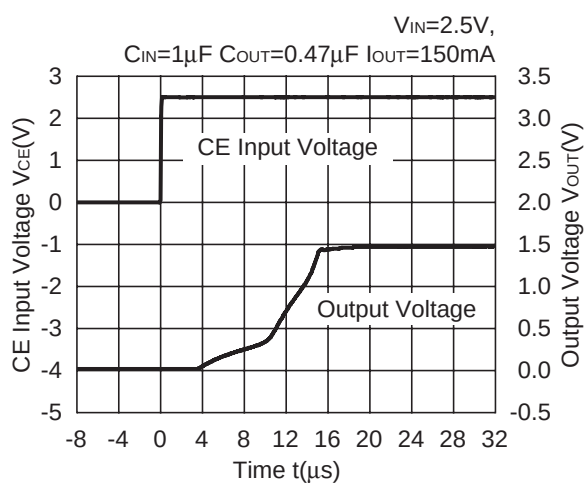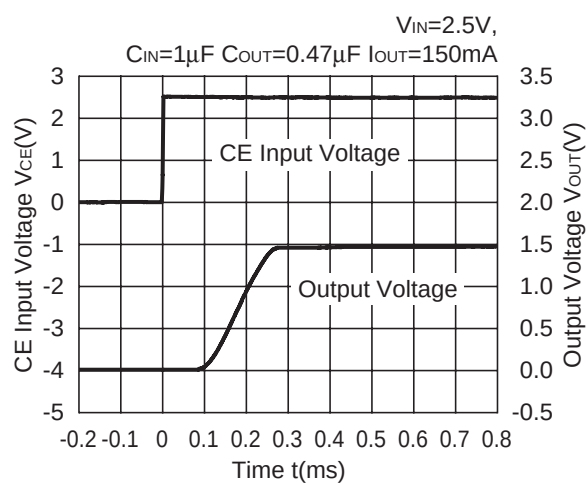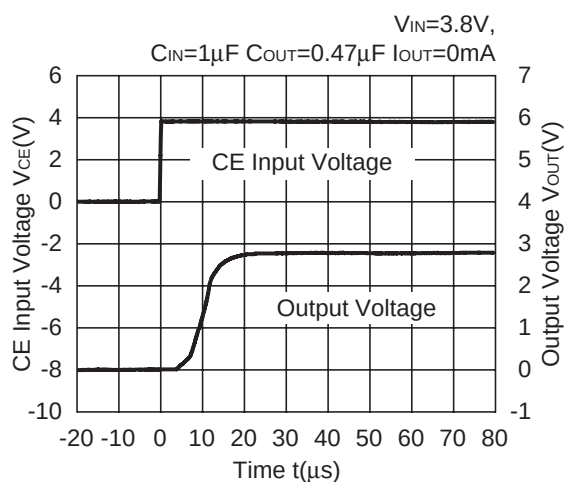
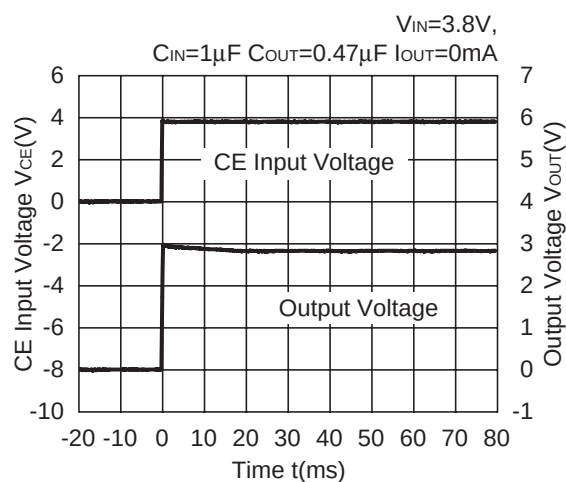
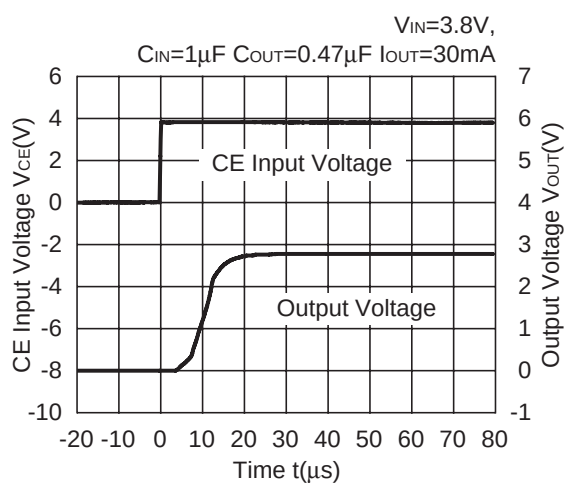
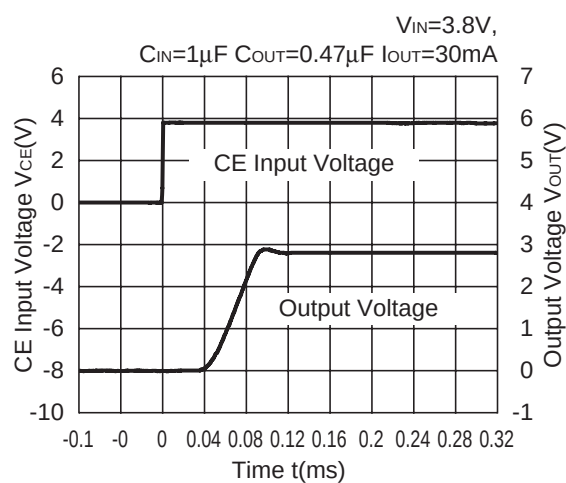


**R1163x151x ECO=H****R1163x151x ECO=L****R1163x281x ECO=H****R1163x281x ECO=L****R1163x281x ECO=H****R1163x281x ECO=L**

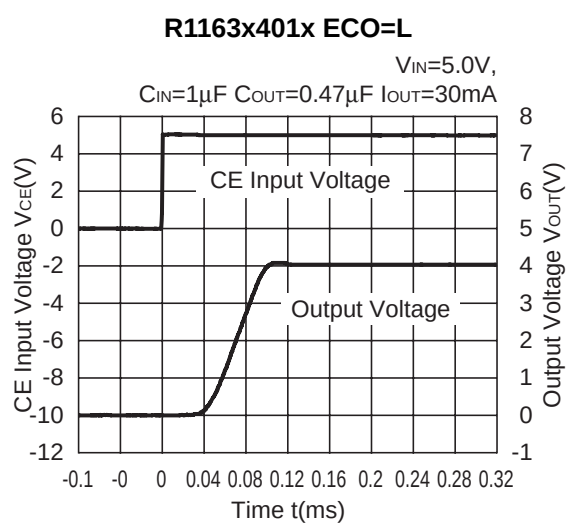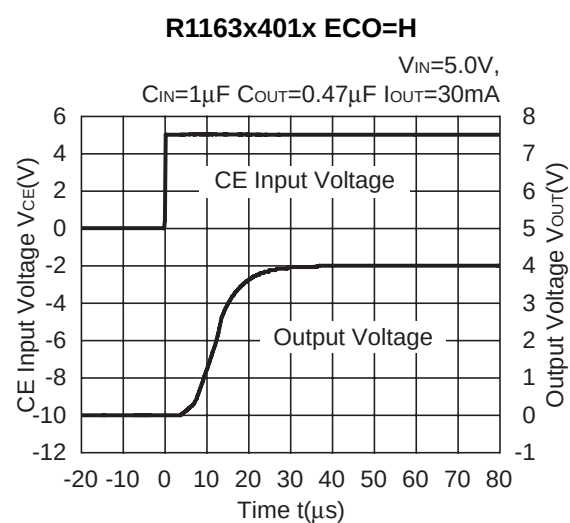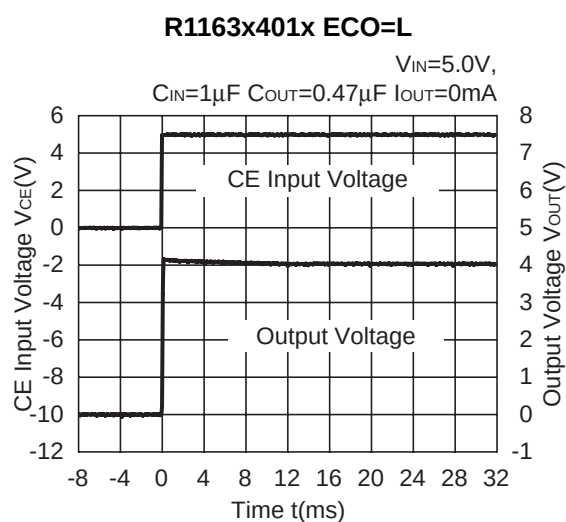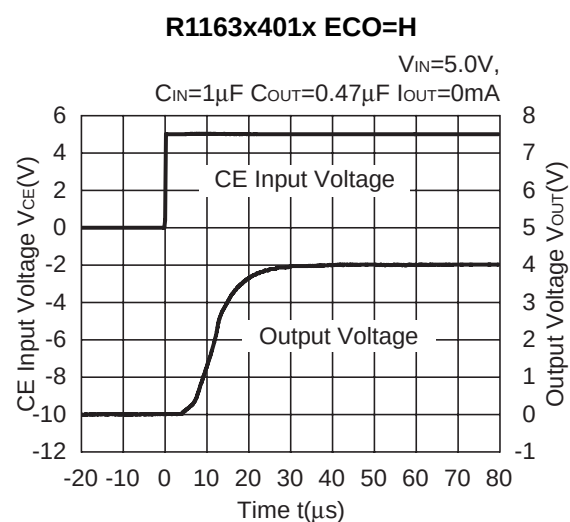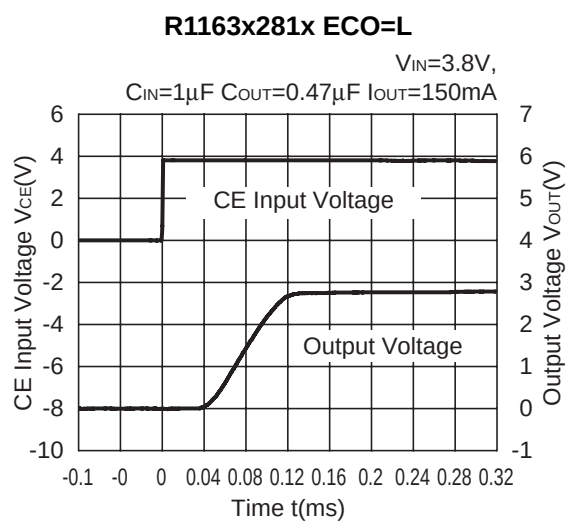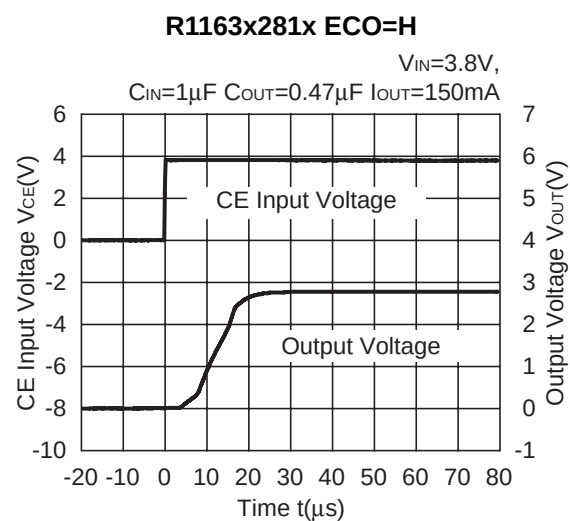

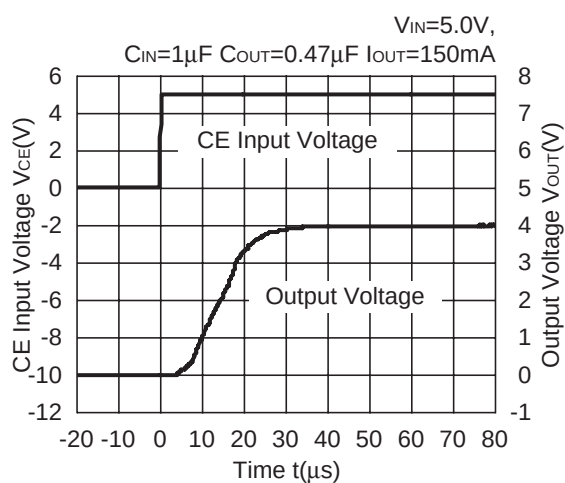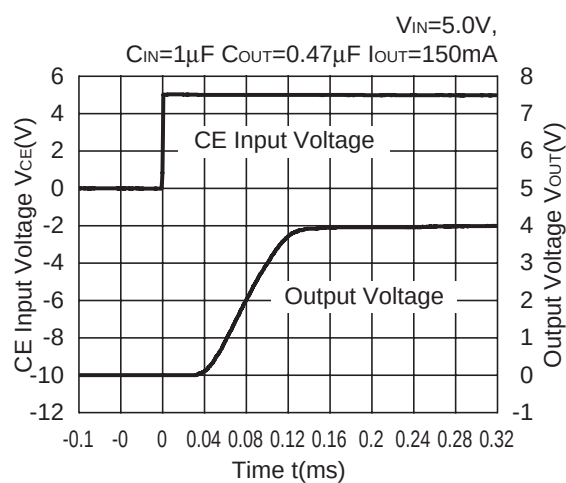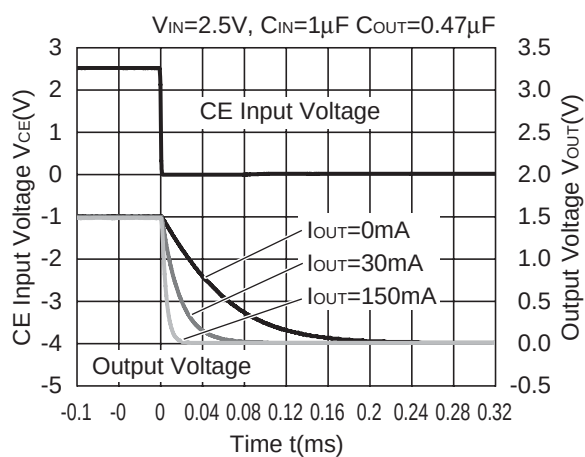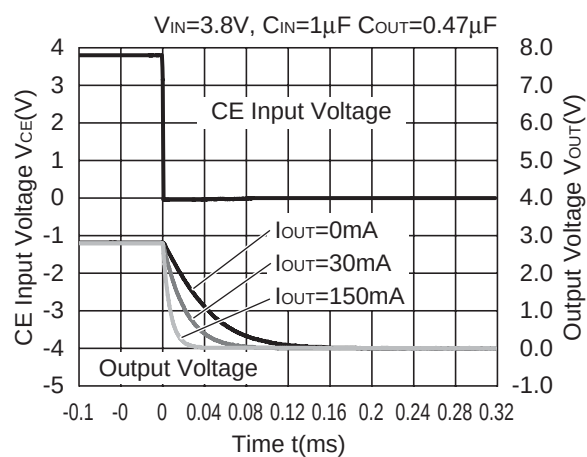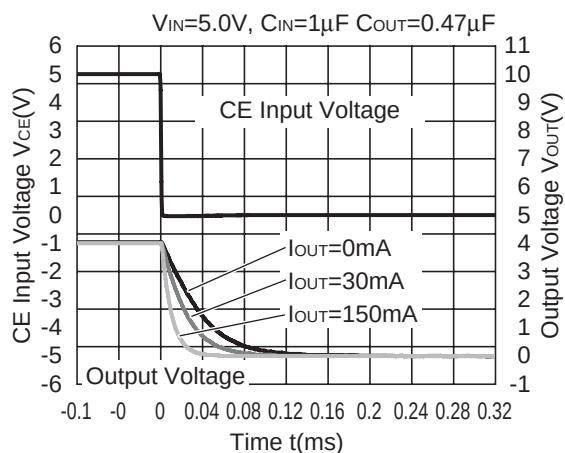**R1163x401x ECO=H****R1163x401x ECO=L****15) Turn off speed with CE pin****R1163x151xD****R1163x281xD****R1163x401xD**

16) Output Voltage at Mode alternative point

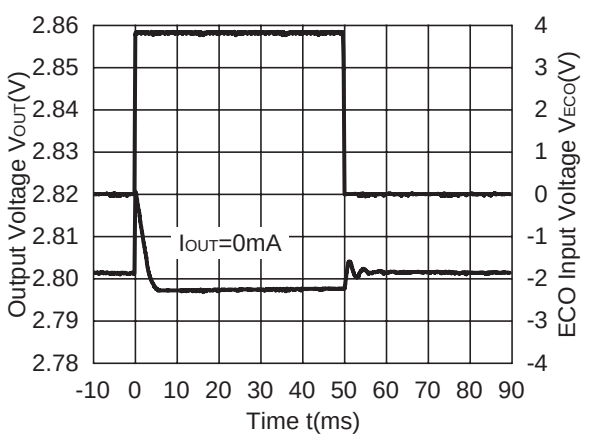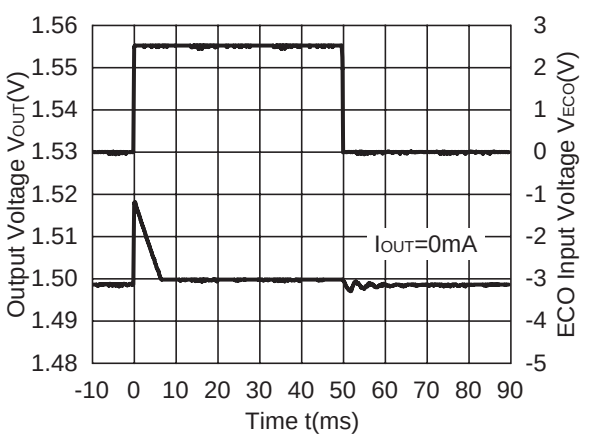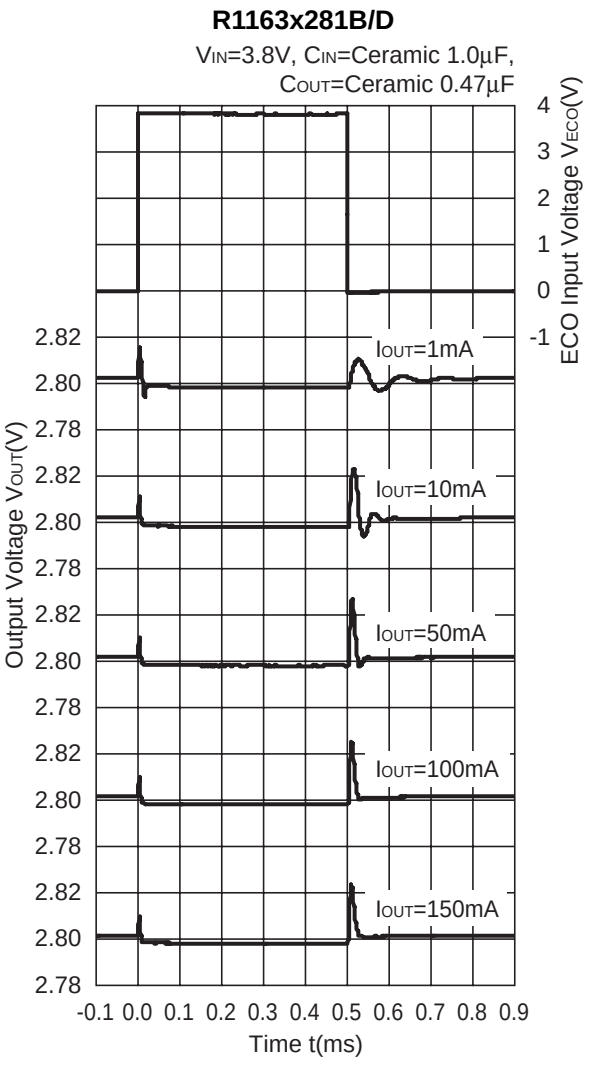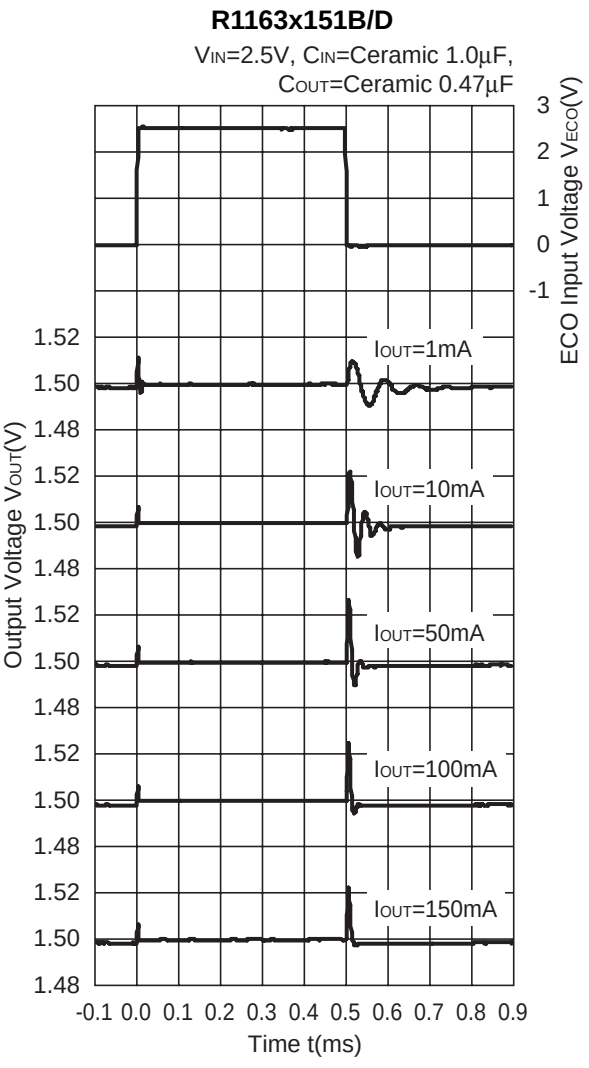

## TECHNICAL NOTES





When using these ICs, consider the following points:

In these ICs, phase compensation is made for securing stable operation even if the load current is varied. For this purpose, be sure to use a capacitor  $C_{OUT}$  with good frequency characteristics and ESR (Equivalent Series Resistance) in the range described as follows:

The relations between  $I_{OUT}$  (Output Current) and ESR of Output Capacitor are shown below. The conditions when the white noise level is under  $40\mu V$  (Avg.) are marked as the hatched area in the graph.

### <Test conditions>

#### (1) Frequency band: 10Hz to 2MHz

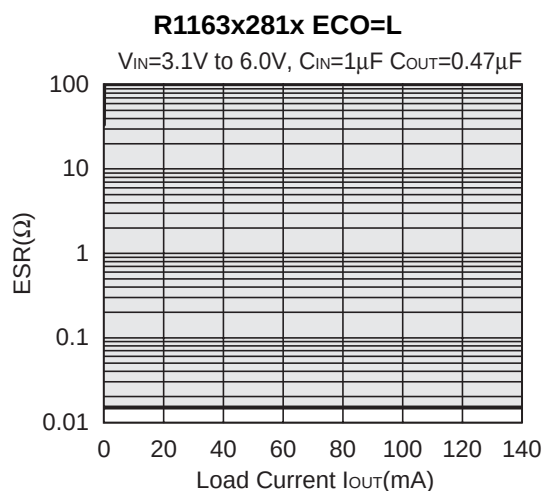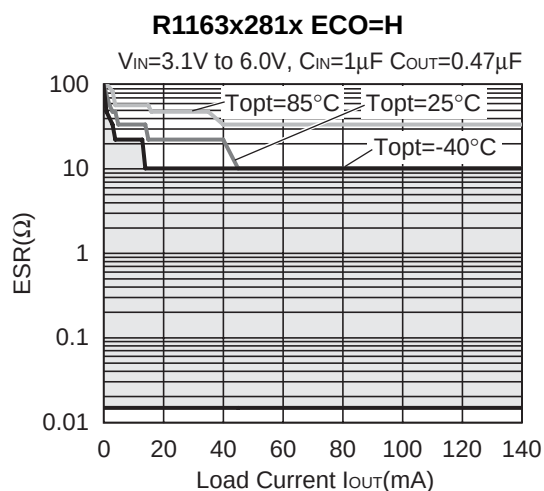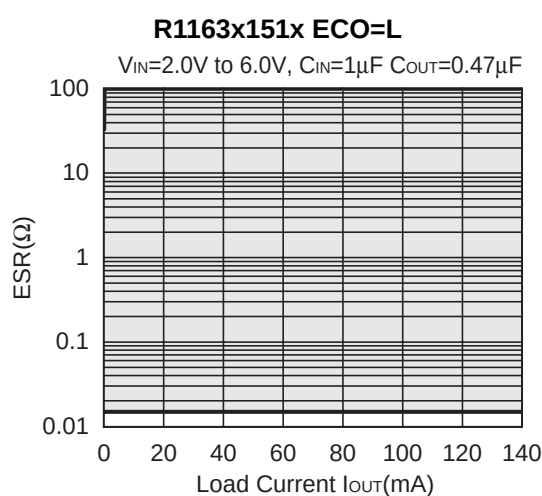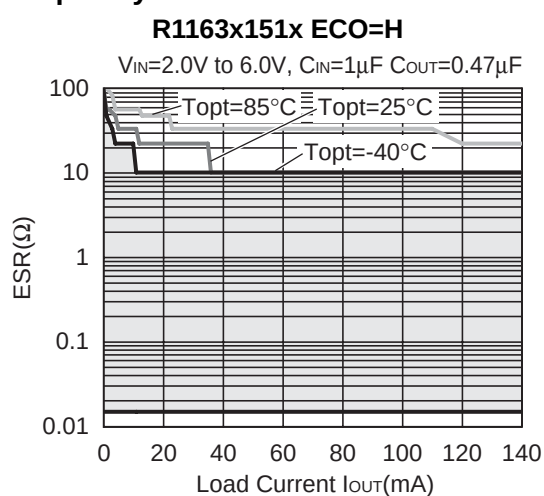



1. The products and the product specifications described in this document are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to Ricoh sales representatives for the latest information thereon.
2. The materials in this document may not be copied or otherwise reproduced in whole or in part without prior written consent of Ricoh.
3. Please be sure to take any necessary formalities under relevant laws or regulations before exporting or otherwise taking out of your country the products or the technical information described herein.
4. The technical information described in this document shows typical characteristics of and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under Ricoh's or any third party's intellectual property rights or any other rights.
5. The products listed in this document are intended and designed for use as general electronic components in standard applications (office equipment, telecommunication equipment, measuring instruments, consumer electronic products, amusement equipment etc.). Those customers intending to use a product in an application requiring extreme quality and reliability, for example, in a highly specific application where the failure or misoperation of the product could result in human injury or death (aircraft, spacevehicle, nuclear reactor control system, traffic control system, automotive and transportation equipment, combustion equipment, safety devices, life support system etc.) should first contact us.
6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order to prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, firecontainment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. Anti-radiation design is not implemented in the products described in this document.
8. Please contact Ricoh sales representatives should you have any questions or comments concerning the products or the technical information.

## RICOH COMPANY., LTD. Electronic Devices Company



■ Ricoh presented with the Japan Management Quality Award for 1999.  
Ricoch continually strives to promote customer satisfaction, and shares the achievements of its management quality improvement program with people and society.



■ Ricoh awarded ISO 14001 certification.

The Ricoh Group was awarded ISO 14001 certification, which is an international standard for environmental management systems, at both its domestic and overseas production facilities. Our current aim is to obtain ISO 14001 certification for all of our business offices.

<http://www.ricoh.com/LSI/>

### RICOH COMPANY, LTD. Electronic Devices Company

● Higashi-Shinagawa Office (International Sales)  
3-32-3, Higashi-Shinagawa, Shinagawa-ku, Tokyo 140-8655, Japan  
Phone: +81-3-5479-2857 Fax: +81-3-5479-0502

### RICOH EUROPE (NETHERLANDS) B.V.

● Semiconductor Support Centre  
Prof. W.H.Keesomlaan 1, 1183 DL Amstelveen, The Netherlands  
P.O.Box 114, 1180 AC Amstelveen  
Phone: +31-20-5474-309 Fax: +31-20-5474-791

### RICOH ELECTRONIC DEVICES KOREA Co., Ltd.

11 floor, Haesung 1 building, 942, Daechidong, Gangnamgu, Seoul, Korea  
Phone: +82-2-2135-5700 Fax: +82-2-2135-5705

### RICOH ELECTRONIC DEVICES SHANGHAI Co., Ltd.

Room403, No.2 Building, 690#Bi Bo Road, Pu Dong New district, Shanghai 201203,  
People's Republic of China  
Phone: +86-21-5027-3200 Fax: +86-21-5027-3299

### RICOH COMPANY, LTD. Electronic Devices Company

● Taipei office  
Room109, 10F-1, No.51, Hengyang Rd., Taipei City, Taiwan (R.O.C.)  
Phone: +886-2-2313-1621/1622 Fax: +886-2-2313-1623



Ricoh completed the organization of the Lead-free production for all of our products. After Apr. 1, 2006, we will ship out the lead free products only. Thus, all products that will be shipped from now on comply with RoHS Directive.