

Package : HTSSOP-B

< A table of contents >

1. Structure and materials	1/4 page
2. Tape and Reel information	1/4 to 3/4 page
3. Storage conditions	3/4 page
4. Marking lot number	3/4 page
5. Footprint dimensions	3/4 page
6. Soldering conditions	3/4 to 4/4 page

1. Structure and materials

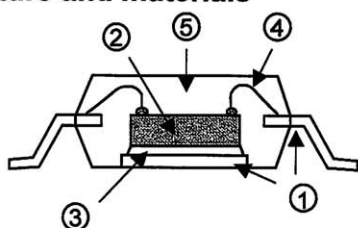


Fig. 1 Structure

No.	Item	Materials
①	Lead Frame	Cu-Alloy (External lead : Pb free solder plating)
②	Die	Silicon
③	Die Attach	Ag paste
④	Wire	Cu
⑤	Molding	Epoxy Resin

2. Tape and Reel information

2. 1. Packing specification

Tape	Embossed carrier tape(with dry pack)
Quantity	See the table on page 4/4
Direction of feed	E2 (See Fig. 2)

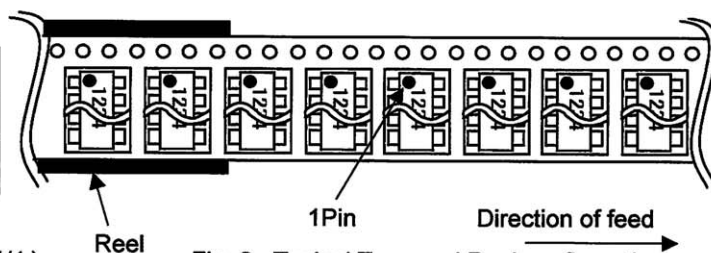


Fig. 2 Typical Tape and Reel configuration

2. 2. Tape and Reel specification

2. 2. 1. Tape and reel dimensions (See the table on page 4/4)

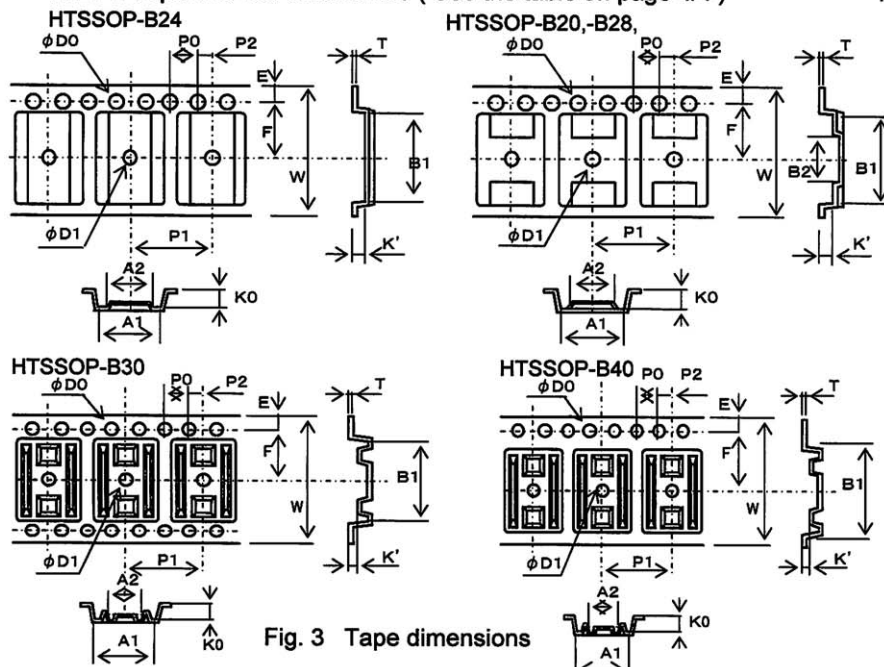


Fig. 3 Tape dimensions

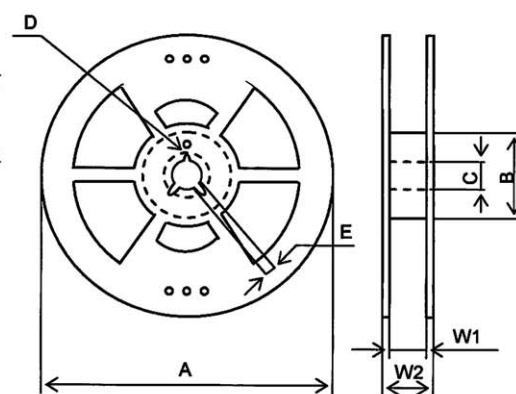


Fig. 4 Reel dimensions

2. 3. Leader and Trailer

2. 3. 1. Leader

No component pockets are 40 pockets or more.

2. 3. 2. Trailer

No component pockets are 10 pockets or more.

Tape is free from reel.

2. 4. Label for Reel and Box

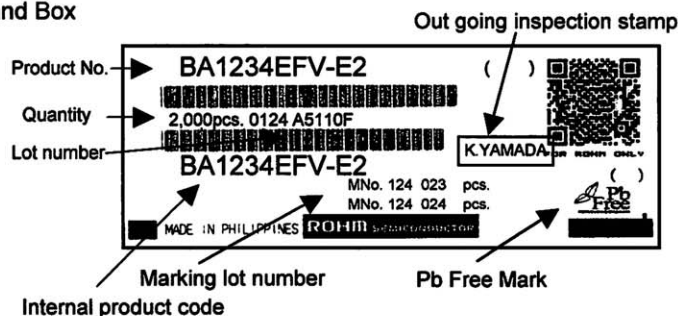


Fig. 5 Label example

2. 5. Packing style


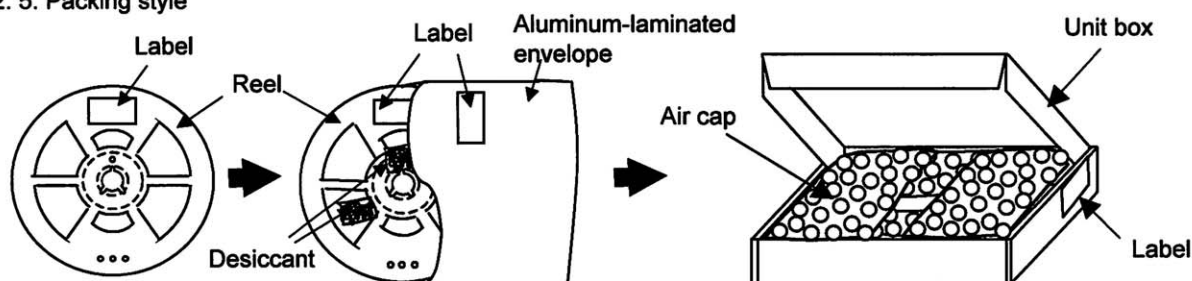


Fig. 6 Packing style

2. 6. Shipping style

5 unit boxes or less per shipping box

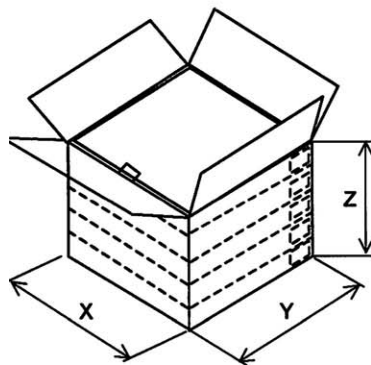

Package	box dimensions (all dimensions in mm)		
	X	Y	Z
HTSSOP-B20	372	368	305
HTSSOP-B24	372	368	305
HTSSOP-B28	372	368	305
HTSSOP-B30	372	368	305
HTSSOP-B40	372	368	355

2. 7. Packing materials

Item	Material
Embossed carrier tape	PS
Cover tape	PET + PE
Reel	PS
Desiccant	Silicagel
Envelope	Aluminume-laminated
Air cap	Polyethylene
Unit box	Cardboard
Shipping box	Cardboard

*Please obey the indication of top side in a shipping box.


Fig. 7 Shipping box dimensions and Shipping style

2. 8. Others

2. 8. 1. Peelback strength

Cover tape peelback strength is 0.2 to 0.7N.

Fig. 8 Test method

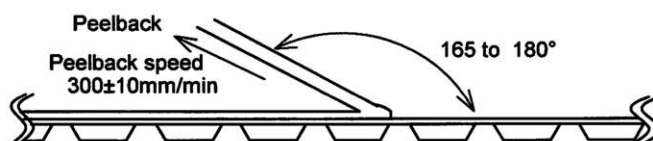

2. 8. 2. Missing lcs

- (1) No consecutive dropouts.
- (2) A maximum 0.1% of specified number of products in each packing may be missing.

3. Storage conditions

3. 1. Storage environment

Recommended storage conditions are as follows :

- Temperature : 5 to 30°C
- Humidity : 40 to 70% RH

3. 2. Storage period

- Specified storage period : 1 year

3. 3. Specified storage period until soldering

Dry process before mounting is necessary in the following two case.

1. After the package is opened , the product is left unused over 168 hours.
2. Before the package is opened , the product is left in the package unused over 1 year.

Please excute dry processing in a reel state with 60°C for 48 hours.

At this time, peelback strength of cover tape become 0.2N - 0.9N.

Case of transferring to heatproof container such as trays, excute dry processing with 125°C for 24 hours.

In addition, the dry processing should be max, 2 times due to influence on the product's solderability.

4. Marking lot number

HTSSOP-B20



Production lot number
Production week code
Production year code


HTSSOP-B24,-B28,-B30,-B40



Production lot number
Production week code
Production year code

5. Footprint dimensions (Optimize footprint dimensions to the board design and soldering condition)

(all dimensions in mm)

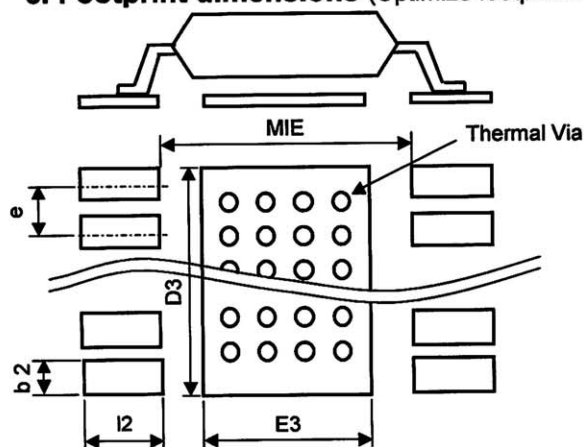


Package	Land pitch e	Land space MIE	Land length ≥ l2	Land width b2
HTSSOP-B20	0.65	4.60	1.20	0.35
HTSSOP-B24	0.65	5.74	1.23	0.35
HTSSOP-B28	0.65	4.60	1.20	0.35
HTSSOP-B30	0.65	5.80	1.20	0.35
HTSSOP-B40	0.65	6.00	1.20	0.35

Package	Radiation land length D3	Radiation land width E3	Thermal via	
			Pitch	Diameter
HTSSOP-B20	6.50	3.60	1.20	φ0.3
HTSSOP-B24	7.80	4.74	1.20	φ0.3
HTSSOP-B28	9.70	3.60	1.20	φ0.3
HTSSOP-B30	10.00	4.80	1.20	φ0.3
HTSSOP-B40	13.60	5.00	1.20	φ0.3

6. Soldering conditions

6. 1. Recommended temperature profile for reflow

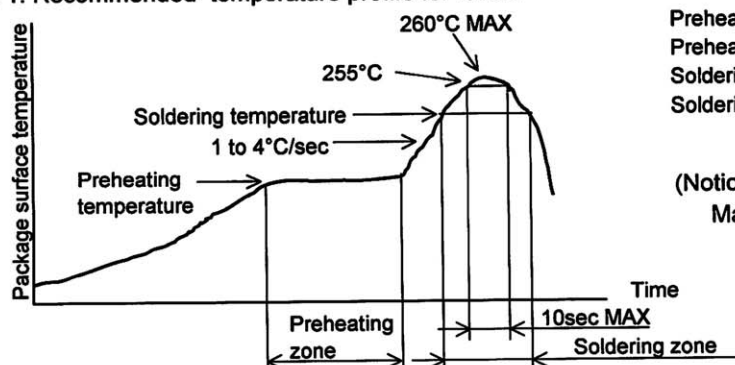

Preheating temperature ; 130°C to 190°C
Preheating zone ; 120sec MAX
Soldering temperature ; 220°C to 230°C
Soldering zone ; 60sec MAX

(Notice)
Maximum 2-times soldering

6. 2. Recommended condition for wave soldering

Process	Conditions	
	Temperature	Time
Preheating	120°C to 150°C	60sec MAX
Soldering	260°C ± 3°C	12sec MAX

(Notice) Soldering time is provided for total soldering time in case of dual wave soldering.

6. 2. 1. Notes for wave soldering

- (1) The heatsink may not be connected using wave soldering methods.
- (2) Do not use other soldering methods with wave soldering.
- (3) Recommend to clean the board to eliminate flux, solder waste, and other impurities for reliability, after soldering.
- (4) Optimize soldering condition to prevent solder bridging.

6. 3. Recommended condition for solder iron

Recommended condition for solder iron

-Solder iron temperature : 380°C or less

-Mounting time : 4sec or less

(Notice) The heatsink may not be connected using solder iron.

< Tape dimensions >

Package	Quantity (pcs)	Tape dimensions (all dimensions in mm)														
		A1	A2	B1	B2	D0	D1	E	F	K'	K0	P1	P2	T	W	P0
HTSSOP-B20	2500	6.7	(4.0)	6.9	(3.2)	φ1.5	φ1.5	1.75	5.5	1.25	1.65	8.0	2.0	0.3	12.0	4.0
HTSSOP-B24	2000	8.2	(5.5)	8.4	—	φ1.5	φ1.5	1.75	7.5	1.2	1.5	12.0	2.0	0.3	16.0	4.0
HTSSOP-B28	2500	6.8	(4.0)	10.3	(6.0)	φ1.5	φ1.5	1.75	7.5	1.15	1.65	8.0	2.0	0.3	16.0	4.0
HTSSOP-B30	2000	8.3	5.35	10.6	—	φ1.5	φ1.5	1.75	7.5	1.0	1.65	12.0	2.0	0.3	16.0	4.0
HTSSOP-B40	2000	8.5	(3.0)	14.2	(6.0)	φ1.5	φ2.0	1.75	11.5	0.85	1.50	12.0	2.0	0.3	24.0	4.0
Tolerance		±0.1	±0.05	±0.1	-	$\begin{smallmatrix} +0.1 \\ -0 \end{smallmatrix}$	$\begin{smallmatrix} +0.1 \\ -0 \end{smallmatrix}$	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.05	±0.3	±0.1

< Reel dimensions >


Package	Reel dimensions (all dimensions in mm)						
	A	B	C	D	E	W1	W2
HTSSOP-B20	φ330	φ80	φ13.0	φ20.2	1.5	13.5	18.5
HTSSOP-B24	φ330	φ80	φ13.0	φ20.2	1.5	17.5	22.5
HTSSOP-B28	φ330	φ80	φ13.0	φ20.2	1.5	17.5	22.5
HTSSOP-B30	φ330	φ80	φ13.0	φ20.2	1.5	17.5	22.5
HTSSOP-B40	φ330	φ80	φ13.0	φ20.2	1.5	24.4	32.4
Tolerance	-	-	±0.2	MIN	MIN	$\begin{smallmatrix} +2.0 \\ -0 \end{smallmatrix}$	MAX

< Dehydrated weight >

Dehydrated weight dimensions in g
0.08
0.12
0.12
0.15
0.20

Package Dimensions


HTSSOP-B20

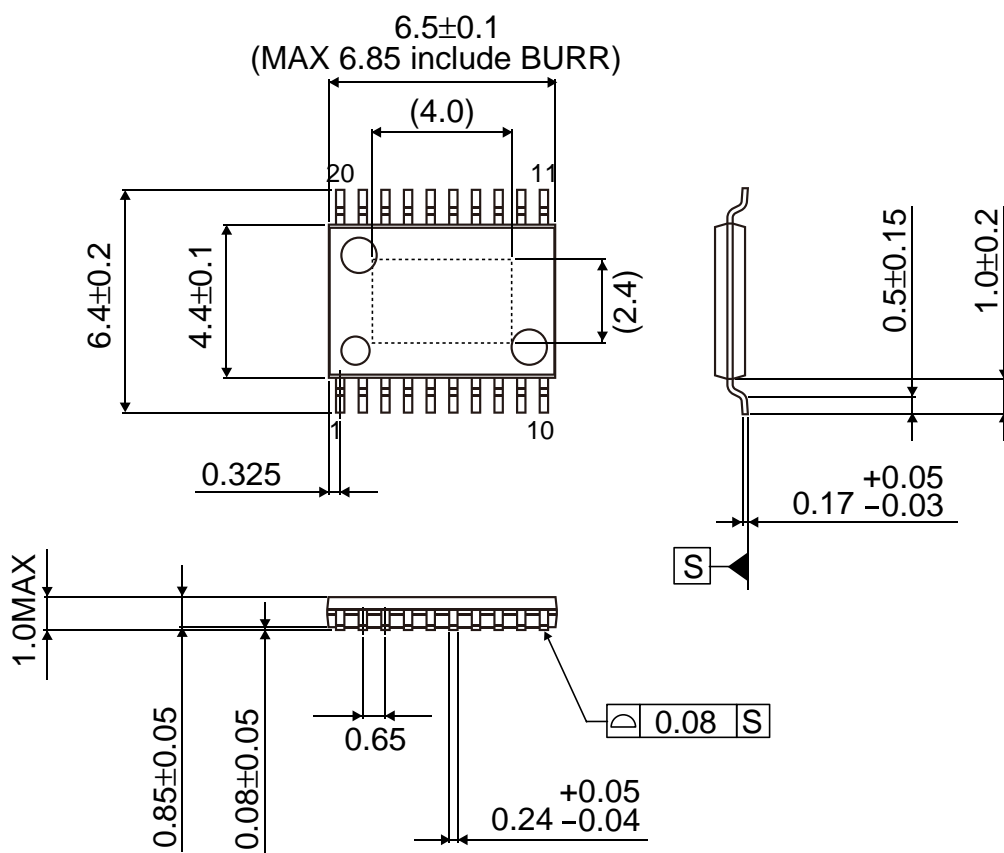

(Unit : mm)


Package Dimensions

HTSSOP-B24

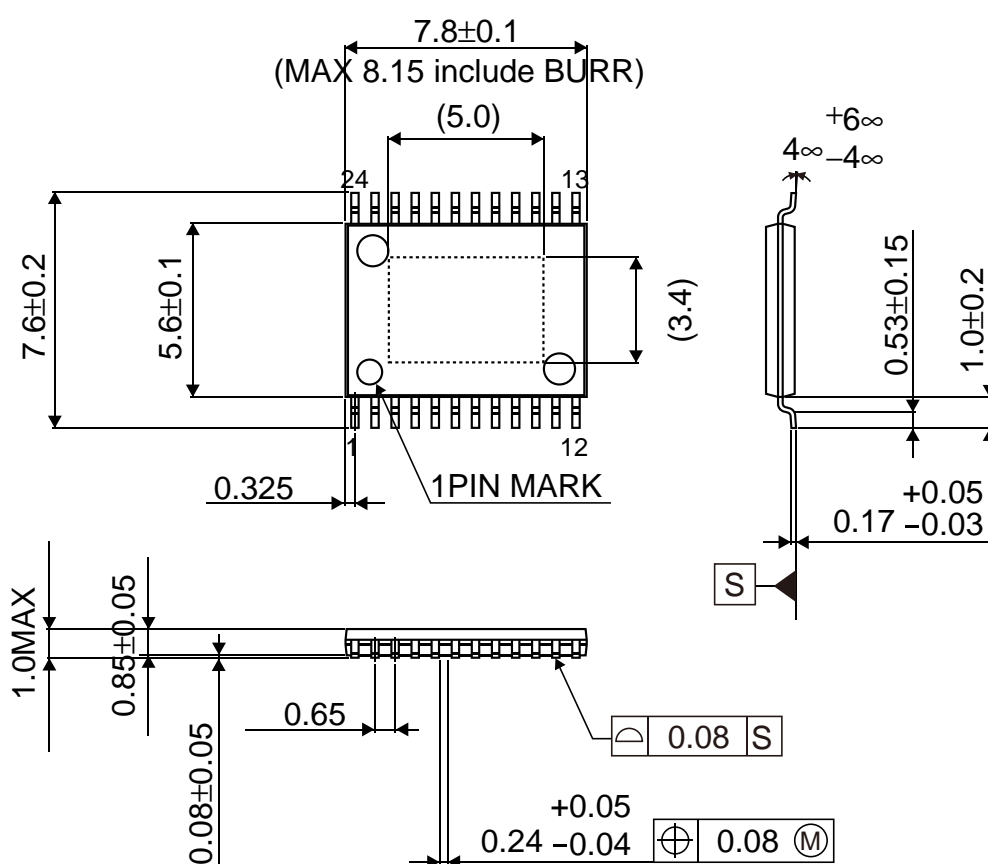

(Unit : mm)


Package Dimensions

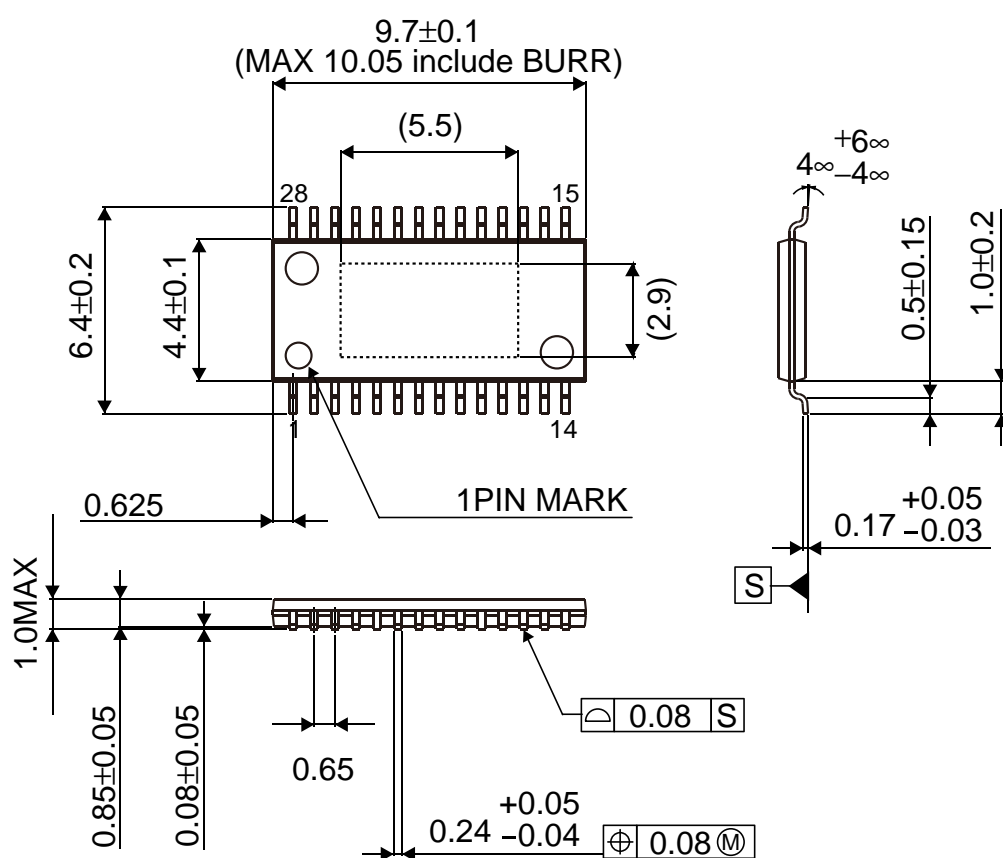HTSSOP-B28

(Unit : mm)

Package Dimensions


HTSSOP-B30

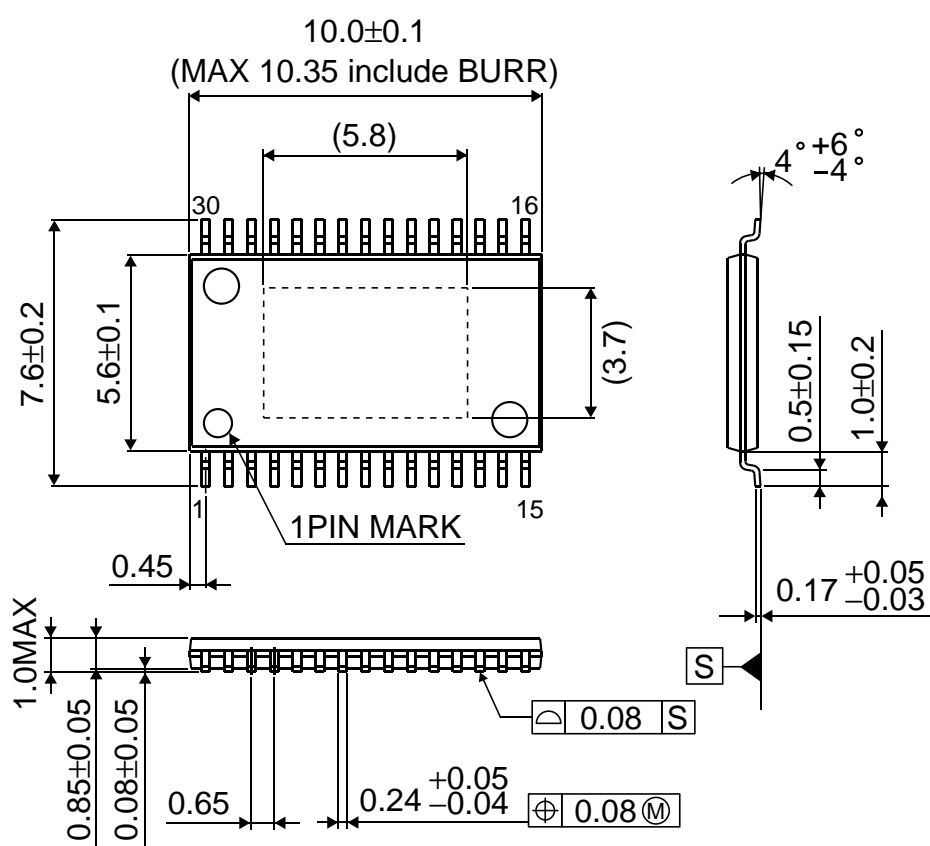

(Unit : mm)

Package Dimensions

HTSSOP-B40

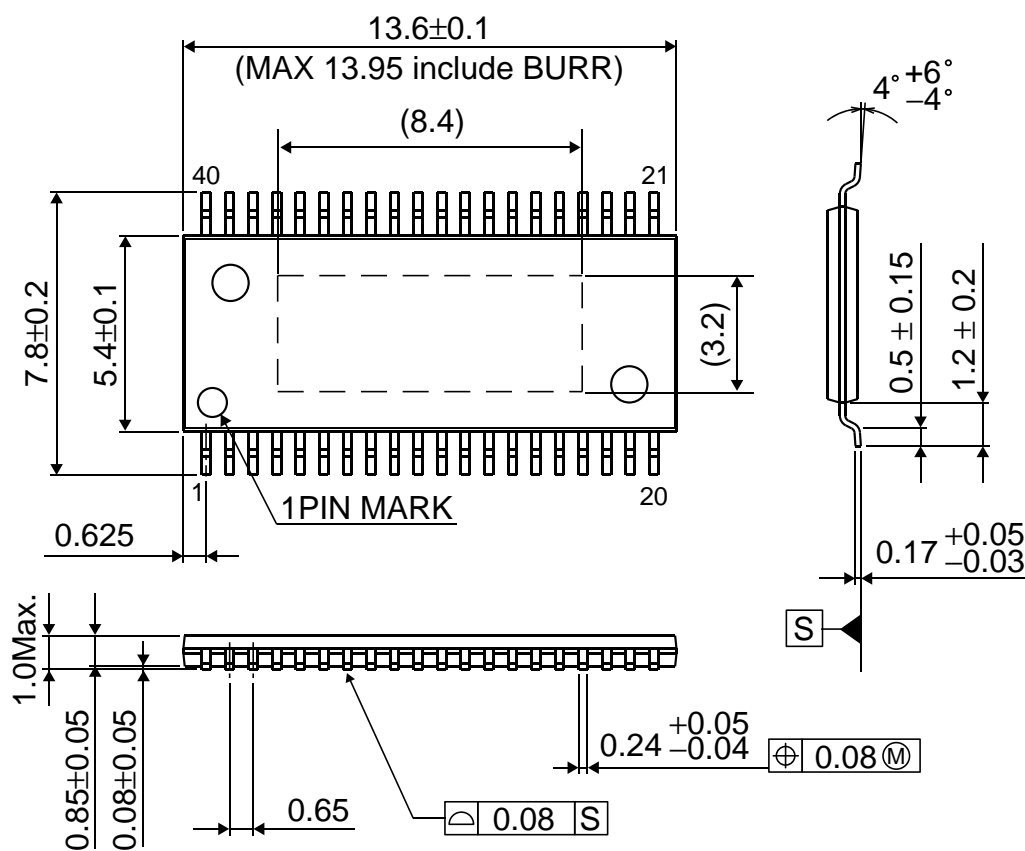

(Unit : mm)

Notes

No copying or reproduction of this document, in part or in whole, is permitted without the consent of ROHM Co.,Ltd.

The content specified herein is subject to change for improvement without notice.

The content specified herein is for the purpose of introducing ROHM's products (hereinafter "Products"). If you wish to use any such Product, please be sure to refer to the specifications, which can be obtained from ROHM upon request.

Examples of application circuits, circuit constants and any other information contained herein illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

Great care was taken in ensuring the accuracy of the information specified in this document. However, should you incur any damage arising from any inaccuracy or misprint of such information, ROHM shall bear no responsibility for such damage.

The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM and other parties. ROHM shall bear no responsibility whatsoever for any dispute arising from the use of such technical information.

The Products specified in this document are intended to be used with general-use electronic equipment or devices (such as audio visual equipment, office-automation equipment, communication devices, electronic appliances and amusement devices).

The Products specified in this document are not designed to be radiation tolerant.

While ROHM always makes efforts to enhance the quality and reliability of its Products, a Product may fail or malfunction for a variety of reasons.

Please be sure to implement in your equipment using the Products safety measures to guard against the possibility of physical injury, fire or any other damage caused in the event of the failure of any Product, such as derating, redundancy, fire control and fail-safe designs. ROHM shall bear no responsibility whatsoever for your use of any Product outside of the prescribed scope or not in accordance with the instruction manual.

The Products are not designed or manufactured to be used with any equipment, device or system which requires an extremely high level of reliability the failure or malfunction of which may result in a direct threat to human life or create a risk of human injury (such as a medical instrument, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel-controller or other safety device). ROHM shall bear no responsibility in any way for use of any of the Products for the above special purposes. If a Product is intended to be used for any such special purpose, please contact a ROHM sales representative before purchasing.

If you intend to export or ship overseas any Product or technology specified herein that may be controlled under the Foreign Exchange and the Foreign Trade Law, you will be required to obtain a license or permit under the Law.



Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

<http://www.rohm.com/contact/>