

Preliminary

BA01202

Specifications are subject to change without notice.

GaAs HBT HYBRID IC

DESCRIPTION

The BA01202 is GaAs RF amplifier designed for N-CDMA PCS hand-held phone.


FEATURES

- Low voltage $V_c=3.2V$
- High power $P_o=28dBm$
- High gain $G_p=25dB$ @ $P_o=28dBm$
- 2stage amplifier
- Internal input and output matching

APPLICATION

N-CDMA (Spreading chip rate is 1.2288Mcps, modulation is OQPSK) hand set.

OUTLINE DRAWING

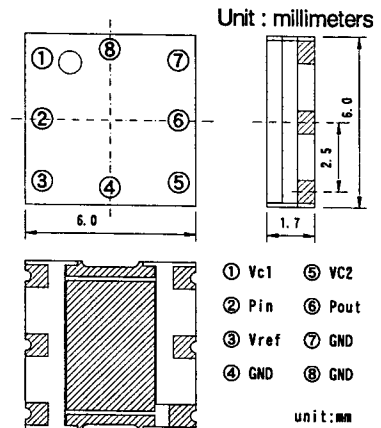

ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

Symbol	Parameter	Condition	Ratings*	Unit
Vcc	Supply voltage of HPA		6	V
Pin	Input power	ZG=ZL=50Ω	5	dBm
Tc(op)	Operating case temp.		-30 ~ +95	°C
Tstg	Storage temp.		-30 ~ +125	°C

*Note : Each maximum rating is guaranteed independently .

ELECTRICAL CHARACTERISTICS(Ta=25°C)

Symbol	Parameter	Test conditions**	Limits			Unit
			MIN	TYP	MAX	
f	Frequency		1850		1910	MHz
Iq	Quiescent current	No RF input	--	60	--	mA
Ict	Total current	Po=28dBm	--	520	--	mA
PAE	Power added efficiency	Vc1=Vc2=3.2V	--	38	--	%
Gain	Gain	Vref=3.0V	--	25	--	dB
pin	Return loss	ZS=ZL=50Ω			-6	dB
ACPR	Adjacent channel power at 1.25MHz			-33	-29	dBc
						dBc
2sp	2nd harmonics				-30	dBc
3sp	3rd harmonics				-30	dBc
Rxnoise	Noise in RX band			-140	-138	dBm/Hz

Mitsubishi Electric Corporation puts the maximum effort into making semiconductor products better and reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, appropriate measures such as (i)placement of substitutive, auxiliary, circuits, (ii)use of non-flammable material or (iii)prevention against any malfunction or mishap.

MITSUBISHI ELECTRIC CORP.

February, 01