

# **Dell Networking W-Series**

## **Instant Access Point**

### **6.2.1.0-3.4**



MIB Reference Guide

## **Copyright**

© 2013 Aruba Networks, Inc. Aruba Networks trademarks include  **Airwave**, Aruba Networks®, Aruba Wireless Networks®, the registered Aruba the Mobile Edge Company logo, and Aruba Mobility Management System®. Dell™, the DELL™ logo, and PowerConnect™ are trademarks of Dell Inc.

All rights reserved. Specifications in this manual are subject to change without notice.

Originated in the USA. All other trademarks are the property of their respective owners.

## **Open Source Code**

Certain Aruba products include Open Source software code developed by third parties, including software code subject to the GNU General Public License (GPL), GNU Lesser General Public License (LGPL), or other Open Source Licenses. Includes software from Litech Systems Design. The IF-MAP client library copyright 2011 Infoblox, Inc. All rights reserved. This product includes software developed by Lars Fenneberg, et al. The Open Source code used can be found at this site:

[http://www.arubanetworks.com/open\\_source](http://www.arubanetworks.com/open_source)

## **Legal Notice**

The use of Aruba Networks, Inc. switching platforms and software, by all individuals or corporations, to terminate other vendors' VPN client devices constitutes complete acceptance of liability by that individual or corporation for this action and indemnifies, in full, Aruba Networks, Inc. from any and all legal actions that might be taken against it with respect to infringement of copyright on behalf of those vendors.

# Contents

<b>Chapter 1</b>	<b>About this Document .....</b>	<b>15</b>
	Intended Audience.....	15
	What's New .....	15
	Related Documents .....	15
	Frequently Used Acronyms .....	15
	Contacting Support .....	18
<b>Chapter 2</b>	<b>MIBs Overview .....</b>	<b>19</b>
	MIBs .....	19
	SNMP .....	20
<b>Chapter 3</b>	<b>Using MIBs .....</b>	<b>23</b>
	Downloading MIB Files.....	23
	Reporting WLAN Health .....	23
	SNMP Operations on W-IAPs .....	23
	MIB Browsers.....	24
	Reading MIB Files.....	25
	Opening Line .....	25
	Imports .....	25
	Inheritance .....	25
	Identity .....	26
	MIB Modules .....	26
	Group.....	26
	Table.....	26
	Entry .....	27
	Closing Line .....	27
	SNMP File.....	27
	HP OpenView .....	28
<b>Chapter 4</b>	<b>Dell W-Instant MIBs.....</b>	<b>29</b>
	aiInfoGroup .....	30
	aiVirtualControllerKey.....	30
	aiVirtualControllerName .....	30
	aiVirtualControllerOrganization .....	31
	aiVirtualControllerVersion .....	31
	aiVirtualControllerIPAddress .....	31
	aiMasterIPAddress.....	31
	aiStateGroup .....	32
	aiAccessPointTable.....	32
	aiAccessPointEntry.....	32
	aiAPMACAddress .....	33
	aiAPName .....	33
	aiAPIPAddress .....	33
	aiAPSerialNum.....	33
	aiAPModel .....	33
	aiAPModelName.....	33
	aiAPCPUUtilization .....	34

aiAPMemoryFree .....	34
aiAPUptime .....	34
aiAPTotalMemory .....	34
aiAPStatus .....	34
aiRadioTable .....	35
aiRadioEntry .....	36
aiRadioAPMacAddress.....	36
aiRadioIndex.....	36
aiRadioMACAddress .....	36
aiRadioChannel .....	36
aiRadioTransmitPower .....	37
aiRadioNoiseFloor .....	37
aiRadioUtilization4 .....	37
aiRadioUtilization64 .....	37
aiRadioTxTotalFrames .....	37
aiRadioTxMgmtFrames .....	37
aiRadioTxDataFrames .....	38
aiRadioTxDataBytes .....	38
aiRadioTxDrops .....	38
aiRadioRxTotalFrames .....	38
aiRadioRxDataFrames .....	38
aiRadioRxDataBytes.....	39
aiRadioRxMgmtFrames .....	39
aiRadioRxBad .....	39
aiRadioPhyEvents.....	39
aiRadioStatus .....	39
aiWlanTable.....	40
aiWlanEntry .....	40
aiWlanAPMACAddress .....	40
aiWlanIndex .....	40
aiWlanESSID.....	41
aiWlanMACAddress.....	41
aiWlanTxTotalFrames .....	41
aiWlanTxDataFrames.....	41
aiWlanTxDataBytes .....	41
aiWlanRxTotalFrames .....	42
aiWlanRxDataFrames .....	42
aiWlanRxDataBytes .....	42
aiClientTable .....	42
aiClientEntry .....	43
aiClientMACAddress .....	43
aiClientWlanMACAddress .....	43
aiClientIPAddress .....	43
aiClientAPIAddress.....	44
aiClientName .....	44
aiClientOperatingSystem.....	44
aiClientSNR .....	44
aiClientTxDataFrames .....	44
aiClientTxDataBytes .....	45
aiClientTxRetries .....	45
aiClientTxRate .....	45
aiClientRxDataFrames .....	45
aiClientRxDataBytes .....	45
aiClientRxRetries .....	46
aiClientRxRate .....	46
aiClientUptime .....	46

<b>System MIB .....</b>	<b>47</b>
sysDescr .....	47
sysObjectID .....	48
sysUpTime .....	48
sysName .....	48
sysLocation .....	48
sysServices .....	49
<b>dot1qTpFdbTable .....</b>	<b>49</b>
dot1qFdbId .....	49
dot1qTpFdbAddress .....	49
dot1qTpFdbPort .....	50
dot1qTpFdbStatus .....	50
<b>ifTable .....</b>	<b>50</b>
ifIndex .....	51
ifDescr .....	51
ifType .....	51
ifMtu .....	52
ifSpeed .....	52
ifPhysAddress .....	52
ifAdminStatus .....	52
ifOperStatus .....	52
ifInOctets .....	53
ifInUcastPkts .....	53
ifInNUcastPkts .....	53
ifInDiscards .....	53
ifInErrors .....	54
ifOutOctets .....	54
ifOutUcastPkts .....	54
ifOutDiscards .....	54
ifOutErrors .....	55
<b>ifXTable .....</b>	<b>55</b>
ifName .....	55
ifInMulticastPkts .....	56
ifInBroadcastPkts .....	56
ifOutMulticastPkts .....	56
ifOutBroadcastPkts .....	56
ifHCInOctets .....	57
ifHCInUcastPkts .....	57
ifHCInMulticastPkts .....	57
ifHCInBroadcastPkts .....	57
ifHCOutOctets .....	58
ifHCOutUcastPkts .....	58
ifHCOutMulticastPkts .....	58
ifHCOutBroadcastPkts .....	58
ifLinkUpDownTrapEnable .....	59
ifPromiscuousMode .....	59
ifConnectorPresent .....	59

<b>Chapter 6</b>	<b>Traps .....</b>	<b>61</b>
	Trap Hierarchy .....	61
	ai Traps Objects Group .....	62
	wlsxTrapAPMacAddress .....	66
	wlsxTrapAPIpAddress .....	66
	wlsxTrapAPBSSID .....	66
	wlsxTrapEssid .....	66
	wlsxTrapTargetAPBSSID .....	67
	wlsxTrapTargetAPSSID .....	67

wlsxTrapTargetAPChannel.....	67
wlsxTrapNodeMac .....	67
wlsxTrapSourceMac .....	67
wlsxReceiverMac .....	68
wlsxTrapTransmitterMac.....	68
wlsxTrapReceiverMac.....	68
wlsxTrapSnr .....	68
wlsxTrapSignatureName.....	68
wlsxTrapFrameType.....	68
wlsxTrapAddressType.....	69
wlsxTrapAPLocation .....	69
wlsxTrapAPChannel.....	69
wlsxTrapAPTxPower .....	69
wlsxTrapMatchedMac.....	69
wlsxTrapMatchedIp.....	69
wlsxTrapRogueInfoURL .....	70
wlsxTrapVLANId.....	70
wlsxTrapAdminStatus .....	70
wlsxTrapOperStatus .....	70
wlsxTrapAuthServerName .....	70
wlsxTrapAuthServerTimeout.....	70
wlsxTrapCardSlot.....	71
wlsxTrapTemperatureValue .....	71
wlsxTrapProcessName .....	71
wlsxTrapFanNumber .....	71
wlsxTrapVoltageType .....	71
wlsxTrapVoltageValue .....	71
wlsxTrapStationBlackListReason .....	72
wlsxTrapSpoofedIpAddress .....	72
wlsxTrapSpoofedOldPhyAddress .....	72
wlsxTrapSpoofedNewPhyAddress .....	72
wlsxTrapDBName .....	72
wlsxTrapDBUserName .....	72
wlsxTrapDBIpAddress .....	73
wlsxTrapDBType .....	73
wlsxTrapVrrpID.....	73
wlsxTrapVrrpMasterIp .....	73
wlsxTrapVrrpOperState.....	73
wlsxTrapESIServerGrpName .....	73
wlsxTrapESIServerName .....	74
wlsxTrapESIServerIpAddress.....	74
wlsxTrapLicenseDaysRemaining .....	74
wlsxTrapSwitchIp .....	74
wlsxTrapSwitchRole.....	74
wlsxTrapUserIpAddress .....	74
wlsxTrapUserPhyAddress .....	75
wlsxTrapUserName .....	75
wlsxTrapUserRole .....	75
wlsxTrapUserAuthenticationMethod.....	75
wlsxTrapAPRadioNumber .....	75
wlsxTrapRogueInfoURL .....	75
wlsxTrapInterferingAPInfoURL.....	76
wlsxTrapPortNumber .....	76
wlsxTrapTime .....	76
wlsxTrapHostIp .....	76
wlsxTrapHostPort .....	76
wlsxTrapConfigurationId .....	76
wlsxTrapCTSURL.....	77

wlsxTrapCTSTransferType .....	77
wlsxTrapConfigurationState .....	77
wlsxTrapUpdateFailureReason .....	77
wlsxTrapUpdateFailedObj .....	77
wlsxTrapTableEntryChangeType .....	77
wlsxTrapGlobalConfigObj .....	78
wlsxTrapTableGenNumber .....	78
wlsxTrapLicenseld .....	78
wlsxTrapConfidenceLevel .....	78
wlsxTrapMissingLicenses .....	78
wlsxVoiceCurrentNumCdr .....	79
wlsxTrapTunneId .....	79
wlsxTrapTunnelStatus .....	79
wlsxTrapTunnelUpReason .....	79
wlsxTrapTunnelDownReason .....	79
wlsxTrapApSerialNumber .....	79
wlsxTraptimeStr .....	80
wlsxTrapMasterIp .....	80
wlsxTrapLocallIp .....	80
wlsxTrapMasterName .....	80
wlsxTrapLocalName .....	80
wlsxTrapPrimaryControllerIp .....	80
wlsxTrapBackupControllerIp .....	81
wlsxTrapSpoofedFrameType .....	81
wlsxTrapAssociationType .....	81
wlsxTrapDeviceIpAddress .....	81
wlsxTrapDeviceMac .....	81
wlsxTrapVcIpAddress .....	81
wlsxTrapVcMacAddress .....	82
wlsxTrapAPName .....	82
wlsxTrapApMode .....	82
wlsxTrapAPPrecChannel .....	82
wlsxTrapAPPrecChannelSec .....	82
wlsxTrapAPPrecTxPower .....	82
wlsxTrapAPCurMode .....	83
wlsxTrapAPPrecMode .....	83
wlsxTrapAPARMChangeReason .....	83
wlsxTrapAPChannelSec .....	83
wlsxTrapUserAttributeChangeType .....	83
wlsxTrapAPControllerIp .....	83
wlsxTrapApMasterStatus .....	84
wlsxTrapCaName .....	84
wlsxTrapCrlName .....	84
wlsxTrapCount .....	84
wlsxTrapAPPrecviousUplinkType .....	85
wlsxTrapAPPrecviousUplinkActiveTime .....	85
wlsxTrapAPActiveUplinkType .....	85
wlsxTrapAPUplinkChangeReason .....	85
wlsxTrapAPManagedModeConfigFailure .....	85
<b>ai Traps Definitions Group .....</b>	<b>86</b>
wlsxNUserEntryCreated .....	94
wlsxNUserEntryDeleted .....	95
wlsxNUserEntryAuthenticated .....	95
wlsxNUserEntryDeAuthenticated .....	95
wlsxNUserAuthenticationFailed .....	95
wlsxNAuthServerReqTimedOut .....	95
wlsxNAuthServerTimedOut .....	95
wlsxNAuthServerIsUp .....	95

wlsxNAccessPointIsUp .....	96
wlsxNChannelChanged.....	96
wlsxNStationAddedToBlackList.....	96
wlsxNStationRemovedFromBlackList.....	96
wlsxNRadioAttributesChanged .....	96
wlsxUnsecureAPDetected .....	97
wlsxUnsecureAPResolved .....	97
wlsxStalImpersonation.....	97
wlsxReservedChannelViolation.....	97
wlsxValidSSIDViolation .....	97
wlsxChannelMisconfiguration .....	98
wlsxOUIMisconfiguration .....	98
wlsxSSIDMisconfiguration .....	98
wlsxShortPreambleMisconfiguration .....	98
wlsxWPAMisconfiguration .....	98
wlsxAdhocNetworkDetected .....	99
wlsxAdhocNetworkRemoved .....	99
wlsxStaPolicyViolation .....	99
wlsxRepeatWEPIVViolation.....	99
wlsxWeakWEPIVViolation .....	99
wlsxChannelInterferenceDetected .....	100
wlsxChannelInterferenceCleared .....	100
wlsxAPIInterferenceDetected.....	100
wlsxAPIInterferenceCleared.....	100
wlsxStalInterferenceDetected .....	100
wlsxStalInterferenceCleared .....	100
wlsxFrameRetryRateExceeded .....	101
wlsxFrameReceiveErrorRateExceeded .....	101
wlsxFrameFragmentationRateExceeded .....	101
wlsxFrameBandWidthRateExceeded .....	101
wlsxFrameLowSpeedRateExceeded .....	101
wlsxFrameNonUnicastRateExceeded.....	102
wlsxLoadbalancingEnabled .....	102
wlsxLoadbalancingDisabled .....	102
wlsxChannelFrameRetryRateExceeded .....	102
wlsxChannelFrameFragmentationRateExceeded .....	102
wlsxChannelFrameErrorRateExceeded .....	102
wlsxSignatureMatchAP .....	103
wlsxSignatureMatchSta .....	103
wlsxChannelRateAnomaly .....	103
wlsxNodeRateAnomaly .....	103
wlsxNodeRateAnomalyAP .....	104
wlsxNodeRateAnomalySta.....	104
wlsxEAPRateAnomaly .....	104
wlsxSignalAnomaly .....	104
wlsxSequenceNumberAnomalyAP .....	105
wlsxSequenceNumberAnomalySta.....	105
wlsxDisconnectStationAttack .....	105
wlsxApFloodAttack .....	106
wlsxAdhocNetwork .....	106
wlsxWirelessBridge .....	106
wlsxInvalidMacOUIAP .....	106
wlsxInvalidMacOUISta .....	106
wlsxWEPMisconfiguration .....	107
wlsxStaRepeatWEPIVViolation .....	107
wlsxStaWeakWEPIVViolation .....	107
wlsxStaAssociatedToUnsecureAP .....	107
wlsxStaUnAssociatedFromUnsecureAP .....	107

wlsxAdhocNetworkBridgeDetected .....	108
wlsxInterferingApDetected .....	108
wlsxColdStart .....	108
wlsxWarmStart .....	108
wlsxAPIImpersonation .....	108
wlsxNAuthServerIsDown .....	108
wlsxWindowsBridgeDetected .....	109
wlsxSignAPNetstumbler .....	109
wlsxSignStaNetstumbler .....	109
wlsxSignAPAsleap .....	109
wlsxSignStaAsleap .....	109
wlsxSignAPAirjack .....	110
wlsxSignStaAirjack .....	110
wlsxSignAPNullProbeResp .....	110
wlsxSignStaNullProbeResp .....	110
wlsxSignAPDeauthBcast .....	110
wlsxSignStaDeauthBcast .....	111
wlsxNStaUnAssociatedFromUnsecureAP .....	115
wlsxOmertaAttack .....	115
wlsxTKIPReplayAttack .....	116
wlsxChopChopAttack .....	116
wlsxFataJackAttack .....	116
wlsxInvalidAddressCombination .....	116
wlsxValidClientMisassociation .....	116
wlsxMalformedHTIEDetected .....	117
wlsxMalformedAssocReqDetected .....	117
wlsxOverflowIEDetected .....	117
wlsxOverflowEAPOLKeyDetected .....	117
wlsxMalformedFrameLargeDurationDetected .....	117
wlsxMalformedFrameWrongChannelDetected .....	118
wlsxMalformedAuthFrame .....	118
wlsxCTSRateAnomaly .....	118
wlsxRTSRateAnomaly .....	118
wlsxNRogueAPDetected .....	118
wlsxNRogueAPResolved .....	119
wlsxNeighborAPDetected .....	119
wlsxNInterferingAPDetected .....	119
wlsxNSuspectRogueAPResolved .....	119
wlsxBlockAckAttackDetected .....	120
wlsxHotspotterAttackDetected .....	120
wlsxNSignatureMatch .....	120
wlsxNSignatureMatchNetstumbler .....	120
wlsxNSignatureMatchAsleap .....	120
wlsxNSignatureMatchAirjack .....	121
wlsxNSignatureMatchNullProbeResp .....	121
wlsxNSignatureMatchDeauthBcast .....	121
wlsxNSignatureMatchDisassocBcast .....	121
wlsxNSignatureMatchWellenreiter .....	122
wlsxAPDeauthContainment .....	122
wlsxClientDeauthContainment .....	122
wlsxAPWiredContainment .....	122
wlsxClientWiredContainment .....	122
wlsxAPTaggedWiredContainment .....	123
wlsxClientTaggedWiredContainment .....	123
wlsxTarpitContainment .....	123
wlsxAPChannelChange .....	123
wlsxAPPowerChange .....	123
wlsxAPModeChange .....	124

wlsxUserEntryAttributesChanged .....	124
wlsxNAPMasterStatusChange .....	124
wlsxNAadhocUsingValidSSID .....	124
wlsxMgmtUserAuthenticationFailed .....	124
<b>SNMP Traps .....</b>	<b>125</b>
linkDown .....	125
linkUp.....	125

# Figures

Figure 1	High-Level MIB Hierarchy.....	19
Figure 2	Running the snmpget Command .....	24
Figure 3	Graphical User Interface.....	24
Figure 4	Dell W-Instant MIB Hierarchy .....	29
Figure 5	Trap Hierarchy .....	61



# Tables

Table 1	New Features in Dell W-Instant 6.2.1.0-3.4.....	15
Table 2	Frequently Used Acronyms .....	15
Table 3	Contact Information.....	18
Table 4	MIB Node Identification - Enterprise Nodes.....	20
Table 5	MIB Keywords .....	21
Table 6	Supported Dell W-Instant MIBs and MIB Tables .....	30
Table 7	aiAccessPointTable OIDs .....	32
Table 8	aiRadioTable OIDs.....	35
Table 9	aiWlanTable OIDs .....	40
Table 10	aiClientTable OID.....	42
Table 11	aiTraps Objects Group OIDs .....	62
Table 12	ai Traps Definitions Group OIDs.....	86



## About this Document

This guide provides information on Management Information Base (MIBs) supported in Dell W-Instant 6.2.1.0-3.4 software release.

## Intended Audience

This manual is intended for network administrators and operators responsible for managing Dell Networking W-Series Instant Access Points (W-IAPs).

## What's New

The version of the document contains the following updates:

**Table 1** *New Features in Dell W-Instant 6.2.1.0-3.4*

Feature	Description
Support for the <a href="#">wlsxTrapAPManagedModeConfigFailure</a> trap object	The <a href="#">wlsxTrapAPManagedModeConfigFailure</a> trap object is added to send an alert or notification when the configuration application on the AP fails.

## Related Documents

In addition to this document, the Dell W-Instant product documentation includes the following:

- *Dell Networking W-Series Instant Access Point 6.2.1.0-3.4 Quick Start Guide*
- *Dell Networking W-Series Instant Access Point 6.2.1.0-3.4 User Guide*
- *Dell Networking W-Series Instant Access Point 6.2.1.0-3.4 CLI Reference Guide*
- *Dell Networking W-Series Instant Access Point 6.2.1.0-3.4 Syslog Messages Reference Guide*
- *Dell Networking W-Series Instant Access Point 6.2.1.0-3.4 Release Notes*

## Frequently Used Acronyms

Table 2 defines frequently used acronyms.

**Table 2** *Frequently Used Acronyms*

Acronym	Definition
3DES	Triple DES
ACL	Access Control List
AM	Air Monitor
AP	Access Point
ARM	Adaptive Radio Management
BSSID	Basic Service Set Identifier

**Table 2** Frequently Used Acronyms (Continued)

Acronym	Definition
CA	Certificate Authority
CAC	Call Admission Control
CHAP	Challenge Handshake Authentication Protocol
CLI	Command Line Interface
CRL	Certificate Revocation List
CSA	Channel Switch Announcement
CSR	Certificate Signing Request
CW	Contention Window
DA	Destination Address
DES	Data Encryption Standard
DHCP	Dynamic Host Configuration Protocol
DNS	Domain Name Service
DOS	Denial of Service
DPD	Dead Peer Detection
DSS	Direct Spread Spectrum
EAP	Extensible Authentication Protocol
EDCA	Enhanced Distributed Channel Access
EIRP	Effective Isotropic Radiated Power
ESI	External Services Interface
ESSID	Extended Service Set Identifier
GRE	Generic Routing Encapsulation
GUI	Graphical User Interface
HAT	Home Agent Table
HT	High Throughput
IAS	Internet Authentication Service
IDS	Intrusion Detection System
IGMP	Internet Group Management Protocol
IKE	Internet Key Exchange
IP	Internet Protocol
IV	Initialization Vectors
kB	Kilobyte
LAN	Local Area Network
LDAP	Lightweight Directory Access Protocol
LI	Listening Interval

**Table 2** Frequently Used Acronyms (Continued)

Acronym	Definition
MAC	Media Access Control
MB	Megabyte
MCHAP	Microsoft Challenge Handshake Authentication Protocol
MIB	Management Information Base
NAS	Network Address Server
NAT	Network Address Translation
NIC	Network Interface Card
NTP	Network Time Protocol
OFDM	Orthogonal Frequency Division Multiplexing
OID	Object Identifier
OUI	Organizational Unit Identifier
PAP	Password Authentication Protocol
PEAP	Protected EAP
PEF	Policy Enforcement Firewall
PIN	Personal Identification Number
PoE	Power over Ethernet
PPTP	Point-to-Point Tunneling Protocol
PSK	Pre-Shared Key
QoS	Quality of Service
RADIUS	Remote Authentication Dial In User Service
RAP	Remote Access Point
RF	Radio Frequency
RMON	Remote Monitor
RSA	Rivest-Shamir-Aldeman (encryption algorithm)
SIP	Session Initiation Protocol
SNMP	Simple Network Management Protocol
SSH	Secure Shell
SSID	Service Set Identifier
TIM	Traffic Indication Map
TLS	Transport Layer Security
ToS	Type of Service
TSPEC	Traffic Specification
VLAN	Virtual Local Area Network
VoIP	Voice over IP

**Table 2** Frequently Used Acronyms (Continued)

Acronym	Definition
VPN	Virtual Private Network
VRRP	Virtual Router Redundancy Protocol
VSA	Vendor Specific Attributes
WEP	Wired Equivalent Protocol
WINS	Windows Internet Naming Service
WLAN	Wireless Local Area Network
WMM	Wireless MultiMedia / Wi-Fi Multimedia
WMS	WLAN Management System
WPA	Wi-Fi Protected Access

## Contacting Support

**Table 3** Contact Information

Web Site Support	
Main Website	<b>dell.com</b>
Support Website	<b>dell.com/support</b>
Documentation Website	<b>dell.com/support/manuals</b>

## MIBs Overview

This chapter provides information about Management Information Base (MIBs) supported in Dell W-Instant 6.2.1.0-3.4 software release.


### MIBs

A MIB is a virtual database that contains information used for network management. Each managed device contains MIBs that define its properties. A separate MIB is provided for each defined property, such as the group of physical ports assigned to a VLAN or the statistical data of packets transferred at a specific rate.

MIB objects, such as a MIB table or a specific object in a MIB table, are identified with Object identifiers (OIDs). The OIDs are designated by text strings and integer sequences.

[Figure 1](#) illustrates the high-level hierarchy of the Enterprise MIBs.

**Figure 1** High-Level MIB Hierarchy

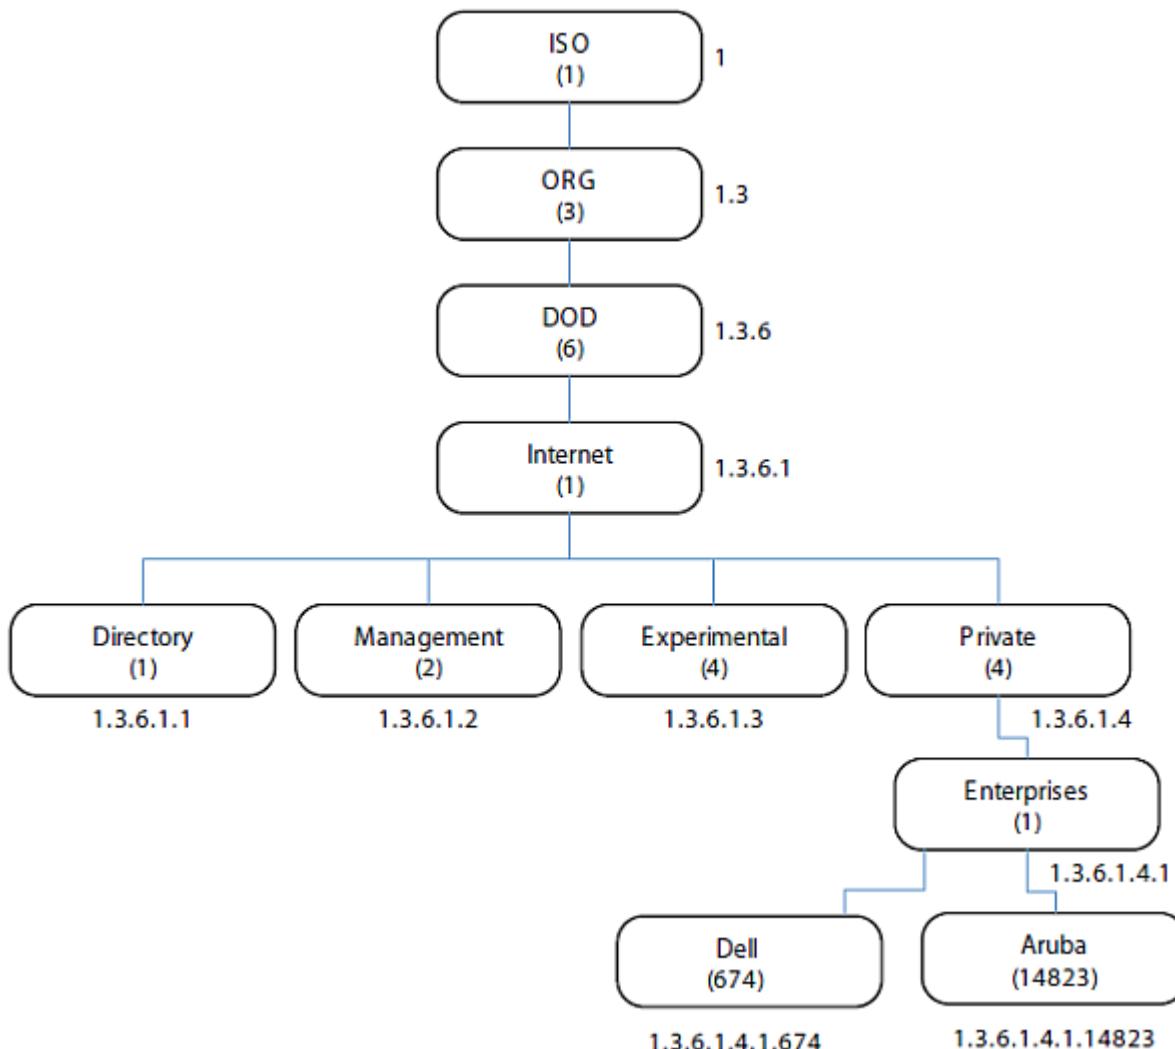

The hardware MIBs are assigned under the Dell organization code, while all others are under the Aruba organization code.

Table 4 indicates the numerical string that lists the nodes of the enterprise MIB hierarchy. The hardware MIBs are assigned under the Dell organization code, while all others are under the Aruba organization code.

**Table 4** MIB Node Identification - Enterprise Nodes

Integer	String	Name
1	1	OSI
3	1.3	ORG
6	1.3.6	DOD
1	1.3.6.1	Internet
4	1.3.6.1.4	Private
1	1.3.6.1.4.1	Enterprise
674	1.3.6.1.4.1.674	Dell

The information provided by a MIB is a file that describes network elements with numerical strings. This information is compiled into readable text by the SNMP manager. For information about reading MIB text files, see “[Reading MIB Files](#)” on page 25.

## SNMP

MIB objects can be accessed through the Simple Network Management Protocol (SNMP). To deliver information between devices, every object referenced in an SNMP message must be listed in the MIB. A component of a device that is not described in a MIB cannot be recognized by SNMP as there is no information for SNMP managers and SNMP agents to exchange.

The significant elements of SNMP are Managers, Agents, and MIBs:

- SNMP Managers (software application) are used for communicating and managing the devices that support SNMP Agents. SNMP Managers can also be used for sending configuration updates or controlling requests to manage a network device.
- SNMP Agents (software application) provide information from the network devices to the SNMP Managers. Network devices include workstations, routers, microwave radios, and other network components.
- MIBs are used for communication between the Managers and the Agents. The OIDs of the MIBs enable the Managers and Agents to communicate specific data requests and data returns.



Dell Networking W-Series Instant MIBs support SNMPv1, SNMPv2, and SNMPv3. For information on configuring SNMP through the Dell W-Instant UI, see *Dell Networking W-Series Instant Access Point 6.2.1.0-3.4 User Guide*.

To retrieve information from a MIB, the following information is required:

- SNMP version
- SNMP community name—*public* or *private*
- The IP Address of the virtual controller

- The OID of the MIB object

**Table 5 MIB Keywords**

Keyword	Description
<b>Sequence</b>	Refers to the sequence of objects of the MIB. This keyword is used with entry MIB objects to list the MIB objects that exchange information.
<b>Syntax</b>	Textual conventions, for example, <i>Integer32</i> .
<b>Max-Access</b>	Defines the object accessibility: <ul style="list-style-type: none"> <li>• <i>read-only</i>: Can be retrieved but not modified</li> <li>• <i>read-write</i>: Can be retrieved and modified</li> <li>• <i>not-accessible</i>: Cannot be retrieved; it is for internal (device) use only</li> <li>• <i>accessible-for-notify</i>: Can be retrieved when a trap message (notification) is sent</li> </ul>
<b>Status</b>	Defines the status of the object: <ul style="list-style-type: none"> <li>• <i>current</i>: Indicates that the object status is up-to-date and valid.</li> <li>• <i>deprecated</i>: Indicates an obsolete definition. It permits new or continued implementation to maintain interoperability with existing implementations.</li> <li>• <i>obsolete</i>: Obsolete. It should not be implemented and/or can be removed if previously implemented.</li> </ul>
<b>Description</b>	A text string that describes the object.

In addition, MIB files can be placed in the appropriate disk location to assist the user in locating desired OID values for monitoring.

It is assumed that the workstation is connected to the Dell W-Instant and a MIB browser is available. For most applications, the *root* of the MIB must be included in the OID—the OID begins with a decimal point as shown below.

.1.3.6.1.4.1.674.2.2.1.1.2.1

If you are using an application that is run through the Linux shell, the command will be as follows:

```
snmpget -v 2c -c <community name> <Instant IP address> <MIB OID>
```

The MIB objects can also be viewed from a MIB Browser GUI.



## Using MIBs

This chapter provides information on using MIBs.

- [Downloading MIB Files](#)
- [Reporting WLAN Health](#)
- [Reading MIB Files](#)
- [SNMP File](#)
- [HP OpenView](#)

### Downloading MIB Files

The latest Aruba MIB files are available for registered customers at:

[dell.com/support](http://dell.com/support)

For assistance to set up an account and access files, contact customer service. See “[Contacting Support](#)” on [page 18](#).

### Reporting WLAN Health

SNMP MIBs are frequently used for running health checks on Dell Networking W-Series Instant devices, through a MIB browser application.

To retrieve information from a MIB, the following information is required:

- SNMP version
- SNMP community name—*public* or *private*
- The IP Address of the Virtual Controller and the slave W-IAPs
- The OID of the MIB value you want to monitor

MIB files can be placed in the appropriate disk location to assist the user in locating desired OID values for monitoring. For most applications, the *root* of the MIB must be included in the OID—the OID begins with a decimal point as shown in the following example:

.1.3.6.1.4.1.674.2.2.1.1.2.1

### SNMP Operations on W-IAPs

Although the virtual controller address is configured on management station, the following MIBs are specific to a particular W-IAP and therefore cannot be accessed from the Virtual Controller.

- [ifTable](#)
- [ifXTable](#)
- [dot1qTpFdbTable](#)

To enable the management station to access the IF-MIB and Q-BRIDGE-MIB tables and W-IAPs to send traps, you must configure the IP address of each W-IAP on the management station. The management station can automatically configure the W-IAP details, by obtaining the IP address of each W-IAP from the AP MIB (*aiAccessPointTable*), which lists all the slave W-IAPs in a swarm and is implemented on a virtual controller.



You do not have to set the SNMP community string and security parameters on each W-IAP as this configuration is common to all W-IAPs and is inherited from virtual controller.

## MIB Browsers

If you are using an application that is run through the Linux shell, the command would be as follows:

```
snmpget -v 2c -c <community name> <Instant IP address><MIB OID>
```


Figure 2 shows an example of submitting a command to obtain information.

**Figure 2** Running the *snmpget* Command

```
[root@localhost ~]# snmpget -v 2c -c public 10.65.77.8 .1.3.6.1.4.1.14823.2.3.3.1.1.2.0  
SNMPv2-SMI::enterprises.14823.2.3.3.1.1.2.0 = STRING: "Instant-CB:A5:52"
```

**Figure 3** shows how information may be obtained through a graphical user interface (GUI). The user interface and the available features vary by application.

**Figure 3** Graphical User Interface

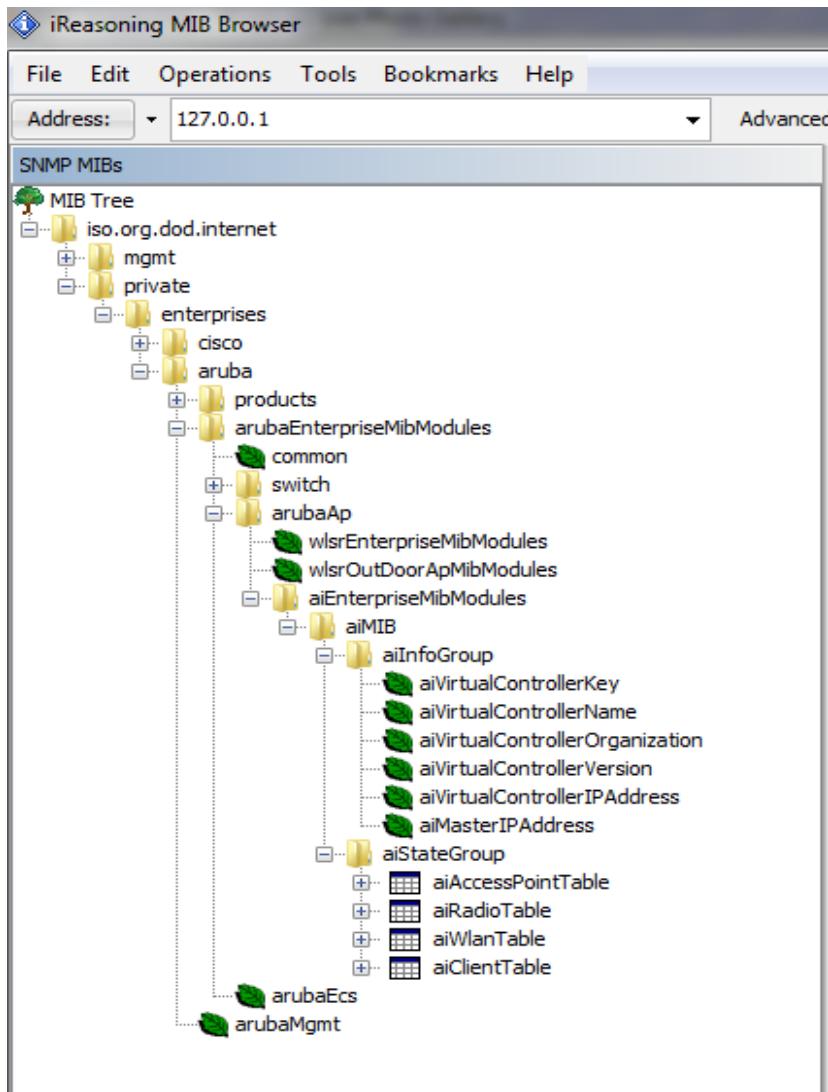

## Reading MIB Files

This section describes how to interpret the basic components of a MIB file. To determine the OIDs, view the file `snmp.h`. For more information, see “[SNMP File](#)” on page 27.

MIB files describe a specific component of a network device. The files are numerical strings that are converted to ASCII text by the compiler of the SNMP manager. A word processor or text editor can be used to open the ASCII file. The contents of an example ArubaOS enterprise MIB file, `aruba-cts.my`, are as follows.

### Opening Line

Following is the opening line, the beginning of the MIB file.

```
AI-AP-MIB DEFINITIONS ::= BEGIN
```

### Imports

The `Imports` section lists the objects that are defined in external ASN.1 files and are used in the current MIB file.

```
IMPORTS
    TEXTUAL-CONVENTION
        FROM SNMPv2-TC

    MODULE-IDENTITY,
    OBJECT-TYPE,
    snmpModules,
    Integer32,
    Counter32,
    Counter64,
    IpAddress,
    NOTIFICATION-TYPE
        FROM SNMPv2-SMI

    DisplayString,
    PhysAddress,
    TimeInterval,
    RowStatus,
    StorageType,
    TestAndIncr,
    MacAddress,
    TruthValue
    FROM SNMPv2-TC

    OBJECT-GROUP
        FROM SNMPv2-CONF
            aiEnterpriseMibModules
                FROM ARUBA-MIB;
```

### Inheritance

This section shows the vendor of the MIB and the inheritance, and provides an overall description.

A significant part of inheritance is the OID. The entire OID is not listed for each MIB object—instead, the parent of the object is shown. The OID can be determined from the parent object as follows.

**aiEnterpriseMibModules** is the parent object —its OID is `1.3.6.1.4.1.14823.2.3.3`.

**aiStateGroup**      **OBJECT IDENTIFIER ::= { aiMIB 2 }**, the OID is  
`1.3.6.1.4.1.14823.2.3.3.1.2`.

**aiVirtualControllerKey OBJECT-TYPE**, the OID is 1.3.6.1.4.1.14823.2.3.3.1.1.1.0.

All MIBs and their related OIDs are listed in the snmp file of ArubaOS. For more information, see “[SNMP File](#)” on page 27.

## aiEnterpriseMibModules

FROM ARUBA-MIB;

### Identity

Identity is the opening description of the MIB. The information includes contact information for the vendor and a general description of the MIB.

```
aiMIB MODULE-DENTITY

LAST-UPDATED "0804160206Z"

ORGANIZATION "Aruba Wireless Networks"

CONTACT-INFO
    "Postal:      1322 Crossman Avenue
     Sunnyvale, CA 94089
    E-mail:      dl-support@arubanetworks.com
    Phone:       +1 408 227 4500"

DESCRIPTION
    "This MIB is for managing Aruba Instant WLAN"

REVISION      "0804160206Z"

DESCRIPTION
    "The initial revision."
::= { aiEnterpriseMibModules 1 }
```

## MIB Modules

MIB objects can be placed in logical groups such as [Group](#) and [Table](#). A group typically contains at least one global-object or table. The table lists the MIB objects that contain the information exchanged.

The first object of a table is an [Entry](#). The OIDs of the subsequent objects of this table are appended increments of the Entry OID.

The keyword SEQUENCE lists the objects of the table that contain device information. Each subsequent object (Informative MIB Object) inherits the OID of the Entry, and contains information sorted by the Syntax, Access, Status, and Description keywords.

### Group

```
aiStateGroup          OBJECT IDENTIFIER ::= { aiMIB 2 }
```

### Table

```
aiAccessPointTable   OBJECT-TYPE
    SYNTAX        SEQUENCE OF AiAccessPointEntry
    MAX-ACCESS    not-accessible
    STATUS        current
    DESCRIPTION
        "This contains all access points connected to the
         virtual controller. This table is empty on AP where
         virtual controller is not active"
```

```

 ::= { aiStateGroup 1 }

Entry

aiAccessPointEntry OBJECT-TYPE
    SYNTAX      AiAccessPointEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "
        INDEX { aiAPMACAddress }
    ::= { aiAccessPointTable 1 } AiAccessPointEntry ::=

SEQUENCE {
    aiAPMACAddress      MacAddress,
    aiAPName            DisplayString,
    aiAPIPAddress       IpAddress,
    aiAPSerialNum       DisplayString,
    aiAPModel           OBJECT IDENTIFIER,
    aiAPModelName       DisplayString,
    aiAPCPUUtilization Integer32,
    aiAPMemoryFree      Integer32,
    aiAPUptime          TimeTicks
}

```

## Closing Line

Following is the closing line—the end of the MIBs file.

END

## SNMP File

The snmp.h file lists the OIDs of all MIBs. Following are sections from snmp.h that show the complete OID of each of the Controller Transport Service (CTS) MIB elements. The list starts from the ancestral parent *iso*.

The SNMP file with all Aruba MIBs is listed in [Chapter 5, “Standard SNMP MIBs” on page 47](#).

All ArubaOS MIBs inherit their OIDs from the Aruba MIB node. The following rows list the MIBs that precede CTS, starting from *iso*.

```

{ "iso",                      HASHNEXT("1") },
{ "org",                       HASHNEXT("1.3") },
{ "dod",                        HASHNEXT("1.3.6") },
{ "internet",                  HASHNEXT("1.3.6.1") },
{ "private",                    HASHNEXT("1.3.6.1.4") },
{ "enterprises",                HASHNEXT("1.3.6.1.4.1") },
{ "aruba",                      HASHNEXT("1.3.6.1.4.1.14823") },
{ "arubaEnterpriseMibModules", HASHNEXT("1.3.6.1.4.1.14823.2") },

```

## HP OpenView

To install the Aruba module for HP OpenView, log in as the root user and execute the following script:

```
# $OV_CONTRIB/NNM/Aruba/install
```


## Dell W-Instant MIBs

The chapter provides information about the Dell W-Instant MIB objects.

[Figure 4](#) shows the architecture of the Dell W-Instant MIB relative to 1.3.6.1.4.1.14823 (iso.org.dod.internet.private.enterprise.aruba).

The Dell W-Instant MIB is listed in the file *aruba-Instant.my*. For information about downloading Dell W-Instant MIB file, see “[Downloading MIB Files](#)” on page 23.

**Figure 4** Dell W-Instant MIB Hierarchy

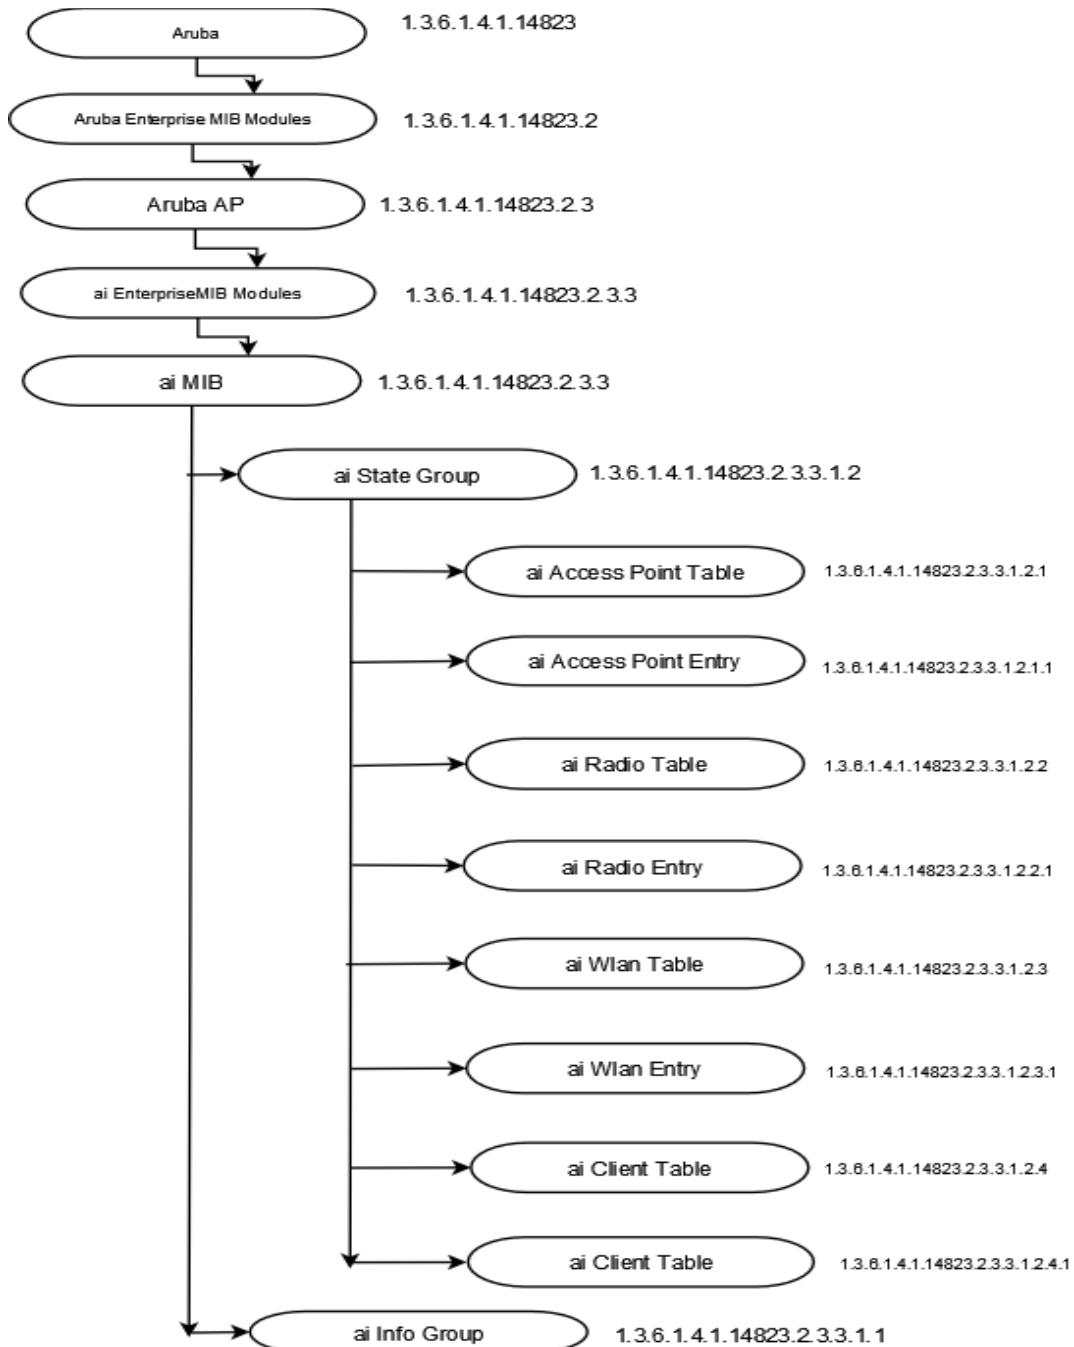

The Dell W-Instant MIB tree consists of the following MIB groups and tables.

**Table 6 Supported Dell W-Instant MIBs and MIB Tables**

Group	Description
aiInfoGroup	Contains details of the virtual controller. For more information, see “ <a href="#">aiInfoGroup</a> ” on page 30.
aiStateGroup	Contains information about status of the Access Point, Radio, WLAN, and Clients connected to a W-IAP. The following tables are available in the aiInfoGroup: <ul style="list-style-type: none"> <li>• <b>aiAccessPointTable</b>—Contains all the access points connected to the virtual controller. This table is indexed by the MAC Address of the W-IAP.</li> <li>• <b>aiRadioTable</b>—Contains all the radios of the access points connected to the virtual controller. This table is indexed by the MAC Address and radio number.</li> <li>• <b>aiWlanTable</b>—Contains all the BSSIDs that are active on the virtual controller. This table is indexed by the MAC address and a WLAN Index of the W-IAP.</li> <li>• <b>aiClientTable</b>—Contains information about all the clients connected to the virtual controller. When a client roams from one access point to another, all the counters in this table are reset to 0.</li> </ul> For more information, see “ <a href="#">aiStateGroup</a> ” on page 32.
aiTrapGroup	Contains the details of traps that can be generated on a W-IAP. For more information, see “ <a href="#">Trap Hierarchy</a> ” on page 61.

## aiInfoGroup

The aiInfoGroup table provides information about the virtual controller:

- [aiVirtualControllerKey](#)
- [aiVirtualControllerName](#)
- [aiVirtualControllerOrganization](#)
- [aiVirtualControllerVersion](#)
- [aiVirtualControllerIPAddress](#)
- [aiMasterIPAddress](#)

### aiVirtualControllerKey

<b>Object ID</b>	1.3.6.1.4.1.14823.2.3.3.1.1.1
<b>Syntax</b>	DisplayString
<b>Max-Access</b>	Read-only
<b>Status</b>	Current
<b>Description</b>	Unique Virtual Controller key

### aiVirtualControllerName

<b>Object ID</b>	1.3.6.1.4.1.14823.2.3.3.1.1.2
<b>Syntax</b>	DisplayString

<b>Max-Access</b>	Read-only
<b>Status</b>	Current
<b>Description</b>	Name of the Virtual Controller

## aiVirtualControllerOrganization

<b>Object ID</b>	1.3.6.1.4.1.14823.2.3.3.1.1.3
<b>Syntax</b>	DisplayString
<b>Max-Access</b>	Read-only
<b>Status</b>	Current
<b>Description</b>	Virtual Controller organization

## aiVirtualControllerVersion

<b>Object ID</b>	1.3.6.1.4.1.14823.2.3.3.1.1.4
<b>Syntax</b>	DisplayString
<b>Max-Access</b>	Read-only
<b>Status</b>	Current
<b>Description</b>	Software version of the controller

## aiVirtualControllerIPAddress

<b>Object ID</b>	1.3.6.1.4.1.14823.2.3.3.1.1.5
<b>Syntax</b>	IPAddress
<b>Max-Access</b>	Read-only
<b>Status</b>	Current
<b>Description</b>	IP address of the Virtual Controller. If this is not set, returns 0.0.0.0.

## aiMasterIPAddress

<b>Object ID</b>	1.3.6.1.4.1.14823.2.3.3.1.1.6
<b>Syntax</b>	IPAddress
<b>Max-Access</b>	Read-only
<b>Status</b>	Current
<b>Description</b>	IP Address of AP on which the Virtual Controller software is active.

## aiStateGroup

The aiStateGroup contains the following tables:

- [aiAccessPointTable](#)
- [aiRadioTable](#)
- [aiWlanTable](#)
- [aiClientTable](#)

## aiAccessPointTable

The objects of the aiAccessPointTable provide information about all the W-IAPs connected to the virtual controller.

**Table 7** *aiAccessPointTable OIDs*

Object	Object ID	Entry OID
aiAccessPointEntry	1.3.6.1.4.1.14823.2.3.3.1.2.1.1	aiAccessPointTable 1
aiAPMACAddress	1.3.6.1.4.1.14823.2.3.3.1.2.1.1.1	aiAccessPointEntry 1
aiAPName	1.3.6.1.4.1.14823.2.3.3.1.2.1.1.2	aiAccessPointEntry 2
aiAPIPAddress	1.3.6.1.4.1.14823.2.3.3.1.2.1.1.3	aiAccessPointEntry 3
aiAPSerialNum	1.3.6.1.4.1.14823.2.3.3.1.2.1.1.4	aiAccessPointEntry 4
aiAPModel	1.3.6.1.4.1.14823.2.3.3.1.2.1.1.5	aiAccessPointEntry 5
aiAPModelName	1.3.6.1.4.1.14823.2.3.3.1.2.1.1.6	aiAccessPointEntry 6
aiAPCPUUtilization	1.3.6.1.4.1.14823.2.3.3.1.2.1.1.7	aiAccessPointEntry 7
aiAPMemoryFree	1.3.6.1.4.1.14823.2.3.3.1.2.1.1.8	aiAccessPointEntry 8
aiAPUptime	1.3.6.1.4.1.14823.2.3.3.1.2.1.1.9	aiAccessPointEntry 9
aiAPTotalMemory	1.3.6.1.4.1.14823.2.3.3.1.2.1.1.10	aiAccessPointEntry 10
aiAPStatus	1.3.6.1.4.1.14823.2.3.3.1.2.1.1.11	aiAccessPointEntry 11

## aiAccessPointEntry

<b>Syntax</b>	aiAccessPointEntry
<b>Max-Access</b>	not-accessible
<b>Status</b>	current
<b>Description</b>	NA
<b>Index</b>	aiAPMACAddress

## aiAPMACAddress

<b>Syntax</b>	MacAddress (OCTET STRING). Hint: 1x:
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	MAC address of the Access Point.

## aiAPName

<b>Syntax</b>	DisplayString (SIZE(0..64))
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Name of the Access Point.

## aiAPIPAddress

<b>Syntax</b>	IpAddress
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	IP address of the Access Point.

## aiAPSerialNum

<b>Syntax</b>	DisplayString (SIZE(0..64))
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Serial number of the Access Point.

## aiAPModel

<b>Syntax</b>	OBJECT IDENTIFIER
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Access Point System OID.

## aiAPModelName

<b>Syntax</b>	DisplayString (SIZE(0..32))
---------------	-----------------------------

<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Model name of the Access Point.

### aiAPCPUUtilization

<b>Syntax</b>	Integer32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	CPU utilization of the Access Point.

### aiAPMemoryFree

<b>Syntax</b>	Integer32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Amount of memory free in the access point in bytes.

### aiAPUptime

<b>Syntax</b>	TimeTicks
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Uptime of the Access Point.

### aiAPTotalMemory

<b>Syntax</b>	Integer32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Total amount of memory available in the AP in bytes.

### aiAPStatus

<b>Syntax</b>	Integer {up(1), down(2)}
<b>Max-Access</b>	read-only
<b>Status</b>	current

<b>Description</b>	Indicates the Access Point Status.
--------------------	------------------------------------

## aiRadioTable

The objects of the aiRadioTable provide information about all the radios and the related information of the Access Points.

**Table 8** *aiRadioTable OIDs*

Object	Object ID	Entry OID
aiRadioEntry	1.3.6.1.4.1.14823.2.3.3.1.2.2.1	aiRadioTable 1
aiRadioAPMacAddress	1.3.6.1.4.1.14823.2.3.3.1.2.2.1.1	aiRadioEntry 1
aiRadioIndex	1.3.6.1.4.1.14823.2.3.3.1.2.2.1.2	aiRadioEntry 2
aiRadioMACAddress	1.3.6.1.4.1.14823.2.3.3.1.2.2.1.3	aiRadioEntry 3
aiRadioChannel	1.3.6.1.4.1.14823.2.3.3.1.2.2.1.4	aiRadioEntry 4
aiRadioTransmitPower	1.3.6.1.4.1.14823.2.3.3.1.2.2.1.5	aiRadioEntry 5
aiRadioNoiseFloor	1.3.6.1.4.1.14823.2.3.3.1.2.2.1.6	aiRadioEntry 6
aiRadioUtilization4	1.3.6.1.4.1.14823.2.3.3.1.2.2.1.7	aiRadioEntry 7
aiRadioUtilization64	1.3.6.1.4.1.14823.2.3.3.1.2.2.1.8	aiRadioEntry 8
aiRadioTxTotalFrames	1.3.6.1.4.1.14823.2.3.3.1.2.2.1.9	aiRadioEntry 9
aiRadioTxMgmtFrames	1.3.6.1.4.1.14823.2.3.3.1.2.2.1.10	aiRadioEntry 10
aiRadioTxDataFrames	1.3.6.1.4.1.14823.2.3.3.1.2.2.1.11	aiRadioEntry 11
aiRadioTxDataBytes	1.3.6.1.4.1.14823.2.3.3.1.2.2.1.12	aiRadioEntry 12
aiRadioTxDrops	1.3.6.1.4.1.14823.2.3.3.1.2.2.1.13	aiRadioEntry 13
aiRadioTxTotalFrames	1.3.6.1.4.1.14823.2.3.3.1.2.2.1.14	aiRadioEntry 14
aiRadioRxDatFrames	1.3.6.1.4.1.14823.2.3.3.1.2.2.1.15	aiRadioEntry 15
aiRadioRxDataBytes	1.3.6.1.4.1.14823.2.3.3.1.2.2.1.16	aiRadioEntry 16
aiRadioRxMgmtFrames	1.3.6.1.4.1.14823.2.3.3.1.2.2.1.17	aiRadioEntry 17
aiRadioRxBad	1.3.6.1.4.1.14823.2.3.3.1.2.2.1.18	aiRadioEntry 18
aiRadioPhyEvents	1.3.6.1.4.1.14823.2.3.3.1.2.2.1.19	aiRadioEntry 19
aiRadioStatus	1.3.6.1.4.1.14823.2.3.3.1.2.2.1.20	aiRadioEntry 20

## aiRadioEntry

<b>Syntax</b>	aiRadioEntry
<b>Max-Access</b>	not-accessible
<b>Status</b>	current
<b>Description</b>	NA
<b>Index</b>	aiRadioAPMACAddress, aiRadioIndex

## aiRadioAPMacAddress

<b>Syntax</b>	MacAddress (OCTET STRING). Hint: 1x:
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	MAC Address of the Access Point where this radio is active.

## aiRadioIndex

<b>Syntax</b>	Integer32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Radio number of the Access Point.

## aiRadioMACAddress

<b>Syntax</b>	MacAddress
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Radio MAC address of the Access Point.

## aiRadioChannel

<b>Syntax</b>	Integer32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Radio channel. The first byte contains primary channel and first two bits of second byte contains indicator for the secondary channel. If first two bits of second byte are 0, it is a 20MHz channel. If first two bits of second byte are 01, the secondary channel is above primary channel, if first two bits of second byte are 10, the secondary channel is below the primary channel.

## aiRadioTransmitPower

<b>Syntax</b>	Integer32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Radio transmission power of the Access Point.

## aiRadioNoiseFloor

<b>Syntax</b>	Integer32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Radio noise of the Access Point in dBm.

## aiRadioUtilization4

<b>Syntax</b>	Integer32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Radio channel utilization 4 second average.

## aiRadioUtilization64

<b>Syntax</b>	Integer32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Radio channel utilization 64 second average.

## aiRadioTxTotalFrames

<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Total number of frames transmitted.

## aiRadioTxMgmtFrames

<b>Syntax</b>	Counter32
---------------	-----------

<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Total number of management frames transmitted.

### aiRadioTxDataFrames

<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Total number of data frames transmitted.

### aiRadioTxDataBytes

<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Total number of data bytes transmitted.

### aiRadioTxDrops

<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Total number of frames dropped during transmission.

### aiRadioRxTotalFrames

<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Total number of received frames.

### aiRadioRxDataFrames

<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current

<b>Description</b>	Total number of received data frames.
--------------------	---------------------------------------

### aiRadioRxDataBytes

<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Total number of received data bytes.

### aiRadioRxMgmtFrames

<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Total number of received management frames.

### aiRadioRxBad

<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Total number of frames received in error.

### aiRadioPhyEvents

<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Number of physical layer events that indicates frames not received because of interference.

### aiRadioStatus

<b>Syntax</b>	Integer {up(1), down(2)}
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Indicates the radio status of the AP.

## aiWlanTable

The objects of the aiWlanTable provide information about all the BSSIDs active on the virtual controller.

**Table 9** *aiWlanTable OIDs*

Object	Object ID	Entry OID
aiWlanEntry	1.3.6.1.4.1.14823.2.3.3.1.2.3.1	aiWlanTable 1
aiWlanAPMACAddress	1.3.6.1.4.1.14823.2.3.3.1.2.3.1.1	aiWlanEntry 1
aiWlanIndex	1.3.6.1.4.1.14823.2.3.3.1.2.3.1.2	aiWlanEntry 2
aiWlanESSID	1.3.6.1.4.1.14823.2.3.3.1.2.3.1.3	aiWlanEntry 3
aiWlanMACAddress	1.3.6.1.4.1.14823.2.3.3.1.2.3.1.4	aiWlanEntry 4
aiWlanTxTotalFrames	1.3.6.1.4.1.14823.2.3.3.1.2.3.1.5	aiWlanEntry 5
aiWlanTxDataFrames	1.3.6.1.4.1.14823.2.3.3.1.2.3.1.6	aiWlanEntry 6
aiWlanTxDataBytes	1.3.6.1.4.1.14823.2.3.3.1.2.3.1.7	aiWlanEntry 7
aiWlanRxTotalFrames	1.3.6.1.4.1.14823.2.3.3.1.2.3.1.8	aiWlanEntry 8
aiWlanRxDataFrames	1.3.6.1.4.1.14823.2.3.3.1.2.3.1.9	aiWlanEntry 9
aiWlanRxDataBytes	1.3.6.1.4.1.14823.2.3.3.1.2.3.1.10	aiWlanEntry 10

## aiWlanEntry

<b>Syntax</b>	AiWlanEntry
<b>Max-Access</b>	not-accessible
<b>Status</b>	current
<b>Description</b>	NA
<b>Index</b>	aiWlanAPMACAddress, aiWlanIndex

## aiWlanAPMACAddress

<b>Syntax</b>	MacAddress (OCTET STRING). Hint: 1x:
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	MAC Address of the Access Point where WLAN is active.

## aiWlanIndex

<b>Syntax</b>	Integer32
<b>Max-Access</b>	read-only

<b>Status</b>	current
<b>Description</b>	Index of the WLAN. This is a unique index assigned to the active WLAN on the Access Point.

### aiWlanESSID

<b>Syntax</b>	DisplayString
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	ESSID of the WLAN

### aiWlanMACAddress

<b>Syntax</b>	MacAddress (OCTET STRING). Hint: 1x:
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	BSSID of the WLAN

### aiWlanTxTotalFrames

<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Total number of frames transmitted.

### aiWlanTxDataFrames

<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Total number of data frames transmitted.

### aiWlanTxDataBytes

<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Total number of data bytes transmitted.

## aiWlanRxTotalFrames

<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Total number of received frames.

## aiWlanRxDataFrames

<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Total number of received data frames.

## aiWlanRxDataBytes

<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Total number of received data bytes.

## aiClientTable

The objects of the aiWlanTable provide information about all the clients connected to the virtual controller.

**Table 10** *aiClientTable OID*

Object	Object ID	Entry OID
aiClientEntry	1.3.6.1.4.1.14823.2.3.3.1.2.4.1	aiClientTable 1
aiClientMACAddress	1.3.6.1.4.1.14823.2.3.3.1.2.4.1.1	aiClientEntry 1
aiClientWlanMACAddress	1.3.6.1.4.1.14823.2.3.3.1.2.4.1.2	aiClientEntry 2
aiClientIPAddress	1.3.6.1.4.1.14823.2.3.3.1.2.4.1.3	aiClientEntry 3
aiClientAPIPAddress	1.3.6.1.4.1.14823.2.3.3.1.2.4.1.4	aiClientEntry 4
aiClientName	1.3.6.1.4.1.14823.2.3.3.1.2.4.1.5	aiClientEntry 5
aiClientOperatingSystem	1.3.6.1.4.1.14823.2.3.3.1.2.4.1.6	aiClientEntry 6
aiClientSNR	1.3.6.1.4.1.14823.2.3.3.1.2.4.1.7	aiClientEntry 7
aiClientTxDataFrames	1.3.6.1.4.1.14823.2.3.3.1.2.4.1.8	aiClientEntry 8
aiClientTxDataBytes	1.3.6.1.4.1.14823.2.3.3.1.2.4.1.9	aiClientEntry 9

**Table 10** *aiClientTable* *OID*

<b>Object</b>	<b>Object ID</b>	<b>Entry OID</b>
aiClientTxRetries	1.3.6.1.4.1.14823.2.3.3.1.2.4.1.10	aiClientEntry 10
aiClientTxRate	1.3.6.1.4.1.14823.2.3.3.1.2.4.1.11	aiClientEntry 11
aiClientRxDataFrames	1.3.6.1.4.1.14823.2.3.3.1.2.4.1.12	aiClientEntry 12
aiClientRxDataBytes	1.3.6.1.4.1.14823.2.3.3.1.2.4.1.13	aiClientEntry 13
aiClientRxRetries	1.3.6.1.4.1.14823.2.3.3.1.2.4.1.14	aiClientEntry 14
aiClientRxRate	1.3.6.1.4.1.14823.2.3.3.1.2.4.1.15	aiClientEntry 15
aiClientUptime	1.3.6.1.4.1.14823.2.3.3.1.2.4.1.16	aiClientEntry 16

**aiClientEntry**

<b>Syntax</b>	aiClientEntry
<b>Max-Access</b>	not-accessible
<b>Status</b>	current
<b>Description</b>	NA
<b>Index</b>	aiClientMACAddress

**aiClientMACAddress**

<b>Syntax</b>	MacAddress (OCTET STRING). Hint: 1x:
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	MAC Address of the client.

**aiClientWlanMACAddress**

<b>Syntax</b>	MacAddress
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	BSSID of WLAN where client is associated.

**aiClientIPAddress**

<b>Syntax</b>	IpAddress
<b>Max-Access</b>	read-only

<b>Status</b>	current
<b>Description</b>	IP address of the client.

### aiClientAPIAddress

<b>Syntax</b>	IpAddress
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Radio channel. First byte contains primary channel and first two bits on second byte contains indicator for secondary channel. If first two bits of second byte is 0, it is a 20MHz channel. If first two bits of second byte is 01, secondary channel is above primary channel, if first two bits of second by is 10, secondary channel is below the primary channel.

### aiClientName

<b>Syntax</b>	DisplayString
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Name of the user using the client.

### aiClientOperatingSystem

<b>Syntax</b>	DisplayString
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Operating system of the client.

### aiClientSNR

<b>Syntax</b>	Integer32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Signal to noise ratio of the client connected to the Access Point

### aiClientTxDataFrames

<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current

<b>Description</b>	Total number of frames transmitted by the client.
--------------------	---

### aiClientTxDataBytes

<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Total number of bytes transmitted by the client.

### aiClientTxRetries

<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Total number of retry frames transmitted by the client.

### aiClientTxRate

<b>Syntax</b>	Integer32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Transmission rate of the client in mbps.

### aiClientRxDataFrames

<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Total number of frames received by the client in mbps.

### aiClientRxDataBytes

<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Total number of bytes received by the client in mbps.

## aiClientRxRetries

<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Total number of retry frames received by the client.

## aiClientRxRate

<b>Syntax</b>	Integer32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Receiving rate of the client in mbps.

## aiClientUptime

<b>Syntax</b>	TimeTicks
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Client uptime. On mobility event all counters are reset to 0 and uptime resets to 0.

## Standard SNMP MIBs

This section provides information on the following standard MIBs modules and tables supported in this release of Dell W-Instant.

- [System MIB](#)
- [dot1qTpFdbTable](#)
- [ifTable](#)
- [ifXTable](#)

### System MIB

The system MIB contains system-specific information about the W-IAP. Dell W-Instant supports the following system MIB objects:

- [sysDescr](#)—Provides information on the W-IAP model and software version of the W-IAP.
- [sysObjectID](#)—Identifies the network management subsystem. The sysObjectID in the standard SNMP MIB can be used to retrieve OIDs for the Dell Networking W-Series Instant products. You can retrieve information on all node devices in *Aruba.my* MIB by extracting the sysObjectId for each device. The sysObjectID returns OIDs for a specific model number of the device within the Dell Networking W-Series Instant product family.

For example, the *iso.org.dod.internet.private.enterprise.aruba.products.apProducts.ap135* (1.3.6.1.4.1.14823.1.2.48) OID is returned for the W-AP135 device. For information on the OIDs associated with the AP devices, see the apProducts tree in the *Aruba.my* MIB file.

- [sysUpTime](#) —Indicates the system up time since the W-IAP was initialized and actively connected to the network.
- [sysName](#) — Indicates the name of the W-IAP.
- [sysLocation](#)— Indicates the physical location of the W-IAP. To retrieve information on the AP location, the system location details for the W-IAP must be configured. For more information on configuring system location details, see *Dell Networking W-Series Instant 6.2.1.0-3.4 User Guide*.
- [sysServices](#)—Indicates the services offered by the W-IAP.

The following system MIB objects are not supported:

- [sysContact](#)
- [sysORLastChange](#)
- [sysORTable](#)

#### **sysDescr**

<b>Object ID</b>	1.3.6.1.2.1.1.1
<b>Syntax</b>	DisplayString
<b>Max-Access</b>	read-only
<b>Status</b>	mandatory

<b>Description</b>	A textual description of the entity. This value should include the full name and version identification of the system's hardware type, software operating-system, and networking software. It is mandatory that this only contains printable ASCII characters.
--------------------	--

## **sysObjectID**

<b>Object ID</b>	1.3.6.1.2.1.1.2
<b>Syntax</b>	Object Identifier
<b>Max-Access</b>	read-only
<b>Status</b>	mandatory
<b>Description</b>	The vendor's authoritative identification of the network management subsystem contained in the entity. This value is allocated within the SMI enterprises subtree (1.3.6.1.4.1) and provides an easy and unambiguous means for determining `what kind of box' is being managed.

## **sysUpTime**

<b>Object ID</b>	1.3.6.1.2.1.1.3
<b>Syntax</b>	TimeTicks
<b>Max-Access</b>	read-only
<b>Status</b>	mandatory
<b>Description</b>	The time (in hundredths of a second) since the network management portion of the system was last re-initialized.

## **sysName**

<b>Object ID</b>	1.3.6.1.2.1.1.5
<b>Syntax</b>	DisplayString
<b>Max-Access</b>	read-write
<b>Status</b>	mandatory
<b>Description</b>	An administrator-assigned fully-qualified domain name for the managed node.

## **sysLocation**

<b>Object ID</b>	1.3.6.1.2.1.1.6
<b>Syntax</b>	DisplayString
<b>Max-Access</b>	read-write
<b>Status</b>	mandatory

<b>Description</b>	The physical location of the AP.
--------------------	----------------------------------

## sysServices

<b>Object ID</b>	1.3.6.1.2.1.1.7
<b>Syntax</b>	Integer
<b>Max-Access</b>	read-only
<b>Status</b>	mandatory
<b>Description</b>	A value which indicates the set of services that the AP primarily offers.

## dot1qTpFdbTable

This table contains information about the associated station MAC addresses, the corresponding port from the interface table, and status. The objects of the dot1qTpFdbTable provide information about the forwarding and filtering status of the clients connected to wired ports and wireless interfaces.

The dot1qTpFdbTable contains the following objects:

- [dot1qFdbId](#)
- [dot1qTpFdbAddress](#)
- [dot1qTpFdbPort](#)
- [dot1qTpFdbStatus](#)

### dot1qFdbId

<b>Object ID</b>	1.3.6.1.2.1.17.7.1.2.1.1.1
<b>Syntax</b>	UNSIGNED32
<b>Max-Access</b>	not-accessible
<b>Status</b>	current
<b>Description</b>	The identity of the filtering database such as VLAN ID of the W-IAP.

### dot1qTpFdbAddress

<b>Object ID</b>	1.3.6.1.2.1.17.7.1.2.2.1.1
<b>Syntax</b>	MacAddress
<b>Max-Access</b>	not-accessible
<b>Status</b>	current
<b>Description</b>	MAC address for which the W-IAP has forwarding or filtering information.

## **dot1qTpFdbPort**

<b>Object ID</b>	1.3.6.1.2.1.17.7.1.2.2.1.2
<b>Syntax</b>	Integer32 (0..65535)
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Port number on which a frame having a source address equal to the value of the corresponding instance of dot1qTpFdbAddress. The index value of ifTable is set as the port number field in this table. If the self MAC address is used, the index is 0.

## **dot1qTpFdbStatus**

<b>Object ID</b>	1.3.6.1.2.1.17.7.1.2.2.1.3
<b>Syntax</b>	INTEGER { other(1), invalid(2), learned(3), self(4), mgmt(5) }
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	The status of the bridge entry is set as learned to indicate that the value of the corresponding instance of dot1qTpFdbPort was learned and is being used. If self MAC address is used, the status is set as self to indicate that the value of the corresponding instance of dot1qTpFdbAddress represents one of the device's addresses. The corresponding instance of dot1qTpFdbPort indicates which of the device's ports has this address.

## **ifTable**

This table contains information about wired ports and wireless interfaces. The objects in this MIB provide information about the interfaces configured on a W-IAP. This table contains the following objects:

- [ifIndex](#)
- [ifDescr](#)
- [ifType](#)
- [ifMtu](#)
- [ifSpeed](#)
- [ifPhysAddress](#)
- [ifAdminStatus](#)
- [ifOperStatus](#)
- [ifInOctets](#)
- [ifInUcastPkts](#)
- [ifInNUcastPkts](#)
- [ifInDiscards](#)
- [ifInErrors](#)
- [ifOutOctets](#)
- [ifOutUcastPkts](#)

- [ifInDiscards](#)
- [ifInErrors](#)

The following ifTable objects are not supported:

- [ifOutQLen](#)
- [ifSpecific](#)
- [ifInUnknownProtos](#)
- [ifLastChange](#)

## **ifIndex**

<b>Object ID</b>	1.3.6.1.2.1.2.2.1.1
<b>Syntax</b>	Integer32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	<p>Value assigned to an interface.</p> <ul style="list-style-type: none"> <li>• Ethernet interface value range: 1–49</li> <li>• Radio 0 interface value range: 50–69.</li> <li>• Radio 1 interface range: 70–89.</li> <li>• GRE interface range: 90–09</li> <li>• PPP interface range: 110–129</li> <li>• VPN interface range: 130–150</li> <li>• Other interfaces: From 500 onwards</li> </ul>

## **ifDescr**

<b>Object ID</b>	1.3.6.1.2.1.2.2.1.2
<b>Syntax</b>	DisplayString (size (0..255))
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Description of the interface, for example eth for Ethernet, radio0_ssid_id2,aruba102 for Radio0 interface, and radioX_ssid_idY for Radio1 interface.

## **ifType**

<b>Object ID</b>	1.3.6.1.2.1.2.2.1.3
<b>Syntax</b>	IANAifType
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Type of the interface. For example, Gigabit Ethernet interface or Fast Ethernet.

## **ifMtu**

<b>Object ID</b>	1.3.6.1.2.1.2.2.1.4
<b>Syntax</b>	Integer32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	The size of the largest packet which can be sent or received on interface.

## **ifSpeed**

<b>Object ID</b>	1.3.6.1.2.1.2.2.1.5
<b>Syntax</b>	Gauge32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	The current bandwidth of the interface in bits per second.

## **ifPhysAddress**

<b>Object ID</b>	1.3.6.1.2.1.2.2.1.6
<b>Syntax</b>	PhysAddress
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Indicates the MAC address of the client.

## **ifAdminStatus**

<b>Object ID</b>	1.3.6.1.2.1.2.2.1.7
<b>Syntax</b>	INTEGER
<b>Max-Access</b>	read-write
<b>Status</b>	current
<b>Description</b>	Administrative state of the interface.

## **ifOperStatus**

<b>Object ID</b>	1.3.6.1.2.1.2.2.1.8
<b>Syntax</b>	INTEGER

<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Operational status of the interface.

## **ifInOctets**

<b>Object ID</b>	1.3.6.1.2.1.2.2.1.10
<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Number of octets received on the interface.

## **ifInUcastPkts**

<b>Object ID</b>	1.3.6.1.2.1.2.2.1.11
<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	The number of packets, delivered by this sub-layer to a higher sub-layer, which were not addressed to a multicast or broadcast address at this sub-layer.

## **ifInNUcastPkts**

<b>Object ID</b>	1.3.6.1.2.1.2.2.1.12
<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	The number of packets, delivered by this sub-layer to a higher sub-layer, which were addressed to a multicast or broadcast address at this sub-layer.

## **ifInDiscards**

<b>Object ID</b>	1.3.6.1.2.1.2.2.1.13
<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current

<b>Description</b>	The number of inbound packets discarded.
--------------------	--

### **ifInErrors**

<b>Object ID</b>	1.3.6.1.2.1.2.2.1.14
<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	The number of packets transmission units with errors.

### **ifOutOctets**

<b>Object ID</b>	1.3.6.1.2.1.2.2.1.16
<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	The total number of octets transmitted out of the interface.

### **ifOutUcastPkts**

<b>Object ID</b>	1.3.6.1.2.1.2.2.1.17
<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	The total number of packets that the higher-level protocols request for transmission, and the packets which are not addressed to a multicast or broadcast address at this sub-layer, including those that are discarded or not sent.

### **ifOutDiscards**

<b>Object ID</b>	1.3.6.1.2.1.2.2.1.19
<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	The number of outbound packets discarded even though no errors that prevented the transmission were detected.

## **ifOutErrors**

<b>Object ID</b>	1.3.6.1.2.1.2.2.1.20
<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	The number of outbound packets that could not be transmitted because of errors.

## **ifXTable**

The ifXTable table contains the following additional objects for the interface table.

- [ifName](#)
- [ifInMulticastPkts](#)
- [ifInBroadcastPkts](#)
- [ifOutMulticastPkts](#)
- [ifOutBroadcastPkts](#)
- [ifHCInOctets](#)
- [ifHCInUcastPkts](#)
- [ifHCInMulticastPkts](#)
- [ifHCInBroadcastPkts](#)
- [ifHCOutOctets](#)
- [ifHCOutUcastPkts](#)
- [ifHCOutMulticastPkts](#)
- [ifHCOutBroadcastPkts](#)
- [ifLinkUpDownTrapEnable](#)
- [ifPromiscuousMode](#)
- [ifConnectorPresent](#)

The following ifXTable objects are not supported:

- [ifHighSpeed](#)
- [ifAlias](#)
- [ifCounterDiscontinuityTime](#)

## **ifName**

<b>Object ID</b>	1.3.6.1.2.1.31.1.1.1.1
<b>Syntax</b>	DisplayString
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	Name of the interface

## **ifInMulticastPkts**

<b>Object ID</b>	1.3.6.1.2.1.31.1.1.1.2
<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	The number of packets, delivered by this sub-layer to a higher layer, which were addressed to a multicast or broadcast address at this sub-layer.

## **ifInBroadcastPkts**

<b>Object ID</b>	1.3.6.1.2.1.31.1.1.1.3
<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	The number of packets, delivered by this sub-layer to a higher layer, which were addressed to a multicast or broadcast address at this sub-layer

## **ifOutMulticastPkts**

<b>Object ID</b>	1.3.6.1.2.1.31.1.1.1.4
<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	The total number of packets that the higher-level protocols request for transmission, and which were addressed to a multicast or broadcast address at this sub-layer.

## **ifOutBroadcastPkts**

<b>Object ID</b>	1.3.6.1.2.1.31.1.1.1.5
<b>Syntax</b>	Counter32
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	The total number of packets that higher-level protocols requested for transmission, and the packets which were addressed to a multicast or broadcast address at this sub-layer.

## **ifHCInOctets**

<b>Object ID</b>	1.3.6.1.2.1.31.1.1.1.6
<b>Syntax</b>	Counter64
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	The total number of octets received on the interface, including framing characters. This object is a 64-bit version of ifInOctets.

## **ifHCInUcastPkts**

<b>Object ID</b>	1.3.6.1.2.1.31.1.1.1.7
<b>Syntax</b>	Counter64
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	The number of packets, delivered by this sub-layer to a higher sub-layer, which were not addressed to a multicast or broadcast address at this sub-layer.

## **ifHCInMulticastPkts**

<b>Object ID</b>	1.3.6.1.2.1.31.1.1.1.8
<b>Syntax</b>	Counter64
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	The number of packets, delivered by this sub-layer to a higher sub-layer, which were addressed to a multicast or broadcast address at this sub-layer.

## **ifHCInBroadcastPkts**

<b>Object ID</b>	1.3.6.1.2.1.31.1.1.1.9
<b>Syntax</b>	Counter64
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	The number of packets, delivered by this sub-layer to a higher sub-layer, which were addressed to a multicast or broadcast address at this sub-layer.

## **ifHCOutOctets**

<b>Object ID</b>	1.3.6.1.2.1.31.1.1.1.10
<b>Syntax</b>	Counter64
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	The total number of octets transmitted out of the interface, including framing characters.

## **ifHCOutUcastPkts**

<b>Object ID</b>	1.3.6.1.2.1.31.1.1.1.11
<b>Syntax</b>	Counter64
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	The total number of packets that higher-level protocols requested be transmitted, and which were not addressed to a multicast or broadcast address at this sub-layer, including those that were discarded or not sent.

## **ifHCOutMulticastPkts**

<b>Object ID</b>	1.3.6.1.2.1.31.1.1.1.12
<b>Syntax</b>	Counter64
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	The total number of packets that higher-level protocols requested be transmitted, and which were addressed to a multicast or broadcast address at this sub-layer, including those that were discarded or not sent.

## **ifHCOutBroadcastPkts**

<b>Object ID</b>	1.3.6.1.2.1.31.1.1.1.13
<b>Syntax</b>	Counter64
<b>Max-Access</b>	read-only
<b>Status</b>	current
<b>Description</b>	The total number of packets that higher-level protocols requested be transmitted, and which were addressed to a multicast or broadcast address at this sub-layer, including those that were discarded or not sent.

## **ifLinkUpDownTrapEnable**

<b>Object ID</b>	1.3.6.1.2.1.31.1.1.1.14
<b>Syntax</b>	Integer
<b>Max-Access</b>	read-write
<b>Status</b>	current
<b>Description</b>	Indicates whether linkUp or linkDown traps must be generated for this interface.

## **ifPromiscuousMode**

<b>Object ID</b>	1.3.6.1.2.1.31.1.1.1.16
<b>Syntax</b>	Integer
<b>Max-Access</b>	TruthValue
<b>Status</b>	current
<b>Description</b>	This object has true (1) and false(2) values.

## **ifConnectorPresent**

<b>Object ID</b>	1.3.6.1.2.1.31.1.1.1.17
<b>Syntax</b>	Integer
<b>Max-Access</b>	TruthValue
<b>Status</b>	current
<b>Description</b>	This object has True(1) value if there is any physical connector, else false (0) value.




## Traps

This module defines the traps that can be generated by the W-IAP. Traps are MIB objects (variables) that transmit information to the SNMP Manager when an event occurs. Traps are included as varbinds (variable bindings) in the trap protocol data unit (PDU). Varbinds are defined in the *Description* section below.

Figure 5 shows the architecture of the Traps MIB relative to 1.3.6.1.4.1.14823 (iso.org.dod.internet.private.enterprise.aruba). The Traps are listed in the file *aruba-trap.my* MIB file. For information about downloading Aruba MIB files, see “[Downloading MIB Files](#)” on page 23.

### Trap Hierarchy

**Figure 5** Trap Hierarchy

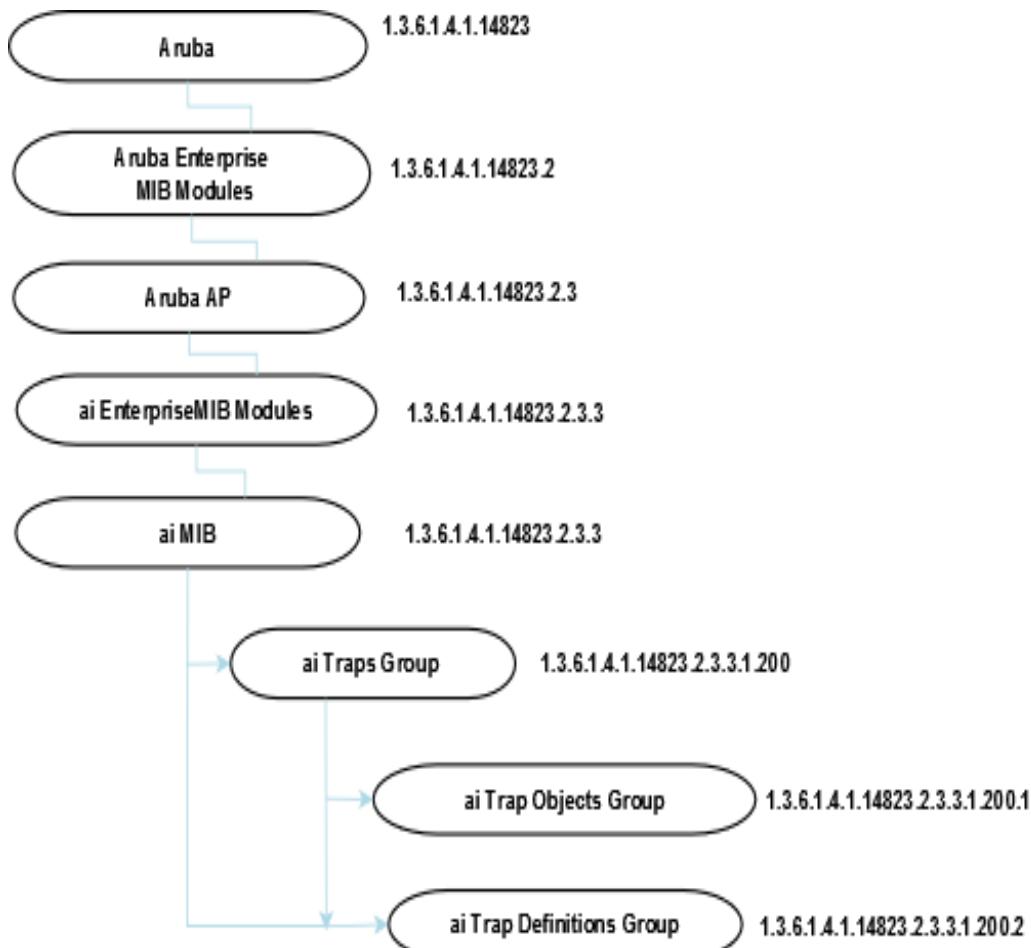

## ai Traps Objects Group

The following table lists the supported trap objects in this group:

**Table 11** *aiTraps Objects Group OIDs*

Object	Object ID	
wlsxTrapAPMacAddress	1.3.6.1.4.1.14823.2.3.3.1.200.1.1	wlsxTrapObjectsGroup 1
wlsxTrapAPIpAddress	1.3.6.1.4.1.14823.2.3.3.1.200.1.2	wlsxTrapObjectsGroup 2
wlsxTrapAPBSSID	1.3.6.1.4.1.14823.2.3.3.1.200.1.3	wlsxTrapObjectsGroup 3
wlsxTrapEssid	1.3.6.1.4.1.14823.2.3.3.1.200.1.4	wlsxTrapObjectsGroup 4
wlsxTrapTargetAPBSSID	1.3.6.1.4.1.14823.2.3.3.1.200.1.5	wlsxTrapObjectsGroup 5
wlsxTrapTargetAPSSID	1.3.6.1.4.1.14823.2.3.3.1.200.1.6	wlsxTrapObjectsGroup 6
wlsxTrapTargetAPChannel	1.3.6.1.4.1.14823.2.3.3.1.200.1.7	wlsxTrapObjectsGroup 7
wlsxTrapNodeMac	1.3.6.1.4.1.14823.2.3.3.1.200.1.8	wlsxTrapObjectsGroup 8
wlsxTrapSourceMac	1.3.6.1.4.1.14823.2.3.3.1.200.1.9	wlsxTrapObjectsGroup 9
wlsxReceiverMac	1.3.6.1.4.1.14823.2.3.3.1.200.1.10	wlsxTrapObjectsGroup 10
wlsxTrapTransmitterMac	1.3.6.1.4.1.14823.2.3.3.1.200.1.11	wlsxTrapObjectsGroup 11
wlsxTrapReceiverMac	1.3.6.1.4.1.14823.2.3.3.1.200.1.12	wlsxTrapObjectsGroup 12
wlsxTrapSnr	1.3.6.1.4.1.14823.2.3.3.1.200.1.13	wlsxTrapObjectsGroup 13
wlsxTrapSignatureName	1.3.6.1.4.1.14823.2.3.3.1.200.1.14	wlsxTrapObjectsGroup 14
wlsxTrapFrameType	1.3.6.1.4.1.14823.2.3.3.1.200.1.15	wlsxTrapObjectsGroup 15
wlsxTrapAddressType	1.3.6.1.4.1.14823.2.3.3.1.200.1.16	wlsxTrapObjectsGroup 16
wlsxTrapAPLocation	1.3.6.1.4.1.14823.2.3.3.1.200.1.17	wlsxTrapObjectsGroup 17
wlsxTrapAPChannel	1.3.6.1.4.1.14823.2.3.3.1.200.1.18	wlsxTrapObjectsGroup 18
wlsxTrapAPTxPower	1.3.6.1.4.1.14823.2.3.3.1.200.1.19	wlsxTrapObjectsGroup 19
wlsxTrapMatchedMac	1.3.6.1.4.1.14823.2.3.3.1.200.1.20	wlsxTrapObjectsGroup 20
wlsxTrapMatchedIp	1.3.6.1.4.1.14823.2.3.3.1.200.1.21	wlsxTrapObjectsGroup 21
wlsxTrapRogueIfoURL	1.3.6.1.4.1.14823.2.3.3.1.200.1.22	wlsxTrapObjectsGroup 22
wlsxTrapVlanId	1.3.6.1.4.1.14823.2.3.3.1.200.1.23	wlsxTrapObjectsGroup 23
wlsxTrapAdminStatus	1.3.6.1.4.1.14823.2.3.3.1.200.1.24	wlsxTrapObjectsGroup 24
wlsxTrapOperStatus	1.3.6.1.4.1.14823.2.3.3.1.200.1.25	wlsxTrapObjectsGroup 25
wlsxTrapAuthServerName	1.3.6.1.4.1.14823.2.3.3.1.200.1.26	wlsxTrapObjectsGroup 26

**Table 11** *aiTraps Objects Group OIDs (Continued)*

Object	Object ID	
wlsxTrapAuthServerTimeout	1.3.6.1.4.1.14823.2.3.3.1.200.1.27	wlsxTrapObjectsGroup 27
wlsxTrapCardSlot	1.3.6.1.4.1.14823.2.3.3.1.200.1.28	wlsxTrapObjectsGroup 28
wlsxTrapTemperatureValue	1.3.6.1.4.1.14823.2.3.3.1.200.1.29	wlsxTrapObjectsGroup 29
wlsxTrapProcessName	1.3.6.1.4.1.14823.2.3.3.1.200.1.30	wlsxTrapObjectsGroup 30
wlsxTrapFanNumber	1.3.6.1.4.1.14823.2.3.3.1.200.1.31	wlsxTrapObjectsGroup 31
wlsxTrapVoltageType	1.3.6.1.4.1.14823.2.3.3.1.200.1.32	wlsxTrapObjectsGroup 32
wlsxTrapVoltageValue	1.3.6.1.4.1.14823.2.3.3.1.200.1.33	wlsxTrapObjectsGroup 33
wlsxTrapStationBlackListReason	1.3.6.1.4.1.14823.2.3.3.1.200.1.34	wlsxTrapObjectsGroup 34
wlsxTrapSpoofedIpAddress	1.3.6.1.4.1.14823.2.3.3.1.200.1.35	wlsxTrapObjectsGroup 35
wlsxTrapSpoofedOldPhyAddress	1.3.6.1.4.1.14823.2.3.3.1.200.1.36	wlsxTrapObjectsGroup 36
wlsxTrapSpoofedNewPhyAddress	1.3.6.1.4.1.14823.2.3.3.1.200.1.37	wlsxTrapObjectsGroup 37
wlsxTrapDBName	1.3.6.1.4.1.14823.2.3.3.1.200.1.38	wlsxTrapObjectsGroup 38
wlsxTrapDBUserName	1.3.6.1.4.1.14823.2.3.3.1.200.1.39	wlsxTrapObjectsGroup 39
wlsxTrapDBIpAddress	1.3.6.1.4.1.14823.2.3.3.1.200.1.40	wlsxTrapObjectsGroup 40
wlsxTrapDBType	1.3.6.1.4.1.14823.2.3.3.1.200.1.41	wlsxTrapObjectsGroup 41
wlsxTrapVrrpID	1.3.6.1.4.1.14823.2.3.3.1.200.1.42	wlsxTrapObjectsGroup 42
wlsxTrapVrrpMasterIp	1.3.6.1.4.1.14823.2.3.3.1.200.1.43	wlsxTrapObjectsGroup 43
wlsxTrapVrrpOperState	1.3.6.1.4.1.14823.2.3.3.1.200.1.44	wlsxTrapObjectsGroup 44
wlsxTrapESIServerGrpName	1.3.6.1.4.1.14823.2.3.3.1.200.1.45	wlsxTrapObjectsGroup 45
wlsxTrapESIServerName	1.3.6.1.4.1.14823.2.3.3.1.200.1.46	wlsxTrapObjectsGroup 46
wlsxTrapESIServerIpAddress	1.3.6.1.4.1.14823.2.3.3.1.200.1.47	wlsxTrapObjectsGroup 47
wlsxTrapLicenseDaysRemaining	1.3.6.1.4.1.14823.2.3.3.1.200.1.48	wlsxTrapObjectsGroup 48
wlsxTrapSwitchIp	1.3.6.1.4.1.14823.2.3.3.1.200.1.49	wlsxTrapObjectsGroup 49
wlsxTrapSwitchRole	1.3.6.1.4.1.14823.2.3.3.1.200.1.50	wlsxTrapObjectsGroup 50
wlsxTrapUserIpAddress	1.3.6.1.4.1.14823.2.3.3.1.200.1.51	wlsxTrapObjectsGroup 51
wlsxTrapUserPhyAddress	1.3.6.1.4.1.14823.2.3.3.1.200.1.52	wlsxTrapObjectsGroup 52
wlsxTrapUserName	1.3.6.1.4.1.14823.2.3.3.1.200.1.53	wlsxTrapObjectsGroup 53
wlsxTrapUserRole	1.3.6.1.4.1.14823.2.3.3.1.200.1.54	wlsxTrapObjectsGroup 54

**Table 11** *aiTraps Objects Group OIDs (Continued)*

Object	Object ID	
wlsxTrapUserAuthenticationMethod	1.3.6.1.4.1.14823.2.3.3.1.200.1.55	wlsxTrapObjectsGroup 55
wlsxTrapAPRadioNumber	1.3.6.1.4.1.14823.2.3.3.1.200.1.56	wlsxTrapObjectsGroup 56
wlsxTrapRogueInfoURL	1.3.6.1.4.1.14823.2.3.3.1.200.1.57	wlsxTrapObjectsGroup 57
wlsxTrapInterferingAPIInfoURL	1.3.6.1.4.1.14823.2.3.3.1.200.1.58	wlsxTrapObjectsGroup 58
wlsxTrapPortNumber	1.3.6.1.4.1.14823.2.3.3.1.200.1.59	wlsxTrapObjectsGroup 59
wlsxTrapTime	1.3.6.1.4.1.14823.2.3.3.1.200.1.60	wlsxTrapObjectsGroup 60
wlsxTrapHostIp	1.3.6.1.4.1.14823.2.3.3.1.200.1.61	wlsxTrapObjectsGroup 61
wlsxTrapHostPort	1.3.6.1.4.1.14823.2.3.3.1.200.1.63	wlsxTrapObjectsGroup 62
wlsxTrapConfigurationId	1.3.6.1.4.1.14823.2.3.3.1.200.1.63	wlsxTrapObjectsGroup 63
wlsxTrapCTSURL	1.3.6.1.4.1.14823.2.3.3.1.200.1.64	wlsxTrapObjectsGroup 64
wlsxTrapCTSTransferType	1.3.6.1.4.1.14823.2.3.3.1.200.1.65	wlsxTrapObjectsGroup 65
wlsxTrapConfigurationState	1.3.6.1.4.1.14823.2.3.3.1.200.1.66	wlsxTrapObjectsGroup 66
wlsxTrapUpdateFailureReason	1.3.6.1.4.1.14823.2.3.3.1.200.1.67	wlsxTrapObjectsGroup 67
wlsxTrapUpdateFailedObj	1.3.6.1.4.1.14823.2.3.3.1.200.1.68	wlsxTrapObjectsGroup 68
wlsxTrapTableEntryChangeType	1.3.6.1.4.1.14823.2.3.3.1.200.1.69	wlsxTrapObjectsGroup 69
wlsxTrapGlobalConfigObj	1.3.6.1.4.1.14823.2.3.3.1.200.1.70	wlsxTrapObjectsGroup 70
wlsxTrapTableGenNumber	1.3.6.1.4.1.14823.2.3.3.1.200.1.71	wlsxTrapObjectsGroup 71
wlsxTrapLicenseId	1.3.6.1.4.1.14823.2.3.3.1.200.1.72	wlsxTrapObjectsGroup 72
wlsxTrapConfidenceLevel	1.3.6.1.4.1.14823.2.3.3.1.200.1.73	wlsxTrapObjectsGroup 73
wlsxTrapMissingLicenses	1.3.6.1.4.1.14823.2.3.3.1.200.1.74	wlsxTrapObjectsGroup 74
wlsxVoiceCurrentNumCdr	1.3.6.1.4.1.14823.2.3.3.1.200.1.75	wlsxTrapObjectsGroup 75
wlsxTrapTunnelId	1.3.6.1.4.1.14823.2.3.3.1.200.1.76	wlsxTrapObjectsGroup 76
wlsxTrapTunnelStatus	1.3.6.1.4.1.14823.2.3.3.1.200.1.77	wlsxTrapObjectsGroup 77
wlsxTrapTunnelUpReason	1.3.6.1.4.1.14823.2.3.3.1.200.1.78	wlsxTrapObjectsGroup 78
wlsxTrapTunnelDownReason	1.3.6.1.4.1.14823.2.3.3.1.200.1.79	wlsxTrapObjectsGroup 79
wlsxTrapApSerialNumber	1.3.6.1.4.1.14823.2.3.3.1.200.1.80	wlsxTrapObjectsGroup 80
wlsxTraptimeStr	1.3.6.1.4.1.14823.2.3.3.1.200.1.81	wlsxTrapObjectsGroup 81
wlsxTrapMasterIp	1.3.6.1.4.1.14823.2.3.3.1.200.1.82	wlsxTrapObjectsGroup 82

**Table 11** *aiTraps Objects Group OIDs (Continued)*

Object	Object ID	
wlsxTrapLocallp	1.3.6.1.4.1.14823.2.3.3.1.200.1.83	wlsxTrapObjectsGroup 83
wlsxTrapMasterName	1.3.6.1.4.1.14823.2.3.3.1.200.1.84	wlsxTrapObjectsGroup 84
wlsxTrapLocalName	1.3.6.1.4.1.14823.2.3.3.1.200.1.85	wlsxTrapObjectsGroup 85
wlsxTrapPrimaryControllerlp	1.3.6.1.4.1.14823.2.3.3.1.200.1.86	wlsxTrapObjectsGroup 86
wlsxTrapBackupControllerlp	1.3.6.1.4.1.14823.2.3.3.1.200.1.87	wlsxTrapObjectsGroup 87
wlsxTrapSpoofedFrameType	1.3.6.1.4.1.14823.2.3.3.1.200.1.88	wlsxTrapObjectsGroup 88
wlsxTrapAssociationType	1.3.6.1.4.1.14823.2.3.3.1.200.1.89	wlsxTrapObjectsGroup 89
wlsxTrapDevicelpAddress	1.3.6.1.4.1.14823.2.3.3.1.200.1.90	wlsxTrapObjectsGroup 90
wlsxTrapDeviceMac	1.3.6.1.4.1.14823.2.3.3.1.200.1.91	wlsxTrapObjectsGroup 91
wlsxTrapVclpAddress	1.3.6.1.4.1.14823.2.3.3.1.200.1.92	wlsxTrapObjectsGroup 92
wlsxTrapVcMacAddress	1.3.6.1.4.1.14823.2.3.3.1.200.1.93	wlsxTrapObjectsGroup 93
wlsxTrapAPName	1.3.6.1.4.1.14823.2.3.3.1.200.1.94	wlsxTrapObjectsGroup 94
wlsxTrapApMode	1.3.6.1.4.1.14823.2.3.3.1.200.1.95	wlsxTrapObjectsGroup 95
wlsxTrapAPPrevChannel	1.3.6.1.4.1.14823.2.3.3.1.200.1.96	wlsxTrapObjectsGroup 96
wlsxTrapAPPrevChannelSec	1.3.6.1.4.1.14823.2.3.3.1.200.1.97	wlsxTrapObjectsGroup 97
wlsxTrapAPPrevTxPower	1.3.6.1.4.1.14823.2.3.3.1.200.1.98	wlsxTrapObjectsGroup 98
wlsxTrapAPCurMode	1.3.6.1.4.1.14823.2.3.3.1.200.1.99	wlsxTrapObjectsGroup 99
wlsxTrapAPPrevMode	1.3.6.1.4.1.14823.2.3.3.1.200.1.100	wlsxTrapObjectsGroup 100
wlsxTrapAPARMChangeReason	1.3.6.1.4.1.14823.2.3.3.1.200.1.101	wlsxTrapObjectsGroup 101
wlsxTrapAPChannelSec	1.3.6.1.4.1.14823.2.3.3.1.200.1.102	wlsxTrapObjectsGroup 102
wlsxTrapUserAttributeChangeType	1.3.6.1.4.1.14823.2.3.3.1.200.1.103	wlsxTrapObjectsGroup 103
wlsxTrapAPControllerlp	1.3.6.1.4.1.14823.2.3.3.1.200.1.104	wlsxTrapObjectsGroup 104
wlsxTrapApMasterStatus	1.3.6.1.4.1.14823.2.3.3.1.200.1.105	wlsxTrapObjectsGroup 105
wlsxTrapCaName	1.3.6.1.4.1.14823.2.3.3.1.200.1.106	wlsxTrapObjectsGroup 106
wlsxTrapCrlName	1.3.6.1.4.1.14823.2.3.3.1.200.1.107	wlsxTrapObjectsGroup 107
wlsxTrapCount	1.3.6.1.4.1.14823.2.3.3.1.200.1.108	wlsxTrapObjectsGroup 108
wlsxTrapAPPPreviousUplinkType	1.3.6.1.4.1.14823.2.3.3.1.200.1.130	wlsxTrapObjectsGroup 130
wlsxTrapAPPPreviousUplinkActiveTime	1.3.6.1.4.1.14823.2.3.3.1.200.1.131	wlsxTrapObjectsGroup 131

**Table 11** *aiTraps Objects Group OIDs (Continued)*

Object	Object ID	
wlsxTrapAPActiveUplinkType	1.3.6.1.4.1.14823.2.3.3.1.200.1.132	wlsxTrapObjectsGroup 132
wlsxTrapAPUplinkChangeReason	1.3.6.1.4.1.14823.2.3.3.1.200.1.133	wlsxTrapObjectsGroup 133
wlsxTrapAPManagedModeConfigFailure	1.3.6.1.4.1.14823.2.3.3.1.200.1.134	wlsxTrapObjectsGroup 134

### wlsxTrapAPMacAddress

<b>Syntax</b>	MacAddress
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the wired MAC address of an access point, for which the trap is being raised.

### wlsxTrapAPIpAddress

<b>Syntax</b>	IpAddress
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the IP address of an access point for which the trap is being raised.

### wlsxTrapAPBSSID

<b>Syntax</b>	MacAddress
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the BSSID of the access point for which we are raising the trap.

### wlsxTrapEssid

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the SSID of the access point, for which the trap is being raised.

## wlsxTrapTargetAPBSSID

<b>Syntax</b>	MacAddress
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the BSSID of the access point, for which we are raising the trap. If an Air Monitor is sending the trap then this will indicate AP. If an access point is sending the trap, then it will point to itself.

## wlsxTrapTargetAPSSID

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the SSID of the access point, for which the trap is being raised. If an Air Monitor is sending the trap then this will indicate AP. If an access point is sending the trap, then it will point to itself.

## wlsxTrapTargetAPChannel

<b>Syntax</b>	Integer32
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the channel of the access point, for which the trap is being raised. If an wlsxr monitor is sending the trap then this will indicate AP. If an access point is sending the trap, then it will point to itself.

## wlsxTrapNodeMac

<b>Syntax</b>	MacAddress
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the MAC address of a node.

## wlsxTrapSourceMac

<b>Syntax</b>	MacAddress
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the MAC address of the source.

## wlsxReceiverMac

<b>Syntax</b>	MacAddress
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the MAC address of the receiver.

## wlsxTrapTransmitterMac

<b>Syntax</b>	MacAddress
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the MAC address of the transmitter.

## wlsxTrapReceiverMac

<b>Syntax</b>	MacAddress
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the MAC address of the receiver.

## wlsxTrapSnr

<b>Syntax</b>	Integer32
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the signal-to-noise ratio.

## wlsxTrapSignatureName

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the signature name.

## wlsxTrapFrameType

<b>Syntax</b>	ArubaFrameType
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the frame type.

## wlsxTrapAddressType

<b>Syntax</b>	ArubaAddressType
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the address type.

## wlsxTrapAPLocation

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the location of the AP.

## wlsxTrapAPChannel

<b>Syntax</b>	Integer32
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the current channel.

## wlsxTrapAPTxPower

<b>Syntax</b>	Integer32
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the AP transmit power.

## wlsxTrapMatchedMac

<b>Syntax</b>	MacAddress
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the MAC address.

## wlsxTrapMatchedIp

<b>Syntax</b>	IpAddress
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the IP address.

## wlsxTrapRogueInfoURL

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used to point to the WEBUI Rogue AP information URL.

## wlsxTrapVLANId

<b>Syntax</b>	Integer32
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the VLAN ID.

## wlsxTrapAdminStatus

<b>Syntax</b>	ArubaEnableValue (INTEGER)
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the admin status of VLAN.

## wlsxTrapOperStatus

<b>Syntax</b>	ArubaOperStateValue
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the admin status of VLAN.

## wlsxTrapAuthServerName

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the authentication server used for authentication.

## wlsxTrapAuthServerTimeout

<b>Syntax</b>	Integer32
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the Authentication Server Timeout.

## wlsxTrapCardSlot

<b>Syntax</b>	Integer32
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the slot in which this card is present.

## wlsxTrapTemperatureValue

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the temperature value.

## wlsxTrapProcessName

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the process name.

## wlsxTrapFanNumber

<b>Syntax</b>	Integer32
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the fan number.

## wlsxTrapVoltageType

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the type of voltage.

## wlsxTrapVoltageValue

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the voltage value in float.

## wlsxTrapStationBlackListReason

<b>Syntax</b>	ArubaBlackListReason
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	The reason for which a station is black listed.

## wlsxTrapSpoofedIpAddress

<b>Syntax</b>	IpAddress
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in a trap to identify a spoofed IP address.

## wlsxTrapSpoofedOldPhyAddress

<b>Syntax</b>	MacAddress
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in a trap to identify an old MAC address.

## wlsxTrapSpoofedNewPhyAddress

<b>Syntax</b>	MacAddress
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in a trap to identify a new MAC address.

## wlsxTrapDBName

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in a trap to identify the name of the database.

## wlsxTrapDBUserName

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in a trap to identify the name of the database user.

## wlsxTrapDBIpAddress

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in a trap to identify the IP address of the database.

## wlsxTrapDbType

<b>Syntax</b>	ArubaDbType
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in a trap to identify the port of the user.

## wlsxTrapVrrpID

<b>Syntax</b>	Integer32
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object contains the virtual router identifier.

## wlsxTrapVrrpMasterIp

<b>Syntax</b>	IpAddress
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object contains the master IP address.

## wlsxTrapVrrpOperState

<b>Syntax</b>	ArubaVrrpState
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the VRRP operational state.

## wlsxTrapESIServerGrpName

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the External Services Interface (ESI) server group name.

## wlsxTrapESIServerName

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the External Services Interface (ESI) server name.

## wlsxTrapESIServerIpAddress

<b>Syntax</b>	IpAddress
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the External Services Interface (ESI) server IP address.

## wlsxTrapLicenseDaysRemaining

<b>Syntax</b>	Integer32
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the number of days remaining prior to a license expiry.

## wlsxTrapSwitchIp

<b>Syntax</b>	IpAddress
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the controller IP address.

## wlsxTrapSwitchRole

<b>Syntax</b>	ArubaSwitchRole
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the role of the controller.

## wlsxTrapUserIpAddress

<b>Syntax</b>	IpAddress
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the IP address of the user.

## wlsxTrapUserPhyAddress

<b>Syntax</b>	MacAddress
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the MAC address of the user.

## wlsxTrapUserName

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the user name.

## wlsxTrapUserRole

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the Authentication method of the user.

## wlsxTrapUserAuthenticationMethod

<b>Syntax</b>	ArubaAuthenticationMethods
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the Authentication method of the user.

## wlsxTrapAPRadioNumber

<b>Syntax</b>	Integer32
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the radio number.

## wlsxTrapRogueInfoURL

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used to point to the WEBGUI Rogue AP information URL.

## wlsxTrapInterferingAPInfoURL

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used to point to the WEBGUI Rogue interfering access point information URL.

## wlsxTrapPortNumber

<b>Syntax</b>	Integer32
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the port number.

## wlsxTrapTime

<b>Syntax</b>	DateAndTime
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in all the enterprise traps to indicate the time when the trap is generated on the controller.

## wlsxTrapHostIp

<b>Syntax</b>	IpAddress
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the trap host.

## wlsxTrapHostPort

<b>Syntax</b>	Integer32
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the trap host port.

## wlsxTrapConfigurationId

<b>Syntax</b>	Integer32
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the ID of the configuration, to be used in traps.

## wlsxTrapCTSURL

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the URL from which the transfer should happen.

## wlsxTrapCTSTransferType

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the transfer type, upload or download.

## wlsxTrapConfigurationState

<b>Syntax</b>	ArubaConfigurationState (INTEGER)
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the state of the configuration transfer.

## wlsxTrapUpdateFailureReason

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the reason for the update failure.

## wlsxTrapUpdateFailedObj

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This variable represents the AMAPI object which is the reason for the update failure.
<b>History</b>	Added in ArubaOS 3.1.0.0.

## wlsxTrapTableEntryChangeType

<b>Syntax</b>	ArubaConfigurationChangeType (INTEGER)
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the type of the configuration change.

## wlsxTrapGlobalConfigObj

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This variable represents the AMAPI object corresponding to the global configuration change.

## wlsxTrapTableGenNumber

<b>Syntax</b>	Integer32
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the generation number of a table. Used in the MMS to keep track of the table content changes.

## wlsxTrapLicenseId

<b>Syntax</b>	Integer32
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the license ID.

## wlsxTrapConfidenceLevel

<b>Syntax</b>	Integer32
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the confidence level as a percentage.

## wlsxTrapMissingLicenses

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This variable indicates any licenses that are not present during a configuration update.

## wlsxVoiceCurrentNumCdr

<b>Syntax</b>	Integer32
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the number of CDRs in buffer.
<b>History</b>	Added in ArubaOS 3.1.0.0.

## wlsxTrapTunnelId

<b>Syntax</b>	Integer32
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the tunnel ID.

## wlsxTrapTunnelStatus

<b>Syntax</b>	Integer32
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the tunnel status.

## wlsxTrapTunnelUpReason

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the tunnel up reason.

## wlsxTrapTunnelDownReason

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the tunnel down reason.

## wlsxTrapApSerialNumber

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the AP serial number.

## wlsxTraptimeTypeStr

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the Time in String format.

## wlsxTrapMasterIp

<b>Syntax</b>	IpAddress
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the master IP address.

## wlsxTrapLocalIp

<b>Syntax</b>	IpAddress
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the local IP address.

## wlsxTrapMasterName

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the master controller name.
<b>History</b>	Added in ArubaOS 3.4.1

## wlsxTrapLocalName

<b>Syntax</b>	DisplayString(Size(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the local controller name.

## wlsxTrapPrimaryControllerIp

<b>Syntax</b>	IpAddress
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the IP address of the AP's primary controller.

## wlsxTrapBackupControllerIp

<b>Syntax</b>	IpAddress
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the IP address of the AP's backup controller.

## wlsxTrapSpoofedFrameType

<b>Syntax</b>	DisplayString (SIZE(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the Spoofed Frame Type

## wlsxTrapAssociationType

<b>Syntax</b>	DisplayString (SIZE(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the type of association.

## wlsxTrapDeviceIpAddress

<b>Syntax</b>	IpAddress
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the IP address of a device seen by an AP.

## wlsxTrapDeviceMac

<b>Syntax</b>	MacAddress
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the MAC address of a device seen by an AP.

## wlsxTrapVclpAddress

<b>Syntax</b>	IpAddress
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the IP Address of a Voice client.

## wlsxTrapVcMacAddress

<b>Syntax</b>	MacAddress
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the MAC address of a Voice client.

## wlsxTrapAPName

<b>Syntax</b>	DisplayString (SIZE(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the Name of the AP.

## wlsxTrapApMode

<b>Syntax</b>	Integer32
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This Object represents the AP Mode.

## wlsxTrapAPPrecChannel

<b>Syntax</b>	Integer32
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the Previous Channel.

## wlsxTrapAPPrecChannelSec

<b>Syntax</b>	ArubaHTEExtChannel (INTEGER)
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the Previous Secondary Channel.

## wlsxTrapAPPrecTxPower

<b>Syntax</b>	Integer32
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate previous AP Transmit Power.

## wlsxTrapAPCurMode

<b>Syntax</b>	ArubaAccessPointMode (INTEGER)
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This Object represents the APs Current Mode.

## wlsxTrapAPPrecMode

<b>Syntax</b>	ArubaAccessPointMode (INTEGER)
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This Object represents the APs Previous Mode.

## wlsxTrapAPARMChangeReason

<b>Syntax</b>	ArubaARMChangeReason (INTEGER)
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This Object represents the APs Previous Mode.

## wlsxTrapAPChannelSec

<b>Syntax</b>	ArubaHTExtChannel (INTEGER)
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the Current Secondary Channel.

## wlsxTrapUserAttributeChangeType

<b>Syntax</b>	ArubaConfigurationChangeType (INTEGER)
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents type of the configuration change.

## wlsxTrapAPControllerIp

<b>Syntax</b>	IpAddress
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	IP address of the controller to which the AP is (or was most recently) registered.

## wlsxTrapApMasterStatus

<b>Syntax</b>	ArubaAPMasterStatus (INTEGER)
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	Status of the AP as seen by the master when the status changes.

## wlsxTrapCaName

<b>Syntax</b>	DisplayString (SIZE(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the name of the trustpoint.

## wlsxTrapCrlName

<b>Syntax</b>	DisplayString (SIZE(0..64))
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object is used in the traps to indicate the name of the CRL.

## wlsxTrapCount

<b>Syntax</b>	Integer32
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the number of occurrence of this trap.

## wlsxTrapAPPPreviousUplinkType

<b>Syntax</b>	ArubaAPUplinkType
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the previous uplink type of an AP.

## wlsxTrapAPPPreviousUplinkActiveTime

<b>Syntax</b>	TimeTicks
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the active time of the previous uplink of an AP.

## wlsxTrapAPActiveUplinkType

<b>Syntax</b>	ArubaAPUplinkType
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the active uplink type of an AP.

## wlsxTrapAPUplinkChangeReason

<b>Syntax</b>	ArubaAPUplinkChangeReason
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object represents the uplink change reason.

## wlsxTrapAPManagedModeConfigFailure

<b>Syntax</b>	DisplayString (SIZE(0..64)
<b>Max-Access</b>	accessible-for-notify
<b>Status</b>	current
<b>Description</b>	This object indicates that the configuration application has failed on the AP.

## ai Traps Definitions Group

**Table 12** *ai Traps Definitions Group OIDs*

Object	Object ID	
wlsxNUserEntryCreated	1.3.6.1.4.1.14823.2.3.3.1.200.2.1014	wlsxTrapDefinitionsGroup 1014
wlsxNUserEntryDeleted	1.3.6.1.4.1.14823.2.3.3.1.200.2.1015	wlsxTrapDefinitionsGroup 1015
wlsxNUserEntryAuthenticated	1.3.6.1.4.1.14823.2.3.3.1.200.2.1016	wlsxTrapDefinitionsGroup 1016
wlsxNUserEntryDeAuthenticated	1.3.6.1.4.1.14823.2.3.3.1.200.2.1017	wlsxTrapDefinitionsGroup 1017
wlsxNUserAuthenticationFailed	1.3.6.1.4.1.14823.2.3.3.1.200.2.1018	wlsxTrapDefinitionsGroup 1018
wlsxNAuthServerReqTimedOut	1.3.6.1.4.1.14823.2.3.3.1.200.2.1019	wlsxTrapDefinitionsGroup 1019
wlsxNAuthServerTimedOut	1.3.6.1.4.1.14823.2.3.3.1.200.2.1020	wlsxTrapDefinitionsGroup 1020
wlsxNAuthServerIsUp	1.3.6.1.4.1.14823.2.3.3.1.200.2.1021	wlsxTrapDefinitionsGroup 1021
wlsxNAccessPointIsUp	1.3.6.1.4.1.14823.2.3.3.1.200.2.1040	wlsxTrapDefinitionsGroup 1040
wlsxNAccessPointIsDown	1.3.6.1.4.1.14823.2.3.3.1.200.2.1041	wlsxTrapDefinitionsGroup 1041
wlsxNChannelChanged	1.3.6.1.4.1.14823.2.3.3.1.200.2.1043	wlsxTrapDefinitionsGroup 1043
wlsxNStationAddedToBlackList	1.3.6.1.4.1.14823.2.3.3.1.200.2.1044	wlsxTrapDefinitionsGroup 1044
wlsxNStationRemovedFromBlackList	1.3.6.1.4.1.14823.2.3.3.1.200.2.1045	wlsxTrapDefinitionsGroup 1045
wlsxNRadioAttributesChanged	1.3.6.1.4.1.14823.2.3.3.1.200.2.1049	wlsxTrapDefinitionsGroup 1049
wlsxUnsecureAPDetected	1.3.6.1.4.1.14823.2.3.3.1.200.2.1053	wlsxTrapDefinitionsGroup 1053
wlsxUnsecureAPResolved	1.3.6.1.4.1.14823.2.3.3.1.200.2.1054	wlsxTrapDefinitionsGroup 1054
wlsxStalImpersonation	1.3.6.1.4.1.14823.2.3.3.1.200.2.1055	wlsxTrapDefinitionsGroup 1055
wlsxReservedChannelViolation	1.3.6.1.4.1.14823.2.3.3.1.200.2.1056	wlsxTrapDefinitionsGroup 1056

**Table 12** *ai Traps Definitions Group OIDs (Continued)*

Object	Object ID	
wlsxValidSSIDViolation	1.3.6.1.4.1.14823.2.3.3.1.200.2.1057	wlsxTrapDefinitionsGroup 1057
wlsxChannelMisconfiguration	1.3.6.1.4.1.14823.2.3.3.1.200.2.1058	wlsxTrapDefinitionsGroup 1058
wlsxOUIMisconfiguration	1.3.6.1.4.1.14823.2.3.3.1.200.2.1059	wlsxTrapDefinitionsGroup 1059
wlsxSSIDMisconfiguration	1.3.6.1.4.1.14823.2.3.3.1.200.2.1060	wlsxTrapDefinitionsGroup 1060
wlsxShortPreambleMisconfiguration	1.3.6.1.4.1.14823.2.3.3.1.200.2.1061	wlsxTrapDefinitionsGroup 1061
wlsxWPAMisconfiguration	1.3.6.1.4.1.14823.2.3.3.1.200.2.1062	wlsxTrapDefinitionsGroup 1062
wlsxAdhocNetworkDetected	1.3.6.1.4.1.14823.2.3.3.1.200.2.1063	wlsxTrapDefinitionsGroup 1063
wlsxAdhocNetworkRemoved	1.3.6.1.4.1.14823.2.3.3.1.200.2.1064	wlsxTrapDefinitionsGroup 1064
wlsxStaPolicyViolation	1.3.6.1.4.1.14823.2.3.3.1.200.2.1065	wlsxTrapDefinitionsGroup 1065
wlsxRepeatWEPIVViolation	1.3.6.1.4.1.14823.2.3.3.1.200.2.1066	wlsxTrapDefinitionsGroup 1066
wlsxWeakWEPIVViolation	1.3.6.1.4.1.14823.2.3.3.1.200.2.1067	wlsxTrapDefinitionsGroup 1067
wlsxChannelInterferenceDetected	1.3.6.1.4.1.14823.2.3.3.1.200.2.1068	wlsxTrapDefinitionsGroup 1068
wlsxChannelInterferenceCleared	1.3.6.1.4.1.14823.2.3.3.1.200.2.1069	wlsxTrapDefinitionsGroup 1069
wlsxAPIInterferenceDetected	1.3.6.1.4.1.14823.2.3.3.1.200.2.1070	wlsxTrapDefinitionsGroup 1070
wlsxAPIInterferenceCleared	1.3.6.1.4.1.14823.2.3.3.1.200.2.1071	wlsxTrapDefinitionsGroup 1071
wlsxStalInterferenceDetected	1.3.6.1.4.1.14823.2.3.3.1.200.2.1072	wlsxTrapDefinitionsGroup 1072
wlsxStalInterferenceCleared	1.3.6.1.4.1.14823.2.3.3.1.200.2.1073	wlsxTrapDefinitionsGroup 1073
wlsxFrameRetryRateExceeded	1.3.6.1.4.1.14823.2.3.3.1.200.2.1074	wlsxTrapDefinitionsGroup 1074

**Table 12** *ai Traps Definitions Group OIDs (Continued)*

Object	Object ID	
wlsxFrameReceiveErrorRateExceeded	1.3.6.1.4.1.14823.2.3.3.1.200.2.1075	wlsxTrapDefinitionsGroup 1075
wlsxFrameFragmentationRateExceeded	1.3.6.1.4.1.14823.2.3.3.1.200.2.1076	wlsxTrapDefinitionsGroup 1076
wlsxFrameBandWidthRateExceeded	1.3.6.1.4.1.14823.2.3.3.1.200.2.1077	wlsxTrapDefinitionsGroup 1077
wlsxFrameLowSpeedRateExceeded	1.3.6.1.4.1.14823.2.3.3.1.200.2.1078	wlsxTrapDefinitionsGroup 1078
wlsxFrameNonUnicastRateExceeded	1.3.6.1.4.1.14823.2.3.3.1.200.2.1079	wlsxTrapDefinitionsGroup 1079
wlsxLoadbalancingEnabled	1.3.6.1.4.1.14823.2.3.3.1.200.2.1080	wlsxTrapDefinitionsGroup 1080
wlsxLoadbalancingDisabled	1.3.6.1.4.1.14823.2.3.3.1.200.2.1081	wlsxTrapDefinitionsGroup 1081
wlsxChannelFrameRetryRateExceeded	1.3.6.1.4.1.14823.2.3.3.1.200.2.1082	wlsxTrapDefinitionsGroup 1082
wlsxChannelFrameFragmentationRateExceeded	1.3.6.1.4.1.14823.2.3.3.1.200.2.1083	wlsxTrapDefinitionsGroup 1083
wlsxChannelFrameErrorRateExceeded	1.3.6.1.4.1.14823.2.3.3.1.200.2.1084	wlsxTrapDefinitionsGroup 1084
wlsxSignatureMatchAP	1.3.6.1.4.1.14823.2.3.3.1.200.2.1085	wlsxTrapDefinitionsGroup 1085
wlsxSignatureMatchSta	1.3.6.1.4.1.14823.2.3.3.1.200.2.1086	wlsxTrapDefinitionsGroup 1086
wlsxChannelRateAnomaly	1.3.6.1.4.1.14823.2.3.3.1.200.2.1087	wlsxTrapDefinitionsGroup 1087
wlsxNodeRateAnomaly	1.3.6.1.4.1.14823.2.3.3.1.200.2.1003	wlsxTrapDefinitionsGroup 1003
wlsxNodeRateAnomalyAP	1.3.6.1.4.1.14823.2.3.3.1.200.2.1088	wlsxTrapDefinitionsGroup 1088
wlsxNodeRateAnomalySta	1.3.6.1.4.1.14823.2.3.3.1.200.2.1089	wlsxTrapDefinitionsGroup 1089
wlsxEAPRateAnomaly	1.3.6.1.4.1.14823.2.3.3.1.200.2.1090	wlsxTrapDefinitionsGroup 1090
wlsxSignalAnomaly	1.3.6.1.4.1.14823.2.3.3.1.200.2.1091	wlsxTrapDefinitionsGroup 1091

**Table 12** *ai Traps Definitions Group OIDs (Continued)*

Object	Object ID	
wlsxSequenceNumberAnomalyAP	1.3.6.1.4.1.14823.2.3.3.1.200.2.1092	wlsxTrapDefinitionsGroup 1092
wlsxSequenceNumberAnomalySta	1.3.6.1.4.1.14823.2.3.3.1.200.2.1093	wlsxTrapDefinitionsGroup 1093
wlsxDisconnectStationAttack	1.3.6.1.4.1.14823.2.3.3.1.200.2.1094	wlsxTrapDefinitionsGroup 1094
wlsxApFloodAttack	1.3.6.1.4.1.14823.2.3.3.1.200.2.1095	wlsxTrapDefinitionsGroup 1095
wlsxAdhocNetwork	1.3.6.1.4.1.14823.2.3.3.1.200.2.1096	wlsxTrapDefinitionsGroup 1096
wlsxWirelessBridge	1.3.6.1.4.1.14823.2.3.3.1.200.2.1097	wlsxTrapDefinitionsGroup 1097
wlsxInvalidMacOUIAP	1.3.6.1.4.1.14823.2.3.3.1.200.2.1098	wlsxTrapDefinitionsGroup 1098
wlsxInvalidMacOUISta	1.3.6.1.4.1.14823.2.3.3.1.200.2.1099	wlsxTrapDefinitionsGroup 1099
wlsxWEPMisconfiguration	1.3.6.1.4.1.14823.2.3.3.1.200.2.1100	wlsxTrapDefinitionsGroup 1100
wlsxStaRepeatWEPIVVViolation	1.3.6.1.4.1.14823.2.3.3.1.200.2.1101	wlsxTrapDefinitionsGroup 1101
wlsxStaWeakWEPIVVViolation	1.3.6.1.4.1.14823.2.3.3.1.200.2.1102	wlsxTrapDefinitionsGroup 1102
wlsxStaAssociatedToUnsecureAP	1.3.6.1.4.1.14823.2.3.3.1.200.2.1103	wlsxTrapDefinitionsGroup 1103
wlsxStaUnAssociatedFromUnsecureAP	1.3.6.1.4.1.14823.2.3.3.1.200.2.1104	wlsxTrapDefinitionsGroup 1104
wlsxAdhocNetworkBridgeDetected	1.3.6.1.4.1.14823.2.3.3.1.200.2.1105	wlsxTrapDefinitionsGroup 1105
wlsxInterferingApDetected	1.3.6.1.4.1.14823.2.3.3.1.200.2.1106	wlsxTrapDefinitionsGroup 1106
wlsxColdStart	1.3.6.1.4.1.14823.2.3.3.1.200.2.1111	wlsxTrapDefinitionsGroup 1111
wlsxWarmStart	1.3.6.1.4.1.14823.2.3.3.1.200.2.1112	wlsxTrapDefinitionsGroup 1112
wlsxAPIImpersonation	1.3.6.1.4.1.14823.2.3.3.1.200.2.1113	wlsxTrapDefinitionsGroup 1113

**Table 12** *ai Traps Definitions Group OIDs (Continued)*

Object	Object ID	
wlsxNAuthServerIsDown	1.3.6.1.4.1.14823.2.3.3.1.200.2.1115	wlsxTrapDefinitionsGroup 1115
wlsxWindowsBridgeDetected	1.3.6.1.4.1.14823.2.3.3.1.200.2.1129	wlsxTrapDefinitionsGroup 1129
wlsxSignAPNetstumbler	1.3.6.1.4.1.14823.2.3.3.1.200.2.1134	wlsxTrapDefinitionsGroup 1134
wlsxSignStaNetstumbler	1.3.6.1.4.1.14823.2.3.3.1.200.2.1135	wlsxTrapDefinitionsGroup 1135
wlsxSignAPASleap	1.3.6.1.4.1.14823.2.3.3.1.200.2.1136	wlsxTrapDefinitionsGroup 1136
wlsxSignStaAsleep	1.3.6.1.4.1.14823.2.3.3.1.200.2.1137	wlsxTrapDefinitionsGroup 1137
wlsxSignAPAirjack	1.3.6.1.4.1.14823.2.3.3.1.200.2.1138	wlsxTrapDefinitionsGroup 1138
wlsxSignStaAirjack	1.3.6.1.4.1.14823.2.3.3.1.200.2.1139	wlsxTrapDefinitionsGroup 1139
wlsxSignAPNullProbeResp	1.3.6.1.4.1.14823.2.3.3.1.200.2.1140	wlsxTrapDefinitionsGroup 1140
wlsxSignStaNullProbeResp	1.3.6.1.4.1.14823.2.3.3.1.200.2.1141	wlsxTrapDefinitionsGroup 1141
wlsxSignAPDeauthBcast	1.3.6.1.4.1.14823.2.3.3.1.200.2.1142	wlsxTrapDefinitionsGroup 1142
wlsxSignStaDeauthBcast	1.3.6.1.4.1.14823.2.3.3.1.200.2.1143	wlsxTrapDefinitionsGroup 1143
wlsxWindowsBridgeDetectedAP	1.3.6.1.4.1.14823.2.3.3.1.200.2.1144	wlsxTrapDefinitionsGroup 1144
wlsxWindowsBridgeDetectedSta	1.3.6.1.4.1.14823.2.3.3.1.200.2.1145	wlsxTrapDefinitionsGroup 1145
wlsxAdhocNetworkBridgeDetectedAP	1.3.6.1.4.1.14823.2.3.3.1.200.2.1146	wlsxTrapDefinitionsGroup 1146
wlsxAdhocNetworkBridgeDetectedSta	1.3.6.1.4.1.14823.2.3.3.1.200.2.1147	wlsxTrapDefinitionsGroup 1147
wlsxDisconnectStationAttackAP	1.3.6.1.4.1.14823.2.3.3.1.200.2.1148	wlsxTrapDefinitionsGroup 1148
wlsxDisconnectStationAttackSta	1.3.6.1.4.1.14823.2.3.3.1.200.2.1149	wlsxTrapDefinitionsGroup 1149

**Table 12** *ai Traps Definitions Group OIDs (Continued)*

Object	Object ID	
wlsxSuspectUnsecureAPDetected	1.3.6.1.4.1.14823.2.3.3.1.200.2.1150	wlsxTrapDefinitionsGroup 1150
wlsxSuspectUnsecureAPResolved	1.3.6.1.4.1.14823.2.3.3.1.200.2.1151	wlsxTrapDefinitionsGroup 1151
wlsxHtGreenfieldSupported	1.3.6.1.4.1.14823.2.3.3.1.200.2.1157	wlsxTrapDefinitionsGroup 1157
wlsxHT40MHzIntoleranceAP	1.3.6.1.4.1.14823.2.3.3.1.200.2.1158	wlsxTrapDefinitionsGroup 1158
wlsxHT40MHzIntoleranceSta	1.3.6.1.4.1.14823.2.3.3.1.200.2.1159	wlsxTrapDefinitionsGroup 1159
wlsxNAdhocNetwork	1.3.6.1.4.1.14823.2.3.3.1.200.2.1161	wlsxTrapDefinitionsGroup 1161
wlsxNAdhocNetworkBridgeDetectedAP	1.3.6.1.4.1.14823.2.3.3.1.200.2.1162	wlsxTrapDefinitionsGroup 1162
wlsxNAdhocNetworkBridgeDetectedSta	1.3.6.1.4.1.14823.2.3.3.1.200.2.1163	wlsxTrapDefinitionsGroup 1163
wlsxClientFloodAttack	1.3.6.1.4.1.14823.2.3.3.1.200.2.1170	wlsxTrapDefinitionsGroup 1170
wlsxValidClientNotUsingEncryption	1.3.6.1.4.1.14823.2.3.3.1.200.2.1171	wlsxTrapDefinitionsGroup 1171
wlsxAdhocUsingValidSSID	1.3.6.1.4.1.14823.2.3.3.1.200.2.1172	wlsxTrapDefinitionsGroup 1172
wlsxAPSpoofingDetected	1.3.6.1.4.1.14823.2.3.3.1.200.2.1173	wlsxTrapDefinitionsGroup 1173
wlsxClientAssociatingOnWrongChannel	1.3.6.1.4.1.14823.2.3.3.1.200.2.1174	wlsxTrapDefinitionsGroup 1174
wlsxNDisconnectStationAttack	1.3.6.1.4.1.14823.2.3.3.1.200.2.1175	wlsxTrapDefinitionsGroup 1175
wlsxNStaUnAssociatedFromUnsecureAP	1.3.6.1.4.1.14823.2.3.3.1.200.2.1176	wlsxTrapDefinitionsGroup 1176
wlsxOmertaAttack	1.3.6.1.4.1.14823.2.3.3.1.200.2.1177	wlsxTrapDefinitionsGroup 1177
wlsxTKIPReplayAttack	1.3.6.1.4.1.14823.2.3.3.1.200.2.1178	wlsxTrapDefinitionsGroup 1178
wlsxChopChopAttack	1.3.6.1.4.1.14823.2.3.3.1.200.2.1179	wlsxTrapDefinitionsGroup 1179

**Table 12** *ai Traps Definitions Group OIDs (Continued)*

Object	Object ID	
wlsxFataJackAttack	1.3.6.1.4.1.14823.2.3.3.1.200.2.1180	wlsxTrapDefinitionsGroup 1180
wlsxInvalidAddressCombination	1.3.6.1.4.1.14823.2.3.3.1.200.2.1181	wlsxTrapDefinitionsGroup 1181
wlsxValidClientMisassociation	1.3.6.1.4.1.14823.2.3.3.1.200.2.1182	wlsxTrapDefinitionsGroup 1182
wlsxMalformedHTIEDetected	1.3.6.1.4.1.14823.2.3.3.1.200.2.1183	wlsxTrapDefinitionsGroup 1183
wlsxMalformedAssocReqDetected	1.3.6.1.4.1.14823.2.3.3.1.200.2.1184	wlsxTrapDefinitionsGroup 1184
wlsxOverflowIEDetected	1.3.6.1.4.1.14823.2.3.3.1.200.2.1185	wlsxTrapDefinitionsGroup 1185
wlsxOverflowEAPOLKeyDetected	1.3.6.1.4.1.14823.2.3.3.1.200.2.1186	wlsxTrapDefinitionsGroup 1186
wlsxMalformedFrameLargeDurationDetected	1.3.6.1.4.1.14823.2.3.3.1.200.2.1187	wlsxTrapDefinitionsGroup 1187
wlsxMalformedFrameWrongChannelDetected	1.3.6.1.4.1.14823.2.3.3.1.200.2.1188	wlsxTrapDefinitionsGroup 1188
wlsxMalformedAuthFrame	1.3.6.1.4.1.14823.2.3.3.1.200.2.1189	wlsxTrapDefinitionsGroup 1189
wlsxCTSRateAnomaly	1.3.6.1.4.1.14823.2.3.3.1.200.2.1190	wlsxTrapDefinitionsGroup 1190
wlsxRTSRateAnomaly	1.3.6.1.4.1.14823.2.3.3.1.200.2.1191	wlsxTrapDefinitionsGroup 1191
wlsxNRogueAPDetected	1.3.6.1.4.1.14823.2.3.3.1.200.2.1192	wlsxTrapDefinitionsGroup 1192
wlsxNRogueAPResolved	1.3.6.1.4.1.14823.2.3.3.1.200.2.1193	wlsxTrapDefinitionsGroup 1193
wlsxNeighborAPDetected	1.3.6.1.4.1.14823.2.3.3.1.200.2.1194	wlsxTrapDefinitionsGroup 1194
wlsxNInterferingAPDetected	1.3.6.1.4.1.14823.2.3.3.1.200.2.1195	wlsxTrapDefinitionsGroup 1195
wlsxNSuspectRogueAPDetected	1.3.6.1.4.1.14823.2.3.3.1.200.2.1196	wlsxTrapDefinitionsGroup 1196
wlsxNSuspectRogueAPResolved	1.3.6.1.4.1.14823.2.3.3.1.200.2.1197	wlsxTrapDefinitionsGroup 1197

**Table 12** *ai Traps Definitions Group OIDs (Continued)*

Object	Object ID	
wlsxBlockAckAttackDetected	1.3.6.1.4.1.14823.2.3.3.1.200.2.1198	wlsxTrapDefinitionsGroup 1198
wlsxHotspotterAttackDetected	1.3.6.1.4.1.14823.2.3.3.1.200.2.1199	wlsxTrapDefinitionsGroup 1199
wlsxNSignatureMatch	1.3.6.1.4.1.14823.2.3.3.1.200.2.1200	wlsxTrapDefinitionsGroup 1200
wlsxNSignatureMatchNetstumbler	1.3.6.1.4.1.14823.2.3.3.1.200.2.1201	wlsxTrapDefinitionsGroup 1201
wlsxNSignatureMatchAsleap	1.3.6.1.4.1.14823.2.3.3.1.200.2.1202	wlsxTrapDefinitionsGroup 1202
wlsxNSignatureMatchAirjack	1.3.6.1.4.1.14823.2.3.3.1.200.2.1203	wlsxTrapDefinitionsGroup 1203
wlsxNSignatureMatchNullProbeResp	1.3.6.1.4.1.14823.2.3.3.1.200.2.1204	wlsxTrapDefinitionsGroup 1204
wlsxNSignatureMatchDeauthBcast	1.3.6.1.4.1.14823.2.3.3.1.200.2.1205	wlsxTrapDefinitionsGroup 1205
wlsxNSignatureMatchDisassocBcast	1.3.6.1.4.1.14823.2.3.3.1.200.2.1206	wlsxTrapDefinitionsGroup 1206
wlsxNSignatureMatchWellenreiter	1.3.6.1.4.1.14823.2.3.3.1.200.2.1207	wlsxTrapDefinitionsGroup 1207
wlsxAPDeauthContainment	1.3.6.1.4.1.14823.2.3.3.1.200.2.1208	wlsxTrapDefinitionsGroup 1208
wlsxClientDeauthContainment	1.3.6.1.4.1.14823.2.3.3.1.200.2.1209	wlsxTrapDefinitionsGroup 1209
wlsxAPWiredContainment	1.3.6.1.4.1.14823.2.3.3.1.200.2.1210	wlsxTrapDefinitionsGroup 1210
wlsxClientWiredContainment	1.3.6.1.4.1.14823.2.3.3.1.200.2.1211	wlsxTrapDefinitionsGroup 1211
wlsxAPTaggedWiredContainment	1.3.6.1.4.1.14823.2.3.3.1.200.2.1212	wlsxTrapDefinitionsGroup 1212
wlsxClientTaggedWiredContainment	1.3.6.1.4.1.14823.2.3.3.1.200.2.1213	wlsxTrapDefinitionsGroup 1213
wlsxTarpitContainment	1.3.6.1.4.1.14823.2.3.3.1.200.2.1214	wlsxTrapDefinitionsGroup 1214
wlsxAPChannelChange	1.3.6.1.4.1.14823.2.3.3.1.200.2.1216	wlsxTrapDefinitionsGroup 1216

**Table 12** *ai Traps Definitions Group OIDs (Continued)*

Object	Object ID	
wlsxAPPowerChange	1.3.6.1.4.1.14823.2.3.3.1.200.2.1217	wlsxTrapDefinitionsGroup 1217
wlsxAPModeChange	1.3.6.1.4.1.14823.2.3.3.1.200.2.1218	wlsxTrapDefinitionsGroup 1218
wlsxUserEntryAttributesChanged	1.3.6.1.4.1.14823.2.3.3.1.200.2.1219	wlsxTrapDefinitionsGroup 1219
wlsxPowerSaveDosAttack	1.3.6.1.4.1.14823.2.3.3.1.200.2.1220	wlsxTrapDefinitionsGroup 1220
wlsxNAPMasterStatusChange	1.3.6.1.4.1.14823.2.3.3.1.200.2.1221	wlsxTrapDefinitionsGroup 1221
wlsxNAdhocUsingValidSSID	1.3.6.1.4.1.14823.2.3.3.1.200.2.1222	wlsxTrapDefinitionsGroup 1222
wlsxMgmtUserAuthenticationFailed	1.3.6.1.4.1.14823.2.3.3.1.200.2.1224	wlsxTrapDefinitionsGroup 1224

### **wlsxNUserEntryCreated**

<b>Objects</b>	wlsxTrapTime, wlsxTrapUserIpAddress, wlsxTrapUserPhyAddress
<b>Status</b>	current
<b>Description</b>	This trap indicates that a new user was created.

## wlsxNUserEntryDeleted

<b>Objects</b>	wlsxTrapTime, wlsxTrapUserIpAddress, wlsxTrapUserPhyAddress
<b>Status</b>	current
<b>Description</b>	This trap indicates that a user was deleted.

## wlsxNUserEntryAuthenticated

<b>Objects</b>	wlsxTrapTime, wlsxTrapUserIpAddress, wlsxTrapUserPhyAddress, wlsxTrapUserName, wlsxTrapUserAuthenticatio Method, wlsxTrapUserRole
<b>Status</b>	current
<b>Description</b>	This trap indicates that a user is Authenticated.

## wlsxNUserEntryDeAuthenticated

<b>Objects</b>	wlsxTrapTime, wlsxTrapUserIpAddress, wlsxTrapUserPhyAddress
<b>Status</b>	current
<b>Description</b>	This trap indicates that a user is Deauthenticated.

## wlsxNUserAuthenticationFailed

<b>Objects</b>	wlsxTrapTime, wlsxTrapUserIpAddress, wlsxTrapUserPhyAddress
<b>Status</b>	current
<b>Description</b>	This trap indicates that a user authentication has failed.

## wlsxNAuthServerReqTimedOut

<b>Objects</b>	wlsxTrapTime, wlsxTrapAuthServerName
<b>Status</b>	current
<b>Description</b>	This trap indicates that the authentication server request timed out.

## wlsxNAuthServerTimedOut

<b>Objects</b>	wlsxTrapTime, wlsxTrapAuthServerName, wlsxTrapAuthServerTimeout
<b>Status</b>	current
<b>Description</b>	This trap indicates that the authentication server timed out.

## wlsxNAuthServerIsUp

<b>Objects</b>	wlsxTrapTime, wlsxTrapAuthServerName
<b>Status</b>	current
<b>Description</b>	This trap indicates that an authentication server is up.

## wlsxNAccessPointIsUp

<b>Objects</b>	wlsxTrapTime, wlsxTrapAPMacAddress
<b>Status</b>	current
<b>Description</b>	A Trap which indicates that an access point up.

## wlsxNAccessPointIsDown

<b>Objects</b>	wlsxTrapTime, wlsxTrapAPMacAddress
<b>Status</b>	current
<b>Description</b>	A Trap which indicates that an access point down.

## wlsxNChannelChanged

<b>Objects</b>	wlsxTrapTime, wlsxTrapAPBSSID, wlsxTrapAPLocation, wlsxTrapAPChannel
<b>Status</b>	current
<b>Description</b>	This trap indicates that an access point at Location wlsxTrapAPLocation has changed the channel.

## wlsxNStationAddedToBlackList

<b>Objects</b>	wlsxTrapTime, wlsxTrapNodeMac, wlsxTrapStationBlackListReason
<b>Status</b>	current
<b>Description</b>	This trap indicates that the station is black listed.

## wlsxNStationRemovedFromBlackList

<b>Objects</b>	wlsxTrapTime, wlsxTrapNodeMac
<b>Status</b>	current
<b>Description</b>	This trap indicates that the station is removed from the black list. the frame type.

## wlsxNRadioAttributesChanged

<b>Objects</b>	{wlsxTrapTime, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPIpAddress, wlsxTrapAPChannel, wlsxTrapAPTxPower }
<b>Status</b>	current
<b>Description</b>	A Trap which indicates changes in the Radio attributes of an access point.

## wlsxUnsecureAPDetected

<b>Objects</b>	{wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel, wlsxTrapMatchedMac, wlsxTrapMatchedIp, wlsxTrapRogueInfoURL}
<b>Status</b>	current
<b>Description</b>	This trap indicates that an unauthorized access point is connected to the wired network. The access point is declared Rogue because it was matched to a MAC address.

## wlsxUnsecureAPResolved

<b>Objects</b>	{wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	This trap indicates that a previously detected access point, classified as Rogue, is no longer present in the network.

## wlsxStalImpersonation

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapNodeMac, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AM detected Station Impersonation.

## wlsxReservedChannelViolation

<b>Objects</b>	{wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AM detected an access point which is violating the Reserved Channel configuration.

## wlsxValidSSIDViolation

<b>Objects</b>	{wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP has detected an access point is violating Valid SSID configuration by using an SSID that is reserved for use by a valid AP only.

## wlsxChannelMisconfiguration

<b>Objects</b>	{wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected an access point that has a channel misconfiguration because it is using a channel that is not valid.

## wlsxOUIMisconfiguration

<b>Objects</b>	{wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected an access point that has an OUI misconfiguration because it is using an OUI that is not valid.

## wlsxSSIDMisconfiguration

<b>Objects</b>	{wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected an access point that has an SSID misconfiguration because it is using an SSID that is not valid.

## wlsxShortPreambleMisconfiguration

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an access point has bad short preamble configuration.

## wlsxWPAMisconfiguration

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected an access point that is misconfigured because it is not using WPA.

## wlsxAdhocNetworkDetected

<b>Objects</b>	{wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AM has detected an adhoc network.

## wlsxAdhocNetworkRemoved

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	This trap indicates that a previously detected adhoc network is no longer present in the network.

## wlsxStaPolicyViolation

<b>Objects</b>	{wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapNodeMac, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	This trap indicates that Protection was enforced because a valid station's association to a non-valid access point violated Valid Station policy. For more information check <a href="http://www.wve.org/entries/show/WVE-2005-0008">http://www.wve.org/entries/show/WVE-2005-0008</a> and <a href="http://www.wve.org/entries/show/WVE-2005-0019">http://www.wve.org/entries/show/WVE-2005-0019</a> .

## wlsxRepeatWEPIVViolation

<b>Objects</b>	{wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected that a valid access point is using the same WEP initialization vector in consecutive packets.

## wlsxWeakWEPIVViolation

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel}
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected that a valid access point is using a Weak WEP initialization vector. For more information check <a href="http://www.wve.org/entries/show/WVE-2005-0021">http://www.wve.org/entries/show/WVE-2005-0021</a>

## wlsxChannelInterferenceDetected

<b>Objects</b>	{wlsxTrapTime, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation,wlsxTrapAPChannel}
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP has detected channel interference.

## wlsxChannelInterferenceCleared

<b>Objects</b>	{wlsxTrapTime, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel}
<b>Status</b>	current
<b>Description</b>	This trap indicates that a previously detected channel interference is no longer present.

## wlsxAPIInterferenceDetected

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP has detected interference for an access point.

## wlsxAPIInterferenceCleared

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	This trap indicates that the previously detected interference for an access point is no longer present.

## wlsxStaInterferenceDetected

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapNodeMac, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP has detected interference for a station.

## wlsxStaInterferenceCleared

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapNodeMac, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	This trap indicates that the previously detected interference for a station is no longer present.

## wlsxFrameRetryRateExceeded

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected that an access point has exceeded the configured upper threshold for Frame Retry Rate.

## wlsxFrameReceiveErrorRateExceeded

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapTargetAPChannel, wlsxTrapAPLocation }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected that an access point has exceeded the configured upper threshold for Frame Receive Error Rate.

## wlsxFrameFragmentationRateExceeded

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapTargetAPChannel, wlsxTrapAPLocation }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected that an access point exceeded the configured upper threshold for Frame Fragmentation Rate.

## wlsxFrameBandWidthRateExceeded

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapNodeMac, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected that a station or access point has exceeded the configured upper threshold for Bandwidth rate.

## wlsxFrameLowSpeedRateExceeded

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapNodeMac, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel}
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected that a station has exceeded the configured upper threshold for Low speed rate.

## wlsxFrameNonUnicastRateExceeded

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapNodeMac, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel}
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected that station has exceeded the configured upper threshold for Non Unicast traffic rate.

## wlsxLoadbalancingEnabled

<b>Objects</b>	{wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AM is reporting that an AP has enabled Load balancing.

## wlsxLoadbalancingDisabled

<b>Objects</b>	{wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AM is reporting that an AP has disabled Load balancing.

## wlsxChannelFrameRetryRateExceeded

<b>Objects</b>	{wlsxTrapTime, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel}
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP has detected that the configured upper threshold for Frame Retry Rate was exceeded on a channel.

## wlsxChannelFrameFragmentationRateExceeded

<b>Objects</b>	{wlsxTrapTime, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel}
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP has detected that the configured upper threshold for Frame Fragmentation Rate was exceeded on a channel.

## wlsxChannelFrameErrorRateExceeded

<b>Objects</b>	{wlsxTrapTime, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel}
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP has detected that the configured upper threshold for Frame Receive Error Rate was exceeded on a channel.

## wlsxSignatureMatchAP

<b>Objects</b>	{wlsxTrapTime, wlsxTrapSignatureName, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation}
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected a signature match in a frame from an access point.

## wlsxSignatureMatchSta

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapSignatureName, wlsxTrapSourceMac, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected a signature match in a frame from a Station.

## wlsxChannelRateAnomaly

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapFrameType, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	<p>This trap indicates that an AP detected frames on a channel which exceed the configured IDS rate threshold.</p> <p>For more information check:</p> <p><a href="http://www.wve.org/entries/show/WVE-2005-0052">http://www.wve.org/entries/show/WVE-2005-0052</a></p> <p><a href="http://www.wve.org/entries/show/WVE-2005-0045">http://www.wve.org/entries/show/WVE-2005-0045</a></p> <p><a href="http://www.wve.org/entries/show/WVE-2005-0046">http://www.wve.org/entries/show/WVE-2005-0046</a></p> <p><a href="http://www.wve.org/entries/show/WVE-2005-0047">http://www.wve.org/entries/show/WVE-2005-0047</a></p> <p><a href="http://www.wve.org/entries/show/WVE-2005-0048">http://www.wve.org/entries/show/WVE-2005-0048</a></p>

## wlsxNodeRateAnomaly

<b>Objects</b>	wlsxTrapTime, wlsxTrapFrameType, wlsxTrapNodeMac, wlsxTrapSnr, wlsxTrapAPBSSID, wlsxTrapAPLocation
<b>Status</b>	current
<b>Description</b>	This trap indicates that a node is exceeding the threshold set for the frame type.

## wlsxNodeRateAnomalyAP

<b>Objects</b>	{wlsxTrapTime, wlsxTrapFrameType, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation}
<b>Status</b>	current
<b>Description</b>	<p>This trap indicates that an AP detected frames transmitted or received by an access point, which exceed the configured IDS rate threshold.</p> <p>For more information check:</p> <p><a href="http://www.wve.org/entries/show/WVE-2005-0052">http://www.wve.org/entries/show/WVE-2005-0052</a></p> <p><a href="http://www.wve.org/entries/show/WVE-2005-0045">http://www.wve.org/entries/show/WVE-2005-0045</a></p> <p><a href="http://www.wve.org/entries/show/WVE-2005-0046">http://www.wve.org/entries/show/WVE-2005-0046</a></p> <p><a href="http://www.wve.org/entries/show/WVE-2005-0047">http://www.wve.org/entries/show/WVE-2005-0047</a></p> <p><a href="http://www.wve.org/entries/show/WVE-2005-0048">http://www.wve.org/entries/show/WVE-2005-0048</a></p>

## wlsxNodeRateAnomalySta

<b>Objects</b>	{wlsxTrapTime, wlsxTrapFrameType, wlsxTrapNodeMac, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation}
<b>Status</b>	current
<b>Description</b>	<p>This trap indicates that an AP detected frames transmitted or received by a node, which exceed the configured IDS rate threshold.</p>

## wlsxEAPRateAnomaly

<b>Objects</b>	{wlsxTrapTime, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel}
<b>Status</b>	current
<b>Description</b>	<p>This trap indicates that the rate of EAP Handshake packets received by an AP has exceeded the configured IDS EAP Handshake rate threshold.</p> <p>For more information check <a href="http://www.wve.org/entries/show/WVE-2005-0049">http://www.wve.org/entries/show/WVE-2005-0049</a></p>

## wlsxSignalAnomaly

<b>Objects</b>	{wlsxTrapTime, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	<p>This trap indicates that an AM detected a Signal Anomaly.</p>

## wlsxSequenceNumberAnomalyAP

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation }
<b>Status</b>	current
<b>Description</b>	<p>This trap indicates that an AM received packets from an AP which exceeds the acceptable sequence number difference. The acceptable sequence number difference is an IDS configuration object.</p> <p>For more information check:</p> <p><a href="http://www.wve.org/entries/show/WVE-2005-0061">http://www.wve.org/entries/show/WVE-2005-0061</a> <a href="http://www.wve.org/entries/show/WVE-2005-0019">http://www.wve.org/entries/show/WVE-2005-0019</a> <a href="http://www.wve.org/entries/show/WVE-2005-0008">http://www.wve.org/entries/show/WVE-2005-0008</a> <a href="http://www.wve.org/entries/show/WVE-2005-0045">http://www.wve.org/entries/show/WVE-2005-0045</a> <a href="http://www.wve.org/entries/show/WVE-2005-0046">http://www.wve.org/entries/show/WVE-2005-0046</a> <a href="http://www.wve.org/entries/show/WVE-2005-0047">http://www.wve.org/entries/show/WVE-2005-0047</a> <a href="http://www.wve.org/entries/show/WVE-2005-0048">http://www.wve.org/entries/show/WVE-2005-0048</a></p>

## wlsxSequenceNumberAnomalySta

<b>Objects</b>	wlsxTrapTime, wlsxTrapSourceMac, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation
<b>Status</b>	current
<b>Description</b>	<p>This trap indicates that an AM received packets from a Node which exceeds the acceptable sequence number difference. The acceptable sequence number difference is an IDS configuration object.</p> <p>For more information check</p> <p><a href="http://www.wve.org/entries/show/WVE-2005-0061">http://www.wve.org/entries/show/WVE-2005-0061</a> <a href="http://www.wve.org/entries/show/WVE-2005-0019">http://www.wve.org/entries/show/WVE-2005-0019</a> <a href="http://www.wve.org/entries/show/WVE-2005-0008">http://www.wve.org/entries/show/WVE-2005-0008</a> <a href="http://www.wve.org/entries/show/WVE-2005-0045">http://www.wve.org/entries/show/WVE-2005-0045</a> <a href="http://www.wve.org/entries/show/WVE-2005-0046">http://www.wve.org/entries/show/WVE-2005-0046</a> <a href="http://www.wve.org/entries/show/WVE-2005-0047">http://www.wve.org/entries/show/WVE-2005-0047</a> <a href="http://www.wve.org/entries/show/WVE-2005-0048">http://www.wve.org/entries/show/WVE-2005-0048</a></p>

## wlsxDisconnectStationAttack

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapFrameType, wlsxTrapSourceMac, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation}
<b>Status</b>	current
<b>Description</b>	<p>This trap indicates that an AM detected a station Disconnect attack.</p> <p>For more information check:</p> <p><a href="http://www.wve.org/entries/show/WVE-2005-0045">http://www.wve.org/entries/show/WVE-2005-0045</a> <a href="http://www.wve.org/entries/show/WVE-2005-0046">http://www.wve.org/entries/show/WVE-2005-0046</a> <a href="http://www.wve.org/entries/show/WVE-2005-0048">http://www.wve.org/entries/show/WVE-2005-0048</a></p>

## wlsxApFloodAttack

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation}
<b>Status</b>	current
<b>Description</b>	<p>This trap indicates that the number of potential fake APs detected by an AP has exceeded the configured IDS threshold. This is the total number of fake APs observed across all bands.</p> <p>For more information check <a href="http://www.wve.org/entries/show/WVE-2005-0056">http://www.wve.org/entries/show/WVE-2005-0056</a></p>

## wlsxAdhocNetwork

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapSourceMac, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation }
<b>Status</b>	current
<b>Description</b>	<p>This trap indicates that an AM detected an Adhoc Network. A station is connected to an adhoc AP.</p>

## wlsxWirelessBridge

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapTransmitterMac, wlsxTrapReceiverMac, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation}
<b>Status</b>	current
<b>Description</b>	<p>This trap indicates that an AP detected a Wireless Bridge when a WDS frame was seen between the transmitter and receiver addresses.</p>

## wlsxInvalidMacOUIAP

<b>Objects</b>	{wlsxTrapTime, wlsxTrapAddressType, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation}
<b>Status</b>	current
<b>Description</b>	<p>This trap indicates that an AP detected an invalid MAC OUI in the BSSID of a frame. An invalid MAC OUI suggests that the frame may be spoofed.</p>

## wlsxInvalidMacOUISta

<b>Objects</b>	{wlsxTrapTime, wlsxTrapAddressType, wlsxTrapNodeMac, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation}
<b>Status</b>	current
<b>Description</b>	<p>This trap indicates that an AP detected an invalid MAC OUI in the SRC or DST address of a frame. An invalid MAC OUI suggests that the frame may be spoofed.</p>

## wlsxWEPMisconfiguration

<b>Objects</b>	{wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel}
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected an access point that is misconfigured because it does not have Privacy enabled.

## wlsxStaRepeatWEPIVViolation

<b>Objects</b>	{wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapNodeMac, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel}
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected that a valid station is using the same WEP initialization vector in consecutive packets.

## wlsxStaWeakWEPIVViolation

<b>Objects</b>	{wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapNodeMac, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel}
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected that a valid station is using a Weak WEP initialization vector.

## wlsxStaAssociatedToUnsecureAP

<b>Objects</b>	{wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapNodeMac, wlsxTrapAPLocation, wlsxTrapAPChannel, wlsxTrapRogueInfoURL}
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AM detected a client associated with a Rogue access point.

## wlsxStaUnAssociatedFromUnsecureAP

<b>Objects</b>	{wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapNodeMac}
<b>Status</b>	current
<b>Description</b>	This trap indicates that a previously detected rogue access point association is no longer present.

## wlsxAdhocNetworkBridgeDetected

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapSourceMac, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AM has detected an Adhoc network that is bridging to a wired network.

## wlsxInterferingApDetected

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel, wlsxTrapInterferingAPIInfoURL }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected an access point classified as Interfering. The access point is declared Interfering because it is neither authorized nor classified as Rogue.

## wlsxColdStart

<b>Objects</b>	wlsxTrapTime
<b>Status</b>	current
<b>Description</b>	An enterprise version of cold start trap, which contains the controller time stamp.

## wlsxWarmStart

<b>Objects</b>	wlsxTrapTime
<b>Status</b>	current
<b>Description</b>	An enterprise version of warm start trap, which contains the controller time stamp.

## wlsxAPImpersonation

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected AP Impersonation because the number of beacons seen has exceeded the expected number by the configured percentage threshold. The expected number is calculated based on the Beacon Interval Field in the Beacon frame.

## wlsxNAuthServerIsDown

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapAuthServerName }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an authentication server is down.

## wlsxWindowsBridgeDetected

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapSourceMac, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AM has detected a station that is bridging from a wireless network to a wired network.

## wlsxSignAPNetstumbler

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapSignatureName, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected a signature match for Netstumbler from an access point. For more information check <a href="http://www.wve.org/entries/show/WVE-2005-0025">http://www.wve.org/entries/show/WVE-2005-0025</a>

## wlsxSignStaNetstumbler

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapSignatureName, wlsxTrapSourceMac, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected a signature match for Netstumbler from a Station. For more information check <a href="http://www.wve.org/entries/show/WVE-2005-0025">http://www.wve.org/entries/show/WVE-2005-0025</a> .

## wlsxSignAPAsleap

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapSignatureName, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected a signature match for ASLEAP from an access point. For more information check <a href="http://www.wve.org/entries/show/WVE-2005-0027">http://www.wve.org/entries/show/WVE-2005-0027</a>

## wlsxSignStaAsleap

<b>Objects</b>	{wlsxTrapTime, wlsxTrapSignatureName, wlsxTrapSourceMac, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation}
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected a signature match for ASLEAP from a Station. For more information check <a href="http://www.wve.org/entries/show/WVE-2005-0027">http://www.wve.org/entries/show/WVE-2005-0027</a>

## wlsxSignAPAirjack

<b>Objects</b>	{wlsxTrapTime, wlsxTrapSignatureName, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected a signature match for AirJack from an access point. For more information check <a href="http://www.wve.org/entries/show/WVE-2005-0018">http://www.wve.org/entries/show/WVE-2005-0018</a>

## wlsxSignStaAirjack

<b>Objects</b>	{wlsxTrapTime, wlsxTrapSignatureName, wlsxTrapSourceMac, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation}
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected a signature match for AirJack from a Station. For more information check <a href="http://www.wve.org/entries/show/WVE-2005-0018">http://www.wve.org/entries/show/WVE-2005-0018</a>

## wlsxSignAPNullProbeResp

<b>Objects</b>	{wlsxTrapTime, wlsxTrapSignatureName, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation}
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected a signature match for Null-Probe-Response from an access point. For more information check <a href="http://www.wve.org/entries/show/WVE-2006-0064">http://www.wve.org/entries/show/WVE-2006-0064</a>

## wlsxSignStaNullProbeResp

<b>Objects</b>	{wlsxTrapTime, wlsxTrapSignatureName, wlsxTrapSourceMac, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation}
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected a signature match for Null-Probe-Response from a Station. For more information check <a href="http://www.wve.org/entries/show/WVE-2006-0064">http://www.wve.org/entries/show/WVE-2006-0064</a>

## wlsxSignAPDeauthBcast

<b>Objects</b>	{wlsxTrapTime, wlsxTrapSignatureName, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation}
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected a signature match for Deauth-Broadcast from an access point. For more information check: <a href="http://www.wve.org/entries/show/WVE-2005-0019">http://www.wve.org/entries/show/WVE-2005-0019</a> <a href="http://www.wve.org/entries/show/WVE-2005-0045">http://www.wve.org/entries/show/WVE-2005-0045</a>

## wlsxSignStaDeauthBcast

<b>Objects</b>	{wlsxTrapTime, wlsxTrapSignatureName, wlsxTrapSourceMac, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation}
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected a signature match for Deauth-Broadcast from a Station. For more information check: <a href="http://www.wve.org/entries/show/WVE-2005-0019">http://www.wve.org/entries/show/WVE-2005-0019</a> <a href="http://www.wve.org/entries/show/WVE-2005-0045">http://www.wve.org/entries/show/WVE-2005-0045</a>

## wlsxWindowsBridgeDetectedAP

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP is detecting an access point that is bridging from a wireless network to a wired network.

## wlsxWindowsBridgeDetectedSta

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapSourceMac, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP is detecting a station that is bridging from a wireless network to a wired network.

## wlsxAdhocNetworkBridgeDetectedAP

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AM has detected an adhoc network that is bridging to a wired network

## wlsxAdhocNetworkBridgeDetectedSta

<b>Objects</b>	wlsxTrapTime, wlsxTrapSourceMac, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AM has detected an adhoc network that is bridging to a wired network

## wlsxDisconnectStationAttackAP

<b>Objects</b>	{wlsxTrapTime, wlsxTrapFrameType, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation}
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AM detected a station Disconnect attack. For more information check: <a href="http://www.wve.org/entries/show/WVE-2005-0045">http://www.wve.org/entries/show/WVE-2005-0045</a> <a href="http://www.wve.org/entries/show/WVE-2005-0046">http://www.wve.org/entries/show/WVE-2005-0046</a> <a href="http://www.wve.org/entries/show/WVE-2005-0048">http://www.wve.org/entries/show/WVE-2005-0048</a>

## wlsxDisconnectStationAttackSta

<b>Objects</b>	wlsxTrapTime, wlsxTrapFrameType, wlsxTrapSourceMac, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AM detected a station Disconnect attack. For more information check: <a href="http://www.wve.org/entries/show/WVE-2005-0045">http://www.wve.org/entries/show/WVE-2005-0045</a> <a href="http://www.wve.org/entries/show/WVE-2005-0046">http://www.wve.org/entries/show/WVE-2005-0046</a> <a href="http://www.wve.org/entries/show/WVE-2005-0048">http://www.wve.org/entries/show/WVE-2005-0048</a>

## wlsxSuspectUnsecureAPDetected

<b>Objects</b>	{wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPRadioNumber, wlsxTrapMatchedMac, wlsxTrapMatchedIp, wlsxTrapConfidenceLevel, wlsxTrapAPLocation, wlsxTrapRogueInfoURL}
<b>Status</b>	current
<b>Description</b>	This trap indicates that an access point, classified as Suspected Rogue, has been detected by a Controller. The AP is suspected to be rogue, with the supplied confidence level, because it was matched to the wired MAC address.

## wlsxSuspectUnsecureAPResolved

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPRadioNumber
<b>Status</b>	current
<b>Description</b>	This trap indicates that a previously detected access point, classified Suspected Rogue, is either no longer present in the network or has changed its state.

## wlsxHtGreenfieldSupported

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected an access point that supports HT Greenfield mode. For more information check <a href="http://www.wve.org/entries/show/WVE-2008-0005">http://www.wve.org/entries/show/WVE-2008-0005</a>

## wlsxHT40MHzIntoleranceAP

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP is detecting an access point with the HT 40MHz intolerance setting. For more information check <a href="http://www.wve.org/entries/show/WVE-2008-0004">http://www.wve.org/entries/show/WVE-2008-0004</a>

## wlsxHT40MHzIntoleranceSta

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapSourceMac, wlsxTrapSnr, wlsxTrapAPChannel, wlsxTrapFrameType, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation }
<b>Status</b>	current
<b>Description</b>	This trap indicates that the system is detecting an HT 40MHz Intolerance setting from a Station. For more information check <a href="http://www.wve.org/entries/show/WVE-2008-0004">http://www.wve.org/entries/show/WVE-2008-0004</a>

## wlsxNAdhocNetwork

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapSourceMac, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected an adhoc network where a station is connected to an adhoc access point.

## wlsxNAdhocNetworkBridgeDetectedAP

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected an adhoc network that is bridging to a wired network.

## wlsxNAdhocNetworkBridgeDetectedSta

<b>Objects</b>	{ wlsxTrapTime, wlsxTrapSourceMac, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel }
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected an adhoc network that is bridging to a wired network.

## wlsxClientFloodAttack

<b>Objects</b>	wlsxTrapTime, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation
<b>Status</b>	current
<b>Description</b>	This trap indicates that the number of potential fake clients detected by an AP has exceeded the configured IDS threshold. This is the total number of fake clients observed across all bands. For more information check <a href="http://www.wve.org/entries/show/WVE-2005-0056">http://www.wve.org/entries/show/WVE-2005-0056</a>

## wlsxValidClientNotUsingEncryption

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapSourceMac, wlsxTrapReceiverMac, wlsxTrapNodeMac, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected an unencrypted data frame between a valid client and an access point.

## wlsxAdhocUsingValidSSID

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected an adhoc network using a valid/protected SSID. For more information check <a href="http://www.wve.org/entries/show/WVE-2005-0008">http://www.wve.org/entries/show/WVE-2005-0008</a>

## wlsxAPSpoofingDetected

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapSourceMac, wlsxTrapReceiverMac, wlsxTrapSpoofedFrameType, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected that one of its virtual APs is being spoofed using MAC spoofing. For more information check <a href="http://www.wve.org/entries/show/WVE-2005-0019">http://www.wve.org/entries/show/WVE-2005-0019</a>

## wlsxClientAssociatingOnWrongChannel

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapSourceMac, wlsxTrapReceiverMac, wlsxTrapSpoofedFrameType, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected a client trying to associate to one of its BSSIDs on the wrong channel. This can be a sign that the BSSID is being spoofed in order to fool the client into thinking the AP is operating on another channel.

## wlsxNDisconnectStationAttack

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapSourceMac, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel
<b>Status</b>	current
<b>Description</b>	<p>This trap indicates that an AP has determined that a client is under Disconnect Attack because the rate of Assoc/Reassoc Response packets received by that client exceeds the configured threshold.</p> <p>For more information check:</p> <p><a href="http://www.wve.org/entries/show/WVE-2005-0045">http://www.wve.org/entries/show/WVE-2005-0045</a></p> <p><a href="http://www.wve.org/entries/show/WVE-2005-0046">http://www.wve.org/entries/show/WVE-2005-0046</a></p> <p><a href="http://www.wve.org/entries/show/WVE-2005-0048">http://www.wve.org/entries/show/WVE-2005-0048</a></p>

## wlsxNStaUnAssociatedFromUnsecureAP

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapNodeMac, wlsxTrapAPLocation, wlsxTrapAPChannel
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP that had previously detected a client association to a Rogue access point is no longer detecting that association.

## wlsxOmertaAttack

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapNodeMac, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel
<b>Status</b>	current
<b>Description</b>	<p>This trap indicates that an AP detected an Omerta attack.</p> <p>For more information check <a href="http://www.wve.org/entries/show/WVE-2005-0053">http://www.wve.org/entries/show/WVE-2005-0053</a></p>

## wlsxTKIPReplayAttack

<b>Objects</b>	wlsxTrapTime, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapSourceMac, wlsxTrapReceiverMac, wlsxTrapTargetAPBSSID, wlsxTrapAPChannel, wlsxTrapSnr
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected a TKIP replay attack. If successful this could be the precursor to more advanced attacks. For more information check <a href="http://www.wve.org/entries/show/WVE-2008-0013">http://www.wve.org/entries/show/WVE-2008-0013</a>

## wlsxChopChopAttack

<b>Objects</b>	wlsxTrapTime, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapSourceMac, wlsxTrapReceiverMac, wlsxTrapTargetAPBSSID, wlsxTrapAPChannel, wlsxTrapSnr
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected a ChopChop attack. For more information check <a href="http://www.wve.org/entries/show/WVE-2006-0038">http://www.wve.org/entries/show/WVE-2006-0038</a>

## wlsxFataJackAttack

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapNodeMac, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected a FATA-Jack attack. For more information check <a href="http://www.wve.org/entries/show/WVE-2006-0057">http://www.wve.org/entries/show/WVE-2006-0057</a>

## wlsxInvalidAddressCombination

<b>Objects</b>	wlsxTrapTime, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapSourceMac, wlsxTrapReceiverMac, wlsxTrapAPChannel, wlsxTrapSnr
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected an invalid source and destination combination. For more information check <a href="http://www.wve.org/entries/show/WVE-2008-0011">http://www.wve.org/entries/show/WVE-2008-0011</a>

## wlsxValidClientMisassociation

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapNodeMac, wlsxTrapAssociationType, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected a misassociation between a valid client and an unsafe AP.

## wlsxMalformedHTIEDetected

<b>Objects</b>	wlsxTrapTime, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapSourceMac, wlsxTrapReceiverMac, wlsxTrapTargetAPBSSID, wlsxTrapAPChannel, wlsxTrapSnr
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected a malformed HT Information Element. This can be the result of a misbehaving wireless driver or it may be an indication of a new wireless attack.

## wlsxMalformedAssocReqDetected

<b>Objects</b>	wlsxTrapTime, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapSourceMac, wlsxTrapReceiverMac, wlsxTrapTargetAPBSSID, wlsxTrapAPChannel, wlsxTrapSnr
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected a malformed association request with a NULL SSID. For more information check <a href="http://www.wve.org/entries/show/WVE-2008-0010">http://www.wve.org/entries/show/WVE-2008-0010</a>

## wlsxOverflowIEDetected

<b>Objects</b>	wlsxTrapTime, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapSourceMac, wlsxTrapReceiverMac, wlsxTrapTargetAPBSSID, wlsxTrapAPChannel, wlsxTrapSnr
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected a management frame with a malformed information element. The declared length of the element is larger than the entire frame containing the element. This may be used to corrupt or crash wireless drivers. For more information check <a href="http://www.wve.org/entries/show/WVE-2008-0008">http://www.wve.org/entries/show/WVE-2008-0008</a>

## wlsxOverflowEAPOLKeyDetected

<b>Objects</b>	wlsxTrapTime, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapSourceMac, wlsxTrapReceiverMac, wlsxTrapTargetAPBSSID, wlsxTrapAPChannel, wlsxTrapSnr
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected a key in an EAPOL Key message with a specified length greater than the length of the entire message. For more information check <a href="http://www.wve.org/entries/show/WVE-2008-0009">http://www.wve.org/entries/show/WVE-2008-0009</a>

## wlsxMalformedFrameLargeDurationDetected

<b>Objects</b>	wlsxTrapTime, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapSourceMac, wlsxTrapAPChannel, wlsxTrapSnr
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected an unusually large duration in a wireless frame. This may be an attempt to block other devices from transmitting. For more information check <a href="http://www.wve.org/entries/show/WVE-2005-0051">http://www.wve.org/entries/show/WVE-2005-0051</a>

## wlsxMalformedFrameWrongChannelDetected

<b>Objects</b>	wlsxTrapTime, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapSourceMac, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapTargetAPChannel, wlsxTrapAPChannel, wlsxTrapSnr
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected a beacon on one channel advertising another channel. This could be an attempt to lure clients away from a valid AP. For more information check <a href="http://www.wve.org/entries/show/WVE-2006-0050">http://www.wve.org/entries/show/WVE-2006-0050</a>

## wlsxMalformedAuthFrame

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapNodeMac, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected an authentication frame with either a bad algorithm (similar to Fata-Jack) or a bad transaction. For more information check <a href="http://www.wve.org/entries/show/WVE-2006-0057">http://www.wve.org/entries/show/WVE-2006-0057</a>

## wlsxCTSRateAnomaly

<b>Objects</b>	wlsxTrapTime, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel
<b>Status</b>	current
<b>Description</b>	This trap indicates that the rate of CTS packets received by an AP exceeds the configured IDS threshold.

## wlsxRTSRateAnomaly

<b>Objects</b>	wlsxTrapTime, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel
<b>Status</b>	current
<b>Description</b>	This trap indicates that the rate of RTS packets received by an AP exceeds the configured IDS threshold.

## wlsxNRogueAPDetected

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPChannel
<b>Status</b>	current
<b>Description</b>	This trap indicates that an unauthorized access point is connected to the wired network. The access point is classified as Rogue by the system.

## wlsxNROgueAPResolved

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPChannel
<b>Status</b>	current
<b>Description</b>	This trap indicates that a previously detected access point, classified as Rogue, is either no longer present in the network or it changed its state.

## wlsxNeighborAPDetected

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPChannel
<b>Status</b>	current
<b>Description</b>	This trap indicates that an access point has been classified as a Neighbor by the system.

## wlsxNIInterferingAPDetected

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPChannel
<b>Status</b>	current
<b>Description</b>	This trap indicates that an access point has been classified as Interfering by the system. The access point is declared Interfering because it is not authorized, nor has it been classified as a rogue.

## wlsxNSuspectRogueAPDetected

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPChannel, wlsxTrapConfidenceLevel
<b>Status</b>	current
<b>Description</b>	This trap indicates that an access point, classified as suspected rogue, is detected by the system. The AP is suspected to be rogue with the supplied confidence level.

## wlsxNSuspectRogueAPResolved

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapAPChannel
<b>Status</b>	current
<b>Description</b>	This trap indicates that a previously detected access point, classified as suspected rogue, is either no longer present in the network or has changed its state.

## wlsxBlockAckAttackDetected

<b>Objects</b>	wlsxTrapTime, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapSourceMac, wlsxTrapReceiverMac, wlsxTrapTargetAPBSSID, wlsxTrapAPChannel, wlsxTrapSnr
<b>Status</b>	current
<b>Description</b>	This trap indicates that an attempt has been made to deny service to the source address by spoofing a block ACK add request that sets a sequence number window outside the currently used window. For more information check <a href="http://www.wve.org/entries/show/WVE-2008-0006">http://www.wve.org/entries/show/WVE-2008-0006</a>

## wlsxHotspotterAttackDetected

<b>Objects</b>	wlsxTrapTime, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapNodeMac, wlsxTrapSourceMac, wlsxTrapTargetAPBSSID, wlsxTrapAPChannel, wlsxTrapSnr, wlsxTrapTargetAPSSID
<b>Status</b>	current
<b>Description</b>	This trap indicates that a new AP has appeared immediately following a client probe request. This is indicative of the Hotspotter tool or similar that attempts to trap clients with a fake hotspot or other wireless network. For more information check <a href="http://www.wve.org/entries/show/WVE-2005-0054">http://www.wve.org/entries/show/WVE-2005-0054</a>

## wlsxNSignatureMatch

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTransmitterMac, wlsxTrapReceiverMac, wlsxTrapSignatureName, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected a signature match in a frame.

## wlsxNSignatureMatchNetstumbler

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTransmitterMac, wlsxTrapReceiverMac, wlsxTrapSignatureName, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected a signature match for Netstumbler in a frame. For more information check <a href="http://www.wve.org/entries/show/WVE-2005-0025">http://www.wve.org/entries/show/WVE-2005-0025</a>

## wlsxNSignatureMatchAsleap

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTransmitterMac, wlsxTrapReceiverMac, wlsxTrapSignatureName, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected a signature match for ASLEAP in a frame. For more information check <a href="http://www.wve.org/entries/show/WVE-2005-0027">http://www.wve.org/entries/show/WVE-2005-0027</a>

## wlsxNSignatureMatchAirjack

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTransmitterMac, wlsxTrapReceiverMac, wlsxTrapSignatureName, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected a signature match for Airjack in a frame. For more information check <a href="http://www.wve.org/entries/show/WVE-2005-0018">http://www.wve.org/entries/show/WVE-2005-0018</a>

## wlsxNSignatureMatchNullProbeResp

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTransmitterMac, wlsxTrapReceiverMac, wlsxTrapSignatureName, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel
<b>Max-Access</b>	
<b>Status</b>	current

**Description**

This trap indicates that an AP detected a signature match for Null-Probe-Response in a frame.  
For more information check <http://www.wve.org/entries/show/WVE-2006-0064>

## wlsxNSignatureMatchDeauthBcast

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTransmitterMac, wlsxTrapReceiverMac, wlsxTrapSignatureName, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel
<b>Max-Access</b>	
<b>Status</b>	current

**Description**

This trap indicates that an AP detected a signature match for Deauth-Broadcast in a frame.  
For more information check:  
<http://www.wve.org/entries/show/WVE-2005-0019>  
<http://www.wve.org/entries/show/WVE-2005-0045>

## wlsxNSignatureMatchDisassocBcast

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTransmitterMac, wlsxTrapReceiverMac, wlsxTrapSignatureName, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel
<b>Max-Access</b>	
<b>Status</b>	current

**Description**

This trap indicates that an AP detected a signature match for Disassoc-Broadcast in a frame.  
For more information check:  
<http://www.wve.org/entries/show/WVE-2005-0019>  
<http://www.wve.org/entries/show/WVE-2005-0046>

## wlsxNSignatureMatchWellenreiter

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTransmitterMac, wlsxTrapReceiverMac, wlsxTrapSignatureName, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected a signature match for Wellenreiter in a frame. For more information check <a href="http://www.wve.org/entries/show/WVE-2006-0058">http://www.wve.org/entries/show/WVE-2006-0058</a>

## wlsxAPDeauthContainment

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapNodeMac, wlsxTrapAPChannel, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP has attempted to contain an access point by disconnecting its client.

## wlsxClientDeauthContainment

<b>Objects</b>	wlsxTrapTime, wlsxTrapNodeMac, wlsxTrapTargetAPBSSID, wlsxTrapAPChannel, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP has attempted to contain a client by disconnecting it from the AP that it is associated with.

## wlsxAPWiredContainment

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapNodeMac, wlsxTrapDeviceIpAddress, wlsxTrapDeviceMac, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP has attempted to contain an access point by disrupting traffic to its client on the wired interface.

## wlsxClientWiredContainment

<b>Objects</b>	wlsxTrapTime, wlsxTrapNodeMac, wlsxTrapTargetAPBSSID, wlsxTrapDeviceIpAddress, wlsxTrapDeviceMac, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP has attempted to contain a client by disrupting traffic to it on the wired interface.

## wlsxAPTaggedWiredContainment

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapNodeMac, wlsxTrapDeviceIpAddress, wlsxTrapDeviceMac, wlsxTrapVlanId, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP has attempted to contain an access point by disrupting traffic to its client on the wired interface.

## wlsxClientTaggedWiredContainment

<b>Objects</b>	wlsxTrapTime, wlsxTrapNodeMac, wlsxTrapTargetAPBSSID, wlsxTrapDeviceIpAddress, wlsxTrapDeviceMac, wlsxTrapVlanId, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP has attempted to contain a client by disrupting traffic to it on the wired interface.

## wlsxTarpitContainment

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapNodeMac, wlsxTrapAPChannel, wlsxTrapTargetAPChannel, wlsxTrapSourceMac, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP has attempted to contain an access point by moving a client that is attempting to associate to it to a tarpit.

## wlsxAPChannelChange

<b>Objects</b>	wlsxTrapTime, wlsxTrapAPChannel, wlsxTrapAPChannelSec, wlsxTrapAPPrevChannel, wlsxTrapAPPrevChannelSec, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPARMChangeReason
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP changed its channel.

## wlsxAPPowerChange

<b>Objects</b>	wlsxTrapTime, wlsxTrapAPTxPower, wlsxTrapAPPrevTxPower, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP changed its transmit power level.

## wlsxAPModeChange

<b>Objects</b>	wlsxTrapTime, wlsxTrapAPCurMode, wlsxTrapAPPrecMode, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP changed its mode from AP to AP Monitor or vice versa.

## wlsxUserEntryAttributesChanged

<b>Objects</b>	wlsxTrapTime, wlsxTrapUserIpAddress, wlsxTrapUserPhyAddress, wlsxTrapAPBSSID, wlsxTrapAPName, wlsxTrapCardSlot, wlsxTrapPortNumber, wlsxTrapUserAttributeChangeType
<b>Status</b>	current
<b>Description</b>	This trap indicates that the user entry attributes have changed.

## wlsxPowerSaveDosAttack

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapNodeMac, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected a Power Save DoS attack.

## wlsxNAPMasterStatusChange

<b>Objects</b>	wlsxTrapTime, wlsxTrapAPMacAddress, wlsxTrapApControllerIp, wlsxTrapApMasterStatus
<b>Status</b>	current
<b>Description</b>	This trap indicates that the status of the AP as seen by the master controller has changed.

## wlsxNAdhocUsingValidSSID

<b>Objects</b>	wlsxTrapTime, wlsxTrapTargetAPBSSID, wlsxTrapTargetAPSSID, wlsxTrapSourceMac, wlsxTrapSnr, wlsxTrapAPMacAddress, wlsxTrapAPRadioNumber, wlsxTrapAPLocation, wlsxTrapAPChannel
<b>Status</b>	current
<b>Description</b>	This trap indicates that an AP detected an adhoc network node using a valid/protected SSID. For more information check <a href="http://www.wve.org/entries/show/WVE-2005-0008">http://www.wve.org/entries/show/WVE-2005-0008</a>

## wlsxMgmtUserAuthenticationFailed

<b>Objects</b>	wlsxTrapTime, wlsxTrapUserName, wlsxTrapUserIpAddress, wlsxTrapAuthServerName
<b>Status</b>	current
<b>Description</b>	This trap indicates that a management user authentication has failed.

## SNMP Traps

SNMP Traps are MIB objects (variables) that transmit information to the SNMP Manager when an event occurs. Traps are included as varbinds (variable bindings) in the trap protocol data unit (PDU).

The following traps are supported for the ifTable objects:

- linkDown
- linkUp

These traps are sent when there is change on a specific interface such as GRE or Ethernet.

### linkDown

<b>Object ID</b>	1.3.6.1.6.3.1.1.5.3
<b>Syntax</b>	NA
<b>Max-Access</b>	Current
<b>Objects</b>	<ul style="list-style-type: none"><li>• ifIndex</li><li>• ifAdminStatus</li><li>• ifOperStatus</li></ul>
<b>Status</b>	current
<b>Description</b>	Indicates that change of state in communication link.

### linkUp

<b>Object ID</b>	1.3.6.1.6.3.1.1.5.4
<b>Syntax</b>	NA
<b>Max-Access</b>	Current
<b>Objects</b>	<ul style="list-style-type: none"><li>• ifIndex</li><li>• ifAdminStatus</li><li>• ifOperStatus</li></ul>
<b>Status</b>	current
<b>Description</b>	Indicates that change of state in communication link.

