



STE2102

240x320RGB single-chip true 262K colors ramless LCD controller/driver

Data Brief

Features

- 240 x 320RGB display matrix
- 8 colors & 262K colors modes
- Programmable number of lines
- Programmable frame & N-line polarity inversion
- System interfaces (read and write)
 - I2C
 - 3-lines SPI
 - 3-lines 9 bits Serial Interface
 - 4-lines SPI
- Graphics interfaces:
 - 16/18Bit RGB Interface
 - 8Bit YCrCb 4:2:2 Interface
- Programmable Gamma look-up tables for optimum colour configuration.
- Fully integrated Bias system and voltage generator
- Designed for chip-on-glass (COG) and chip-on-foil (COF) applications
- Logic supply voltage range from 1.5 to 1.95V
- Interface and control signals supply voltage range from 1.5 to 3.6V
- High voltage generator supply voltage range from 2.2 to 3.6V
- Selectable scan direction
- Common electrode and gate-off switching
- Cap-on-common and cap-on-gate (patented) TFT structures
- Gate, common and source waveform timing generation digitally tunable
- Gate drivers voltage range from -15 to 16.5V
- Source drivers voltage range from 0 to 5.5V
- Common driver voltage range from -2.5 to 4.5V
- On chip calibration (with OTP Cells) of Key configuration parameters

Description

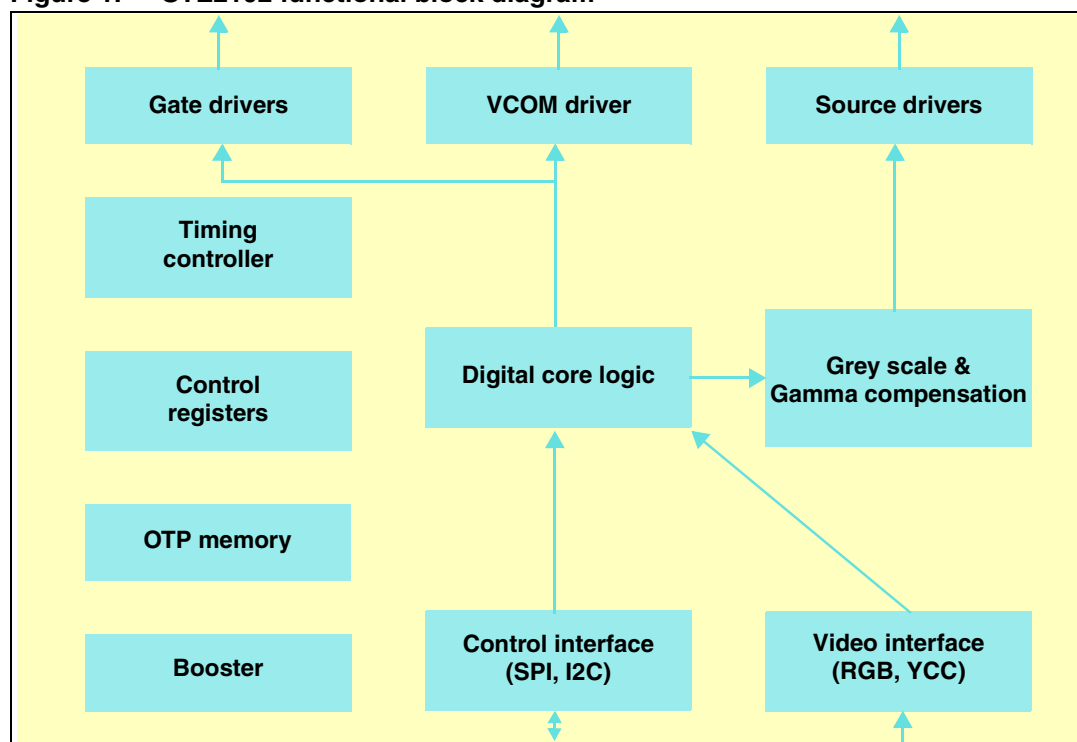
The STE2102 is a low power CMOS single-chip TFT controller/driver featuring an extremely low current consumption thanks to an innovative charge pump architecture. Designed to drive a 240 rows by 320RGB columns 262k colors graphic display, with amplitude modulation method, the STE2102 provides all the necessary functions in a single chip, including on-chip gate drivers supply, source drivers supply and source reference voltages generators, resulting in a minimum of externals components.

STE2102 features an high-speed RGB interface to transfer flicker-free video data, an 8-bit YCrCb digital video interface and several bi-directional serial interfaces to configure the display.

The IC is designed to operate with both traditional Cap-on-CE and with Cap-On-Gate panels.

Table 1. Key features and benefits

Features	Benefits
High driving capability	Can drive panel sizes up to 4"
320RGBx240, landscape type	Suitable for several application <ul style="list-style-type: none"> – portable multimedia – digital still camera – printers – handheld instrumentation
Video interface <ul style="list-style-type: none"> – parallel RGB – YCC 	Suitable for video streaming
Low power circuitry	Only ~6mA when driving 3.5" panel with natural pictures
Requires few external components On Chip DC/DC converter	Reduced number of system components
Integrated OTP (SmarT OTP)	<ul style="list-style-type: none"> – Allows parameters setting for calibration and tuning at module maker side – No need of external EEPROM – SmarT OTP ensuring high programming yield
Specific features for production <ul style="list-style-type: none"> – Bump misalignment – Bump detachment – Glass break 	Allows module maker to control easily assembly quality on production chain

Figure 1. STE2102 functional block diagram

Ordering information

Table 2. Order codes

Part number	Description
STE2102D3	Bumped Dice on Waffle Pack

Revision history

Table 3. Document revision history

Date	Revision	Changes
20-Dec-2006	1	Initial release.

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2006 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com