



The RP150K Series are CMOS-based dual output LDO regulators featuring 300mA output. RP150K features supply current as low as 24 $\mu$ A per output, which is substantially lower compared to existing lines. Due to a built-in 0.7 $\Omega$  (at  $V_{OUT}=2.8V$ ) on-resistor, RP150K can provide a low dropout voltage. RP150K also features an excellent line transient response, ripple rejection at 80dB, and low noise. The output voltage accuracy is as high as  $\pm 1\%$  and the temperature drift coefficient of output voltage is low at  $\pm 30ppm/^{\circ}C$ . RP150K is available in RoHS compliant DFN(PLP)2020-8 package.

## FEATURES

- Supply Current ( $I_{SS}$ ) ..... Typ. 24 $\mu$ A  $\times$  2 ( $V_{IN}=\text{SET } V_{OUT}+1.0V$ )
- Standby Current ( $I_{standby}$ ) ..... Typ. 0.1 $\mu$ A  $\times$  2 (Same as above, CE1/CE2="L")
- Dropout Voltage ( $V_{DIF}$ ) ..... Typ. 0.21V ( $I_{OUT}=300mA, V_{OUT}=2.8V$ )
- Ripple Rejection (RR) ..... Typ. 80dB ( $f=1kHz$ )
- Input Voltage Range ( $V_{IN}$ ) ..... 2.5V to 5.25V
- Output Voltage Range ( $V_{OUT}$ ) ..... 1.5V to 3.3V\* (internally fixed)
- Output Voltage Accuracy .....  $\pm 1\%$
- Temp. coeff. of Output Voltage ..... Typ.  $\pm 30ppm/^{\circ}C$
- Line Regulation ..... Typ. 0.02%/V
- Fold-back Protection Circuit ..... Current limit Typ. 50mA
- Auto-Discharge function ..... B Version
- Package ..... DFN(PLP)2020-8
- Ceramic capacitors can be used. ... 1 $\mu$ F or more

\*) For information about combination of the output voltage, please check our website.

## BLOCK DIAGRAMS

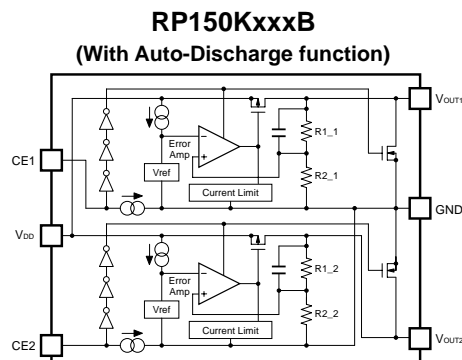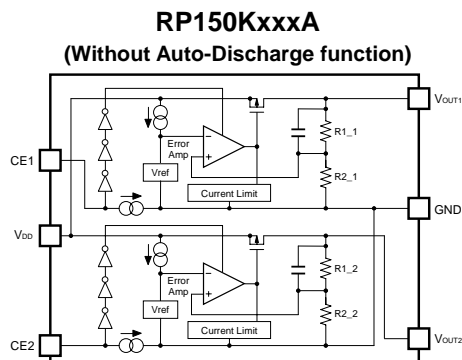

## SELECTION GUIDE


Halogen Free	Package	Q'ty per Reel	Part No.
H/F	DFN(PLP)2020-8	5,000 pcs	RP150Kxxx*-TR

xxx : Specify a combination of output voltage for each output using serial numbers.

\* : Select from (A) without auto-discharge function or (B) with auto-discharge function.

## PACKAGE

### DFN(PLP)2020-8




1	CE1	Chip Enable Pin 1
2	GND	Ground Pin
3	CE2	Chip Enable Pin 2
4	NC	No Connection
5	NC	No Connection
6	VOUT2	Output Pin 2
7	VDD	Input Pin
8	VOUT1	Output Pin 1

\*) The tab is substrate level (GND).

## TYPICAL CHARACTERISTIC

### RP150K (VR1/VR2) Output Voltage vs. Operating Temperature

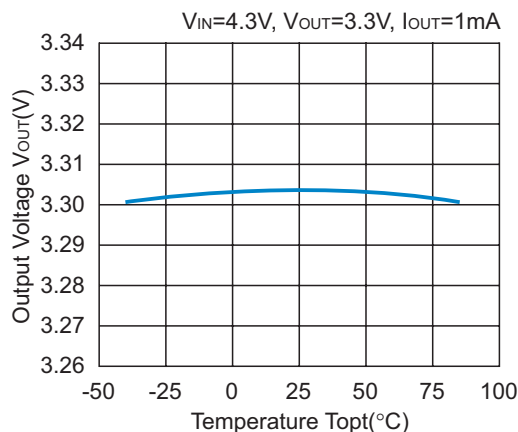

## APPLICATIONS

- Power source for hand-held communication equipment
- Power source for battery-powered equipment
- Power source for cameras, VCRs, and video cameras.



1. The products and the product specifications described in this document are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to Ricoh sales representatives for the latest information thereon.
2. The materials in this document may not be copied or otherwise reproduced in whole or in part without prior written consent of Ricoh.
3. Please be sure to take any necessary formalities under relevant laws or regulations before exporting or otherwise taking out of your country the products or the technical information described herein.
4. The technical information described in this document shows typical characteristics of and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under Ricoh's or any third party's intellectual property rights or any other rights.
5. The products listed in this document are intended and designed for use as general electronic components in standard applications (office equipment, telecommunication equipment, measuring instruments, consumer electronic products, amusement equipment etc.). Those customers intending to use a product in an application requiring extreme quality and reliability, for example, in a highly specific application where the failure or misoperation of the product could result in human injury or death (aircraft, spacevehicle, nuclear reactor control system, traffic control system, automotive and transportation equipment, combustion equipment, safety devices, life support system etc.) should first contact us.
6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order to prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, firecontainment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. Anti-radiation design is not implemented in the products described in this document.
8. Please contact Ricoh sales representatives should you have any questions or comments concerning the products or the technical information.

## RICOH COMPANY., LTD. Electronic Devices Company



■ Ricoh presented with the Japan Management Quality Award for 1999.  
Ricoch continually strives to promote customer satisfaction, and shares the achievements of its management quality improvement program with people and society.



■ Ricoh awarded ISO 14001 certification.

The Ricoh Group was awarded ISO 14001 certification, which is an international standard for environmental management systems, at both its domestic and overseas production facilities. Our current aim is to obtain ISO 14001 certification for all of our business offices.

<http://www.ricoh.com/LSI/>

### RICOH COMPANY, LTD. Electronic Devices Company

● **Shin-Yokohama office (International Sales)**  
3-2-3, Shin-Yokohama, Kohoku-ku, Yokohama City, Kanagawa 222-8530, Japan  
Phone: +81-45-477-1697 Fax: +81-45-477-1698

### RICOH EUROPE (NETHERLANDS) B.V.

● **Semiconductor Support Centre**  
Prof. W.H.Keesomlaan 1, 1183 DL Amstelveen, The Netherlands  
P.O.Box 114, 1180 AC Amstelveen  
Phone: +31-20-5474-309 Fax: +31-20-5474-791

### RICOH ELECTRONIC DEVICES KOREA Co., Ltd.

11 floor, Haesung 1 building, 942, Daechidong, Gangnamgu, Seoul, Korea  
Phone: +82-2-2135-5700 Fax: +82-2-2135-5705

### RICOH ELECTRONIC DEVICES SHANGHAI Co., Ltd.

Room403, No.2 Building, 690#Bi Bo Road, Pu Dong New district, Shanghai 201203,  
People's Republic of China  
Phone: +86-21-5027-3200 Fax: +86-21-5027-3299

### RICOH COMPANY, LTD. Electronic Devices Company

● **Taipei office**  
Room109, 10F-1, No.51, Hengyang Rd., Taipei City, Taiwan (R.O.C.)  
Phone: +886-2-2313-1621/1622 Fax: +886-2-2313-1623



Ricoh completed the organization of the Lead-free production for all of our products. After Apr. 1, 2006, we will ship out the lead free products only. Thus, all products that will be shipped from now on comply with RoHS Directive.