z/OS

DFSMS Object Access Method Planning, Installation, and Storage Administration Guide for Object Support

SC35-0426-04

z/OS

DFSMS Object Access Method Planning, Installation, and Storage Administration Guide for Object Support

SC35-0426-04

Note
Before using this information and the product it supports, be sure to read the general information under "Notices" on page 593.

Fifth Edition, September 2006

This edition applies to Version 1 Release 8 of z/OS® (5694-A01), Version 1 Release 8 of z/OS.e (5655-G52), and to all subsequent releases and modifications until otherwise indicated in new editions.

This edition replaces SC35-0426-03.

IBM® welcomes your comments. A form for readers' comments may be provided at the back of this publication, or you may address your comments to the following address:

International Business Machines Corporation
Department 55JA, Mail Station P384
2455 South Road
Poughkeepsie, NY 12601-5400
United States of America

FAX (United States & Canada): 1+845+432-9405
FAX (Other Countries):
Your International Access Code +1+845+432-9405

IBMLink™ (United States customers only): IBMUSM10(MHVRCFS)
Internet e-mail: mhvrcfs@us.ibm.com
World Wide Web: http://www.ibm.com/servers/eserver/zseries/zos/webqs.html

If you would like a reply, be sure to include your name, address, telephone number, or FAX number.

Make sure to include the following in your comment or note:
- Title and order number of this document
- Page number or topic related to your comment

When you send information to IBM, you grant IBM a nonexclusive right to use or distribute the information in any way it believes appropriate without incurring any obligation to you.

© Copyright International Business Machines Corporation 1989, 2006. All rights reserved.
US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

Contents

Figures vii

Tables ix

About This Document xi
Required product knowledge xi
Referenced documents xi
Accessing z/OS DFSMS documents on the Internet xii
Using LookAt to look up message explanations . . xii
How to Read Syntax Diagrams xiii

Summary of Changes xv
Summary of Changes for SC35-0426-04 z/OS Version 1 Release 8 xv
New Information xv
Changed Information xvi
Summary of Changes for SC35-0426-03 z/OS Version 1 Release 7 xvi
New Information xvi
Changed Information xvii
Deleted Information xviii
Summary of Changes for SC35-0426-02 z/OS Version 1 Release 5 xviii
New Information xviii
Changed Information xix
Summary of Changes for SC35-0426-01 z/OS Version 1 Release 3 xix
New Information xx
Deleted Information xx
Changed Information xxi

Chapter 1. Understanding the Object Access Method 1
Collections 1
Application Programming Interface (OSREQ Macro) 2
System-Managed Storage for Data and Space Management 2
Moving Objects Throughout the Hierarchy 2
Hardware and Software Interaction with OAM . . . 3
Parallel Sysplex and OAM 4
OAMplex 4
Shipping Request Limitations for Larger Data Objects 5
OAMplex Restrictions 6
OAM Components 6
CBROAMxx PARMLIB Member Statements 8
SETOAM Statement for Object Tape Volumes . . 8
SETOPT Statement for Optical Volumes 8
SETOSMC Statement for OSMC Processing . . . 8
OAMXCF Statement for Parallel Sysplexes . . . 8
ISMF Library Management Role within OAM . . . 9
Installation Storage Management Policy Overview . . 9
SMS Constructs and ACS Routines 11
Understanding the Storage Group Construct . . 12
Understanding the Storage Class Construct . . . 18
Understanding the Management Class Construct 22
Understanding the Data Class Construct. . . . 24
ACS Routines 27
OAM Address Space 28
OTIS Address Space 29
Optical Storage 29
Optical Devices that OAM No Longer Supports 30
Optical Disk Cartridges 31
Optical Recording Techniques 31
Optical Volumes 32
Optical Media Types 34
Optical Disk Drives. 34
Optical Libraries. 35
Tape Storage 39
Tape Capacity and Compaction. 42
Tape Capacity and Performance Scaling 43
Performance Segmentation 43
Tape Volumes 43
Tape Drives 46
Tape Libraries 49
Object Tape and Optical Volume Management . . . 49
Recycling Tape and Optical Volumes 50
Deleting Tape and Optical Volumes 50
Deleting Recovered Tape and Optical Volumes . 50

Chapter 2. Planning for OAM Installation 51
Setting Up the Planning Team 51
Analyzing Your Business Environment 52
Grouping Objects 53
Establishing Performance Objectives 53
Identifying Management Cycles 54
Concluding the Business Analysis Phase. . . . 60
Analyzing Your Processing Environment 60
Hardware 60
Software 61
Estimating Resource Requirements 62
General Requirements 63
DASD Storage 63
Object Storage on Removable Media 69
Concluding Resource Estimation 72
Preparing the Physical Environment 73
Preparing for Installation and Customization . . . 73
Planning to Program Applications for OAM . . . 74
Planning to Administer OAM 75
Preparing to Operate OAM 75
OAM Planning Case Study 75
Object Characterization 75
Resource Estimation 78

Chapter 3. Migrating, Installing, and Customizing OAM 85
Verifying Hardware and Software Prerequisites . . 86
Preparing the Processing Environment 86

© Copyright IBM Corp. 1989, 2006

Preparing for Migration or Installation 86
High-Level Installation and Migration Checklists 88
Changing DB2 Installation Parameters 93
Changing CICS Installation Parameters 95
Modifying the Installation Exit to Manage Deleted Objects 97
Changing System Libraries 97
Creating DB2 Databases for Object Tables and Directories 134
Defining User Catalogs 150
IPL the System 151
Specifying the SMS Definitions and Programs Used by OAM 151
Validating and Activating the SMS Configuration 171
Verifying Object Support Installation With IVP 172
Adding New Tape Devices to the OAM Object Tape Configuration 172
Specialized OAM Installation Procedures 172
Procedures for Moving OAM to Another System 173
Merging OAMs into an OAMplex 174
Adding OAM Systems to an Existing OAMplex 174

Chapter 4. Administering OAM 177

Monitoring and Maintaining the Optical Configuration using ISMF 177
ISMF Library Management 177
Typical ISMF Library Management Procedures 178
Monitoring and Maintaining Optical Volumes . . 182
ISMF Mountable Optical Volume Application 182
Handling OAM Scheduling Errors 191
Monitoring and Maintaining SMS Construct Definitions 192
Changing SMS Construct Definitions 192
Monitoring DB2 Databases 195
DB2 RUNSTATS Utility 195
DB2 STOSPACE Utility 196
SQL Statements. 196
Tuning OAM 196
Tuning OAM Connections to DB2 196
Tuning the DB2 Databases 197
Tuning Object Retrieval Response Time. 205
Recalling Objects to DB2 DASD 206
Tuning the Storage Management Cycle 207
Balancing Library Usage. 209
Using Appropriate Transport Classes within XCF 209
Measuring OAM Transaction Performance Using SMF 211
OAM SMF Record Subtypes 212
OAM SMF Start and End Time Accuracy . . . 213
Identifying OAM Transaction Activity Using RMF 213
OAM Transaction Classes 214
Establishing Recovery Procedures 222
Recovering DB2 Databases 222
Recovering Single Objects from Removable Media 223
Recovering an Entire Optical Cartridge or Tape Volume 223
Recovering Collection Name Catalog Entries 224
Accessing Backup Objects Automatically . . . 225
Using the Move Volume Utility 225
Preparation of the Move Volume Utility Environment 227
Reusing Recycled Tape and Optical Volumes 235
Deleting Recycled Tape and Optical Volumes from OAM 236
Starting Tape Recycle. 237
Expiring Tape and Optical Volumes 238
Expiring Tape Volumes in Object or Object Backup Storage Groups 238
Expiring Optical Volumes in Object or Object Backup Storage Groups 239
Using the OAM Object Tape Volume Return to MVS Scratch Exit Routine 240
Synchronizing OAM Scratch Tape 244
Processing Object Expiration 245
Destroying and Deleting Expired Data 246
Diagnosing Nondeletion/Expiration of Objects During OSMC Processing 247
Checking CBRHADUX 247
Objects Not Selected for Expiration Processing by OSMC. 247
Diagnosing Unexpected Results of Object Movement during OSMC Processing 249
Invoking the OSREQ Macro Through the OSREQ TSO/E Command Processor 253
OSREQ TSO/E Command Syntax 254
OSREQ TSO/E Command Processor Return Codes 260
3995 Optical Service Information Messages . . . 261

Chapter 5. Operating OAM and OTIS Address Spaces and OSMC Functions 263

Overview of Operator Tasks 263
Message Format Conventions 264
Overview of Operator Commands 265
Starting OTIS 266
Starting OAM 267
Starting OSMC Functions 269
Starting the Storage Management Cycle . . . 272
Starting the Library Space Management Cycle 275
Starting the DASD Space Management Cycle for an Individual Storage Group 277
Starting the OAM Volume Recovery Utility . . 278
Starting the Move Volume Utility. 288
Starting Automatic Access to Backup Copies of Objects 298
Varying Optical Drives and Libraries 301
Varying an Optical Drive Online or Offline . . 301
Varying a Real Optical Library Online or Offline 302
Entering an Optical Disk into an Optical Library 304
Entering an Unlabeled Optical Disk into a 3995 Optical Library 306
Entering a Labeled Optical Disk into an Optical Library 308
Ejecting an Optical Disk 309
Specifying the Shelf Location 310
Associating Pseudo Libraries 310
Removing the Optical Disk Cartridge 311
Mounting an Optical Disk on an Operator-Accessible Drive 311

Demounting and Removing an Optical Disk Cartridge from an Operator-Accessible Drive . . . 312
Labeling an Optical Disk on a 3995 Operator-Accessible Drive 312
Relabeling a 3995 Optical Disk Volume 318
Reformatting a 3995 Optical Disk. 319
Displaying Status 322
Displaying OAM Status 322
Displaying OAM XCF Status 325
Displaying OSMC Summary Status 327
Displaying OSMC Task Status 329
Displaying Drive Online/Offline Connectivity 333
Displaying Drive Detail Status. 336
Displaying Library Online/Offline Connectivity 339
Displaying Library Detail Status 344
Displaying Storage Group Status 346
Displaying Volume Status 350
Displaying Volumes that Have LOSTFLAG Set 356
Displaying SETOPT, SETOAM, and SETOSMC Parameters 357
Displaying Outstanding OAM Messages 360
Querying Summary and Detail Information for Pending and Active Requests 361
Scheduling an SVC Dump for the OAM Address Space 365
Restarting the OAM Address Space 366
Using the UPDATE Command to Set SETOAM, SETOSMC, and SETOPT Values 368
Updating SETOAM Values 369
Updating SETOPT Values 372
Updating SETOSMC Values 373
Using the UPDATE Command to Set OAMXCF Values. 376
Updating Fields in the DB2 Volume Table and the Tape Volume Table 377
Auditing a Volume 379
Remapping an Optical Library 380
Stopping OAM Functions 380
Stopping OAM 381
Stopping OSMC 381
Stopping OSMC Processing for a Storage Group 382
Stopping the Move Volume Utility 382
Stopping a Volume Recovery that is in Progress 383
Stopping Automatic Access to Backup 384
Stopping OTIS 385

Appendix A. Sample Optical Hardware Configurations 387
MVS/ESA 3995 Optical Library Dataserver . . . 387
Configurations for the 3995-1xx Models . . . 388
Configurations for the 3995-Cxx Models . . . 390
Defining 3995 Device Numbers 394
Sample ISMF Session for an IBM 3995 Optical Library Dataserver 402
Defining Real 3995 Libraries 405
Defining Pseudo Libraries 412
Defining Additional Optical Libraries 413
Defining Optical Drives 413
Defining Additional Optical Disk Drives . . . 418
Maintaining and Modifying Optical Libraries and Optical Drives 418
Altering a 3995 Optical Library 418
Changing the 3995 Library Connectivity . . . 422
Altering an Optical Disk Drive 424
Copying Optical Library and Drive Definitions 425
Deleting an Optical Library. 426
Deleting an Optical Disk Drive 427
Using DELETE FORCE to Delete an Optical Library or Optical Drive. 428

Appendix B. Sample Library Members 429
Changing System Libraries 430
CBRAPROC 430
CBRIPROC 430
Creating Object Databases 431
CBRIALC0 431
CBRIALCX 434
CBRIALCY 437
CBRILOB. 438
CBRSMR18 441
CBRISQL0 443
CBRISQLX 447
CBRISQLY 450
OAM Optical Configuration Database 452
Sample Migration Jobs 452
CBRSAMPL 452
CBRSMB2 459
CBRSMPDS 461
CBRSM150 463
CBRSMR13 465
CBRSMR15 469
CBRSMERG 471
CBRSG100 478
Application Plans 488
CBRPBIND 488
CBRIBIND and CBRIGRNT 489
CBRHBIND and CBRHGRNT 489
CBRABIND and CBRAGRNT 489
OAM Installation Verification Program and OAMUTIL 489
CBRSAMIV 489
CBRSAMUT. 490
Automatic Class Selection 492
CBRHSC 493
CBRHMC 497
CBRHSG 506

Appendix C. Understanding OAM Databases 509
Object Storage Databases 509
Object Directory Tables 511
Object Storage Tables. 514
Object Administration Database 515
Storage Class Identifier Table 516
Management Class Identifier Table 516
Collection Name Identifier Table 517
Optical Configuration Database 517
Library Table 519
Drive Table 521
Slot Table. 522
Volume Table 523

Deleted Objects Table 527
Tape Volume Table 527

Appendix D. OAM System Management Facility Records 535
OAM SMF Record Header 535
OAM SMF Record Product Section 536
OSREQ Activity Subtypes 1–7 Data Section Format 537
OSMC Storage Management Activity (Subtypes 32–35) 543
OSMC Single Object Recovery Utility (Subtype 36) 547
OSMC Library Space Management (Subtype 37) 551
OSMC RECALL to DB2 DASD (Subtype 38) . . . 551
Immediate Backup Copy (Subtype 39) 553
Tape Recycle (Subtype 40) 555
LCS Optical Library/Drive Vary Online/Offline (Subtypes 64–67) 555
LCS Optical Cartridge Entry, Eject, Label, Audit, Mount, and Demount (Subtypes 68–73). 558
LCS Optical Write, Read, Logical Delete, Physical Delete (Subtypes 74–77) 562
LCS Tape Write and Read Request (Subtypes 78–79, and 88) 567
OAM Tape Volume Demount (Subtype 87) . . . 569
Invoking the SMF PARMLIB Member 571
Changing SMF Recording 571
DASD Space Allocation 572

Appendix E. Auto-Delete Installation Exit. 573
Auto-Delete Installation Exit (CBRHADUX) . . . 573
Installing and Replacing the CBRHADUX Installation Exit. 573
Writing the CBRHADUX Exit 574
Registers on Entry to the Auto-Delete Exit Routine 575
Auto-Delete Installation Exit Parameter List . . 575
Registers on Return from the CBRHADUX Installation Exit. 576
Sample Auto-Delete Installation Exit. 577

Appendix F. Accessibility 591
Using assistive technologies 591
Keyboard navigation of the user interface 591
z/OS information 591

Notices 593
Programming interface information 594
Trademarks 594

Glossary 597

Index 607

Figures

1. OAM Interactions with Software and Hardware 3
2. OAM Application Illustration 7
3. Overview of the Installation Storage Management Policy 10
4. Conceptual Overview of Storing a Primary Object 19
5. Conceptual Overview of Storing a First Backup Copy of an Object 20
6. Conceptual Overview of Storing a Second Backup Copy of an Object 21
7. Storing an Object on Optical Media through an OSREQ STORE Request 28
8. Write-Once, Read-Many (WORM) Recording Technique 32
9. Rewritable Magneto-Optic (MO) Recording Technique 32
10. Real Optical Library 36
11. Example of Using Class Transitions and ACS Routines to Change Management Classes . . 55
12. IEAICSxx SUBSYS Specification for OSREQ Transactions 100
13. CBROAMxx PARMLIB Member Sample 102
14. CBROAMxx PARMLIB Member Samples Using the SETOPT Statement and Optional Parameters 121
15. CBROAMxx PARMLIB Member Samples Using the SETOSMC Statement and Optional Parameters 126
16. Another Drive is Started When DRIVE STARTUP THRESHOLD is Exceeded . . . 153
17. CBROAMxx PARMLIB Member Samples Using the OAMXCF Statement and Optional Parameters 175
18. Confirm Library Audit Request Panel 179
19. Mountable Optical Volume Selection Entry Panel 183
20. Mountable Optical Volume List, Columns 14 through 16 185
21. Mountable Optical Volume List, Columns 17 through 21 185
22. Confirm Optical Volume Audit Panel 189
23. Sample RMF Monitor I Workload Activity Report 218
24. Sample RMF Monitor II Transaction Activity Report 221
25. Example of a Normal Completion of Recovery of a Backup Tape Volume 282
26. Example of a Normal Completion of Recovery of an Optical Volume without All Backup Copies 283
27. Example of a Limited Completion of Recovery of a Backup Volume Due to Error Condition 284
28. Object Storage Group and Volume Relationship 288
29. Example of Messages Returned after a Normal Completion of MOVEVOL 295
30. Example of Messages Returned after a Normal Completion with Contention . . . 296
31. Example of Messages Returned after a Limited Completion 297
32. Example of Messages Returned after a Not Available Completion 297
33. Sample Hardware Configuration—IBM 3995 Models 131, 132, 133, 111, 112, 113 389
34. Sample Hardware Configuration—IBM 3995 Models C3A, C32, and C12 391
35. Sample Hardware Configuration—IBM 3995 Models C3A and C34 392
36. Sample Hardware Configuration—IBM 3995 Model C3A, C36, and C16 393
37. Sample Hardware Configuration—IBM 3995 Model C3A, C38 and C18 394
38. Changing the Device and Control Unit Statements for 3995-Cxx Optical Devices . . 397
39. Changing the Device and Control Unit Statements for 3995-1xx Optical Devices . . 400
40. ISMF Primary Option Menu 403
41. Library Management Selection Menu 403
42. Optical Library Application Selection Panel 404
43. 3995 Library Define Panel for LIBRARY1 (Page 1 of 2) 406
44. 3995 Library Define Panel for LIBRARY1 (Page 2 of 2) 408
45. 3995 Library Define Panel for LIB1C (Page 1 of 2) 409
46. 3995 Library Define Panel for LIB1C (Page 2 of 2) 409
47. 3995 Library Define Panel for LIBRARY2 (Page 1 of 2) 410
48. 3995 Library Define Panel for LIBRARY2 (Page 2 of 2) 410
49. 3995 Library Define Panel for LIBRARYA (Page 1 of 2) 411
50. 3995 Library Define Panel for LIBRARYA (Page 2 of 2) 411
51. 3995 Library Define Panel for LIBRARYB (Page 1 of 2) 412
52. 3995 Library Define Panel for LIBRARYB (Page 2 of 2) 412
53. Pseudo Library Define Panel for PSEUDO1 413
54. Optical Drive Application Selection Panel 414
55. 3995 Drive Define Panel for LIB1D1 415
56. 3995 Drive Define Panel for LIB2D1 416
57. 3995 Drive Define Panel for LIBAD1 416
58. 3995 Drive Define Panel for LIBBD1 417
59. 3995 Drive Define Panel for OPA1 417
60. 3995 Drive Define Panel for OPDRV1 418
61. 3995 Library Alter Panel (Page 1 of 2) 419
62. 3995 Library Alter Panel (Page 2 of 2) 421
63. 3995 Library Alter Panel (Page 1 of 2) 423

© Copyright IBM Corp. 1989, 2006

64. 3995 Library Alter Panel (Page 2 of 2) 423
65. Conversion Confirmation Panel 424
66. 3995 Drive Alter Panel 425
67. Copy Entry Panel 426
68. Deleting an Optical Library 427
69. Deleting an Optical Disk Drive 428
70. CBRAPROC SAMPLIB Member 430
71. CBRIPROC SAMPLIB Member. 431
72. CBRIALC0 SAMPLIB Member 432
73. CBRIALCX SAMPLIB Member. 435
74. CBRIALCY SAMPLIB Member. 437
75. CBRILOB SAMPLIB Member 438
76. CBRSMR18 SAMPLIB Member. 442
77. CBRISQL0 SAMPLIB Member 443
78. CBRISQLX SAMPLIB Member 448
79. CBRISQLY SAMPLIB Member 451
80. CBRSAMPL SAMPLIB Member 453
81. CBRSMB2 SAMPLIB Member 460
82. CBRSMPDS SAMPLIB Member 462
83. CBRSM150 SAMPLIB Member 464
84. CBRSMR13 SAMPLIB Member. 466
85. CBRSMR15 SAMPLIB Member. 470
86. CBRSMERG SAMPLIB Member 472
87. CBRSG100 SAMPLIB Member 479
88. CBRSAMIV SAMPLIB Member 490
89. CBRSAMUT SAMPLIB Member 491
90. CBRHSC SAMPLIB Member 493
91. CBRHMC SAMPLIB Member 498
92. CBRHSG SAMPLIB Member 506
93. Object Storage Group Database Structure 511
94. LOB Storage Structure 515
95. Object Administration Database Structure 516
96. Optical Configuration Database 518
97. Sample OSMC Auto-Delete Installation Exit 577

Tables

1. Referenced documents xi
2. Management Class Examples for Objects 24
3. Optical Devices that OAM Supports 29
4. Optical Devices that OAM No Longer Supports 30
5. Tape Storage Configurations 40
6. Storage Class Service Levels for a Variety of Business Needs 54
7. Data Set Name Qualifiers and Descriptions for Each 65
8. Variables Used in DASD Formulas 66
9. DASD Device Characteristics. 66
10. Example of Calculations For Determining DASD Requirements 67
11. CBROAM Space Recommendations 68
12. OAMADMIN Space Recommendations 68
13. Formulas for Calculating Storage Requirements 69
14. Effective Optical Volume Usage for IBM Optical Disk Media 71
15. Object Characteristics 76
16. Storage Calculations for the Object Storage Database Data Sets 81
17. Sample Storage Space Calculation Results 82
18. Optical Resource Requirements for Library Resident Data 83
19. The Number of Tape Cartridges Needed Per Workday 84
20. Checklist for Migrating to a New Release of OAM 87
21. Checklist for Installing OAM. 88
22. Example of the TAPECOMPACTION / NOTAPECOMPACTION Selection Process . . 117
23. Recommended Values for DRIVE STARTUP THRESHOLD 154
24. Constructs Verified or Changed through ACS Routines Invoked by the &ACSENVIR Variables—All OAM Environments 161
25. Constructs Verified or Changed through ACS Routines Invoked by the &ACSENVIR Variables—Change Environment Only . . . 161
26. Remap Results That Appear in the VOLUME ERROR STATUS Column 181
27. Discrepancies REMAP Resolves between the Outboard Inventory and the Optical Configuration Database 181
28. Auditing Results That Appear in the VOLUME ERROR STATUS Column 189
29. Generic AUDIT Messages 190
30. Specific AUDIT Messages 190
31. Record Subtypes and Descriptions 212
32. OSREQ Transaction Names 214
33. OSMC Transaction Names 216
34. Examples of Data Movement with the Move Volume Utility 226
35. Migrating from Old Media Type to New Media Type by Removing Libraries from Storage Group Definitions 229
36. Migrating from Old Media Type to New Media Type without Modifying the SCDS . . 229
37. Migrating from Old Media Type to New Media Type Using Library Default Media Type 230
38. Migrating from Old Media Type to New Media Type Using Multifunction Libraries without Modifying the SCDS 230
39. Registers on Entry to the Exit Routine 243
40. ARCTVEXT Parameter List 243
41. ARCTVEXT Parameter List 244
42. 244
43. Functions of the OSREQ macro 254
44. RETCODE2 values for OSREQ RETRIEVE 258
45. RETCODE2 values for OSREQ STORE 259
46. Valid SETOAM Keywords on the UPDATE Command 369
47. Valid SETOPT Keywords on the UPDATE Command 372
48. Valid SETOSMC Keywords on the UPDATE Command 373
49. Field Values for Optical Volumes 378
50. Field Values for Object Tape Volumes 379
51. PCA Card Speed Setting to Match CPU Channel Speeds. 389
52. Optical Libraries and their Associated Drive Names and Drive Device Types 413
53. Object Storage Database Naming Conventions 509
54. Object Directory Table. 511
55. Object Directory Table Field Contents 512
56. Object Storage Table 514
57. LOB Storage Table 515
58. Storage Class Identifier Table 516
59. Management Class Identifier Table 517
60. Collection Name Identifier Table 517
61. Collection Name Identifier Table Contents 517
62. Library Table Column Description 519
63. Drive Table Column Description 521
64. Slot Table Column Description. 522
65. Volume Table Column Description 523
66. Deleted Object Table Column Description 527
67. Tape Volume Table Column Description 528
68. Header Format for OAM SMF Records 535
69. Product Section Format for OAM SMF Subtypes 536
70. Subtype Data Section Format for OSREQ functions 537
71. Valid Subtype Data Section Fields for OSREQ Functions 542
72. Format of the Subtype Data Section for Subtypes 32–35 543
73. Format of the Subtype Data Section for Subtype 36 547

© Copyright IBM Corp. 1989, 2006

74. Format of the Subtype Data Section for Subtype 37 551
75. Format of the Subtype Data Section for Subtype 38 551
76. Format of the Subtype Data Section for Subtype 39 553
77. Format of the Subtype Data Section for Subtype 40 555
78. Format of the Subtype Data Section for Subtypes 64–67 555
79. Valid Subtype Data Section Fields for Subtypes 64–67 557
80. Format of the Subtype Data Section for Subtypes 68–73 558
81. Valid Subtype Data Section Fields for Subtypes 68–73 562
82. Format of the Subtype Data Section for Subtypes 74–77 563
83. Valid Subtype Data Section Fields for Subtypes 74–77 565
84. Format of Subtype Data Section for Subtypes 78–79 567
85. Format of Subtype Data Section for Subtype 87 569
86. Auto-Delete Parameter List, CBRADUP 575
87. Auto-Delete Return Codes, CBRADUP 576

About This Document

This document introduces OAM and explains how to do the following tasks:
- Plan for the installation of OAM.
- Install OAM.
- Customize OAM.
- Administer OAM.
- Operate OAM.

This document discusses using OAM's object support which you can use to manage objects on DB2 DASD, optical, and tape volumes. For information on using OAM to manage tape library dataservers, see the *z/OS DFSMS OAM Planning, Installation, and Storage Administration Guide for Tape Libraries*.

This document is for the system programmers, storage administrators, and system operators who perform these tasks.

For information about the accessibility features of z/OS, for users who have a physical disability, see Appendix F, "Accessibility," on page 591.

Required product knowledge

To use this document effectively, you should be familiar with:
- IBM DATABASE 2™ (DB2®)
- Data Facility Storage Management System (DFSMS)
- Interactive Storage Management Facility (ISMF)
- Customer Information Control System (CICS®)—optional, depending on your installation
- Information Management System (IMS™)—optional, depending on your installation

Referenced documents

For a complete list of DFSMS documents and related z/OS documents referenced by this document, see the *z/OS Information Roadmap*. You can obtain a softcopy version of this document and other DFSMS documents from sources that are listed here.

The following documents are referenced in this document, or are useful in understanding and applying the material presented:

Table 1. Referenced documents

Document Title	Order Number
z/OS Collection	SK3T-4269
http://www.ibm.com/servers/eservers/zseries/zos	z/OS web site that includes the unlicensed documents from DFSMS library and other z/OS element libraries.
z/OS Program Directory	GI10-0670

© Copyright IBM Corp. 1989, 2006

Table 1. Referenced documents (continued)

Document Title	Order Number
3490 A and B Models Introduction	GA32-0125
3490 Models C10, C11, C1A, C22 and C2A Introduction	GA32-0217
IBM TotalStorage Enterprise Tape Library (3494) Introduction and Planning Guide	GA32-0448
IBM TotalStorage Enterprise Automated Tape Library (3495) Introduction	GA32-0234
IBM TotalStorage Enterprise High Performance Tape System 3590 Introduction and Planning Guide	GA32-0329
IBM TotalStorage 3592 Tape System Introduction and Planning Guide	GA32-0464
3995 Introduction and Planning Guide	GA32-0121
3995 Model 133,132,131 Operator's Guide	GA32-0122
3995 Operator Guide for C-Series Models	GA32-0352
3995 Introduction and Planning for C-Series Models	GA32-0350
z/OS DFSMS Software Support for IBM TotalStorage Tape System 3590 Models E1x/H1x	SC35-0484
z/OS DFSMS Software Support for IBM TotalStorage Enterprise Tape System 3592	SC26-7514
http://www.ibm.com/db2/	Click on the Library link in the navigational panel to access the DB2 library.
http://www.ibm.com/cics/	Click on the Library link in the navigational panel to access the CICS library.
IMS Version 8: Application Programming: EXEC DLI Commands for CICS and IMS Version 8	SC26-8726

Accessing z/OS DFSMS documents on the Internet

In addition to making softcopy documents available on CD-ROM, IBM provides access to unlicensed z/OS softcopy documents on the Internet. To view, search, and print z/OS documents, go to the z/OS Internet Library:

`www.ibm.com/servers/eserver/zseries/zos/bkserv/`

Using LookAt to look up message explanations

LookAt is an online facility that lets you look up explanations for most of the IBM® messages you encounter, as well as for some system abends and codes. Using LookAt to find information is faster than a conventional search because in most cases LookAt goes directly to the message explanation.

You can use LookAt from the following locations to find IBM message explanations for z/OS® elements and features, z/VM®, and VSE:

- The Internet. You can access IBM message explanations directly from the LookAt Web site at http://www.ibm.com/eserver/zseries/zos/bkserv/lookat/.

- Your z/OS TSO/E host system. You can install code on your z/OS or z/OS.e systems to access IBM message explanations, using LookAt from a TSO/E command line (for example, TSO/E prompt, ISPF, or z/OS UNIX® System Services running OMVS).
- Your Windows® workstation. You can install code to access IBM message explanations on the *z/OS Collection* (SK3T-4269), using LookAt from a Windows DOS command line.
- Your wireless handheld device. You can use the LookAt Mobile Edition with a handheld device that has wireless access and an Internet browser (for example, Internet Explorer for Pocket PCs, Blazer, or Eudora for Palm OS, or Opera for Linux handheld devices). Link to the LookAt Mobile Edition from the LookAt Web site.

You can obtain code to install LookAt on your host system or Windows workstation from a disk on your *z/OS Collection* (SK3T-4269), or from the LookAt Web site (click **Download**, and select the platform, release, collection, and location that suit your needs). More information is available in the LOOKAT.ME files available during the download process.

How to Read Syntax Diagrams

There is one basic rule for reading the syntax diagrams: Follow only one line at a time from the beginning to the end and code everything you encounter on that line.

The following rules apply to the conventions that are used in the syntax diagrams for all the OAM commands:

- Read the syntax diagrams from left to right and from top to bottom.
- Each syntax diagram begins with a double arrowhead (►►) and ends with opposing arrows (►◄).
- An arrow (→►) at the end of a line indicates that the syntax continues on the next line. A continuation line begins with an arrow (►→).
- Commands and keywords are shown in uppercase letters.
- Some commands and keywords have alternative abbreviations; these appear as part of the stack for that command or keyword. For example, the alternative abbreviation for **DISPLAY** is **D**.

- Where you can choose from two or more keywords, the choices are stacked one above the other. If one choice within the stack lies on the main path, a keyword is required, and you must choose one. In the following example you must choose either **DETAIL** or **STATUS**.

- If a stack is placed below the main path, a keyword is optional, and you can choose one or none. In the following example, **PURGE**, **KEEP**, and **LOCATION** are optional keywords. You can choose any one of the three.

- Where you can choose from two or more keywords and one of the keywords appears above the main path, that keyword is the default. You may choose one or the other of the keywords, but if none is entered, the default keyword is automatically selected. In the following example you may choose either **DETAIL** or **STATUS**. If neither is chosen, **STATUS** is automatically selected.

- Words or names in italicized, lowercase letters represent information that you supply. The values of these variables may change depending on the items to which they refer. For example, *volser* refers to the serial number of a volume, while *storgrp_name* refers to the name of a storage group.
- You must provide all items enclosed in parentheses ( ). You must include the parentheses. In the following example, you must supply the volume serial number (*volser*) and it must be enclosed in parentheses.



  You would code this as follows:

  D SMS,VOL(*volser***)**

  The variable *volser* is the serial number of the volume you wish to display.
- The repeat symbol shown below indicates that you can specify keywords and variables more than once. The repeat symbol appears above the keywords and variables that can be repeated. For example, when a comma appears in the repeat symbol, you must separate repeated keywords or variables with a comma.

  In the following example, you may specify the *library_name* and one or more system identification numbers (*system_id*) that are separated by commas. You must enclose the name of the library and all of the system IDs in parentheses.



  You would code this as follows:

  (*library_name***,** *system_id***,** *system_id***,** *system_id***)**

  The variable *library_name* is the name of the library you are working with, and *system_id* names three different instances of system identification numbers.

Summary of Changes

Summary of Changes for SC35-0426-04 z/OS Version 1 Release 8

This document contains information previously presented in *z/OS DFSMS OAM Planning, Installation, and Storage Administration Guide for Object Support*, SC35-0426-03.

The following sections summarize the changes to that information.

New Information

This edition includes the following new information:

In Chapter 3, "Migrating, Installing, and Customizing OAM," on page 85, a new keyword LOB was added to IEFSSNxx to enable or disable Binary Large Object Support.

In Chapter 3, "Migrating, Installing, and Customizing OAM," on page 85, the following CBROAM PARMLIB specifications SETOAM parameters are added:

- MAXRECYCLETASKS
- PERCENTVALID
- SGMAXRECYCLETASKS
- SGMAXTAPERETRIEVETASKS
- SGMAXTAPESTORETASKS.

In Chapter 4, "Administering OAM," on page 177, a new RETCODE2 parameter was added on OSREQ STORE command for immediate backup support.

In Chapter 5, "Operating OAM and OTIS Address Spaces and OSMC Functions," on page 263, a new operator command display option, GLOBAL, was added for SETOAM, SETOSMC, and SETOPT.

In Appendix B, "Sample Library Members," on page 429, two new sample jobs, CBRILOB and CBRSMR18, were added for creating LOB storage structures for each storage group that is to be LOB enabled.

In Appendix D, "OAM System Management Facility Records," on page 535:

- A table for new subtype 39,Table 76 on page 553, was added for immediate backup copy
- A table for new subtype 40, Table 77 on page 555, was added for tape recycle.
- Two new fields, ST32LOBI and ST32LOBD, were added for LOB support in Table 72 on page 543.

In Appendix D, "OAM System Management Facility Records," on page 535, the following tables were updated with new media types:

- Table 70 on page 537
- Table 72 on page 543
- Table 73 on page 547
- Table 75 on page 551

© Copyright IBM Corp. 1989, 2006

- Table 84 on page 567
- Table 85 on page 569

Enhanced support for the IBM TotalStorage™ Enterprise Tape System 3592 Model E05, added two media types, MEDIA9 and MEDIA10, and one recording technology, EFMT2. For more information, see:

- "Tape Storage" on page 39
- "Understanding the Data Class Construct" on page 24
- "Tape Volumes" on page 43
- "Tape Resources" on page 84
- "Displaying Volume Status" on page 350
- "Optical Configuration Database" on page 517

Changed Information

The following information was changed in this edition:

In Appendix D, "OAM System Management Facility Records," on page 535, the following tables were updated for large object support:

- Table 70 on page 537
- Table 72 on page 543

This document contains terminology, maintenance, and editorial changes. Technical changes or additions to the text and illustrations are indicated by a vertical line to the left of the change.

You may notice changes in the style and structure of some content in this document—for example, headings that use uppercase for the first letter of initial words only or procedures that have a different look and format. The changes are ongoing improvements to the consistency and retrievability of information in our documents.

Summary of Changes for SC35-0426-03 z/OS Version 1 Release 7

This document contains information previously presented in *z/OS DFSMS OAM Planning, Installation, and Storage Administration Guide for Object Support*, SC35-0426-02.

The following sections summarize the changes to that information.

New Information

This edition includes the following new information:

- Enhanced support for the IBM TotalStorage Enterprise Tape System 3592 Model J, adding three additional media types, including two media types for WORM tape. For more information, see "Tape Storage" on page 39.
- A new SMS subtype 38 record is added, and subtype 3 and 32 records are updated. See Appendix D, "OAM System Management Facility Records," on page 535 for details.
- When a full or partial object is retrieved from a tape or optical device, you can have a full copy of that object written to DB2 DASD and retained there for a specified number of days. For more information, see:
  - "Recalling Objects to DB2 DASD" on page 206

  - "OSREQ TSO/E Command Syntax" on page 254
  - "Updating SETOSMC Values" on page 373
  - "OSMC RECALL to DB2 DASD (Subtype 38)" on page 551
- A new IEFSSN*xx* keyword, MOS=*nnn*, expands the maximum object size supported by OAM from 50MB to 256MB. For more information, see:
  - "Device Considerations for Larger Data Objects" on page 60
  - "Shipping Request Limitations for Larger Data Objects" on page 5
  - "Considerations for Larger Data Objects" on page 208
  - "Updating the IEFSSNxx PARMLIB member" on page 98
  - "OSREQ TSO/E Command Syntax" on page 254

  `
- When an object is moved from an optical or tape volume to DB2 DASD during an OSMC cycle, the volser and sector location, or blockid, is retained in the object directory. This is because the transition to DB2 is usually temporary and the object will later move back to optical or tape. V1R7 adds a new option, CLEAROLDLOC, that will instruct OAM to clear the original volser and sector location or blockid in the object directory for a given object when that object is moved by OSMC to DB2 DASD. See "SETOSMC Keyword Definitions" on page 126 for more information.
- A new dynamic exit name, CBRUXTVS_EXIT, is invoked to inform the tape management system when a tape volume has been purged from the OAM inventory. This notification exit is patterned after the DFSMSrmm EDGTVEXT exit and the DFSMShsm ARCTVEXT exit. For more information, see "Using the OAM Object Tape Volume Return to MVS Scratch Exit Routine" on page 240.
- The MOVEVOL utility is enhanced to accommodate OAM scratch volumes. This allows MOVEVOL to be used with the DELETE option to remove scratch volumes from OAM's inventory. For more information, see "Using the Move Volume Utility" on page 225.
- A new TAPEDISPATCHERDELAY keyword is added to the SETOAM statement in the CBROAMxx PARMLIB member to delay processing of certain requests and minimize demounting and remounting. See "SETOAM Keyword Definitions" on page 103 and "Updating SETOAM Values" on page 369 for details.
- A new global SETOAM keyword, DSNWITHSGNAME is added. When specified, the storage group name is appended to the OAM tape dataset names. See "SETOAM Keyword Definitions" on page 103 for details.
- Information has been added to Table 5 on page 40 to reflect the new media types for the TotalStorage Enterprise WORM Tape Cartridge (MEDIA6), the TotalStorage Enterprise Economy Tape Cartridge (MEDIA7), and the TotalStorage Enterprise WORM Economy Tape Cartridge (MEDIA8).

Changed Information

The following information was changed in this edition:

- The MODIFY OAM,UPDATE,VOL command no longer allows users to update the EMPTY status of OAM object volumes. This changes the syntax displayed in "Updating Fields in the DB2 Volume Table and the Tape Volume Table" on page 377.
- The following display-type operator commands have been changed to disallow specifying the console for detail status (L=cc or L=cca):
  - "Displaying OAM Status" on page 322

- "Displaying OSMC Summary Status" on page 327
- "Displaying OSMC Task Status" on page 329
- "Displaying Drive Online/Offline Connectivity" on page 333
- "Displaying Drive Detail Status" on page 336
- "Displaying Library Online/Offline Connectivity" on page 339
- "Displaying Library Detail Status" on page 344
- "Displaying Storage Group Status" on page 346
- "Displaying Volume Status" on page 350

Deleted Information

Information about Filenet 9246 optical libraries, 9247 optical drives, and 12-inch optical media has been deleted from this publication because OAM no longer supports these media devices.

This document contains terminology, maintenance, and editorial changes, including changes to improve consistency and retrievability.

Summary of Changes for SC35-0426-02 z/OS Version 1 Release 5

This document contains information previously presented in *z/OS DFSMS OAM Planning, Installation, and Storage Administration Guide for Object Support*, SC35-0426-01.

The following sections summarize the changes to that information.

New Information

This edition includes the following new information:

- You can now recycle or delete object tape volumes and optical volumes after the Move Volume utility completes successfully. You also can recycle or delete OAM object tape and optical volumes for both Object and Object Backup storage groups when the volumes meet expiration criteria and they no longer contain any active objects. For more information, see the following topics:
  - "Object Tape and Optical Volume Management" on page 49
  - "Reusing Recycled Tape and Optical Volumes" on page 235
  - "Deleting Recycled Tape and Optical Volumes from OAM" on page 236
  - "Expiring Tape and Optical Volumes" on page 238
  - "Moving Objects and Recycling the Source Volume" on page 291
  - "Moving Objects and Deleting the Source Volume" on page 293
- OAM can stop a volume recovery that is in progress or delete a recovered optical or tape volume. For more information, see the following topics:
  - "Deleting a Recovered Tape or Optical Volume" on page 284
  - "Stopping a Volume Recovery that is in Progress" on page 383
- Information has been added to "Tape Storage" on page 39 that describes the IBM TotalStorage Enterprise Tape System 3592 Model J. The 3592 Model J provides an EFMT1 recording format and stores up to 300 GB (MEDIA5) noncompacted. For more information about the new performance scaling attribute in the data class, see "Tape Capacity and Performance Scaling" on page 43.
- Information has been added to "Tape Storage" on page 39 that describes the IBM TotalStorage Enterprise Tape System 3590 Model H. The 3590 Model H provides a 384-track recording format and stores up to 30 GB (MEDIA3) and 60 GB (MEDIA4) noncompacted.

- Information has been added to “SETOAM Keyword Definitions” on page 103 about the new SETOAM TAPERECYCLEMODE and SETOAM OAMSCRATCHSYNCH statements.
- Information has been added to “SETOPT Keyword Definitions” on page 122 about specifying SETOPT OPTICALREINITMODE for Object Backup storage groups.
- Information has been added to “SETOSMC Keyword Definitions” on page 126 about the new SETOSMC CYCLEWINDOW statement.
- The CBRSMR15 SAMPLIB job must be run if you are migrating OAM to z/OS Version 1 Release 5 (see Table 20 on page 87 and “CBRSMR15” on page 469).
- Information has been added to “CYCLE START TIME and CYCLE END TIME” on page 155 to describe the OSMC cycle start and end times.
- Information has been added to “Displaying Storage Group Status” on page 346 to describe the new output of the DISPLAY SMS,STORGRP,*storgrp*,DETAIL command.
- Information has been added to “Displaying Volume Status” on page 350 to describe the new output of the DISPLAY SMS,VOLUME,*volser* command.
- “Updating SETOSMC Values” on page 373 describes the new F OAM,UPDATE,SETOSMC command.
- Information has been added to indicate that OAM no longer supports Filenet 9246 optical libraries, 9247 optical drives, and 12-inch optical media.
- Information about the new OUNITNAM and DATACLAS fields has been added to “Tape Volume Table” on page 527. The CAPACITY field also displays information about the 3590 Model H and 3592 Model J tape devices.
- Information about the new SMF records has been added to “OSMC Storage Management Activity (Subtypes 32–35)” on page 543.

Changed Information

The following information was changed in this edition:

- Examples of the PERIODIC attribute have been added to Table 2 on page 24.
- Split the information that was formerly listed in the “Media Supported” column into two columns, “Media Supported” and “Attaches To” in Table 3 on page 29.
- Information about pseudo optical library configurations has been added to “Pseudo Optical Library Concept” on page 36.
- Table 18 on page 83 has been updated with cartridge capacity for user data for WORM and rewritable optical media.
- An example of stopping OSMC processing for a storage group has been added to “Stopping OSMC Processing for a Storage Group” on page 382.

This document contains terminology, maintenance, and editorial changes, including changes to improve consistency and retrievability.

Summary of Changes for SC35-0426-01 z/OS Version 1 Release 3

This document contains information previously presented in *z/OS DFSMS OAM Planning, Installation, and Storage Administration Guide for Object Support* (SC35-0426-00).

The following sections summarize the changes to that information.

New Information

This edition includes the following new information:

- The new subsection "SETOSMC Statement for OSMC Processing" on page 8 describes how you might associate an Object storage group with an Object Backup storage group that stores the first or second backup copies of objects.
- Three new figures were added to depict the process of storing primary, first backup, and second backup copies of objects. These figures are Figure 4 on page 19, Figure 5 on page 20, and Figure 6 on page 21.
- Information has been added to "OAMplex Restrictions" on page 6 that clarifies use of optical libraries defined in a source control data set (SCDS) as well as use of 9246 optical libraries and 9247 optical drives in an OAMplex.
- Information has been added to "SMS Constructs and ACS Routines" on page 11 to describe the SMS management policy parameters.
- Information has been added to "Using Object, Object Backup, and Tape Storage Groups" on page 12 to describe the second backup copy of objects function.
- Information has been added to "Defining an Object or Object Backup Storage Group" on page 13 to describe the use of ISMF in defining Object and Object Backup storage groups.
- Information has been added to "Assigning Object Backup Storage Groups" on page 14 to describe how to direct OAM to create first and second backup copies of objects.
- Information has been added to "Determining Which Media to Use for Backup Copies" on page 15 to describe the ways in which OAM schedules writes of first and second backup copies of objects.
- The NUMBER OF BACKUP VERSIONS (DATA SET EXISTS) field has been added to Table 2 on page 24.
- Information has been added to "Determining Data Class During Scratch Tape Allocation" on page 25 to describe the second backup copy of an object's DATACLASS specification for the associated tape support data set.
- Information has been added to "Determining Class Transition and Backup Requirements" on page 56 to describe how the management class parameters determine the assignment of first and second backup copies to the appropriate Object Backup storage groups.
- Special circumstances for working with the DEMOUNTWAITTIME parameter were added to "DEMOUNTWAITTIME" on page 104 and "DEMOUNTWAITTIME" on page 115.
- Information has been added to "High-Level Installation and Migration Checklists" on page 88 to include the steps that are needed to migrate to the new installation (z/OS V1R3) and to take advantage of the second backup copy of objects capability. Notes were also added to the checklist to guide DASD-only installations through migration operations.
- A new section, "Displaying Volumes that Have LOSTFLAG Set" on page 356, has been added to describe the added functionality of displaying optical and tape volumes that have LOSTFLAG set. Command syntax and display output are included.

Deleted Information

The following information was deleted from this edition:

- "Defining Optical Libraries" in Chapter 1, "Understanding the Object Access Method," on page 1 has been deleted.

- "Determining DRIVE STARTUP THRESHOLD for Object Backup Storage Group" in Chapter 3, "Migrating, Installing, and Customizing OAM," on page 85 has been deleted. The pertinent information in this section was combined with the information in "Improving Performance with Low DRIVE STARTUP THRESHOLD Value" on page 153.
- The figure "Conceptual Overview of Storing a Primary, Backup, or Secondary Backup Object to Tape" in Chapter 1, "Understanding the Object Access Method," on page 1 has been deleted.
- The subsection entitled "Creating or Updating the CBROAM*xx* PARMLIB Member with SETOAM Statements" in Chapter 3, "Migrating, Installing, and Customizing OAM," on page 85 has been deleted. The information from this subsection has been rolled into "SETOAM Statements for Object Tape Storage" on page 101.

Changed Information

The following information was changed in this edition:

- The figure "WORM and Rewritable Media Characteristics" was broken out into two separate figures: Figure 8 on page 32 and Figure 9 on page 32.
- Three columns were deleted ("120", "130", and "130/SPE") from and two columns were added ("OS/390® V2R10" and "z/OS V1R3") to Table 20 on page 87. A new row, "Creating and Binding DB2 Packages", was also added to this table.

This document contains terminology, maintenance, and editorial changes, including changes to improve consistency and retrievability.

Chapter 1. Understanding the Object Access Method

The object access method (OAM) uses a class of data referred to as objects. An *object* is a named stream of bytes. The content, format, and structure of that byte stream are unknown to OAM. There are no restrictions on the data in an object. For example, an object can be a compressed scanned image or coded data. Objects are different from data sets handled by existing access methods. The following characteristics distinguish them from traditional data sets:

- **No record orientation.** There are no individual records within an object.
- **Broad range of size.** An object can contain less than one kilobyte (KB) or up to 256 megabytes (MB) of data. (To increase the maximum object size above 50MB, use the MOS keyword in the OAM1 statement of the IEFSSNxx parmlib member. See "Updating the IEFSSNxx PARMLIB member" on page 98.)
- **Volume.** Objects are usually much smaller than data sets; however, they are more numerous and consume vast amounts of external storage.
- **Varying access-time requirements.** Reference patterns for objects change over time or cyclically, allowing less-critical objects to be placed on lower-cost slower devices or media.

This chapter covers the following topics related to using OAM to manage objects on DB2 DASD, tape, and optical volumes.

Topic	Page
Collections	1
Application Programming Interface (OSREQ Macro)	2
System-Managed Storage for Data and Space Management	2
Moving Objects Throughout the Hierarchy	2
Hardware and Software Interaction with OAM	3
Parallel Sysplex® and OAM	4
OAM Components	6
CBROAMxx PARMLIB Member Statements	8
ISMF Library Management Role within OAM	9
Installation Storage Management Policy Overview	9
SMS Constructs and ACS Routines	11
OAM Address Space	28
OTIS Address Space	29
Optical Storage	29
Tape Storage	39
Object Tape and Optical Volume Management	49

Collections

A *collection* is a group of objects typically having similar performance, availability, backup, retention, and class transition characteristics. You can use a collection to catalog a large number of objects. If these objects are cataloged separately, it could require an extremely large catalog. Every object must be assigned to a collection. Object names within a collection must be unique. However, the same object name

© Copyright IBM Corp. 1989, 2006

can be used in multiple collections. Each collection belongs to only one Object storage group. Each storage group can contain from one to many collections.

Application Programming Interface (OSREQ Macro)

OAM provides an application programming interface known as the OSREQ macro. The OSREQ macro sets up (ACCESS) the environment for a user to change, store, retrieve, delete, and query information about an object, and then releases (UNACCESS) the resources required for this macro when they are no longer needed. OAM includes the functions necessary to manage the objects after they are stored.

Related reading: For more detailed information on the OSREQ macro, see *z/OS DFSMS OAM Application Programmer's Reference*.

System-Managed Storage for Data and Space Management

OAM is a component of DFSMSdfp™, the base for the Storage Management Subsystem (SMS). OAM uses system-managed storage, which provide functions for data and space management. SMS provides the following benefits:

- Manages storage growth
- Improves the use of storage space
- Reduces the effort of device conversion and coexistence
- Provides centralized control of external storage
- Exploits the capabilities of available hardware

Use SMS to define a storage hierarchy for objects and the parameters for managing those objects. OAM uses this hierarchy definition and management parameters to place user-accessible objects anywhere in the SMS storage hierarchy.

The object storage hierarchy can consist of:

- Direct access storage device (DASD)
- Tape volumes associated with a tape library device (SMS-managed, library-resident tape volumes), and tape volumes outside of a library device (non-SMS-managed, shelf-resident tape volumes)
- Optical volumes inside a library device (SMS-managed, library-resident optical volumes), and optical volumes outside of a library device (SMS-managed, shelf-resident optical volumes)

Moving Objects Throughout the Hierarchy

During the storage management cycle, OAM determines whether the primary copy of an object is correctly positioned in the OAM storage hierarchy. If the object is not correctly positioned in the OAM storage hierarchy, the primary copy of the object is moved to the correct storage medium. One of following medium transitions can be performed for the primary copy of an object:

- DASD to tape
- DASD to optical
- Tape to DASD
- Tape to optical
- Optical to DASD
- Optical to tape

The location of an object in the hierarchy is unknown to the user of the programming interface. You do not need to supply device-dependent information. For example, there are no JCL DD statements and no requirements for device geometry, such as track size.

Related reading: See "Media Selection for Object Storage" on page 18 for information regarding the criteria that is used in placing objects onto the appropriate media type.

Hardware and Software Interaction with OAM

Figure 1 shows the hardware and software in a typical OAM object environment and illustrates the possible interactions. The OAM object environment is closely tied to SMS and DB2. OAM also interacts with the OAM thread isolation support (OTIS). OTIS is an OAM subsystem that provides OAM-to-DB2 functions that use a different thread to DB2 than the application program thread. Applications can use OSREQ, the application programming interface, to interact with OAM. Applications can also communicate directly with DB2. Each application is responsible for synchronizing its DB2 databases, whether the operation is generated by the application or by OAM.

Note: The artwork in this document uses tape cartridge and optical disk symbols to depict tape and optical storage libraries and devices. For a detailed list of the devices that OAM uses, see "Hardware" on page 60.

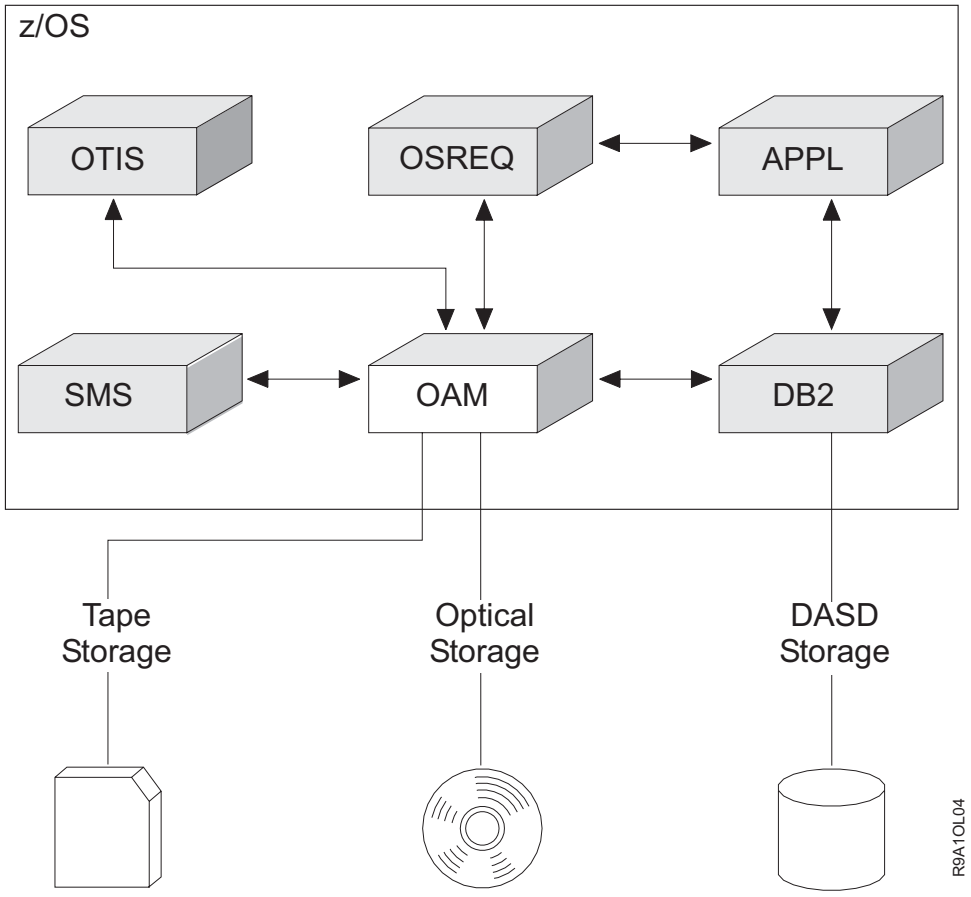

Figure 1. OAM Interactions with Software and Hardware

Related reading: For more information on OSREQ, see the *z/OS DFSMS OAM Application Programmer's Reference*.

Parallel Sysplex® and OAM

OAM functions in a z/OS Parallel Sysplex. A Parallel Sysplex links many systems together and provides multisystem data sharing through the use of the cross-system coupling facility (XCF) component of z/OS. XCF services allow authorized applications on one system to communicate with applications on the same system or on other systems. XCF services also allow data to be shared between the applications on these systems. The system linking and multisystem data sharing makes the sysplex platform ideal for parallel processing. In a Parallel Sysplex, objects can be accessed from all instances of OAM and from optical hardware within the sysplex, and transactions can be processed more efficiently.

Related reading: For more information regarding a Parallel Sysplex, see the following documents:

- *z/OS Parallel Sysplex Overview*
- *z/OS Parallel Sysplex Application Migration*

OAMplex

An *OAMplex* consists of one or more instances of OAM running on systems that are part of a Parallel Sysplex. An OAMplex has a one-to-one correlation to an XCF group in a Parallel Sysplex. The XCF group associated with an OAMplex is joined by instances of OAM address spaces, running on separate systems in a Parallel Sysplex, sharing a common OAM database in a DB2 sharing group. Each instance of OAM is a member of the same XCF group. Also, the DB2 subsystems connected to these instances of OAM belong to the same DB2 data sharing group. The instances of OAM belonging to the same XCF group are able to communicate with each other through the XCF services. The DB2 data sharing group shares the DB2 database information (OCDB, OAMADMIN, and object databases) among OAMs belonging to the OAMplex. When different OAMs sharing a common database on DB2 join an XCF group to become an OAMplex, all object data and configuration information is known to all instances of OAM in the OAMplex. Any object, regardless of which OAM stored the object, can be retrieved by any instance of OAM in the OAMplex.

Requirement: In a Parallel Sysplex, only one OAM XCF group (OAMplex) can share a single common DB2 database. All instances of OAM running in XCF mode in a Parallel Sysplex sharing a common DB2 database *must* join the same XCF group. Also, all instances of OAM in an OAMplex must share a common catalog where the OAM collection names are defined. Multiple OAMplexes can exist within the Parallel Sysplex, but each OAMplex must use a different shared DB2 database. No two OAMplexes can share the same DB2 database. Additionally, OAMs that are not in XCF mode cannot share the DB2 database.

OAM uses the XCF messaging facilities to communicate between systems, synchronize resource information, and coordinate where transactions should be processed.

OAM can be running in XCF mode (in an OAMplex), or non-XCF mode (not in an OAMplex). When OAM is running as part of an OAMplex on a system in a Parallel Sysplex, you must initialize that instance of OAM with a CBROAM*xx* PARMLIB member using the OAMXCF statement, which specifies an XCF member name and an XCF group name.

If all instances of OAM involved with the transaction belong to the same OAMplex, you can retrieve any OAM object from any z/OS system in a Parallel Sysplex. This is allowed regardless of which OAM in the sysplex stored the object or on which medium (3995 optical, tape, or DASD) the object resides.

The system uses *transaction shipping* to send and receive requests between OAMs within the OAMplex. If each instance of OAM in an OAMplex shares the same configuration, transaction shipping allows any OAM in a Parallel Sysplex to write objects to, retrieve objects from, or delete objects from any 3995 optical volume in the Parallel Sysplex. Requests to read data from or write data to 3995 optical volumes that reside in a 3995 optical library being managed by a different OAM on a separate z/OS system in the same Parallel Sysplex are serviced by sending the request (using XCF) to the OAM running on the z/OS system that controls the 3995 optical library dataserver. This configuration is possible only as long as both the requesting and responding OAMs are members of the same OAMplex. 3995 optical library dataservers are still controlled and managed by a single OAM running on a single z/OS system. If a system failure occurs, you can switch control of a 3995 optical library dataserver to another OAM running on another z/OS system in the same OAMplex.

Requirement: When multiple OAMplexes exist within a Parallel Sysplex, each OAMplex must have a unique set of OAM resources (optical devices and media for object storage) defined in its configuration.

The object tape environment also uses the basic concept of transaction shipping. However, MVS dynamic allocation handles the required tape resource allocation, because OAM does not control tape resources. Tape resources are allocated as needed and only for the time required for their use.

For object tape processing, tape drives must be available to any OAM in an OAMplex where a tape request may need to be processed. Tape transactions are shipped across systems *only* when the requested tape volume for a *retrieve* request is allocated and mounted on a tape drive that is in use by another OAM in the OAMplex, or when the OAMplex has different support levels (full support versus coexistence support). For example, if a *retrieve* request originated on a coexistence-support system and another system in the OAMplex is available and has full support for the request, the *retrieve* request can be shipped to the full-support system. There are available tape drives on the system where the request originated to satisfy the request. Tape *write* requests are not sent across systems for processing.

Shipping Request Limitations for Larger Data Objects

Shipping requests to another system requires that OAM obtain storage for that object on the receiving system. To ensure that the OAM address space does not run out of virtual storage when the maximum object size is expanded above 50MB (with the MOS keyword in the OAM1 statement of the IEFSSNxx parmlib member) the following limitations are in effect:

- Tape RETRIEVE requests for an object larger than 50MB will not be shipped to the system in which the volume is currently mounted. Instead, they will wait to be processed on the system where the request originated. If the originating system is not capable of honoring the request, the read request will fail on that system. To avoid problems, ensure that all systems in the OAMPLEX are capable of honoring the request.

- Optical RETRIEVE and STORE requests for objects larger than 50MB must be processed on the system to which the optical library and drives are attached. If not, OAM will fail the request with return code 12, reason code X'0813'.

When planning for data objects larger than 50MB in an OAMPLEX, consider storing and processing them only on DASD using DB2 tables or on tape.

OAMplex Restrictions

There are some restrictions with an OAMplex that you should keep in mind:

- Any instance of OAM running on a system in a Parallel Sysplex that is not running in XCF mode cannot share any resources (optical libraries, optical drives, optical volumes, or tape volumes for object data) that another instance of OAM owns.
- Any OAM not running in XCF mode cannot share its DB2 databases with any other instances of OAM.
- Optical libraries that are defined in a source control data set (SCDS) as connected to a system where OAM is not running in XCF mode must be logically connected to only that system.
- When you define optical libraries in an SCDS as logically connected to multiple systems, all instances of OAM on those systems must be part of a single OAMplex.
- If an OAM DB2 database is being shared, the catalog used for the OAM collection names must also be shared.

It is important that these restrictions be implemented and adhered to. OAM cannot detect or prohibit processing that does not conform to these standards, so unexpected results can occur if these restrictions are not strictly enforced.

OAM Components

The functions of OAM are performed by its three components, as illustrated in Figure 2 on page 7, are discussed below.

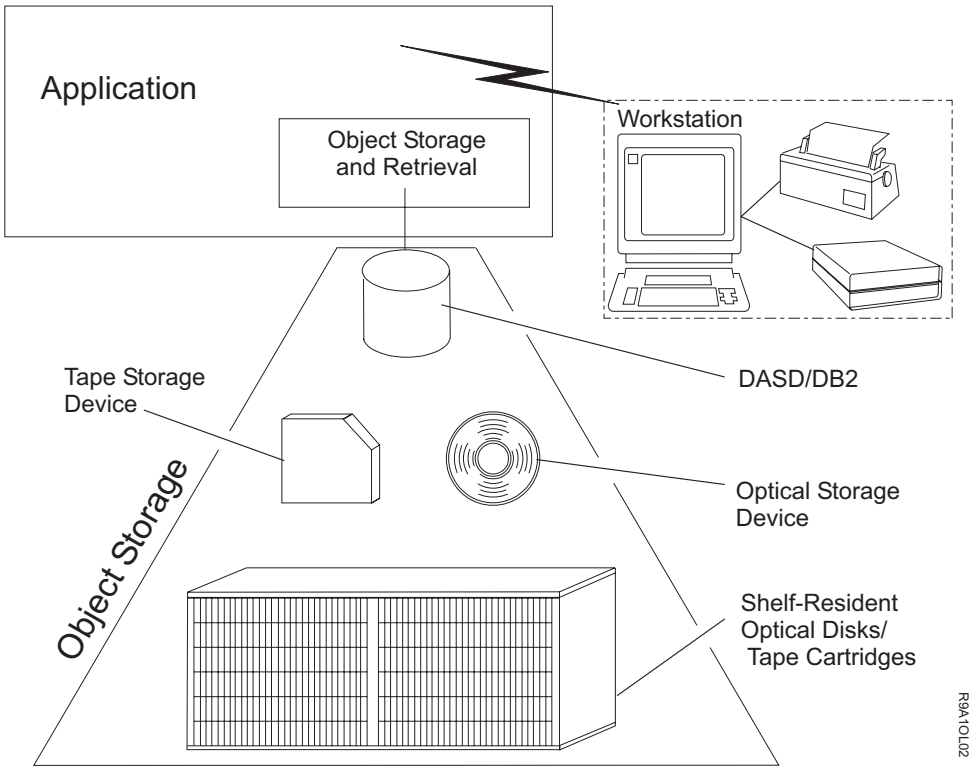

Figure 2. OAM Application Illustration

1. The **Object Storage and Retrieval (OSR)** component is an application programming interface for OAM. Applications operating in Customer Information Control System (CICS), Information Management System (IMS), TSO, and z/OS use OSR to store, retrieve, query, and delete objects, and to change information about objects. OSR stores the objects in the storage hierarchy and maintains the information about these objects in DB2 databases. OSR functions, invoked through the application programming interface, require the OAM thread isolation support (OTIS) application for administrative processing.
2. The **Library Control System (LCS)** component writes and reads objects on tape and optical disk storage. It also manipulates the volumes on which the objects reside. The LCS component controls the usage of optical hardware resources that are attached to the system.
3. The **OAM Storage Management Component (OSMC)** determines where objects should be stored in the OAM storage hierarchy, manages object movement within the object storage hierarchy, manages expiration attributes that are based on the installation storage management policy that is defined through SMS, and creates the requested backup copies of the objects. OSMC also provides recovery, movevol, and immediate recall to DB2 functionality.

Related reading: For more information on how LCS controls the library management for tape library dataservers (automated and manual), see the *z/OS DFSMS OAM Planning, Installation, and Storage Administration Guide for Tape Libraries*.

CBROAMxx PARMLIB Member Statements

The CBROAM*xx* PARMLIB member establishes the environment under which OAM runs. You can customize the CBROAM*xx* PARMLIB member by updating it with statements that alter the operating environment independently of ISMF and SMS. The statements include SETOAM, SETOPT, SETOSMC, and OAMXCF. Once you have updated the CBROAM*xx* PARMLIB member with one or more of these statements, you must restart OAM.

SETOAM Statement for Object Tape Volumes

The CBROAM*xx* PARMLIB member contains one or more SETOAM statements. These statements contain keywords that you can use to tailor the object tape function. These statements can supplement or override information that was previously specified when the applicable Object or Object Backup storage group was defined using ISMF. Some keywords apply to all of the Object or Object Backup storage groups that use the object tape function, and others apply only to the group for which they have been explicitly specified.

Related reading: For more information on changing the SETOAM values dynamically or defining the values when the CBROAM*xx* PARMLIB member is not used at initialization, see "SETOAM Statements for Object Tape Storage" on page 101 and "Updating SETOAM Values" on page 369.

SETOPT Statement for Optical Volumes

The CBROAM*xx* PARMLIB member contains one or more SETOPT statements. The SETOPT statement and its associated keywords define rules at global and storage group levels that OAM uses to administer optical volumes.

Related reading: For more information on changing the SETOPT values dynamically or defining the values when the CBROAM*xx* PARMLIB member is not used at initialization, see "Updating SETOPT Values" on page 372.

SETOSMC Statement for OSMC Processing

The CBROAM*xx* PARMLIB member contains one or more SETOSMC statements. The SETOSMC statement and its associated keywords determine the valid values of settings, at a global or storage group level, for OSMC processing. They associate an Object storage group with the Object Backup storage group that stores the first or second backup copies of objects. The SETOSMC statement determines which Object Backup storage groups contain the first and second copies of the objects that are associated with an Object storage group. If you do not provide a SETOSMC SECONDBACKUPGROUP statement, and specify a second backup group, OAM does not create second backup copies of objects. SETOSMC statements can also be used to enable and customize object recall to DB2 processing.

Related reading: For more information on changing the SETOSMC values dynamically or defining the values when the CBROAM*xx* PARMLIB member is not used at initialization, see "Updating SETOSMC Values" on page 373.

OAMXCF Statement for Parallel Sysplexes

The CBROAM*xx* PARMLIB member contains one or more OAMXCF statements that allow you to use OAM in a Parallel Sysplex. The OAMXCF statement allows you to provide group and member names for OAMplexes and instances of OAM to be associated with various XCF groups and members to allow data sharing within the sysplex. There are also timeout values that are assigned to optical and

tape request types to determine the number of seconds that OAM is to wait for completion of a read or write request that was shipped to another OAM within the OAMplex.

Related reading: For more information on changing the OAMXCF values dynamically or defining the values when the CBROAM*xx* PARMLIB member is not used at initialization, see "Using the UPDATE Command to Set OAMXCF Values" on page 376.

ISMF Library Management Role within OAM

Use the Interactive Storage Management Facility (ISMF) Library Management to integrate OAM into system-managed storage. Use DB2 to define optical disk drives and libraries into the optical configuration database. Use SMS to define the same drives and libraries into the specified SCDS, making such devices a part of the SMS configuration when that SCDS is activated.

For object tapes, other information supplied by the SETOAM statement of the CBROAM*xx* PARMLIB member can supplement or override the ISMF information assigned to the Object or Object Backup storage group.

Note: OAM identifies tape volumes eligible for reading and writing objects through information provided by the Tape Volume Table in the optical configuration database and by the Object or Object Backup storage group to which the volume is assigned. Therefore, definition of tape libraries and tape drives to the optical configuration database through the use of ISMF is not required for object tapes. However, tape libraries are defined to an SCDS and to the tape configuration database. Tape drives are dynamically allocated by the system as needed to satisfy requests to read or write objects.

Upon activation of an SCDS having optical libraries and optical disk drives defined, as well as tape drives available for allocation as needed, an operator on any console within an SMS complex can issue commands targeted for any library or drive within the configuration.

Related reading:

- For more information on how IBM tape drives are allocated to the configuration, see "Using Dynamic Allocation for Tape Drives" on page 46, and *z/OS DFSMS OAM Planning, Installation, and Storage Administration Guide for Tape Libraries*.
- For more information concerning ISMF usage in an optical environment, see Appendix A, "Sample Optical Hardware Configurations," on page 387, and *z/OS DFSMS Using the Interactive Storage Management Facility*.

Installation Storage Management Policy Overview

Each installation defines a storage management policy that allows effective object storage management without requiring user intervention. Using ISMF, the storage administrator and system programmer define an installation storage management policy in an SMS configuration. OAM manages object storage according to the active policy. Optical, tape, and DASD can all be used as the primary storage media for storing objects. Backup copies of objects can only be stored on optical or tape volumes. See Figure 3 on page 10 for a pictorial overview of this process.

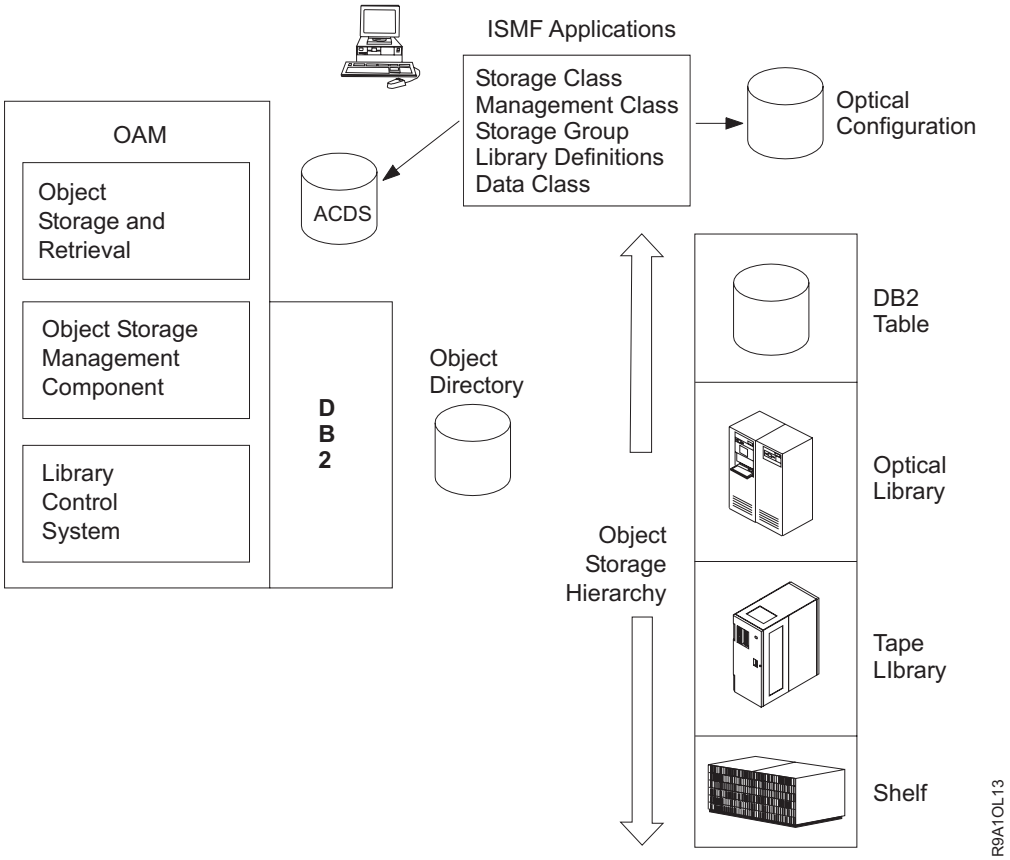

Figure 3. Overview of the Installation Storage Management Policy

An SMS configuration consists of the following elements:

- **Base configuration.** The base configuration identifies the systems in an SMS configuration and contains installation defaults. It also applies to SMS-managed data sets as well as objects. Only object-related functions are discussed in this document.
- **Active control data set (ACDS).** The ACDS controls the storage management policy for the installation.
- **Automatic class selection (ACS) routines.** The storage administrator uses the ACS routines to assign storage group, storage class, management class, and data class constructs to data sets or objects that are based on customer-defined criteria. ACS routines are invoked with user-input variables, and they make decisions based on the environment called. The ACS routines use input values to set new values which causes changes in the SMS handling of the data.
- **Optical library and optical drive definitions.** Optical storage hardware must be defined to the system through ISMF before it can be used. (Tape drives are dynamically allocated for use when required. They are defined to the system through the use of the Hardware Configuration Definition [HCD], not ISMF.)
- **Optical configuration.** OAM stores the optical library and drive definitions in the optical configuration database (DB2) and in the ACDS through the SMS constructs.
- **SMS constructs.** Constructs are lists of attributes that are assigned to objects and storage areas. An SMS configuration can contain the following types of constructs. However, OAM uses only four of them (storage group, storage class, management class, and data class) to manage object storage. An SMS configuration can contain multiple constructs of each type.

- The **Storage group** construct allows you to define a storage hierarchy and manage that hierarchy as if it were one large, single storage area. See "Understanding the Storage Group Construct" on page 12 for information on establishing and manipulating storage groups.
- The **Storage class** construct allows you to define different levels of performance objectives and availability requirements for objects. See "Understanding the Storage Class Construct" on page 18 for information on assigning an object to a storage class.
- The **Management class** construct allows you to define backup, retention, and class transition attributes for objects. See "Understanding the Management Class Construct" on page 22 for specific information on defining the management class attributes.
- The **Data class** construct allows you to define specific data attributes that are required for your installation's tape storage. See "Understanding the Data Class Construct" on page 24.
- **Aggregate group** allows you to group a collection of data objects to prepare for disaster recovery, application transfer or archiving, or data migration. An aggregate groups allows the data to be referred to collectively or individually. OAM *does not* use aggregate groups.
- A **copy pool** is a defined set of storage groups that contain data that DFSMShsm™ can back up and recover collectively using fast replication. OAM *does not* use copy pools.

Related reading:

- For more information on using SMS, see *z/OS DFSMS Introduction* and the *z/OS DFSMS Storage Administration Reference*.
- For information on using ISMF, see the *z/OS DFSMS Using the Interactive Storage Management Facility*.

SMS Constructs and ACS Routines

This section discusses the SMS constructs used by OAM and their relationship with the automatic class selection (ACS) routines. OAM defines the management policy parameters in the SMS constructs of storage group, storage class, management class, and data class.

OAM associates these parameters with every object that it stores. The storage administrator defines the associations through ACS routines. The parameters include the following:

- Object retention rates
- The media on which OAM stores object collections
- Legal requirements for object retention
- Retrieval response time
- Location of object collections in the storage hierarchy
- How long OAM should hold the object collection at that level in the hierarchy
- Number of backup copies required (0, 1 or 2)
- Whether the first backup copy is written at the time the object is initially stored or during a subsequent storage management cycle
- The media type to which OAM should direct backup copies of objects
- Affiliation of libraries with relevant storage groups

Understanding the Storage Group Construct

For data sets, the storage group construct simplifies the task of administering external data. By putting a number of homogeneous data sets into one storage group, they can be viewed as one entity.

An Object storage group is composed of a set of volumes. Each installation develops Object storage groups according to its individual needs. Storage groups can be used to segregate different types of data (such as production versus development) and aggregate like types of data.

By separating the physical volumes from the service level (as defined by the storage class construct), Object storage groups also allow installations to change the physical aspects of storage without affecting the logical requirements of data access. For example, a new volume or device can be added to the storage group without affecting end-user routines.

In an OAM environment, Object storage groups allow the storage administrator to define an object storage hierarchy. The *object storage hierarchy* classifies storage areas according to location and, therefore, according to retrieval response time. Each object storage hierarchy must contain an *object directory*, containing control information about each object. Additionally, the hierarchy can have:

- DB2 object storage tables on DASD
- Optical volumes that are associated with optical libraries (real or pseudo), and operator-accessible optical disk drives
- Tape volumes that are associated with tape libraries or stand-alone tape drives

During an object's lifetime, it can move from one OAM storage hierarchy level (storage location) to another, ascending or descending depending on its performance objectives.

Related reading: For more information on storage groups for data sets and objects, see *z/OS DFSMS Storage Administration Reference*.

Using Object, Object Backup, and Tape Storage Groups

In addition to the storage groups that are defined by each installation for its data sets, OAM uses three special storage group types: Object, Object Backup, and Tape. OAM uses these storage groups as follows:

- An Object storage group contains primary objects. See "Assigning Tape Storage Groups" on page 14 for more information on assigning storage groups.
- An Object Backup storage group contains the first or the second backup copy of each object for which the management class construct requires a backup. See "Assigning Object Backup Storage Groups" on page 14 for more information on assigning Object Backup storage groups.
- A Tape storage group contains tape volumes that are associated with an automated tape library dataserver (ATLDS) or a manual tape library (MTL). See "Assigning Tape Storage Groups" on page 14 for more information on assigning storage groups.

A *primary* object is the primary copy of an object in the object storage hierarchy which is stored in the Object storage group on direct access storage device (DASD), optical, or tape. A *backup* object is the first backup copy of an object, which is stored in the Object Backup storage group specified as a first backup storage group. A *second backup* object is the second backup copy of an object, which is stored in the Object Backup storage group specified as a second backup storage group.

You can retrieve the primary, backup, or second backup copy of an object by using the OSREQ RETRIEVE command. Specify VIEW(PRIMARY), VIEW(BACKUP), or VIEW(BACKUP2) on the RETRIEVE request. You can also get automatic access to the backup copies for retrieval by using the Automatic Access to Backup facility.

When a primary or backup copy of an object residing on optical or tape media is retrieved, OAM can also create a temporary copy of the object in DB2 for a user-defined number of days. This can significantly improve the performance rate for subsequent retrieves of this object. This object recall to DB2 process can be initiated explicitly using a RECALL keyword on the OSREQ RETRIEVE request, or implicitly using defaults defined through SETOSMC statements in the CBROAMxx Parmlib member. Refer to "Recalling Objects to DB2 DASD" on page 206 for details.

Related reading: See *z/OS DFSMS OAM Application Programmer's Reference* for more detailed information on the OSREQ macro.

Defining an Object or Object Backup Storage Group: To define an Object or Object Backup storage group, use the ISMF Storage Group application. Use SETOAM statements in the CBROAM*xx* PARMLIB member to specify the tape-related options that can supplement or override these ISMF specifications for the Object or Object Backup storage group definitions.

If a tape unit name is associated with an Object Backup storage group on the SETOAM statement in the CBROAM*xx* PARMLIB member, the backup copies are written to tape volumes. In this instance, any optical libraries that are associated with the Object Backup storage group that is defined using the ISMF storage group define panel are ignored for writing backup copies of objects to that Object Backup storage group. If the SETOAM statement does not direct the Object Backup storage group to tape media, OAM writes the backup copies to optical media. Additionally, if there is no SETOAM statement in the CBROAM*xx* PARMLIB member, then OAM automatically writes the backup copies to optical media.

Other information that is supplied by the CBROAM*xx* PARMLIB member can supplement or override the ISMF information that is assigned to the Object or Object Backup storage group.

If an Object or Object Backup storage group belongs to an OAM that is a member of an OAMplex, it can be connected to more than one system in an SMS complex. The libraries that are defined for these storage groups can also be connected to multiple systems within the OAMplex. If the OAM is not part of an OAMplex, each Object or Object Backup storage group can be connected to only one system in the SMS complex.

Related reading:

- For information on changing the SETOAM values dynamically and on defining the values when the CBROAM*xx* PARMLIB member is not used at initialization, see "Using the UPDATE Command to Set SETOAM, SETOSMC, and SETOPT Values" on page 368.
- For more information on assigning backup copies of objects to various media types, see "Determining Which Media to Use for Backup Copies" on page 15.

Assigning Tape Storage Groups: A Tape storage group can be assigned to an Multiple Virtual Storage (MVS™) scratch tape when it is first used to store an OAM object. The Tape storage group is assigned to the tape volume through the ACS routines at tape volume allocation. A tape volume is assigned to an object backup storage group when space is needed to write a backup copy of an object. As a result, a single tape volume which was originally allocated inside of an ATLDS or MTL might have both an associated Tape storage group and an associated Object Backup storage group.

The Tape storage group is assigned to the tape volume, and the Object or Object Backup storage group is assigned to the object. Because a single tape volume can only contain objects that belong to one Object or Object Backup storage group, the tape volume is associated with the Object or Object Backup storage group containing the first object that is written to the tape volume.

Assigning Object Storage Groups: An Object storage group is associated with an object through SETOSMC statements in the CBROAM*xx* member of PARMLIB. Through these statements, you can associate an Object storage group with a first and a second Object Backup storage group. If no storage groups are specified, then the defaults for the configuration are used.

Note: You can access only volumes that are associated with the Object or Object Backup storage groups that are defined in the active SMS configuration. A volume that is associated with an Object or Object Backup storage group that is not defined in the active SMS configuration cannot be accessed. Objects that are already written on that volume cannot be retrieved, and OAM cannot write new objects to that volume. A message is issued at OAM initialization for each volume that is associated with the Object or Object Backup storage group that is not defined in the active configuration. (Message CBR0182I is issued for optical volumes or CBR0210I for tape volumes.) To remedy this problem, define the Object or Object Backup storage groups to the active configuration by activating an SCDS that contains the Object or Object Backup storage groups.

Related reading: See "SETOSMC Statements for Use in the OSMC Environment" on page 125 for a sample SETOSMC statement that you can use when assigning storage groups to objects.

Assigning Object Backup Storage Groups: You can direct OAM to create a first and a second backup copy of objects using the existing NUMBER OF BACKUP VERSIONS (DATA SET EXISTS) field that is located in the SMS management class definition. OAM uses this field to determine how many backup copies of an object are to be made when OSMC processing is done for an object's storage group, if there are SETOSMC statements in the CBROAM*xx* member of PARMLIB indicating that second backup copies are to be created. See page "Defining Management Classes" on page 168 for the specifics of defining this field.

An Object Backup storage group can serve as either a first backup storage group, or as a second backup storage group, but not both. OAM automatically verifies that the Object Backup storage group is not specified as both a first and a second backup storage group.

Assigning Object Backup storage groups differs from assigning the Object storage group in that you must use SETOSMC statements to indicate that you want the second backup copy stored in an Object Backup storage group that is not the default Object Backup storage group. If you do not provide SETOSMC statements, then OAM does not process second backup copies of objects.

Related reading: See "Displaying SETOPT, SETOAM, and SETOSMC Parameters" on page 357 for the specifics of assigning Object Backup storage groups using SETOSMC statements.

Determining Which Media to Use for Backup Copies

OSMC uses the AUTO BACKUP parameter on the management class to determine if backup copies of an object should be written. OSMC schedules writes of **two** backup copies if all of the following items are true:

- The AUTO BACKUP parameter equals **Y**.
- The number of backup versions that is specified in the management class field, NUMBER OF BACKUP VERSIONS (DATA SET EXISTS), is greater than or equal to two (≥2).
- A SECONDBACKUPGROUP keyword is specified in a SETOSMC statement in the CBROAM*xx* PARMLIB member.

The backup copies of the object are written to the Object Backup storage groups assigned to the Object storage group to which the object belongs. Using the SETOAM statements, you can specify that the backup copies of the object be written to the same removable media type or to different removable media types, or both. The media that is selected for the backup copies might be optical or tape. If OAM is initialized with a CBROAM*xx* PARMLIB member containing SETOAM statements for the Object Backup storage groups, and the SETOAM statements include valid TAPEUNITNAME specifications, the backup copies are written onto tape media. If the TAPEUNITNAME is not valid, OAM initialization fails. If no valid SETOAM statements exist for a given Object Backup storage group, all backup copies written to that Object Backup storage group are written to optical media.

Note: If the Management Class associated with the object has AUTO BACKUP = Y and BACKUP FREQUENCY = 0, then the first backup copy is created at the time the object is initially stored.

OSMC schedules a write of only **one** backup copy if all of the following items are true:

- The AUTO BACKUP parameter equals **Y**.
- The NUMBER OF BACKUP VERSIONS (DATA SET EXISTS) parameter is less than two.

OAM writes the single backup copy to the designated Object Backup storage group onto the media type that is assigned for that storage group.

Tip: The default number of backup versions in the NUMBER OF BACKUP VERSIONS (DATA SET EXISTS) field is two.

Note: If the Management Class associated with the object has AUTO BACKUP = Y and BACKUP FREQUENCY = 0, then the first backup copy is created at the time the object is initially stored.

First and second backup copies of objects can never reside on the same tape volume or optical disk volume because the first copy is stored on a volume belonging to the Object storage group and backup copies reside on volumes belonging to the specified Object Backup storage groups. A single tape volume or optical disk cannot belong to more than one Object or Object Backup storage group. Likewise, first and second backup copies of objects belong to separate Object Backup storage groups. Therefore, first and second backup copies of objects cannot reside on the same volume.

The optical disk volume that is chosen to store the primary copy or first or second backup copies of the object is an optical volume (primary copy) or backup optical volume (backup copy) that is contained in one of the real or pseudo optical disk libraries that are listed in the Object or Object Backup storage group definitions.

Allocating a Scratch Tape for the Tape Storage Group

If a scratch tape volume is being allocated to store the primary or backup copy of the object, MVS scratch tape allocation chooses a library-resident tape volume (from an ATLDS or MTL) that is associated with the Tape storage group. If a scratch tape volume is not needed, an existing tape volume that is associated with an Object or Object Backup storage group that is defined in the current SCDS and capable of being mounted and handling the write request is allocated.

Using the DATACLASS Parameter to Determine Compaction

If the storage class indicates tape media and the Tape storage group that specifies the tape volume allocation is for a tape library dataserver, the allocation process uses the DATACLASS parameter on the SETOAM statement to determine tape compaction or no tape compaction for the volume. If the TAPECOMPACTION or NOTAPECOMPACTION keywords on the SETOAM statement are specified for a particular storage group, the data is written in compacted or noncompacted format as specified. If these keywords are not specified at storage group level of the SETOAM statement, the DATACLASS parameter of the SETOAM statement at the global level is used to determine tape compaction or no tape compaction. Should the DATACLASS parameter not be specified at the OAM global level, information that is passed on the DEVSUP parameter after allocation processing is used to determine whether the allocated tape volume should have tape compaction or no tape compaction.

Related reading: See “Media Selection for Object Storage” on page 18 for more information.

Using the TAPEUNITNAME Parameter for Volume Allocation to a Stand-Alone Drive

If the volume allocation is done using a stand-alone tape drive and no OAM scratch tape is available, OAM allocates a scratch tape using the TAPEUNITNAME parameter that is specified in the subparameter of the STORAGEGROUP parameter on the SETOAM statement. If no TAPEUNITNAME parameter is associated with the Object storage group that is assigned to the object, the storage of the object fails. The TAPEUNITNAME is stored in the UNITNAME column of the TAPEVOL table. The TAPEVOL table contains a single row for each tape volume containing OAM objects.

Requirement: The TAPEUNITNAME parameter is required and is specified on all dynamic allocations so that the device which is allocated is compatible with the tape to be mounted.

Object Tape Data Set Low-Level Qualifier

To assist the tape management system in mounting an appropriate media type in the stand-alone environment (non system-managed tape environment), a global keyword DSNWITHSGNAME can be specified in the SETOAM statement in the CBROAMxx PARMLIB member. When specified, the object storage group name is appended to the OAM primary and backup tape data set names. The tape management system can parse the data set low-level qualifier (storage group) to determine from which pool a scratch volume should be selected for a mount request in the stand-alone environment. Refer to "SETOAM Keyword Definitions" on page 103 for more information.

Using SETOAM to Direct Objects to a Specific Device Type for an Object Storage Group

You can use a SETOAM statement to direct all objects for an Object or Object Backup storage group to a specific tape type by specifying the TAPEUNITNAME(*device-type*) parameter that is associated with the storage group.

The following are examples of directing objects to specific tape device types using the TAPEUNITNAME parameter of the SETOAM statement:

- If 3490 is the TAPEUNITNAME parameter, then objects written to the subject Object or Object Backup storage group would all have this unit name recorded in the tape volume table. Objects written to the Object or Object Backup storage group would all be written to 3490 devices.
- If the TAPEUNITNAME(3490) is changed to a new device type, such as TAPEUNITNAME(3590), OAM continues to write to the available usable tape volumes that are associated with the Object or Object Backup storage group using 3490 devices until an MVS scratch allocation is required. When an MVS scratch tape is required to handle an out-of-space condition for the Object or Object Backup storage group, that scratch tape is written on a device that is specified by the SETOAM TAPEUNITNAME statement for that group, which is 3590 in this example.

  OAM continues to read the objects that were previously written on 3490 devices for the Object or Object Backup storage group so long as there is a 3490 device available for allocation at the time the read is requested.

  Note: If a tape volume that was previously written on a 3490 device is entered into an ATLDS or MTL, that tape volume continues to be used as long as the ATLDS or MTL to which it was entered contains a compatible device.

Related reading: See "Using Dynamic Allocation for Tape Drives" on page 46 for information concerning compatible devices not being available to handle requests.

Grouping Devices (Esoteric Unit Names)

Devices can be grouped together and defined as one group to the system. For instance, a group of 3590 tape drives in the same room can be grouped together and defined as 3590GRP. These device groups are known as esoteric unit names or *esoterics*. If you specify an esoteric on the SETOAM command for a group, you must ensure that this esoteric exists if an OAM tape has that esoteric specified in the UNITNAME field of the TAPEVOL table. Do not change the contents of that esoteric to introduce incompatible device types. Should the esoteric name be deleted or changed, the volumes that are associated with the esoteric name cannot

be allocated. Because the TAPEUNITNAME cannot be resolved, the tape volume that is required for the request is not mounted and the allocation request fails.

Using DB2 with Object Storage Groups

Each Object storage group consists of a DB2 database. The DB2 database is referred to as the *object storage database*. The object storage database contains the following DB2 tables:

- An object directory containing entries for objects residing in a particular Object storage group. These entries contain control information needed to locate and manage the object.
- A storage table for objects less than or equal to 3980 bytes.
- A storage table for objects greater than 3980 bytes.
- An optional table for objects greater than 32640 bytes.

Understanding the Storage Class Construct

The storage class construct enables storage administrators to separate the logical requirements for accessing data from the physical requirements for storing data. Storage class represents the level of service (performance objectives and availability requirements) for an object.

Every object is assigned to a storage class when it is created; therefore, every object is SMS-managed. This assignment determines where the object initially resides in the object storage hierarchy (optical, tape, and DASD). See Figure 7 on page 28 for a diagram of this process. The assignment can change as part of a class transition or as the result of an explicit application request (OSREQ CHANGE).

Related reading:

- For more information on changing defaults, see "Modifying Default Storage and Management Classes" on page 193.
- For more information on using the OSREQ macro to customize your application interface, see *z/OS DFSMS OAM Application Programmer's Reference*.

Media Selection for Object Storage

Each object that OAM stores is assigned a storage class and a management class. OAM uses the storage class to determine the initial placement of an object in the OAM object storage hierarchy. OAM also uses the storage class during the OSMC storage management cycle to determine the correct placement of the object when the storage management cycle processes that object. OAM uses the Initial Access Response (IARS) parameter in the storage class to determine if a primary copy of an object is stored on DASD or on removable media (optical and tape). If the IARS parameter in the storage class that is assigned to the object is zero, the primary copy of the object is stored in DB2 tables on DASD. If the IARS parameter is nonzero, the primary object is stored on removable media.

The Sustained Data Rate (SDR) parameter of the storage class determines which removable media, optical or tape, is used to accept the primary copy of the object once it is determined that removable media is to be used. If the SDR parameter of the storage class is *greater than* or *equal to* three (≥3), the primary copy of the object is stored on a tape volume. If the SDR parameter of the storage class is *less than* three (<3), the primary copy of the object is stored on an optical disk volume.

Conceptual Overview of Storing a Primary Object: Figure 4 shows how OAM uses the IARS and the SDR parameters to determine where to store a primary object.

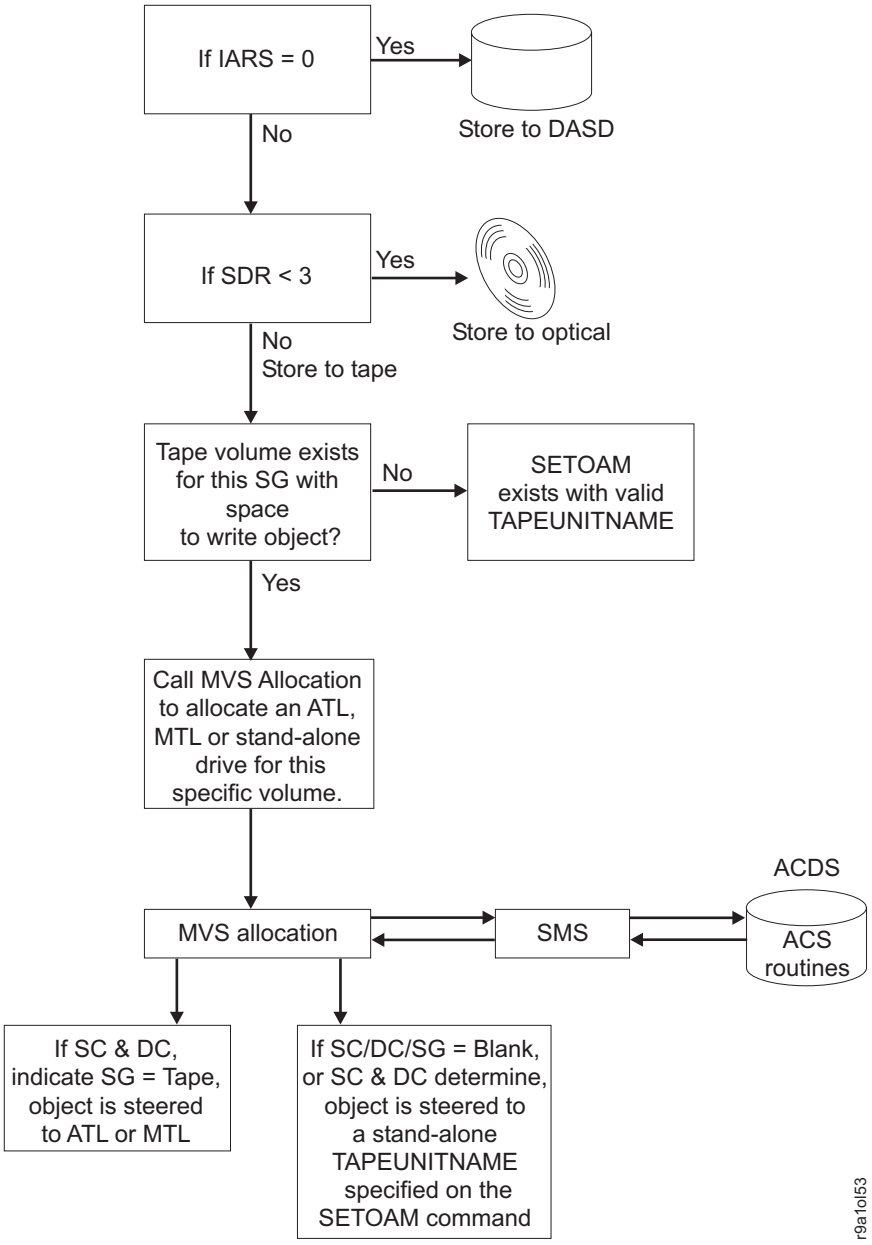

Figure 4. Conceptual Overview of Storing a Primary Object

Conceptual Overview of Storing a First Backup Copy of an Object: Figure 5 shows how OAM uses the AUTOBACKUP and the FIRSTBACKUPGROUP parameters to determine where to store a first backup copy of an object.

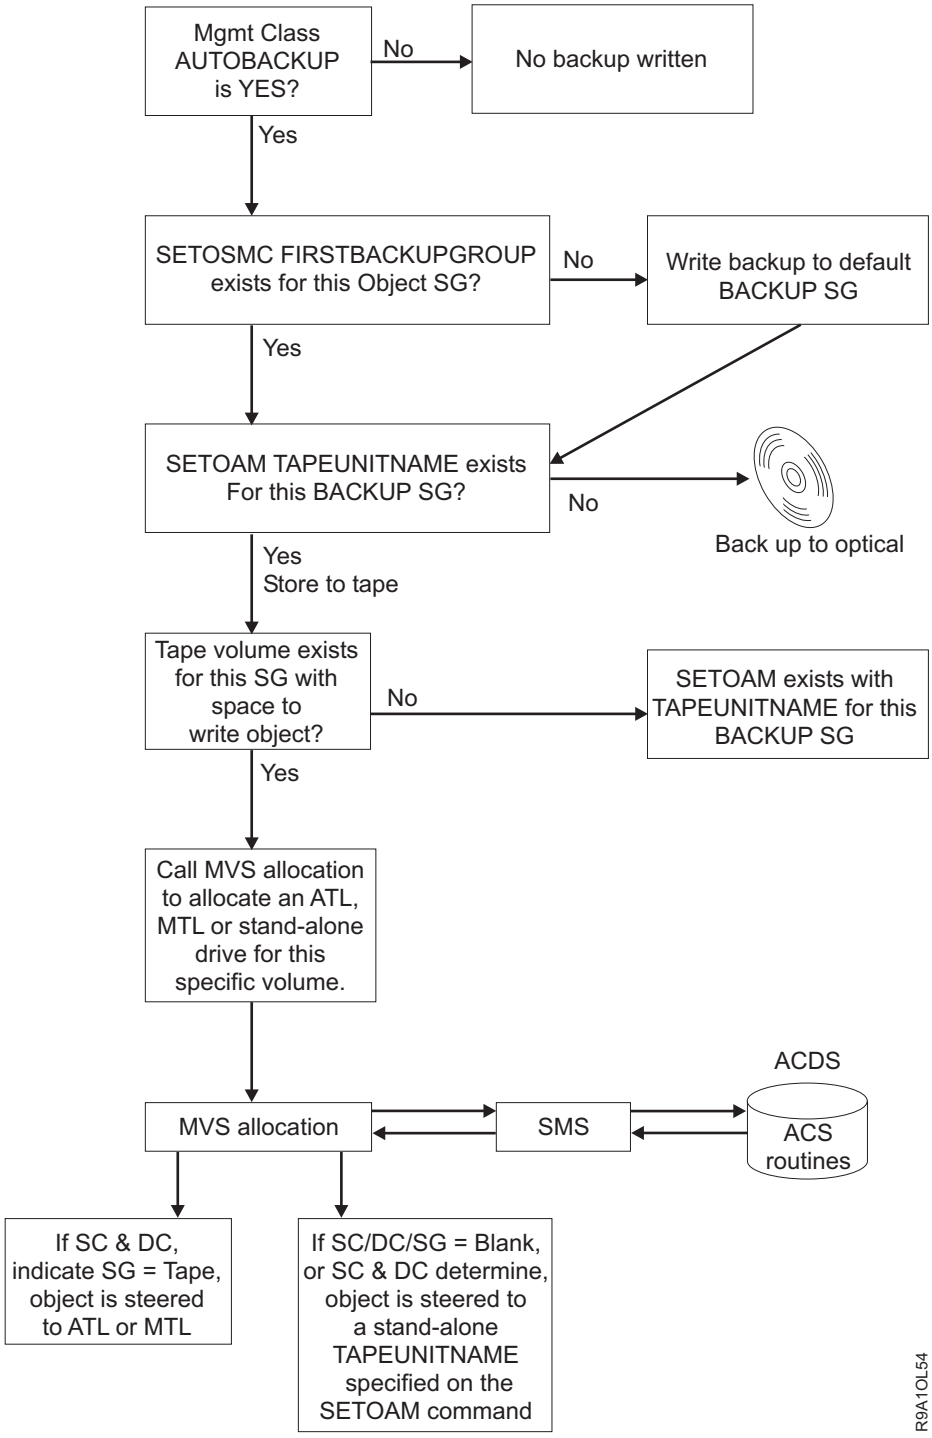

Figure 5. Conceptual Overview of Storing a First Backup Copy of an Object

Conceptual Overview of Storing a Second Backup Copy of an Object: Figure 6 shows how OAM uses the AUTOBACKUP and the SECONDBACKUPGROUP parameters to determine where to store a second backup copy of an object.

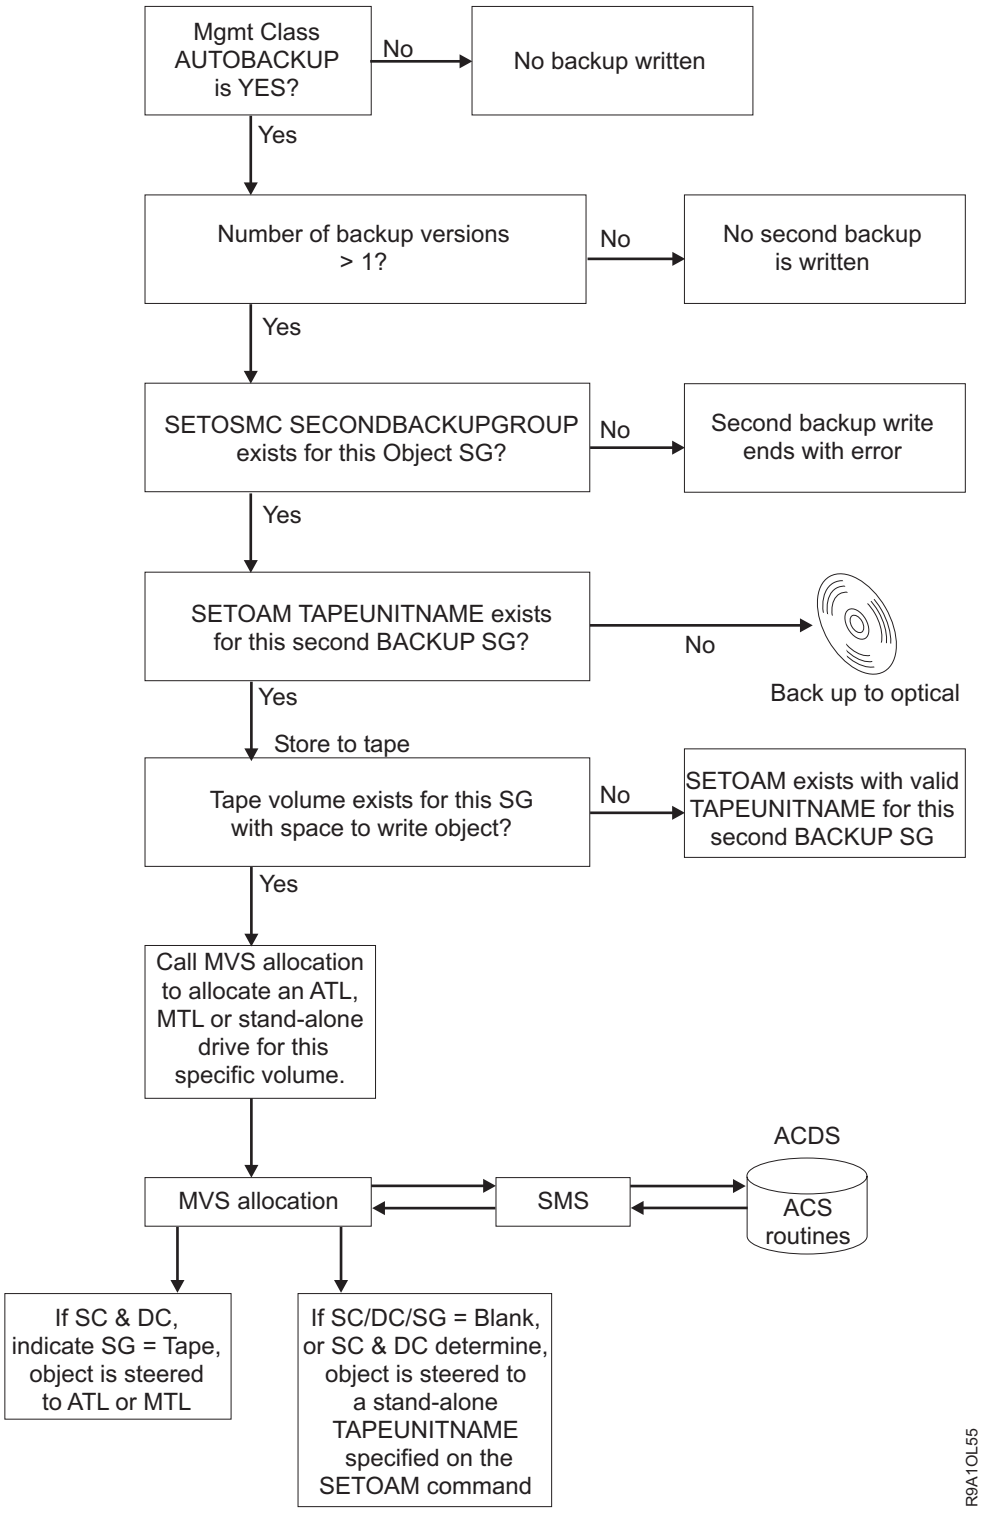

Figure 6. Conceptual Overview of Storing a Second Backup Copy of an Object

Object Storage on the Shelf

In addition to an object being stored inside a library (library-resident), an object can be assigned to a "shelf" (shelf-resident) location within the storage hierarchy. The following concepts apply to shelf storage:

- A shelf-resident volume can be either an optical or tape cartridge that is associated with stand-alone tape drives or operator-accessible optical drives within a pseudo library. The optical volume is physically stored on a shelf location near the drives that are associated with the pseudo-library to which the volume is assigned. The tape volume is physically stored on a shelf location near the drives that are associated with the TAPEUNITNAME parameter to which the volume is assigned.
- Assigning an object to storage class **shelf** (through an OSREQ STORE/CHANGE request or a class transition) does not cause the object to be physically moved to another volume. (The storage class ID row in the object directory table is the only change that is made.) Nor does the volume, on which the object resides, automatically get ejected from the library to which it is associated, even if all the objects on the volume indicate the storage class **shelf**. There is no storage class definition for shelf storage (no specific IARS value specific to shelf). This storage class assignment allows an installation a way of differentiating between performance objectives for objects that are actively accessed and those that must be archived, or those that are accessed the least. According to their storage management policy, the installation determines whether these objects having a storage class of **shelf** should be removed from the library and placed physically on a shelf location for storage.

Understanding the Management Class Construct

The SMS management class is a list of class transition, backup, and retention attributes. OAM uses management class attributes to manage objects. Every object is assigned a management class when it is created. See Table 2 on page 24 for management class examples.

Class transition attributes allow OAM to change the way an object is managed based on its age, its usage, or a predefined, periodic calendar event (for example, the 30th day of every month or the first day of the quarter). You cannot use the PERIODIC and TIME SINCE CREATE transition attributes together. Class transitions occur when the OSMC storage management cycle is invoked. For objects requiring class transition, OSMC uses the ACS routines to determine if the objects should be managed using a different management class or if they should be placed at a different level of the storage hierarchy according to a different storage class.

OAM uses management class attributes to decide when to write the first backup copy and whether to write one or two backup copies of an object. AUTO BACKUP with BACKUP FREQUENCY determines when a backup copy is written.

- You can schedule a backup copy to be written immediately after the object is stored.
- You can make backup copies during the first storage management cycle after the object is stored, or during the first storage management cycle after a new management class is assigned for the object.

AUTO BACKUP and NUMBER OF BACKUP VERSIONS (DATA SET EXISTS) determine whether more than one backup copy is to be written.

Retention period and expiration attributes of the management class definition determine the OAM action for object expiration. An object can expire automatically

based on its age, its usage, or a specific date (derived from its management class or a management-class-approved object-specific retention period, if provided). OSMC uses the auto-delete installation exit to automatically delete expired objects during the storage management cycle.

Related reading:

- For information on changing management class defaults, see "Modifying Default Storage and Management Classes" on page 193.
- For information on how OAM determines whether to write one or two backup copies, see "Determining Which Media to Use for Backup Copies" on page 15.
- For more information about deleting expired objects, see Appendix E, "Auto-Delete Installation Exit," on page 573.

Table 2 shows examples for specifying various management class attributes for objects.

Table 2. Management Class Examples for Objects

MANAGEMENT CLASS NAMES	TIME SINCE CREATION (retention attribute)	TIME SINCE LAST USE (transition attribute)	PERIODIC (transition attribute)	AUTOBACKUP (backup attribute)	NUMBER OF BACKUP VERSIONS (DATA SET EXISTS) (backup attribute)
MAGONLY	30 DAYS	N/A	N/A	NO	0
FOREVER	NOLIMIT	NOLIMIT	N/A	YES	2
MAGS	N/A	5 DAYS	N/A	NO	0
MAG30D	30 DAYS	N/A	N/A	YES	1
MAG30LIB	6 MONTHS	N/A	N/A	NO	0
MAG30SHF	7 YEARS	N/A	N/A	NO	0
OPT6LIBF	6 MONTHS	N/A	N/A	NO	0
OPT6SLH	7 YEARS	N/A	N/A	NO	0
TAPE30	30 DAYS	N/A	N/A	NO	0
TAPE30B	30 DAYS	N/A	N/A	YES	2
MLAST	N/A	N/A	MONTHLY on 30	NO	0
MFIRST	N/A	N/A	QUARTLY on FIRST	YES	2
Note: N/A = not applicable					

Understanding the Data Class Construct

Data class is an SMS construct that determines the characteristics for a tape volume during scratch tape allocation. Data class determines the following attributes for a tape volume allocated in an ATLDS or MTL:

- Tape expiration date
- Retention period
- Performance scaling
- Performance segmentation
- Tape device selection information (TDSI):
  - Compaction (YES | NO | BLANK)
  - Media type (BLANK | MEDIA1 | MEDIA2 | MEDIA3 | MEDIA4 | MEDIA5 | MEDIA6 | MEDIA7 | MEDIA8 | MEDIA9 | MEDIA10)
  - Recording technology (BLANK | 18-TRACK | 36-TRACK | 128-TRACK | 256-TRACK | 384-TRACK | EFMT1 | EFMT2)
  - Special attribute (NONE | READCOMPATIBLE)

Data class determines the following attributes for a tape volume allocated to a stand-alone tape drive:

- Tape expiration date
- Retention period
- Performance scaling
- Performance segmentation
- Compaction

Determining Data Class During Scratch Tape Allocation

The data class of a volume is determined when a scratch tape volume is allocated. If the allocation is steered to an ATLDS or a MTL, the data class subparameter on the SETOAM statement of the CBROAM*xx* PARMLIB member for the Object or Object Backup storage group is used, if it is specified.

If the SETOAM statement does not specify the data class subparameter at the storage group level, use the DATACLASS parameter of the SETOAM statement for the OAM global level to specify the values for the tape volume. The DATACLASS parameter of the SETOAM statement at the global level applies to all tape volumes that belong to storage groups not having their own DATACLASS assigned. If you do not specify DATACLASS at the storage group or at the OAM global level, OAM uses the DEVSUP parameter default to determine tape compaction or no tape compaction for the tape volume. The ACS routines can also supplement or override the data class values that you specify for the tape volume from either the SETOAM statement or the DEVSUP parameter.

Recommendation for data class and ACS routines: Do not allow the ACS routines to assign or change the data class assignment of an OAM tape volume. Ensure that the ACS routines do not change any DATACLASS specification for OAM object tape data sets, including any OAM.PRIMARY.DATA, OAM.BACKUP.DATA, or OAM.BACKUP2.DATA for any storage group. The data class for OAM tape volumes is determined by the SETOAM statement of the CBROAM*xx* PARMLIB member at MVS scratch tape allocation. The SETOAM statement provides this information either at the Object or Object Backup storage group level or at the OAM global level—whichever best suits the requirements for the tape volume that is being allocated. Allowing the ACS routines to alter this specification could create unexpected consequences (for example, no compaction of the data when the SETOAM statement specifies compaction). When you write the ACS routines, ensure that the data class construct for OAM tape volumes is kept intact.

See Figure 4 on page 19 for a diagram of the process of storing objects to tape.

Ignoring TDSI Data Class Information for a Stand-Alone Allocation

If the allocation is for a stand-alone tape drive, the information that you specify on the TAPEUNITNAME subparameter of the STORAGEGROUP parameter of the SETOAM statement determines the specific device type that is allocated for the tape volume. Tape volumes that are allocated to stand-alone tape drives are not SMS-managed (the objects on the tape volumes are SMS-managed, but the tape volumes are not). Therefore, the TDSI information (media type and recording technology) of the data class is not necessary for non-SMS-managed volumes. This information is ignored when an MVS scratch tape volume is allocated to a stand-alone tape drive. If an allocated tape drive supports multiple recording formats, for example, the 3592 Model E05, specification of the lower recording format in data class might be needed to ensure that the desired recording format is used during OPEN processing, otherwise the drive defaults to its higher recording

format. In addition to this, the tape expiration date, retention period, compaction, performance scaling, and performance segmentation information that are provided by the data class are also used.

Related reading: For more information concerning these data class attributes, see *z/OS DFSMS OAM Planning, Installation, and Storage Administration Guide for Tape Libraries*.

ACS Routines

Automatic class selection (ACS) routines determine, validate, or override the existing values that are assigned for the storage group, storage class, management class, and data class constructs for a collection. The classes assigned are those assigned to the collection or those that are explicitly stated on the OSREQ request to store or change an object. ACS routines are called to verify the storage class and management class that are stated on the OSREQ request. The ACS routines can accept the stated class, select a different one, or reject the stated class and return an error code.

Every object belongs to a collection. Each collection belongs to only one Object storage group. When an object is stored, it is automatically assigned to the Object storage group to which its specified collection belongs. Every object, when it is stored, is assigned a storage class and a management class. See Figure 7 on page 28 for a diagram of this process.

Note: Storage and management classes are optional on the OSREQ STORE request. If they are not specified, they are assigned the defaults from the collection. For a new collection, the ACS routines supply defaults for them.

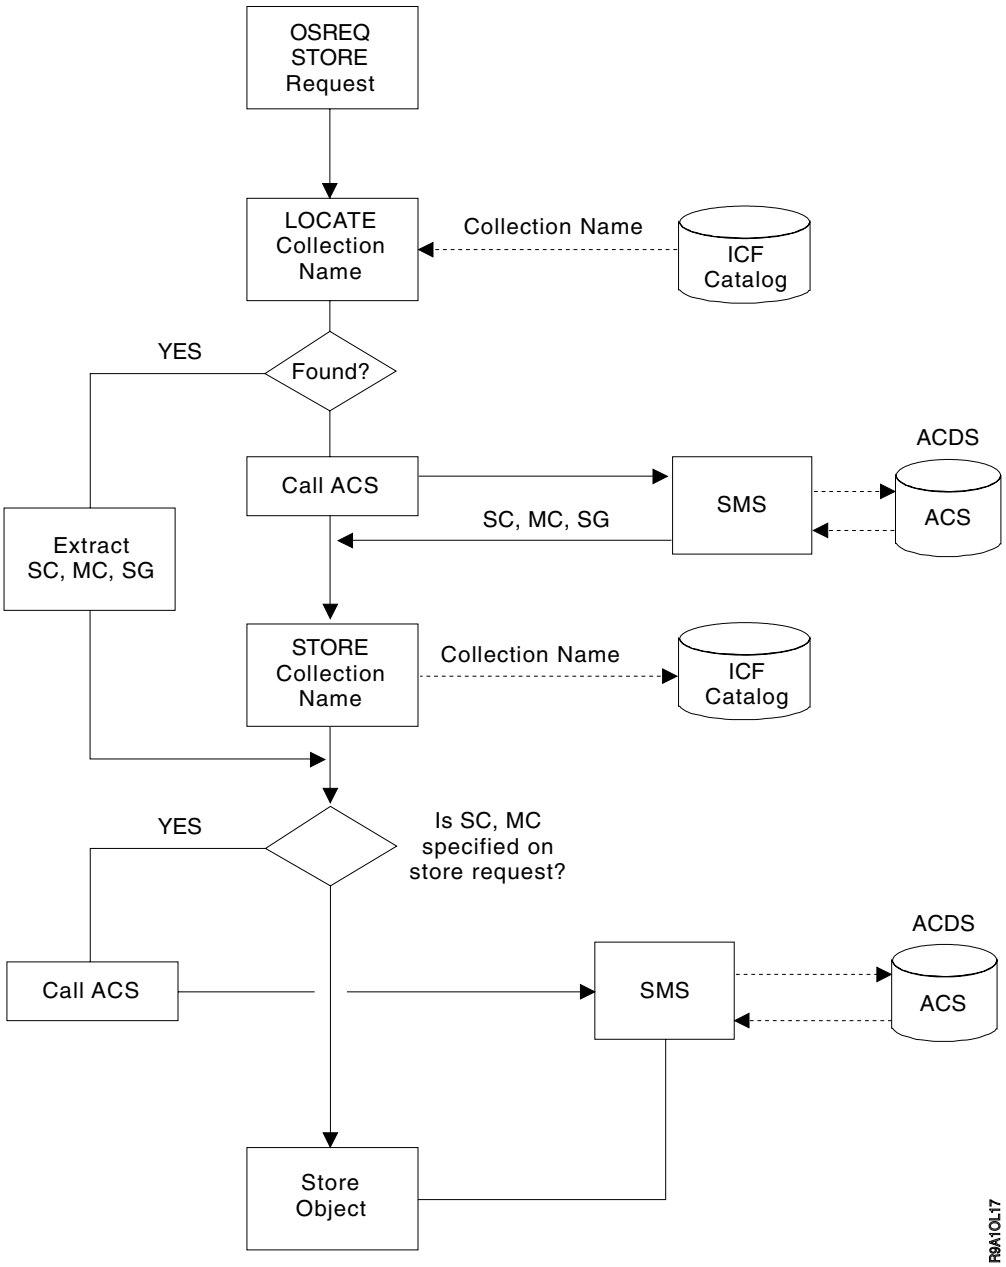

Figure 7. Storing an Object on Optical Media through an OSREQ STORE Request

Recommendation: For objects that reside on tape volumes, having the ACS routines alter the data class that was originally assigned to the tape volume through the SETOAM statement at MVS scratch tape allocation is not recommended. For more information, see the recommendation regarding "data class and ACS routines" on page 25.

OAM Address Space

The *OAM address space* uniquely identifies the active OAM session. Start the OAM address space if you plan to use optical or tape devices for storing objects and OSMC functions or if you plan to delete objects within your data storage environment.

Restrictions for OAM address spaces: There are four address space restrictions that apply to each OAM session, regardless of whether it is part of an OAMplex:

- Only one OAM address space can be active in the z/OS system.
- Only one DB2 subsystem can be associated with the active OAM address space.
- Optical devices can only be directly accessed by the owning OAM address space. However, requests for the optical devices can be shipped to the OAM in an OAMplex that owns the optical devices by using the XCF messaging service.
- Specifying a region size other than 0 MB on the OAM-started procedure JCL may result in storage shortage abends, especially during an OSMC cycle.

OTIS Address Space

OAM uses the OAM thread isolation support (OTIS) when it adds new collections to the catalog. OTIS provides an interface to DB2 that updates the collection table in DB2. The OTIS address space uniquely identifies the active OTIS interface session. Start the OTIS address space if you plan to use any of the functions that are associated with the OSREQ application interface.

Related reading: See *z/OS DFSMS OAM Application Programmer's Reference* for further information on the OSREQ application interface.

Optical Storage

Optical disks are generally used for storing objects that are accessed infrequently, primarily because of their high capacity and performance characteristics. This section provides an overview of optical storage and its role in OAM. Table 3 lists the optical devices that OAM uses.

Table 3. Optical Devices that OAM Supports

Device Name	Disk Size	Storage Slots	Internal Drives	Operator-Accessible	Media Supported	Attaches To
3995-131	5.25 inch	144	4	1	sd-REWR	Attaches to host system.
3995-132	5.25 inch	144	4	1	sd-WORM	Attaches to host system.
3995-133	5.25 inch	144	4	1	sd/dd WORM/REWR	Attaches to host system.
3995-111	5.25 inch	144	4	0	sd-REWR	Attaches to Model 131.
3995-112	5.25 inch	144	4	0	sd-WORM	Attaches to Model 132.
3995-113	5.25 inch	144	4	0	sd/dd WORM/REWR	Attaches to Model 133.
3995-C3A	5.25 inch	0	0	1 or 6	sd/dd/qd/8*x* WORM/REWR	Attaches to host system.
3995-C32	5.25 inch	52	2	0	sd/dd/qd/8*x* WORM/REWR	Attaches to Model C3A.
3995-C12	5.25 inch	52	2	0	sd/dd/qd/8*x* WORM/REWR	Attaches to Model C3A/C32 pair.
3995-C34	5.25 inch	104	2 or 4	0	sd/dd/qd/8*x* WORM/REWR	Attaches to Model C3A.
3995-C36	5.25 inch	156	4 or 6	0	sd/dd/qd/8*x* WORM/REWR	Attaches to Model C3A.
3995-C16	5.25 inch	156	4 or 6	0	sd/dd/qd/8*x* WORM/REWR	Attaches to Model C3A/C36 pair.

Table 3. Optical Devices that OAM Supports (continued)

Device Name	Disk Size	Storage Slots	Internal Drives	Operator-Accessible	Media Supported	Attaches To
3995-C38	5.25 inch	258	4 or 6	0	sd/dd/qd/8*x* WORM/REWR	Attaches to Model C3A.
3995-C18	5.25 inch	258	4 or 6	0	sd/dd/qd/8*x* WORM/REWR	Attaches to Model C3A/C38 pair.
3995-SW3*	5.25 inch	N/A	N/A	N/A	sd/dd/qd WORM/REWR	This drive is used in the C3A, C1*x*, and C3*x* libraries.
3995-SW4**	5.25 inch	N/A	N/A	N/A	sd/dd/qd/8*x* WORM/REWR	This drive is used in the C3A, C1*x*, and C3*x* libraries.

Notes:
REWR = rewritable
WORM = write-once, read-many
sd = single-density (652 MB maximum disk size)
dd = double-density (1304 MB maximum disk size)
qd = quad-density (2600 MB maximum disk size)
8*x* = eight times density (5.2 GB maximum disk size)

* The 3995-SW3 drive in the C3A, C1*x*, and C3*x* libraries is capable of reading only from single-density WORM and rewritable media, not writing to it. It can read from or write to double- and quad-density media.

** The 3995-SW4 drive in the C3A, C1*x*, and C3*x* libraries is capable of reading only from single- and double-density WORM or rewritable media, not writing to it. It can read from or write to quad- and 8*x*-density media. Quad-density and 8*x*-density drives cannot coexist in the same library.

For information concerning approximate user data disk capacities for the supported media, see Table 18 on page 83.

The approximate user data disk capacity can vary depending on file sizes. Smaller file sizes take up more space on the disk than larger file sizes due to the increase in extents.

For simplicity, the following 3995 library models are referred to as C1*x* and C3*x* respectively: C12, C16, C18, C32, C34, C36, C38.

Related reading: For more information about the 3995 optical library, see the following documents:
- *3995 Introduction and Planning Guide*
- *3995 Introduction and Planning for C-Series Models*

Optical Devices that OAM No Longer Supports

With z/OS DFSMS V1R5, OAM no longer supports the following optical devices (see Table 4). The information about the 9246/9247 devices will be deleted with the next release of this publication. The 9246/9247 devices supported 12-inch LMSI optical media.

Table 4. Optical Devices that OAM No Longer Supports

Device Name	Disk Size	Cartridge capacity	Storage Slots	Internal Drives	Operator-Accessible	Media Supported	Attaches To
9246	12 inch	1 996 800	64	2 or 4	0	WORM	Attaches to host system.
9247	12 inch	1 996 800	0	0	N/A	WORM	This drive is used in the 9246 library.

Optical Disk Cartridges

Objects are stored on optical media called *optical disks*. Each optical disk is encased in a protective housing. Together, the disk and its housing are called an *optical disk cartridge*. An optical disk has recording surfaces on both sides. Each side is referred to as an *optical volume*.

Related reading: For information concerning optical disk cartridge capacities, see Table 3 on page 29, or the following documents:

- *3995 Introduction and Planning Guide*
- *3995 Introduction and Planning for C-Series Models.*

Optical Recording Techniques

Using laser technology, optical disk cartridges access *optical disk drives* to seek, read, write, and delete data on optical disks through the means of two optical media recording processes:

- Write-Once, Read-Many (WORM) media
  - Reads from and writes to 5.25-inch, 12-inch, single-, double-, quad-, and 8*x*-density WORM optical disk media.
- Magneto-Optic (MO) rewritable media
  - Reads from and writes to 5.25-inch, single-, double-, quad-, and 8*x*-density, rewritable optical disk media.

Notes:

1. The term "rewritable" is used within this document to depict this type of optical disk media. Also, continuous composite WORM (CCW) media is included wherever the terminology double-, quad-, and 8*x*-density WORM media is used, unless otherwise stated.
2. The 3995-SW3 optical disk drive (in all the C3A, C1*x*, and C3*x* libraries) is not capable of writing to any 3995 single-density (WORM or rewritable) media. It is capable of reading this type of media, as well as reading from and writing to 3995 double- or quad-density WORM, rewritable, or CCW optical disk media type.
3. The 3995-SW4 optical disk drive (in all the C3A, C1*x*, and C3*x* libraries) is not capable of writing to any 3995 single-, or double-density (WORM or rewritable) media. It is capable of reading this type of media, as well as reading from and writing to any 3995 quad- or 8*x*-density WORM, rewritable, or CCW optical disk media type.

Write-Once, Read-Many Recording Technique

Write-once recording is an irreversible process that uses heat from a laser beam to make holes in the surface of the optical disk. Once the record is created, it cannot be altered. If the data needs to be written again, a new record is created, but the space used by the original entry is not recovered. This type of media is advantageous in instances where a permanent record is needed (for example, signed application forms), or when data is stored that will never be altered or updated (for example, in the case of items being stored on microfiche, completed forms, or X-rays). Because of the permanent nature of the data recorded, you can access WORM optical disks an unlimited number of times (read-many). See Figure 8 on page 32 for a graphical depiction of WORM recording technique.

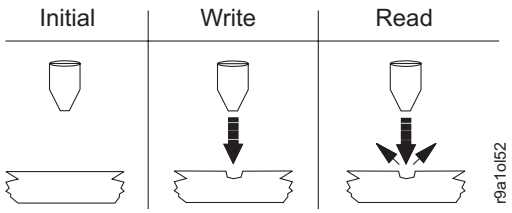

Figure 8. Write-Once, Read-Many (WORM) Recording Technique

Magneto-Optic Rewritable Recording Technique

Magneto-Optic (MO) rewritable recording is a reversible process that combines the use of magnetic and laser technologies to write, read, erase, and rewrite data. Rewritable recording is somewhat similar in concept to DASD recording. It uses a laser beam to heat the recording layer and then applies a magnetic field. The direction of magnetization changes only when the media is heated and the magnetic field is applied simultaneously. This process is used both at the time of recording and at the time of erasure. See Figure 9 for a pictorial overview of the MO optical media recording process.

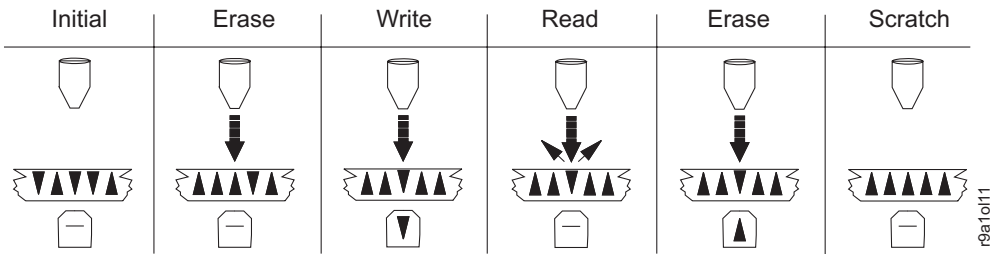

Figure 9. Rewritable Magneto-Optic (MO) Recording Technique

Optical Volumes

A unique volume serial number identifies each optical volume. This unique volume serial number must be unique within the entire installation. No two volumes (regardless of the media type) can have the same volume serial number. The volume serial number must conform to z/OS volume serial number naming conventions as documented in the *z/OS MVS JCL Reference*.

Because optical volumes can reside either inside libraries or on shelves, the physical procedure for accessing volumes varies according to their location:

- When a library-resident optical volume is needed, the system mounts it on an optical disk drive in the optical library containing the volume. If a compatible optical library drive is unavailable (for example, the drive is offline or non-operational), the request to retrieve the object fails.
- When a shelf-resident optical volume is needed, the system requests that the volume be mounted on an operator-accessible optical disk drive for a 3995 volume. If an operator-accessible optical disk drive is unavailable (for example, the drive is offline or non-operational), the request to retrieve the object fails. If the requested volume is unavailable, the operator can terminate the request.

Shelf storage can be local to the computer facility and, therefore, accessible to the optical disk drive operator, or it can be located elsewhere. The operator can enter a shelf-resident volume into any compatible optical library by placing the optical disk cartridge into the input/output station of the optical library. However, if there

is an outstanding request to mount the volume on an operator-accessible optical disk drive, the attempt to insert the volume into the library is rejected.

Optical Volume Types

There are three types of optical volumes:

- Scratch
- Grouped
- Backup

Requirement: Both volumes comprising an optical disk *must* belong to the same Object or Object Backup storage group.

Scratch Volumes: A scratch volume is an optical volume that is not yet associated with an Object storage group or an Object Backup storage group.

If an optical volume is not pre-formatted and labeled, it must be labeled with a unique volume serial number before it can be accessed by OAM. This task can be completed in either of two ways:

- Labeling an unlabeled optical disk on an operator-accessible optical disk drive in response to a LABEL command which is entered by the operator
- Labeling an unlabeled optical disk on a library-resident optical disk drive as a result of being inserted into the input/output station of an optical library

In either case, the operator is asked to supply the volume serial number for each side of the optical disk. The volume labels are written and rows are created in the volume table in the optical configuration database. The volumes are marked as scratch volumes or grouped volumes depending on how the operator replies to the CBR4432D message during label processing.

Both sides of a scratch volume become either grouped or backup volumes when a scratch volume is used to satisfy an out-of-space condition in an Object or an Object Backup storage group.

Note: Because WORM optical volumes that are full or have very little free space are not as useful as scratch volumes, the operator is notified by message CBR4451I if the kilobytes that are free are less than the SCRENTRYTHRESHOLD parameter. The message contains the number of kilobytes that are free and the percentage of free space that this represents on the volume. This gives the operator the opportunity to fail the cartridge entry process by responding through message CBR4452D, thus causing the cartridge to be ejected from the library.

Grouped Volumes: A grouped volume is an optical volume that is associated with an Object storage group. Volumes are grouped to subdivide the total available optical storage. A grouped volume contains objects from a single Object storage group.

A scratch volume becomes a grouped volume when OAM uses it to satisfy a write request that specifies an Object storage group name. When a scratch volume becomes a grouped volume, both volumes on the optical disk become grouped volumes that are assigned to the same Object storage group.

Taken together, all of the optical volumes that are associated with an Object storage group constitute the optical volume portion of the hierarchy in that Object storage group.

Backup Volumes: A backup volume is an optical volume that is associated with an Object Backup storage group. Backup volumes are usually intended to provide disaster recovery or to meet legal storage requirements. They contain backup copies of objects whose primary copies reside elsewhere in the object storage hierarchy. OAM can create up to two backup copies of an object. A primary copy of an object resides on a grouped volume; backup copies reside on backup volumes.

A scratch volume becomes a backup volume when it is used by OAM to satisfy a write request for the Object Backup storage group. When a scratch volume becomes a backup volume, both volumes on the optical disk become backup volumes.

Optical Media Types

There are a number of optical disk media types that can be used with the 3995 optical device. You can use the following media types in the optical environment:

- 5.25-inch, single-density, WORM optical disk media
- 5.25-inch, double-density, WORM optical disk media
- 5.25-inch, single-density, rewritable optical disk media
- 5.25-inch, double-density, rewritable optical disk media
- 5.25-inch, quad-density, WORM optical disk media
- 5.25-inch, quad-density, rewritable optical disk media
- 5.25-inch, 8*x*-density, rewritable optical disk media
- 5.25-inch, 8*x*-density, WORM optical disk media

Note: Unless otherwise stated, continuous composite WORM (CCW) media is included wherever the terminology double-, quad-, and 8*x*-density WORM media is used. For more information on these media types and the libraries and drives that use them, see Table 3 on page 29.

When an object is stored using the OSREQ STORE macro, it is assigned to a specific Object storage group by the SMS storage group ACS routine. If the object is stored on an optical volume, OAM selects an optical volume residing in one of the optical libraries associated with the Object storage group to which the object has been assigned. See page 407 for more information concerning the DEFAULT MEDIA TYPE option.

Optical Disk Drives

An optical disk drive uses laser technology to write data to and read data from an optical disk. The optical disk drives use removable media. The following are the different types of optical disk drives:

- Library-resident (in 3995 libraries)
- Operator-accessible (3995)
- Multifunction (library resident or operator-accessible in all 3995 models except 3995-131 and 3995-132)

Library-Resident Optical Disk Drive

A library-resident optical disk drive is inside an optical library. The cartridge transport mechanism in the library mounts and demounts the optical disk cartridges for the internal disk drives.

Operator-Accessible Optical Disk Drive

In addition to internal disk drives accessing the optical disk cartridges stored inside the library (library-resident), an operator-accessible optical disk drive is provided for users who need to read, write, or delete from an optical disk without

storing or retrieving it from the library. When WORM optical media is used, the data is logically deleted from the optical disks. When rewritable optical media is used, the data is physically as well as logically deleted from the optical disks.

The operator-accessible drive cannot be accessed by the library's internal cartridge transport mechanism, and the operator-accessible drive does not have access to the optical disk volumes which are stored inside of the library. Operator-accessible drives are used to access shelf-resident optical disks. A human operator mounts and demounts the shelf-resident optical disk cartridges for the operator-accessible optical disk drives.

Multifunction Optical Disk Drives

The optical disk drives 3995-133, -113, -SW3, and -SW4 are considered *multifunction* drives. These drives can be library-resident optical disk drives, or operator-accessible optical disk drives, or both. Multifunction drives can read and write a combination of media types. For information on the media types that multifunction optical disk drives use, see "Optical Storage" on page 29.

The multifunction optical disk drive capability provides the flexibility to populate the libraries containing these optical disk drives with any combination of valid optical disk media. This can be done by using the DEFAULT MEDIA TYPE.

Related reading: See page 407 for information concerning DEFAULT MEDIA TYPE, and "Defining Optical Drives" on page 413 for information on defining multifunction optical disk drives.

Optical Libraries

An optical library is a set of optical volumes and the optical disk drives that are associated with those volumes. The volumes within the optical library are said to be library-resident optical volumes. Optical volumes can also be located outside of the optical library. These volumes are referred to as shelf-resident optical volumes.

Shelf-resident optical volumes can be associated with operator-accessible optical disk drives, or both, that are used to create a pseudo optical library. For more information, see "Pseudo Optical Library Concept" on page 36.

An optical library can contain optical volumes that belongs to more than one Object storage group or the Object Backup storage group, or both.

A 3995 optical library can be specified as connected to more than one system within an OAMplex. However, the library must still be *physically* connected to only one z/OS system in an SMS complex at a time.

Optical libraries are defined to SMS and OAM using the ISMF Library Management application. For more information, see "Sample ISMF Session for an IBM 3995 Optical Library Dataserver" on page 402.

Real Optical Libraries

A real optical library (see Figure 10 on page 36) is a storage device containing the following elements:

- An input/output station for entering into and removing cartridges from the library
- Optical disk drives
- A cartridge storage area for holding optical disk cartridges

- A cartridge transport mechanism for moving cartridges between the input/output station, slots in the cartridge storage area, and the optical disk drives

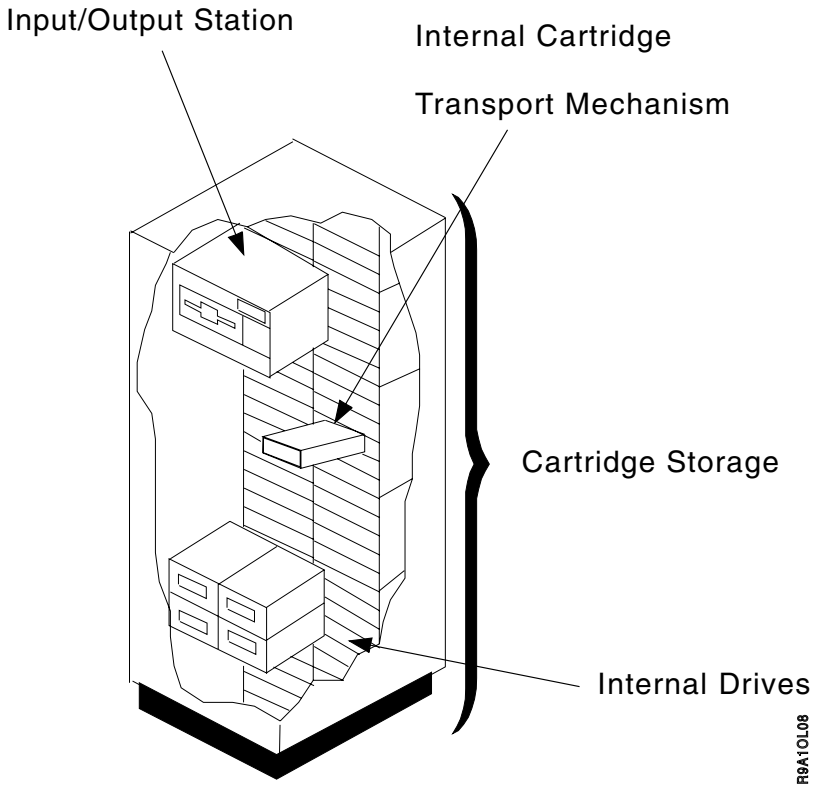

Figure 10. Real Optical Library

In real optical libraries, an optical volume in an optical library can be mounted only on an optical disk drive within the same optical library.

Note: For a grouped write request, OAM selects a volume in a library that is included in the target Object or Object Backup storage group. If a volume is in a library that is not included in the targeted Object or Object Backup storage group, the volume is not considered for write requests that are associated with that Object or Object Backup storage group. Any objects already written on the volume can still be read.

Pseudo Optical Library Concept

In addition to real optical libraries, OAM also supports the concept of pseudo optical libraries. The concept of pseudo libraries has changed from previous releases; however, pseudo libraries defined in previous releases are still supported.

Recommendation: Convert to the new pseudo library concept to allow more flexibility and customization within your storage environment. This conversion prepares you for the eventual elimination of the device type association restrictions required with previous pseudo libraries.

A pseudo library is a collection of optical volumes sitting on shelves and operator-accessible drives that these volumes can be mounted on. A pseudo library works like a real optical library, except humans instead of robots are moving the cartridges from the shelves to the drives. The controller for the 3995-C*xx* library is

a PC tower. The external drives are mounted in drive bays in the controller. You can attach one or more optical libraries to the controller.

The operator-accessible drives are physically attached to a real library controller, but logically belong to a pseudo library. For example, you could have three 3995-C3A controllers, each with six operator-accessible drives. You could map those eighteen operator-accessible drives in several ways:

- Assign all eighteen operator-accessible drives to a single pseudo library.
- Split the operator-accessible drives into three pseudo libraries, each containing six drives.
- Assign twelve operator-accessible drives to one pseudo library and the other six drives to the second pseudo library.

An example of a configuration that is not valid would be to map fifteen drives to pseudo library #1 and map three drives to pseudo library #2. All the drives on any given controller must belong to the same pseudo library.

Defining Optical Volumes in Pseudo Libraries

The installation defines these optical volumes, which are not necessarily of the same device and media types. Pseudo libraries are defined without a device type. When operator-accessible drives are defined, they can be assigned to a pseudo library chosen by the person defining the devices. These devices can be grouped in a manner that best fits the needs of the installation (for example, physical location, device and media affinity, backup and primary objects stored together, and so forth). There is no limit on the number of pseudo libraries that can be defined within an active SMS configuration.

Pseudo libraries defined prior to DFSMS/MVS™ 1.5 are still supported. These pseudo libraries were defined as a collection of one or more operator-accessible drives of the same device type, and one or more shelf-resident optical volumes of a like media type. OAM continues to honor these old pseudo library definitions. Support for both concepts allows installations wishing to convert their environments to the new pseudo library concept over a period of time the ability to use their previously defined pseudo libraries during the transition period.

Your installation needs to determine the pseudo library to which an optical volume is to be associated. This determination is made either when the volume is ejected from a real library, or when a volume is labeled on an operator-accessible drive.

During OAM initialization, if a volume record is encountered with an associated library name that is not known to the active configuration (ACDS), a message is issued indicating that the volume is ignored and that the library must be defined to the configuration before the volume will be recognized. For a shelf-resident volume, the library name associated with a volume is that of the pseudo library.

The default pseudo library definitions created by OAM are temporary definitions that exist only while the OAM address space is active. They are not part of the active SMS configuration (ACDS). If no pseudo library is defined within the optical configuration database, OAM defines a pseudo library for each supported drive type. The reserved optical library names for these OAM-defined pseudo libraries for the shelf-resident volumes are as follows:

- PCTREUSE for 3995-131 drives and single-density rewritable volumes
- PCTWORM for 3995-132 drives and single-density WORM volumes
- P3995133 for 3995-133 drives and double-density volumes
- P3995SW3 for 3995-SW3 drives and quad-density volumes

- P3995SW4 for 3995-SW4 drives and 8*x*-density volumes

Attention: The installation must make certain that drives in the pseudo library are available to perform the requested task so that OAM can direct requests to a compatible drive for the task. Otherwise, the request fails, and an error message indicates that there were no available drives for the request. A given drive might be able to read requests but not write requests for a given media.

Related reading: For more information, see "Associating Pseudo Libraries" on page 310 and "Labeling an Optical Disk on a 3995 Operator-Accessible Drive" on page 312. For more information on media compatibility and capability for optical drives, see Table 3 on page 29.

Associating Ejected Optical Volumes with Pseudo Libraries

Once an optical volume is ejected from a real optical library, it becomes shelf-resident and is associated with a pseudo optical library determined by the installation. For more information concerning associating ejected volumes with pseudo libraries, see "Associating Pseudo Libraries" on page 310.

Mounting a Shelf-Resident Optical Volume on an Operator-Accessible Drive

When a read request for a 3995 shelf-resident volume that belongs to a default pseudo library (with device type association) is received by OAM, any operator-accessible drive belonging to a pseudo library with an associated device type that is read-compatible with the volume is eligible to mount the volume.

When a read request for a 3995 shelf-resident volume that belongs to a pseudo library with no device type association is received, any operator-accessible drive (within the set of drives assigned to that pseudo library) with a device type that is read-compatible with the volume is eligible for the request.

If the request is a write request, drive selection is based on the drives in libraries associated with the storage group. A drive must belong to a library that is associated with the storage group in order to be considered. If a volume belonging to a pseudo library with a device type association is selected, only drives that are write-compatible and belong to a pseudo library that also has a device type association are eligible for the request. If the volume selected belongs to a pseudo library that has no device type association, then only drives that are write compatible with the selected volume and belong to the same pseudo library as the volume are eligible for the request. You can isolate volumes and operator-accessible drives by physical location instead of by device type. An installation can choose to have a large pseudo library if everything is in the same location, or have several pseudo libraries in various locations as long as there are associated drives that can satisfy the request.

When a shelf-resident optical volume is mounted on an operator-accessible drive in an OAMplex, the volume is managed and controlled by the instance of OAM to which the drive belongs. Any requests for the volume are then sent to the OAM where the volume is mounted, thus eliminating the need to demount and remount the volume.

Failing Read/Write Requests for Pseudo Libraries

If a shelf-resident optical volume is associated with a pseudo optical library that does not contain any operator-accessible optical disk drives, then requests to write data to that volume or requests to read data from that volume fail because there is

no optical disk drive on which to mount the volume. OAM never asks for a specific shelf-resident optical disk volume (by volume serial number) to be entered into a specific optical disk library for reading data from or writing data to the volume.

Tape Storage

Tape volumes provide a low cost storage medium for storing primary and or backup copies of objects. Storing objects on tape volumes in conjunction with DASD and optical media provides flexibility and efficiency within the storage management facility. All devices within the installation can be used in concert with each other, complementing the performance objectives of the objects that reside on each medium. Objects can be migrated from DASD to tape to optical disk or any combination of these three media, providing the most cost-effective method for meeting your data storage objectives.

Table 5 on page 40 describes hardware configurations that you can use separately or in specific combinations to create or modify your tape storage environment for OAM. The notes that correspond to the reference numbers in the table are listed at the end of the table.

The following drive types are supported in an IBM tape library environment:

3480 Identified in JCL statements as UNIT=3480. Only supported in the MTL.

3490 Identified on JCL statements as UNIT=3480X. Supported in the 3495 ATLDS and in the MTL.

3490E Identified on JCL statements as UNIT=3490. Supported in the 3495 and 3494 ATLDS and in the MTL.

3590-1 Identified on JCL statements as UNIT=3590-1. Supported in the 3495 and 3494 ATLDS and in the MTL as a 3590 Model B Tape Subsystem.

3590-E Identified on JCL statements as UNIT=3590-1. Supported in the 3494 ATLDS and in the MTL in 3590-1 emulation mode as a 3590 Model E Tape Subsystem.

3590-H Identified on JCL statements as UNIT=3590-1. Supported in the 3494 ATLDS and in the MTL in 3590-1 emulation mode as a 3590 Model H Tape Subsystem.

3592-J Identified on JCL statements as UNIT=3590-1. Supported in the 3494 and 3584 ATLDS and in the MTL in 3590-1 emulation mode as a 3592 Model J Tape Subsystem.

3592-2 Identified on JCL statements as UNIT=3590-1. Supported in the 3494 and 3584 ATLDS and in the MTL in 3590-1 emulation mode as a 3592 Model E05 Tape Subsystem.

Note: The devices that are listed above are also supported in the stand-alone (non-IBM tape library) environment.

Table 5. Tape Storage Configurations

Library Model	Subsystem Device Type	Library Attachment	Media Supported		Recording Technology	Noncompacted Data Capacity
3495	3490	Yes	MEDIA1	(R/W)	18	200MB
L20, L30, L40, L50	3490E	Yes	MEDIA1 MEDIA1/2	(R) (R/W)	18 36	200MB 400MB, 800MB
	3590-1 **2**	Yes	MEDIA3/4	(R/W)	128	10 GB, 20 GB
3494 L10	3490E	Yes	MEDIA1 MEDIA1/2	(R) (R/W)	18 36	200MB 400MB, 800MB
	3590-1 **2**	Yes	MEDIA3/4	(R/W)	128	10 GB, 20 GB
	3590-E **3** (3590-1 emulation)	Yes	MEDIA3/4 MEDIA3/4	(R) (R/W)	128 256	10 GB, 20 GB 20 GB, 40 GB
	3590-H **4** (3590-1 emulation)	Yes	MEDIA3/4 MEDIA3/4 MEDIA3/4	(R) (R) (R/W)	128 256 384	10 GB, 20 GB 20 GB, 40 GB 30 GB, 60 GB
	3592-J **5** (3590-1 emulation)	Yes	MEDIA5/6 MEDIA7/8	(R/W) (R/W)	EFMT1 EFMT1	300 GB 60 GB
	3592-2 **6** (3590-1 emulation)	Yes	MEDIA5/6 MEDIA5/6 MEDIA7/8 MEDIA7/8 MEDIA9/10	(R/W) (R/W) (R/W) (R/W) (R/W)	EFMT1 EFMT2 EFMT1 EFMT2 EFMT2	300GB 500GB 60GB 100GB TBD
3584 L22	3592-J **5** (3590-1 emulation)	Yes	MEDIA5/6 MEDIA7/8	(R/W) (R/W)	EFMT1 EFMT1	300 GB 60 GB
	3592-2 **6** (3590-1 emulation)	Yes	MEDIA5/6 MEDIA5/6 MEDIA7/8 MEDIA7/8 MEDIA9/10	(R/W) (R/W) (R/W) (R/W) (R/W)	EFMT1 EFMT2 EFMT1 EFMT2 EFMT2	300GB 500GB 60GB 100GB TBD
MTL	3480	N/A	MEDIA1	(R/W)	18	200MB
	3490	N/A	MEDIA1	(R/W)	18	200MB
	3490E	N/A	MEDIA1 MEDIA1/2	(R) (R/W)	18 36	200MB 400MB, 800MB
	3590-1 **2**	N/A	MEDIA3/4	(R/W)	128	10 GB, 20 GB
	3590-E **3** (3590-1 emulation)	N/A	MEDIA3/4 MEDIA3/4	(R) (R/W)	128 256	10 GB, 20 GB 20 GB, 40 GB
	3590-H **4** (3590-1 emulation)	N/A	MEDIA3/4 MEDIA3/4 MEDIA3/4	(R) (R) (R/W)	128 256 384	10 GB, 20 GB 20 GB, 40 GB 30 GB, 60 GB
	3592-J **5** (3590-1 emulation)	N/A	MEDIA5/6 MEDIA7/8	(R/W) (R/W)	EFMT1 EFMT1	300 GB 60 GB
	3592-2 **6** (3590-1 emulation)	N/A	MEDIA5/6 MEDIA5/6 MEDIA7/8 MEDIA7/8 MEDIA9/10	(R/W) (R/W) (R/W) (R/W) (R/W)	EFMT1 EFMT2 EFMT1 EFMT2 EFMT2	300GB 500GB 60GB 100GB TBD

Table 5. Tape Storage Configurations (continued)

Library Model	Subsystem Device Type	Library Attachment	Media Supported		Recording Technology	Noncompacted Data Capacity
STAND ALONE	3480	N/A	MEDIA1	(R/W)	18	200MB
	3490	N/A	MEDIA1	(R/W)	18	200MB
	3490E	N/A	MEDIA1 MEDIA1/2	(R) (R/W)	18 36	200MB 400MB, 800MB
	3590-1 **2**	N/A	MEDIA3/4	(R/W)	128	10 GB, 20 GB
	3590-E **3** (3490E or 3590-1 emulation)	N/A	MEDIA3/4 MEDIA3/4	(R) (R/W)	128 256	10 GB, 20 GB 20 GB, 40 GB
	3590-H **4** (3490E or 3590-1 emulation)	N/A	MEDIA3/4 MEDIA3/4 MEDIA3/4	(R) (R) (R/W)	128 256 384	10 GB, 20 GB 20 GB, 30 GB 30 GB, 60 GB
	3592-J **5** (3590-1 emulation)	N/A	MEDIA5/6 MEDIA7/8	(R/W) (R/W)	EFMT1 EFMT1	300 GB 60 GB
	3592-J **5** (3490-E emulation)	N/A	MEDIA5	(R/W)	EFMT1	300 GB
	3592-2 **6** (3590-1 emulation)	N/A	MEDIA5/6 MEDIA5/6 MEDIA7/8 MEDIA7/8 MEDIA9/10	(R/W) (R/W) (R/W) (R/W) (R/W)	EFMT1 EFMT2 EFMT1 EFMT2 EFMT2	300GB 500GB 60GB 100GB TBD

Notes:

1. MB = 1 048 576 bytes
   GB = 1 073 741 824 bytes
   (R) = Read only
   (R/W) = Read and write
   MEDIA1 = IBM Cartridge System Tape
   MEDIA2 = IBM Enhanced Capacity Cartridge System Tape
   MEDIA3 = IBM High Performance Cartridge Tape
   MEDIA4 = IBM Extended High Performance Cartridge Tape
   MEDIA5 = IBM TotalStorage Enterprise Tape Cartridge
   MEDIA6 = IBM TotalStorage Enterprise WORM Tape Cartridge
   MEDIA7 = IBM TotalStorage Enterprise Economy Tape Cartridge
   MEDIA8 = IBM TotalStorage Enterprise Economy WORM Tape Cartridge
   MEDIA9 = IBM TotalStorage Enterprise Extended Tape Cartridge
   MEDIA10 = IBM TotalStorage Enterprise Extended WORM Tape Cartridge
2. 3590-1 represents the 3590 Model B Tape Subsystem and is a system-defined esoteric.
3. 3590-E represents the 3590 Model E Tape Subsystem and is not a system-defined esoteric. It is supported in a library as a 3590 Model E tape subsystem rather than what it is emulating.
4. 3590-H represents the 3590 Model H Tape Subsystem and is not a system-defined esoteric. It is supported in a library as a 3590 Model H tape subsystem rather than what it is emulating.
5. 3592-J represents the 3592 Model J Tape Subsystem and is not a system-defined esoteric. It is supported in a library as a 3592 Model J tape subsystem rather than what it is emulating.
6. 3592-2 represents the 3592 Model E05 Tape Subsystem and is not a system-defined esoteric. It is supported in a library as a 3592 Model E05 tape subsystem rather than what it is emulating.
7. The library models indicated can be configured with any combination of correlating tape subsystem devices. These configurations may vary in the number of drives, slots, and media type supported in the libraries.

Related reading: For information about cartridge storage feature options and cartridge capacities for these tape devices, see the following documents:

- *TotalStorage Automated Tape Library (3494) Introduction and Planning Guide*

- *3480 Models A11/A22 and B11/B22 Introduction*
- *3490 A and B Models Introduction*
- *3490 Models C10, C11, C1A, C22 and C2A Introduction*
- *3590 Introduction and Planning Guide*
- *3592 Introduction and Planning Guide*
- *z/OS DFSMS Software Support for IBM TotalStorage Tape System 3590 Models E1x/H1x*
- *z/OS DFSMS Software Support for IBM TotalStorage Enterprise Tape System 3592*

Tape Capacity and Compaction

Use Table 5 on page 40 to determine the estimated capacity of an IBM cartridge tape when OAM is storing either objects or the backup copies of objects on IBM cartridge tape written on IBM tape subsystems.

The capacity of an IBM cartridge tape written by OAM and containing the primary or backup copies of OAM objects can be affected by a variety of factors, such as:

- The size of the object being stored.
- Whether the data OAM is storing is already hardware or software compacted.
- The tape compaction specified for the Object or Object Backup storage group using the SETOAM TAPECOMPACTION statement in the CBROAM*xx* PARMLIB member.
- The tape volume percent-full specified for the Object or Object Backup storage group using the SETOAM TAPEPERCENTFULL statement in the CBROAM*xx* PARMLIB member.
- The tape full threshold specified for the Object or Object Backup storage group using the SETOAM TAPEFULLTHRESHOLD statement in the CBROAM*xx* PARMLIB member.

If the object being stored is relatively small (16 KB or less), then the capacity of the tape cartridge can be substantially reduced. Likewise, if the size of the object being stored on tape cartridges is large, the capacity of the tape cartridge can be increased and better used. The smaller the object size, the more buffer space is required to separate the objects.

For example, if the data on an Enterprise Tape Cartridge 3592 compacts at a 3 to 1 ratio, the tape can store as much as 900 GB.

Recommendation: The tape compaction capability provides hardware compaction in the tape control unit and can increase the effective capacity of the tape media. Enable the compaction feature when OAM is writing primary copies or backup copies of objects to tape.

If the data that OAM is storing already is compacted, you should not expect any increase in the effective capacity of a tape cartridge due to the use of compaction. This situation is true for image data (such as ImagePlus® algorithm suited for image data). In addition, if the application invoking OAM for storing data is compacting the data, such as with the Item Access Facility (IAF) program, you should not expect an increase in the effective capacity of a tape cartridge using compaction.

OAM provides the capability for each Object or Object Backup storage group to specify what percent full OAM is to fill each tape cartridge belonging to the storage group. This option is specified with the TAPEPERCENTFULL keyword on the SETOAM statement in the CBROAM*xx* PARMLIB member.

Recommendation: If you want OAM to fill the tape cartridges to a certain percentage of their estimated capacity, reduce the approximate capacities listed in Table 5 on page 40. If your installation specifies the tape volumes should be filled to 90% of the estimated capacity, reduce the approximate capacities listed in the prior table by 10%.

Tape Capacity and Performance Scaling

Performance scaling, also known as capacity scaling, is a function that allows you to contain data in a specified fraction of the tape, yielding faster locate and read times.

The 3592 Model J provides performance scaling by using the first 60 GB of MEDIA5 physical tape or capacity scaling by using the full 300 GB of physical tape. The 3592 Model E05 also provides performance scaling; which allows you to optimize performance for MEDIA5 and MEDIA9 cartridges. Performance scaling for the 3592 Model E05 limits the data written to the first 20% (the optimally scaled performance capacity) of the cartridge. Use the ISMF Data Class application to set the performance scaling attribute for tape allocations in an IBM tape library or in the stand-alone (non-SMS managed) tape environment. The performance scaling attribute allows you to select optimal performance for certain types of jobs and applications. The default setting is to use the full capacity of the tape.

In the OAM object tape environment, you can define a new SETOAM DATACLASS parameter that specifies a data class that uses the performance scaling attribute for a 3592 tape device. For instance, you might choose to use performance scaling for your primary object data (one or more Object storage groups), and use the full tape capacity for your backup object data.

Performance Segmentation

Using performance segmentation, it is possible to segment the tape into two segments, one as a fast access segment to be filled first, and the other as additional capacity to be filled after the fast access segment. With the 3592 Model E05 and EFMT2, you can segment the MEDIA5 cartridge into a 100 GB fast access segment and a 333 GB slower access. With the 3592 Model J and EFMT1 (or the 3592 Model E05 and EFMT1), you can segment the MEDIA5 cartridge into a 60 GB fast access segment and a 200 GB slower access segment. The segmented capacities of the extended length cartridge, MEDIA9, is to be decided. If you decide to use the performance segmentation attribute, define a data class specifying the performance segmentation attribute and assign it to your SETOAM DATACLASS parameter in your CBROAMxx PARMLIB member.

Tape Volumes

Each tape volume is identified by a unique volume serial number. The volume serial number must conform to z/OS volume serial number naming conventions as documented in the *z/OS MVS JCL Reference*. The serial number on the tape volume cannot match the serial number assigned to any other SMS tape, DASD, or optical volume within the entire storage environment of the customer. The serial number must be unique within the installation.

Tape volumes can be used either in automated or manual tape libraries, or with stand-alone tape drives.

Tape volumes reside in a protective housing known as a *tape cartridge*. The following types of tape media can be housed within a tape cartridge and used on IBM tape drives:

- IBM Cartridge System Tape (MEDIA1)
- IBM Enhanced Capacity Cartridge System Tape (MEDIA2)
- IBM High Performance Cartridge Tape (MEDIA3)
- IBM Extended High Performance Cartridge Tape (MEDIA4)
- IBM TotalStorage Enterprise Tape Cartridge (MEDIA5)
- IBM TotalStorage Enterprise WORM Tape Cartridge (MEDIA6)
- IBM TotalStorage Enterprise Economy Tape Cartridge (MEDIA7)
- IBM TotalStorage Enterprise Economy WORM Tape Cartridge (MEDIA8)
- IBM TotalStorage Enterprise Extended Cartridge (MEDIA9)
- IBM TotalStorage Enterprise Extended WORM Cartridge (MEDIA10)

When objects are stored on tape volumes through an OSREQ STORE request, they are assigned to a specific Object storage group. OAM selects the appropriate tape cartridge type based on the DATACLASS parameter (if applicable), or the TAPEUNITNAME parameter that is specified for the storage group on the SETOAM statement. If the tape volume is allocated for a stand-alone tape drive, the TAPEUNITNAME determines the device type to be used, so the characteristics of the tape cartridge must be consistent with the capabilities of the tape drive.

3592 Media Considerations

Storage groups using 3592 drives should be comprised of either WORM tape volumes or rewritable tape volumes. Additionally, it may not be desirable to mix extended, standard and economy length media types in the same storage group. In the IBM automated tape library environment, the SETOAM DATACLASS parameter (at the storage group or global level) can be used to specify a desired media type. By specifying a DATACLASS media interchange for the storage group, MEDIA5, MEDIA6, MEDIA7, MEDIA8, MEDIA9, and MEDIA10 (applicable 3592 media types) can be segregated and prevent unintentional writing to the wrong media type. In the stand-alone environment, see "SETOAM Keyword Definitions" on page 103 for assisting the tape management system in determining which media type to select for a mount request based on the storage group name being appended to the OAM tape data set names.

Related reading: For information concerning mounting, demounting, entering, and ejecting tape volumes into tape libraries or information regarding tape cartridges (requirements, capacities, and planning for their usage), see *z/OS DFSMS OAM Planning, Installation, and Storage Administration Guide for Tape Libraries*.

Tape Volume Types

You can use three types of tape volumes to store objects:

- A group volume that is associated with an Object storage group
- A backup volume that is associated with an Object Backup storage group
- An MVS scratch volume that, when added dynamically, appears as belonging to an Object or Object Backup storage group when another volume is needed by OAM to satisfy a request
- An OAM scratch volume that is associated with the *SCRTCH* Object storage group. It is available to be used by any Object or Object Backup storage group that uses the same unit name and data class as this volume.

Group and Backup Volumes

Group and backup volumes are volumes that are already assigned to an Object or Object Backup storage group. If you issue a request to write objects to a tape

volume that is already assigned to an Object or Object Backup storage group, the tape volume that OAM selects must have sufficient space available to satisfy the request. If no group or backup tape volumes with sufficient space are available to satisfy the request, OAM attempts to select an OAM scratch tape volume with a compatible unit name and data class to accommodate the write request. If no OAM scratch tape volume is available, OAM allocates an MVS scratch tape volume to accommodate the write request.

Scratch Volumes

When an MVS scratch tape is added to an Object or Object Backup storage group, it is assigned the TAPEUNITNAME of the SETOAM statement that is associated with the storage group. Even though a tape unit name is specified for the group, the ACS routines (for ALLOC) can override this tape unit name specification by assigning the allocation to a Tape storage group that directs the allocation into an ATLDS or a MTL.

Example: The SETOAM statement can have a TAPEUNITNAME of 3480 associated with it. When the ACS routine runs for ALLOC, however, it overrides the information on the SETOAM statement and allocates the scratch tape to reside in an automated or manual tape library. In this case, the TAPEUNITNAME is automatically overwritten with the exact device type that was used to first mount the tape volume when it was first added to the storage group. The volume is allocated to a compatible tape device after it is ejected from the tape library dataserver.

Format of the Object Data on the Tape Media

OAM records object data on tape volumes using the BSAM OPEN, WRITE, CHECK, NOTE, POINT, SYNCDEV, and CLOSE macros to process the data recorded.

If the tape volume is a primary volume that belongs to an Object storage group and contains the primary copy of the objects, the data set name of the physical sequential data set is **OAM.PRIMARY.DATA**. Because the same data set name is created on multiple OAM tape primary volumes, the data set is not cataloged.

If the tape volume is a backup volume that belongs to an Object Backup storage group, and it contains the first backup copies of objects, the data set name of the physical sequential data set is **OAM.BACKUP.DATA**. If the tape volume is a backup volume that belongs to an Object Backup storage group, and it contains the second backup copies of objects, the data set name of the physical sequential data set is **OAM.BACKUP2.DATA**. Because OAM creates the same data set names on multiple OAM tape backup volumes, it does not catalog the data sets.

Attention:

1. If the DSNWITHSGNAME global keyword is specified on the SETOAM statement in the CBROAMxx PARMLIB member, the data set names will have the storage group name appended to the dataset names: OAM.PRIMARY.DATA.sgname, OAM.BACKUP.DATA.sgname, OAM.BACKUP2.DATA.sgname.
2. Allowing the ACS routines to assign or change the data class assignment of a tape volume is not recommended. The data class for tape volumes is determined by the SETOAM statement of the CBROAM*xx* PARMLIB member at MVS scratch tape allocation. The SETOAM statement provides this information either at the storage group level or at the OAM global level and best suits the requirements for the tape volume being allocated. Allowing the ACS routines to alter this specification could create unexpected consequences

(for example, no compaction of the data when the SETOAM statement specified compaction). Your installation must ensure that the ACS routines do not alter the data class construct for OAM tape volumes.

NOT Programming Interface information

Each user object is recorded as one or more records within the data set. The maximum number of user object bytes within a single record is 32 628. No record contains data from more than one user object. Each record containing object data is self-describing and starts with a 128-byte prefix. The 128-byte prefix contains the following information:

- Prefix identifier
- Prefix version number
- Prefix length
- Collection name
- Object name
- Offset of first byte of user data contained in this record
- Length field containing number of bytes of user object data in this record
- Reserved space

When an OSREQ STORE macro is issued to store an object on tape, OAM physically writes the object data to the tape media, before the OSREQ STORE macro returns control to the application program.

End of NOT Programming Interface information

Restriction: A single object never spans tape volumes.

Tape Drives

In addition to optical disk drives, OAM also can store the primary copy, or the backup copy, or both, of objects on tape volumes that can be mounted on these tape drives. OAM provides support for various IBM tape subsystems (stand-alone tape drives), the automated tape library dataserver (ATLDS), and the manual tape library (MTL).

Unlike optical drives, tape drives are not defined to the system through ISMF. The system allocates the tape drives to use to satisfy read and write requests of objects. The system relies on information from the ACS routines, and the location of the volume to be mounted to determine what device should be allocated to handle the request. If the volume is a library-resident volume (residing in an ATLDS or MTL), the system chooses a device to satisfy the request. If the volume resides outside of an ATLDS or MTL, the system allocates a stand-alone drive. The drive selected for use with a stand-alone tape depends on the TAPEUNITNAME associated with that tape in the TAPEVOL table row. For an MVS scratch tape (which has no TAPEVOL table row), the TAPEUNITNAME associated with the storage group to which the tape is assigned determines the type of stand-alone device which is allocated. See Table 5 on page 40 for detailed information on all supported models.

Related reading: For more information concerning tape hardware configurations, and OAM's role with the tape library dataservers and stand-alone tape drives, see *z/OS DFSMS OAM Planning, Installation, and Storage Administration Guide for Tape Libraries*.

Using Dynamic Allocation for Tape Drives

OAM uses the z/OS dynamic allocation macro (DYNALLOC) for all tape drive allocations. Tape drives remain allocated while OAM is using them, but are then

dynamically deallocated when OAM no longer needs them. Thus, the tape drives are obtained and released as OAM needs them; the tape drives are not dedicated to OAM. The tape drives are allocated to the OAM address space and not the application address space (for example, CICS, IMS MPP, or IMS BMP) invoking the OAM application programming interface (the OSREQ macro).

The allocated device could be a stand-alone tape drive or a drive inside of an automated or manual tape library. The device allocation depends on:

- The contents of the ACS routines
- Whether this mount is for an existing OAM tape that contains objects or a mount for an MVS scratch tape
- The location of the volume to be mounted

Although tape drives are not permanently allocated to the OAM address space, tape drives must be available to the OAM address space when they are needed to handle a request to store or retrieve an object on a tape volume.

The maximum number of tape drives capable of being concurrently allocated to the OAM address space is controlled by the sum of the MAXTAPESTORETASKS and the MAXTAPERETRIEVETASKS keywords at the OAM global level on the SETOAM statement.

Failing Dynamic Allocation and z/OS Allocation Recovery

If the initial dynamic allocation of a tape drive fails, OAM retries the dynamic allocation every 10 seconds for a full minute. If after one minute OAM does not successfully allocate the required device, OAM issues message CBR6425I indicating to the operator that OAM has not allocated a tape drive. The CBR6425I message lists the object name, collection name, storage group name, and tape volume name (SCRTCH if for an MVS scratch allocation) for this tape allocation request.

OAM continues to retry dynamic allocation every 10 seconds, for another four minutes or until a suitable tape drive is allocated, whichever comes first. During this period of time (up to five minutes) that OAM is trying to allocate a tape drive, z/OS allocation recovery processing is disabled and OAM is retrying the dynamic allocation.

If OAM does not successfully allocate a suitable tape drive at the end of five minutes, then OAM reissues message CBR6425I along with message CBR6400D. The CBR6400D message lists the storage group name and tape volume name for this tape drive allocation request and asks the operator if OAM should continue to retry with a NOWAIT option, continue to retry with a WAIT option, or cancel the request to dynamically allocate a tape drive. If the operator replies **R** (meaning retry with WAIT) to the CBR6400D message, OAM again issues the dynamic allocation macro, but with z/OS allocation recovery processing enabled. If the allocation request cannot be satisfied immediately, z/OS allocation recovery issues message IEF238D and no other dynamic allocations, dynamic deallocations, OPENs, or CLOSEs can occur in the OAM address space until this allocation completes or is canceled.

If the operator replies **N** (meaning retry with NOWAIT) to the CBR6400D message, OAM repeats the retry process from the beginning. OAM issues the dynamic allocation every 10 seconds for one minute. If after one minute OAM does not successfully allocate the required device, OAM issues the CBR6425I message. This message indicates to the operator that OAM has not allocated a tape drive. OAM continues to retry dynamic allocation every 10 seconds for another four minutes or until a suitable tape drive is allocated, whichever comes first. During this period

(up to five minutes) that OAM is trying to allocate a tape drive, z/OS allocation recovery processing is disabled while OAM is retrying the dynamic allocation.

If the operator replies **C** (meaning cancel) to the CBR6400D message, OAM fails the tape drive allocation and its associated OAM request. Any other reply to the CBR6400D message causes OAM to reissue the CBR6425I and CBR6400D messages.

The actions performed during z/OS allocation recovery processing are affected by the options specified in the ALLOC*xx* member in PARMLIB. If an eligible device is not made available to OAM, the dynamic allocation request fails and the associated store or retrieve request for the object also fails. For more information concerning the ALLOC*xx* member of PARMLIB and the installation defaults for handling allocation requests, see *z/OS MVS Initialization and Tuning Reference*.

Note: This processing applies to stand-alone devices as well as devices inside of automated or manual tape libraries.

Retrying or Canceling a Volume Mount

If OAM is waiting for the mount of a volume after the appropriate device has been allocated and the five minute default or the time specified on the MOUNTWAITTIME parameter of the SETOAM statement has elapsed with no mount occurring, message CBR6405D is issued to the operator to ask if the mount should be retried or canceled. If the operator replies **R**, the mount message is left on the console until the installation-specified amount of time (MOUNTWAITTIME) has again elapsed or the mount has been completed. This process continues until the requested volume is mounted or until the operator replies **C**. Should the operator cancel the request, one or more of the following actions occur:

- Message CBR2003I, stating that the tape volume that was requested to be mounted was not found, and is marked lost, is issued.

  Note: This message is not issued for an MVS scratch tape mount that is used to satisfy the request. This message is only issued for tape volumes that have rows in the TAPEVOL table.
- OAM marks the volume as lost so that future and current read requests for this volume fail with a nonzero return and reason code. For more information, see "Displaying Volumes that Have LOSTFLAG Set" on page 356.
- If the request that required the mount was a write request with a corresponding row in the TAPEVOL table, OAM marks the volume as lost. OAM tape volume selection attempts to find another volume for the request. If the cancellation was for an MVS scratch tape, OAM fails the request.

Retrieving Objects on Devices Compatible with the Tape Data Format

Whenever an object exists on tape, OAM can retrieve the object only when a device compatible with the format of the data written on the tape volume is available at the time of the retrieve request. To retrieve any objects from tape, you must initialize OAM with a valid CBROAM*xx* specification.

If an Object or Object Backup storage group that used to have its objects written on tape is now having objects written to optical media, those objects can also be read back using a tape device compatible with the format of the data written on the tape volume available at the time of the retrieval request. To read data back from tapes previously written in a group that is no longer writing data to tape, there *does not* have to be a SETOAM statement for that group in the CBROAM*xx* PARMLIB member processed.

OAM has a default of one system read and one system write task; each group has a default of one read task and one write task. The installation should ensure that there is a compatible tape device available for allocation at the time the retrieval request is received. If there is no device available for allocation, z/OS allocation recovery issues allocation recovery messages, requesting that an offline or inaccessible device be made available. If this is not possible, the retrieval request for the pending mount fails.

Related reading: For more information, see "Using Dynamic Allocation for Tape Drives" on page 46.

Tape Libraries

Tape libraries consist of a set of tape volumes and the set of tape drives on which those tape volumes can be mounted. A tape library can consist of one or more tape subsystems. These drives are configured into automated or manual tape library dataservers that contain library-resident tape volumes. The storage administrator defines tape libraries to SMS using ISMF library management definition panels. A tape library can contain tapes from multiple storage groups and a storage group can span up to eight libraries (ATLDSs, MTLs, or a combination of these).

Related reading: For more information on defining tape libraries, see *z/OS DFSMS OAM Planning, Installation, and Storage Administration Guide for Tape Libraries*.

Object Tape and Optical Volume Management

OAM expires optical and tape volumes that belong to Object and Object Backup storage groups. You can recycle or delete OAM object tape and optical volumes after all active data has been moved or recovered.

You can specify whether OAM is to leave the expired object tape volume in its storage group, reassign the volume as an OAM scratch volume, or remove the volume from OAM control.

You can specify whether OAM is to leave expired optical volumes in their storage group or to reassign them to OAM scratch status. The rewritable optical volume is available for reuse. OAM expires a WORM optical volume only if all objects have been expired and both sides of the optical platter are full.

The function provides the following benefits:

- Reduces significantly the amount of private storage that the OAM address space uses at larger installations.
- Frees up resources by expiring tape or optical cartridges when all of the data on the tapes has expired.
- Frees up resources by purging and recycling tape and optical volumes.

Related reading:

- For more information about using SETOAM TAPERECYCLEMODE to disposition expired object tape volumes, see "SETOAM Statements for Object Tape Storage" on page 101.
- For more information about using SETOPT OPTICALREINITMODE to disposition expired optical volumes, see "SETOPT Statements for Use in an Optical Environment" on page 121.
- For more information about expiring volumes, see "Expiring Tape and Optical Volumes" on page 238.

Recycling Tape and Optical Volumes

You can use the TAPE RECYCLE command to recycle 1 to 40 tape volumes, or use the MOVEVOL command with the RECYCLE option to recycle single tape or optical volumes. After all the objects have been moved off of the tape or optical volume, OAM processes the volume in a similar way as if it has expired. When you recycle a tape volume, you can leave it in its storage group, return the volume to OAM scratch status, or return the volume to MVS scratch status. You can reuse the tape or optical volume immediately.

When a volume is released from DFSMSdfp, DFSMSrmm™ also releases the volume.

Related reading: For more information about recycling volumes, see the following material:

- "Reusing Recycled Tape and Optical Volumes" on page 235
- "Moving Objects and Recycling the Source Volume" on page 291
- "Using the OAM Object Tape Volume Return to MVS Scratch Exit Routine" on page 240
- *z/OS DFSMSrmm Guide and Reference*

Deleting Tape and Optical Volumes

You can use the MOVEVOL command with the DELETE option to delete tape and optical volumes. When the Move Volume process completes and no objects remain on the source tape or optical volume, OAM removes the volume from the OAM inventory. OAM does not reclaim space on rewritable optical platters that have been deleted.

Related reading: For more information about deleting volumes, see the following topics:

- "Deleting Recycled Tape and Optical Volumes from OAM" on page 236
- "Moving Objects and Deleting the Source Volume" on page 293

Deleting Recovered Tape and Optical Volumes

You can use the volume RECOVERY command with the DELETE option to delete recovered tape and optical volumes. When the recovery process completes and no objects remain on the source tape or optical volume, OAM removes the volume from the OAM inventory.

Related reading: For more information about deleting recovered volumes, see "Deleting a Recovered Tape or Optical Volume" on page 284.

Chapter 2. Planning for OAM Installation

In many ways, planning is the most important phase of the OAM implementation and administration cycle. Time spent in planning is fully repaid in time, effort, and money saved by a well-implemented installation and a smooth transition to full system integration. This chapter identifies key areas that must be addressed during planning. Rather than repeat large amounts of information available elsewhere in the DFSMS and storage management libraries, this chapter focuses specifically on object-related issues and provides references to other resources. A case study, included at the end of this chapter, illustrates how planning concepts can be applied in a typical situation.

This chapter is organized into various sections, one for each phase of the planning process, and one for the case study. The following subtasks are covered:

Subtask	Page
Analyzing Your Business Environment	52
Analyzing Your Processing Environment	60
Estimating Resource Requirements	62
Preparing the Physical Environment	73
Preparing for Installation and Customization	73
Planning to Program Applications for OAM	74
Planning to Administer OAM	75
Preparing to Operate OAM	75
OAM Planning Case Study	75

Setting Up the Planning Team

To most effectively implement OAM using the information in this chapter, your planning team should include individuals with significant technical expertise in the following areas:

- **DFSMS-Related Products.** OAM is a component of DFSMS and interacts closely with other members of the DFSMSdfp family of products. Knowledge of system-managed storage (SMS) and the interactive storage management facility (ISMF) is essential for successful planning and implementation. Additionally, familiarity with DFSMShsm and the other DFSMS components provides a meaningful context for understanding OAM.
- **DB2.** OAM uses DB2 databases to store objects and internal information (such as object indexes). Implementing OAM for objects is likely to have a significant impact on your installation's DB2 space requirements. If OAM is to be set up in a Parallel Sysplex, DB2 data sharing installation and knowledge is also required.
- **Catalogs.** OAM uses collections to subdivide object data within Object storage groups. Collections must be cataloged.
- **Customer Information Control System (CICS).** If OAM is invoked by CICS transactions, the planning team must evaluate the effect of their interaction.
- **Hardware Configuration Definition (HCD).** HCD is used to define devices to the hardware configuration.

© Copyright IBM Corp. 1989, 2006

- **Information Management System (IMS).** If OAM is invoked by IMS transactions, the planning team must evaluate the effect of their interaction.
- **Time Sharing Option/Extended (TSO/E).** If OAM is invoked by TSO/E transactions, the planning team must evaluate the effect of their interaction.
- **Cross-system Coupling Facility (XCF).** If OAM is to be established in a Parallel Sysplex, the planning team must evaluate the impact to the coupling facility requirements and resources.

As with any major installation, the OAM planning effort should also involve people with project management experience and representatives of the end-user areas that are affected by the implementation.

Analyzing Your Business Environment

Your processing environment reflects the unique goals, procedures, and structure of your business; therefore, you need to analyze your business environment so that you can implement OAM for objects successfully. The technical installation can then evolve logically from the functions and requirements you have defined.

The first task in the analysis process is to characterize the objects that are processed. Among the most useful classification categories are:

- **Size.** Are objects small, medium, or large? What are the criteria for these categories in your installation?
- **Activity.** How often are objects retrieved? How often are new objects stored? Is one object accessed many times or are many objects accessed one time each? What is the required response time for accessing an object?
- **Volume.** How many objects of each size will be created? How many objects must be processed every hour or every day?
- **Life cycle.** Is the activity level stable or does it change in response to a business cycle (such as monthly billing)? Are such changes random or periodic? How frequently do these changes occur? Are objects backed up? How long do you plan to retain objects? How do you plan to handle expired objects? Do you plan to delete objects automatically?
- **OAMplex.** If you are planning to run an OAMplex, how many systems (OAMs) will be in your OAMplex? Which systems will have the hardware physically attached to assist in determining where OSMC should be run? How will the storage group and library disbursement be handled between systems?

As a result of this analysis, you can:

- Determine criteria for grouping objects.
- Establish performance objectives.
  - Determine the best system for OSMC processing per storage group.
  - Determine hardware distribution based on demand and location.
- Identify storage management cycles.

This analysis, in turn, leads you to create storage groups, collections, storage classes, data classes, and management classes through which OAM and SMS can implement your storage management policy. The ultimate goal is to develop a set of Storage Management Subsystem (SMS) constructs that you can use to accurately describe and respond to the complex reality of your business environment.

Grouping Objects

During the process of characterizing your installation's objects, you probably discovered that the objects can be grouped in various ways. OAM uses the following techniques to group objects physically and logically:

- Object storage group assignment represents the physical storage, managed by OSMC according to your storage management policy.
- Collection assignment represents a logical relationship between objects.

Every object belongs to a collection; every collection belongs to an Object storage group. Each Object storage group can contain one or more collections; however, a collection can never span multiple Object storage groups.

Object Storage Groups

The Object storage group makes it possible to manage a set of storage devices as a single object storage area. Each Object storage group encompasses several types of storage devices in an object storage hierarchy. (See "Using Object, Object Backup, and Tape Storage Groups" on page 12.)

You can organize storage into physically separate groups, such as:

- Business needs
- Accountability
- Security
- Application isolation
- Device characteristics
- Connectivity

Collections

A collection typically contains objects that are used by the same application or are of a similar type. Collections are useful for dealing with sets of objects that are too large to be handled as a single object, but too small to warrant a separate Object storage group. For example, all objects in a collection can have the same default initial storage class and management class attributes.

You can organize objects into collections for a variety of reasons. For example, if objects related to a corporate division are kept in one Object storage group, it might be desirable to subdivide that Object storage group into collections of departmental data.

Establishing Performance Objectives

Different response times are required for different sets of objects and some objects are accessed more frequently than others. OAM uses the storage class to specify object performance objectives and availability requirements to SMS. Every object in the object storage hierarchy must have an associated storage class. The fact that every object has an associated storage class makes every object, by definition, SMS-managed.

Your business needs provide the service-level criteria on which storage classes are built. Table 6 on page 54 shows how you can specify performance objectives for different storage classes depending on the service levels required:

Table 6. Storage Class Service Levels for a Variety of Business Needs

Business Need	Service Level
Daily operation	Fast response; frequent access
Online customer inquiries	Fast response; occasional access
Quarterly batch processing	Medium response; periodic access
Legal retention requirements	Slow response; very infrequent access

A storage class does not represent any physical storage. OAM analyzes the storage class parameters and tries to meet the performance objectives by placing the object on a device that best meets those objectives. Using storage classes to force use of a specific device type can defeat the purpose of system-managed storage and cause serious inefficiencies.

Example: Using a storage class that causes objects to be written directly to optical media without being staged through DASD can degrade system performance. It also can significantly increase the number of optical disks needed per day because of the inefficient storing of optical volume table of contents (VTOC) information.

Consider separating the storage classes that are used to control objects for one application from the storage classes that are used for other applications. If it becomes necessary to change the performance objectives for objects used by an application, its associated storage classes can be changed without affecting the other applications.

Related reading: For a detailed discussion of storage classes and how to plan for them, see *z/OS DFSMS Storage Administration Reference*.

Identifying Management Cycles

Every business is subject to operational cycles that influence work flow. These cycles often have a direct effect on performance and availability requirements. The management class, with storage classes and ACS routines, makes it possible for SMS to respond to these cycles as it manages object storage. Every object in the object storage hierarchy must have an associated management class. (See Figure 11 on page 55 for a representation of this process.)

As you analyze your business environment, consider the potential effects of these cycles on your work load and, therefore, your object access requirements:

- Accounting
- Reporting
- Manufacturing
- Marketing
- Backup
- Retention
- Physical location

Remember to factor into your analysis the frequency of each cycle (such as daily, weekly, monthly, quarterly, or annually).

To fully exploit the management class construct, it is necessary to understand class transitions and storage management cycles. A *class transition* is a change in an object's management class or storage class when an event occurs that brings about a change in an object's service level or management criteria. Class transition criteria are specified in management class definitions. When a recalled object is

restored to removable media, and its time on DB2 DASD has exceeded the MC definition, the object will be processed per the MC definition in effect.

Example: A management class might specify that 180 days from an object's creation date, the ACS routines should be invoked to determine if a class transition is needed.

Understanding Storage Management Cycles

A class transition occurs during a storage management cycle. A *storage management cycle* is an invocation of the OAM Storage Management Component (OSMC) for an Object or Object Backup storage group. The storage management cycle ensures that every object that is scheduled for processing is placed in the correct level of the object storage hierarchy (as specified by its storage class), is deleted or backed up (as specified by its management class), and, if necessary, is flagged for action during a subsequent storage management cycle.

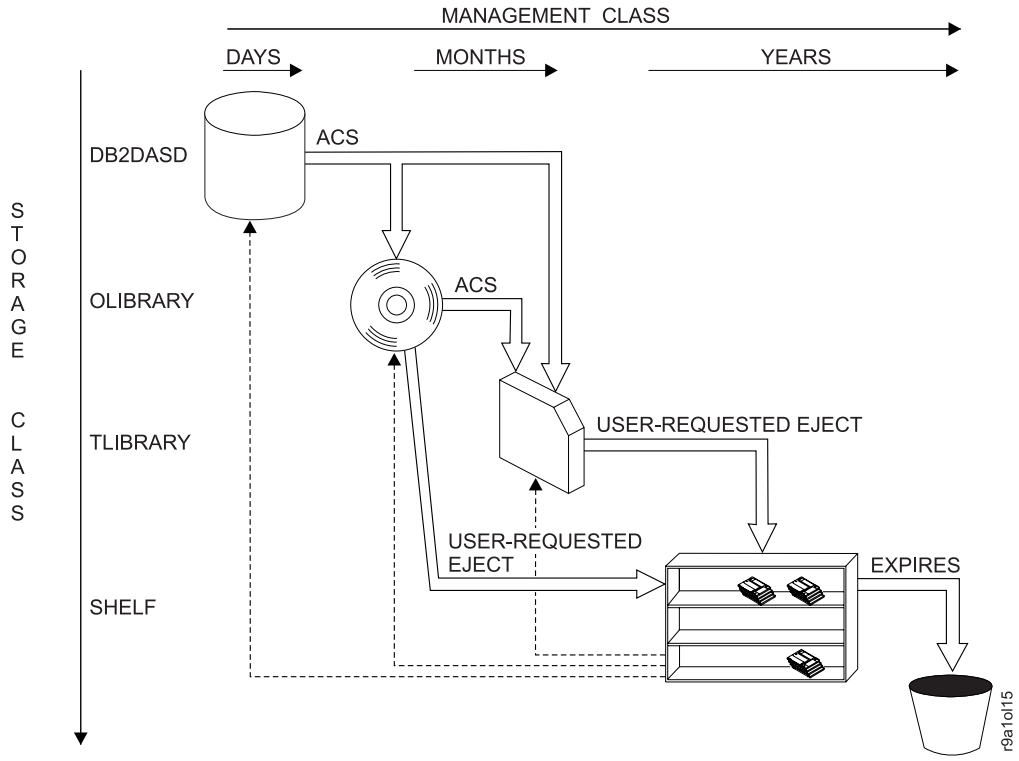

Figure 11. Example of Using Class Transitions and ACS Routines to Change Management Classes

Storage management cycles can run automatically once each day, starting at a period of time that you specify (for example, during third shift). If you are in an OAMplex and using automatic startup, you should also specify a system name; otherwise, multiple systems will try to process the same storage group at the same time. As it executes, OSMC checks to see if an object is scheduled for processing. An object is scheduled for processing for any one of the following reasons:

- It was stored since the last storage management cycle.
- It was retrieved and the UPD=N parameter is not specified on the OAM1 statement in the IEFSSN*xx* member of PARMLIB.
- Its storage class, management class, or expiration date has been changed since the last storage management cycle.
- It was marked for a class transition by a previous storage management cycle.

- It was marked for expiration by a previous storage management cycle.
- It was previously recalled to DB2 DASD for user-defined number of days, and that number of days has elapsed. OSMC will restore the object back to removable media, and process per object's management class.

Checking for Object Deletion

When OSMC encounters an object in the Object storage group that is scheduled for processing, it first checks to see if the object has reached its scheduled expiration. If it has, OSMC invokes the auto-delete (CBRHADUX) installation exit to determine if the object is allowed to be expired. If the auto-delete exit approves of the deletion, then the expiration is honored and all copies of the object are deleted. If the auto-delete exit denies the deletion, then the expiration is not honored and no copies of the object are deleted.

If the object is being deleted from an optical rewritable volume, the deleted space and deleted counts are updated, and the object name, collection name, volume serial number, and sector location are added to the deleted objects table for later physical deletion. If the object is deleted from a tape volume, the tape volume record is updated with the deleted kilobytes.

Each time OAM receives a request to delete an object from a tape volume, OAM updates the number of logical kilobytes deleted from that tape volume by adding the size of the object which was just deleted to the existing logical kilobytes deleted value for that tape.

Related reading: For more information on deleting objects, see the following topics:

- "Deleting Tape and Optical Volumes" on page 50
- "Auto-Delete Installation Exit (CBRHADUX)" on page 573

Recommendation: If you are using DFSMSrmm to manage OAM objects on tape, the following vital record specifications, shown in TSO/E format, might be appropriate:

```
RMM ADDVRS DSNAME('OAM.PRIMARY.DATA') COUNT(99999) LOCATION(HOME)

RMM ADDVRS DSNAME('OAM.BACKUP.DATA') COUNT(99999) LOCATION(HOME)

RMM ADDVRS DSNAME('OAM.BACKUP2.DATA') COUNT(99999) LOCATION(HOME)

RMM ADDVRS DSNAME('OPEN') JOBNAME(oamtaskname) COUNT(99999) LOCATION(HOME)

RMM ADDVRS DSNAME('ABEND') JOBNAME(oamtaskname) COUNT(99999) LOCATION(HOME)
```

The above DSNAME examples are data set names without DSNWITHSGNAME specified in the SETOAM statement. If DSNWITHSGNAME were specified, the storage group name would be appended as the data set name's low level qualifier. The JOBNAME value is the name of the job and started task for the OAM address space that opens the tape data sets.

Determining Class Transition and Backup Requirements

If the object has not been marked for expiration, OSMC determines if a class transition is needed. When a class transition is indicated, OSMC invokes the ACS routines. These routines evaluate the object's class assignments and change them, if necessary. Next, OSMC performs any actions that an object's class assignments indicate:

- OSMC checks the storage class to determine if the object should be placed at a different level of the object storage hierarchy.

- OSMC checks the management class to set the *next* date on which management action (that is, expiration or class transition) is needed.
- OSMC makes up to two backup copies of the object if the management class indicates that one or two backup copies are required, and the requested number of backup copies does not currently exist.

This situation can result from any of the following scenarios:

- This storage management cycle is the first one for a new object.
- An application change changes an object's management class to one that requires backups.
- A class transition changes an object's management class to one that requires backups.
- An application change occurs so that the object's management class requires two backup copies where currently only one backup copy exists.
- A class transition occurs so that the object's management class requires two backup copies where currently only one backup copy exists.

For objects with a primary copy on DASD, tape, or optical, OSMC performs the following actions:

- OSMC makes backup copies according to the management class that is assigned to the object. Backup copies can be directed to an optical disk, tape volume, or both, depending on the definitions that are associated with the Object storage group on which the primary copy of the object resides.

  If the management class requires a single backup copy, OSMC directs the backup copy to the associated Object Backup storage group. This storage group can be located on either an optical disk or a tape volume. If the management class indicates that two backup copies of the object are required and the SETOSMC statement associates two Object Backup storage groups with the Object storage group where the primary object copy resides, the first backup copy is written to one Object Backup storage group and the second backup copy is written to the other Object Backup storage group. These Object Backup storage groups can reside on the same or different media types (optical or tape).

  For backup copies to be made to tape volumes, you must specify SETOAM statements with the STORAGEGROUP and TAPEUNITNAME parameters for the Object Backup storage groups.
- The object is presented to the ACS routines in the CTRANS environment to allow for class transition.
- If SETOSMC CLEAROLDLOC has been specified for objects transitioning from removable media to DB2 DASD, the old location information is cleared during this OSMC cycle.
- The next scheduled processing for the object is determined. If the object has not expired yet, OSMC processing for the object is next scheduled for when the object is to expire (based on the OSREQ STORE/CHANGE specifications for the RETPD and the management class assigned to the object).
- On expiration of the object, OSMC deletes all copies of the object (primary and all the backups). Deletion removes information from the object directory but might or might not result in physical deletion, depending on the type of media. OSMC does not physically delete object copies residing on tape and WORM media. For objects that reside on tape volumes, the number of logical kilobytes that are deleted from the volumes is incremented for each object deleted.

Related reading: For more information on expiring objects, see "Objects Not Selected for Expiration Processing by OSMC" on page 247.

Developing Appropriate Management Classes

Before you begin: Like storage classes, management classes can be developed to meet a variety of needs. Develop as many management classes as necessary to use the class transitions and storage management cycles that are required by your business. To avoid processing inefficiencies or unexpected results, or both, careful analysis of the end results of class transition is critical for a successful implementation.

Perform the following steps to develop your management classes:

__ • Analyze your applications to plan for large groups of objects that have the same management requirements. You can assign these objects to one management class and store them together in one collection.

__ • Identify objects that are good candidates for early deletion or class transition.

__ • Separate objects that do not need to be backed up from those that do.

__ • Identify objects or collections that require immediate backup.

__ • Identify objects that require a delayed class transition.

__ • Identify objects with medium to low response-time requirements, so that they can be moved to tape or optical storage as soon as possible.

__ • Use ISMF to define your management classes by selecting option 3, Management Class, from the ISMF Primary Option Menu for storage administrators.

Related reading: For more information on defining management classes, see *z/OS DFSMS Storage Administration Reference*.

OSMC Processing Management in an OAMplex

You can decide whether to start OSMC processing automatically or manually for a specific Object or Object Backup storage group. You can specify the name of the OSMC processing system name in the ISMF panel for defining/altering storage groups.

Automatic OSMC Processing of Storage Groups: You can start OSMC processing automatically for Object and Object Backup storage groups using the OSMC cycle window in the ISMF Storage Group Define panel. If you specify the OSMC system name in the Storage Group Define panel, OSMC processes the storage groups on the specified OSMC system. If you omit the OSMC system name, OSMC processes all storage groups in the OAMplex. For more information, see "Understanding Storage Management Cycles" on page 55.

You also can use the SETOSMC CYCLEWINDOW keyword to specify either START/ONLY or START/STOP mode for the OSMC cycle. START/STOP mode defines the start and end times for processing the storage group. START/ONLY mode defines the start time for processing the storage group. For more information on using the SETOSMC CYCLEWINDOW keyword, see "SETOSMC Statements for Use in the OSMC Environment" on page 125. **Specifying the processing system name is important because omitting it can result in significant resource contention in DB2 and OSMC.**

Example: You have three systems in an OAMplex and all systems started processing storage group SGROUP01 at the same time. Because all three systems are in contention for the same resources associated with SGROUP01, it could result in errors when one system is waiting for resources that another system holds. The most efficient way to start OSMC processing is to use the OSMC processing system name to have each system process different storage groups at the same time.

Manual OSMC Processing of Storage Groups: You can use the F OAM,START,OSMC command to start OSMC processing for Object storage groups only. If you issue an F OAM,START,OSMC command, OSMC starts all Object storage groups whose OSMC processing system name is blank or matches the system name on which the command was issued. You can use the F OAM,S,STORGRP command to start OSMC processing for either Object or Object Backup storage groups. The F OAM,START,STORGRP,*storagegroup* command is

always honored on the system where the command is issued, even if another system name is specified in the processing system name.

Recommendation: Try to localize the OSMC processing to the system where the hardware is physically online for that storage group to reduce the amount of cross-system processing that is required. Also, if multiple systems are running different storage groups at a time, the impact to DB2 should be analyzed (especially if normal activity to the storage group is occurring at the same time).

Concluding the Business Analysis Phase

As you have seen, OAM and SMS use a variety of conceptual structures through which you can describe your business environment and specify a storage management policy. Furthermore, each of these structures offers a significant amount of flexibility.

Unless your business environment is an unusually simple one, you should expect the analysis process to require several iterations. There are likely to be several equally viable ways to define your Object storage groups and classes. Unfortunately, there are no magic algorithms for choosing which approach to implement. That decision can be made only by one who knows the most about your business: *you*.

At this point in the planning process, you should have a rough idea of how your objects are to be organized into Object storage groups, collections, storage classes, and management classes. The next step is to analyze your processing environment.

Analyzing Your Processing Environment

Installing a new product is rarely an isolated event. Planners must evaluate how the existing environment will be affected by the new product, as well as how the new product must be customized to integrate with the existing components. This section presents guidelines for analyzing the hardware and software that make up your processing environment.

Hardware

You would use OAM in a mainframe environment. To take advantage of the full range of OAM capabilities, the environment should provide substantial amounts of internal and external storage. In addition to standard direct access storage device (DASD) devices, OAM also uses optical disk drives and tape devices inside of and outside of ATLDSs and MTLs within an object storage environment. OAM does not have any hardware prerequisites; however, you can expand internal and external storage capacities to accommodate an increased work load.

Device Considerations for Larger Data Objects

When expanding the maximum data object size beyond 50MB (using the IEFSSN*xx* keyword, MOS=*nnn*), remember that OAM does not span an object across multiple volumes. Ensure that the removable storage media used to store, backup, or transition a larger data object has sufficient capacity. See “Updating the IEFSSNxx PARMLIB member” on page 98 for more information.

Grouping Tape Devices

You can group together tape devices and define them as one group to the system. For instance, a group of 3490 tape drives in the same room can be grouped together and defined as 3490GRP. These tape device groups are known as *esoterics*. Once an esoteric is specified on the SETOAM statement for a group, you need to

ensure the existence of that esoteric while an OAM tape exists that specifies that esoteric in the TAPEUNITNAME field of the OAM tape volume (TAPEVOL) table.

Attention: Do not change the contents of that esoteric to introduce incompatible tape device types. Should the esoteric name be deleted or changed, the volumes associated with the esoteric name cannot be allocated. Because the TAPEUNITNAME cannot be resolved, the tape that is required for the request is not mounted and the allocation request fails.

For scratch allocations for an ATLDS or MTL, the esoteric TAPEUNITNAME associated with a storage group is overridden with the exact device type for the device that is allocated for the MVS scratch tape mount.

Considering Storage Configurations

Use of optical or tape storage is *not* required for OAM. In fact, as you first begin to work with objects, it can be desirable to implement a pilot application that uses only DASD. If and when optical or tape storage is included in your storage management scheme, one or a combination of the hardware configurations described in Table 3 on page 29 and Table 5 on page 40 can be used as a standard configuration.

Related reading: For more information and examples concerning standard tape library hardware configurations, see *z/OS DFSMS OAM Planning, Installation, and Storage Administration Guide for Tape Libraries*.

Deferring Hardware Ordering Until After Work Load Analysis

The task of ordering hardware should be deferred until after the OAM work load is analyzed and resource requirements are estimated (see "Estimating Resource Requirements" on page 62). Depending on the volume of objects to be processed and stored, you can order additional DASD, optical storage devices, tape devices, or all three. An Object or Object Backup storage group can specify no more than eight optical libraries. Be sure to request appropriate documentation when you place the hardware order (see Table 1 on page xi).

Related reading: For more information about OAM hardware-related issues, see Appendix A, "Sample Optical Hardware Configurations," on page 387, and *z/OS DFSMS OAM Planning, Installation, and Storage Administration Guide for Tape Libraries*.

Software

Software analysis must address two distinct types of programs:

- System software—system control programs, transaction control programs, security packages, communication programs, database management systems, storage management systems, and similar global system products
- Custom applications—locally-written application programs, customized exits, site-specific macros, and other software unique to your installation

Additionally, OAM has software prerequisites that you must install prior to implementing OAM.

System Software

OAM is a component of DFSMSdfp and uses DB2 extensively. CICS and IMS transactions, TSO/E programs, and MVS batch jobs can invoke the OSREQ application programmer's interface (API) to OAM.

Restrictions: Consider the following restrictions when planning for the installation of OAM:

- Only one OAM address space can be active per z/OS system.
- Only one DB2 subsystem application can be associated per OAM address space.
- Optical devices can only be directly accessed by the OAM address space where they are physically online; however, they can be indirectly accessed by other OAMs within an OAMplex.
- If in an OAMplex, the DB2 subsystems connected to the OAMs in the OAMplex must belong to the same DB2 data sharing group.

Related reading: See *z/OS DFSMS OAM Application Programmer's Reference* for additional information on the OSREQ API.

Custom Applications

By definition, custom applications are unique to your installation. ***The planning team is responsible for thoroughly investigating the installed software base to determine what, if any, custom application constraints apply for OAM implementation.***

Software Prerequisites

The following software is the minimum release level that must be installed to enable this release of OAM:

- IBM DATABASE 2 Version 6.1
- If the OSREQ macro is invoked from a CICS transaction, then IBM CICS/MVS® Version 2, Release 1.1 is required:
- If the OSREQ macro is invoked from an IMS application, then one of the following is required:
  - IBM IMS/VS Version 2
  - IBM IMS/ESA® Version 4 Database Manager

Software can be ordered as soon as you have determined which, if any, of the required components must be added or upgraded. Remember to request supporting documentation when you place the software order (see Table 1 on page xi).

If you are adding significant new system software along with OAM, consider phasing the installations. Install and test one product at a time; then, when the system is stabilized, add another product. This approach simplifies error diagnosis by limiting the number of potential problem areas.

Related reading: For more information about the software requirements for DFSMS, see *z/OS Migration*.

Estimating Resource Requirements

To fully assess the potential impact of implementing OAM, you must translate the work load estimates from the business analysis phase into resource requirements. This section provides some guidelines for evaluating resource needs and formulas for estimating space requirements for DASD, tape, and optical storage.

After the estimating process is complete, you can evaluate the capacity of the current processing environment and prepare to increase it, if necessary.

Attention: The formulas, constants, and performance rates used in this section are only for estimating purposes. They do not constitute benchmarks or

guarantees and are provided solely as guidelines to assist you in your planning effort. They should not be interpreted as estimates for operation under normal work loads.

General Requirements

Estimating resource requirements is more of an art than a science. Although rules of thumb and generalized algorithms are useful, each installation's needs and environment are unique. To optimize the estimating effort, each planning team should allow a reasonable margin of error and be alert to the subtle interactions that can affect performance, throughput, and resource requirements. The following comments are included to stimulate your analysis during the estimation process:

- Object size and activity level influences virtually all aspects of resource utilization. The validity of the remaining resource estimates depends on the accuracy of these fundamental assumptions.
- When estimating object transfer rate and other throughput issues, remember that OAM is part of a complex system, influenced by many factors.
- Application design can have a significant effect on OAM efficiency. For example, careful use of buffering can reduce virtual storage requirements.
- When estimating the amount of time needed to complete a storage management cycle, consider the following:
  - All data movement resulting from storage class changes, whether caused by class transition or application request, is handled during the storage management cycle.
  - Movement from DASD to optical or tape is typically faster than the reverse.
  - The frequency and volume of backup copies of objects that are made during the cycle can increase processing time.
  - The effective drive transfer rate is faster for a single large object than for multiple small objects.
- In addition to estimating obvious needs, such as DASD, tape, and optical storage space, consider possible requirements for resources that are less directly related to the OAM installation. For example, do you have enough of the following:
  - Trained support personnel, application developers, and end users?
  - User IDs with the correct access authority?
  - Tapes to process backups for the DB2 tables?
  - Shelf space for shelf-resident optical disks and library-resident tape volumes associated with manual tape libraries?
  - Shelf space for shelf-resident tape volumes used with stand-alone tape devices?
  - Customized transport classes (CTCs) for OAM XCF processing to decrease any possible impact on cross-system processing based on locality of hardware versus the system originating the request.
  - DB2 threads and locks to process concurrent access to tables during an OSMC cycle?

DASD Storage

Implementing OAM requires a significant amount of DASD storage. DASD space is required for the object databases and for the OAM administration database. This section provides techniques for calculating DASD space requirements for these databases.

In addition to the space requirements detailed here, consider DASD space needed for the optical configuration database, OAM-related system and application programs, and the catalog that contains collection name entries. See "DASD Resources" on page 78 for an example of how these computations are applied.

System Paging

The various subcomponents of OAM make significant use of virtual storage resulting in a high auxiliary storage requirement. In most instances, an installation uses one or more dedicated DASD volumes for paging so that there is sufficient auxiliary storage. If after system tuning low paging activity occurs, you can allocate other low-activity data sets to a paging volume.

Attention: A minimum of 210 MB (290 cylinders on a 3390 DASD) of auxiliary storage is required for OAM local paging. Other applications that use OAM might require additional auxiliary storage.

Object Databases

Each Object storage group has one object database. Each object database requires eight separate VSAM linear data sets. These data sets are for the object directory and its three indexes, the small object table and its index, and the large object table and its index. These data sets are explicitly allocated to give you control over data set placement and size. This control allows you to take full advantage of your configuration to optimize system and DASD I/O performance. (See Figure 93 on page 511 for a diagram of an object database.)

Before attempting to estimate your DASD requirements, you must have completed the business analysis process by establishing the following:

- Object grouping for all objects to be handled by OAM
- Object sizes within each Object storage group
- Number of objects to be stored in DB2 databases for each Object storage group

Tip: Object Backup storage groups do not use the object database. Backup information for each object is kept in the object database for the primary Object storage group.

Data Set Name Qualifiers: Table 7 on page 65 provides descriptions and data set name qualifiers for each of the required data sets in the database.

Table 7. Data Set Name Qualifiers and Descriptions for Each

Qualifier	Description
OSMDTS	Object directory table; information about the object
OSMLBTS	LOB base table; LOB specific information about the object.
OTLOBX1	LOB base table index 1; index (collection ID/object name) into the LOB base table
OSMLATS	LOB auxiliary table; storage area for objects designated as LOB
OTLOBAX1	LOB auxiliary table index1; index (ROWID) into the LOB auxiliary table to navigate to LOB data
OBJDIRX1	Object directory index 1; cluster index (odcreats) into the object directory table
OBJDIRX2	Object directory index 2; index (pending action date) into the object directory table
OBJDIRX3	Object directory index 3; index (collection name/object name) into the object directory table
OSMOTS04	4 KB small object table; storage area for objects with a length less than or equal to 3980 bytes (small objects)
OBJT04X1	4 KB object table index 1; index (collection ID/object name) into the 4 KB object table
OSMOTS32	32 KB large object table; storage area for objects with a length greater than 3980 bytes (large objects)
OBJT32X1	32 KB object table index 1; index (collection ID/object name/segment name) into the 32 KB object table
Note: Kilobytes = 1 024 bytes.	

Variables: Table 8 describes the variables used in the DASD formulas:

Table 8. Variables Used in DASD Formulas

Variable	Description
nt	Total number of objects stored within an Object storage group, which includes objects stored in the small object table, objects stored in the large object table, and objects stored directly on optical or tape storage
ns	Maximum number of objects stored in the small object table
nl	Maximum number of objects stored in the large object table
aos	Average object size
b	Number of 4-kilobyte pages per track on the device (see Table 9)
cb	Number of 32-kilobyte blocks per cylinder on the device (see Table 9)

Constants: Table 9 summarizes the constants that are related to device type.

Table 9. DASD Device Characteristics

Device Type	3390	3380
Pages per track (b)	12	10
Blocks per cylinder (cb)	22	19
Tracks per cylinder	15	15

Formulas: Table 10 on page 67 provides calculations for estimating DASD requirements for the eight object data sets.

These formulas do not include any significant free space. Calculate these formulas using the absolute maximum number of objects anticipated, plus whatever additional free space that you require.

The results of the formulas are expressed in tracks on DASD, which can be converted to cylinders using the information in Table 9. The exception is the large object table, where the result of the calculation is expressed in cylinders.

The results of all these calculations must be rounded up to the next higher integer.

Table 10. Example of Calculations For Determining DASD Requirements

OBJECT DIRECTORY TABLE or INDEX	CALCULATION
Directory table (OSMDTS)	*nt* ÷ (35 x *b*)
Directory index 1 (OBJDIRX1)	*nt* ÷ (260 x *b*)
Directory index 2 (OBJDIRX2)	*nt* ÷ (166 x *b*)
Directory index 3 (OBJDIRX3)	*nt* ÷ (68 x *b*)
4 KB small object table (OSMOTS04)	If *aos* > 1900 bytes: (*ns* ÷ *b*) x 1.1 *If *aos* < 1900 bytes: (*ns* ÷ *b*) ÷ "floor" (4074 ÷ (*aos* + 61)) x 1.1
4 KB object table index 1 (OBJT04X1)	*ns* ÷ (68 x *b*)

Optical Configuration Database

The optical configuration database (CBROAM) defines the optical hardware configuration and all of the optical volumes. It is a DB2 database and consists of the following tables:

Library Contains one row for each optical library. The DB2 name of this table is **OLIBRARY**. There is a unique index on the library name.

Drive Contains one row for each optical drive, whether operator-accessible or library-resident. The DB2 name of this table is **DRIVE**. There are two indexes defined on the table; one is unique and one is not.

Slot Contains one row for each of the slots in a 9246 optical library. The DB2 name of this table is **SLOT**. There is a unique index defined on the slot name in combination with the library name.

Note: The 9246 optical library is no longer supported.

Volume Contains one row for each optical disk volume. The DB2 name of this table is **VOLUME**. There is a unique index on the volume serial number.

Deleted-Objects Contains one row for each object waiting to be deleted from 3995 rewritable optical media. The DB2 name of this table is **DELOBJT**. There are two indexes defined on the table; one is unique and one is not.

Tape Volume Contains one row for each tape volume used by OAM for object storage. The DB2 name of this table is **TAPEVOL**. There is a unique index on the volume serial number.

Table 11 on page 68 provides DASD space recommendations for storage of the CBROAM tables.

Table 11. CBROAM Space Recommendations

Description	DB2 Name	Primary Space 3390 Tracks	Secondary Space 3390 Tracks
Library Table	OCLIBTSP LNAMINDX	1 1	1 1
Drive Table	OCDRVTSP DNAMINDX DRIDINDX	5 1 1	1 1 1
Slot Table	OCSLTTSP SLIBINDX	1 1	1 1
Volume Table	OCVOLTSP VSERINDX	20 2	10 1
Deleted-Objects Table	OCDELTSP DVOLINDX DELOINDX	100 10 100	10 5 10
Tape Volume Table	OCTVLTSP TVOLINDX	10 2	1 1

These recommendations allow:
- 216 optical library definitions
- 1 320 drive definitions
- 1 404 slot definitions for as many as twenty-two 9246 library definitions
- 5 040 volume definitions
- 39 600 objects waiting for deletion from rewritable media
- 5 280 tape volumes to be used for storing objects

If your installation requires more entry space or if you are using DASD storage that allows fewer than twelve pages per track, the above space recommendations might need to be increased.

OAM Administration Database

An additional database is needed for object management. This database is identified by the data set name qualifier OAMADMIN. Although specific calculations could be made for exact tracks needed based on the number of storage class names, management class names, and collection names used by your installation, experience has shown that the recommendations in Table 12 should be adequate.

Table 12. OAMADMIN Space Recommendations

Description	Data Set Qualifier	Primary Space 3390 Tracks	Secondary Space 3390 Tracks
Management Class ID Table	MCIND CBRMGTX CBRMGTY	1 1 1	1 1 1
Storage Class ID Table	SCIND CBRSTOX CBRSTOY	1 1 1	1 1 1
Collection Name Table	COLIND CBRCLTX1 CBRCLTX2 CBRCLTX3	2 1 1 1	2 1 1 1

These recommendations allow the maximum 32 767 storage class names, the maximum 32 767 management class names and over 60 000 collection names.

Object Storage on Removable Media

If your installation is going to use optical, tape, or both types of storage, you must estimate the amount of optical disk and tape cartridge storage that you need for your OAM implementation. Factors to consider should include the number of the following:

- Optical libraries required per day
- Optical disks, tape cartridges, or both required per year
- Shelf-resident optical disks, tape cartridges, or both
- Optical, tape, or both types of libraries
- Operator-accessible optical disk drives
- Tape stand-alone drives, ATLDSs, and MTLs, or a combination of these devices

This section provides techniques for calculating optical and tape space requirements based on these considerations. See "Optical Resources" on page 82 for an example of how these computations are applied.

Constants

Use the information in Table 3 on page 29 and Table 5 on page 40 regarding storage slot and cartridge capacities as constants for DASD resource calculations for your optical and tape configurations.

Formulas

The following formulas can be used to calculate storage (optical, tape, or both) estimates.

Note: The term "cartridge" in the following formulas refers to optical disk cartridges and tape cartridges. If you are only using one type of medium within your installation, simply calculate according to the needs of your storage management policy. If you are using both optical and tape storage, consider cartridges needed for both media when calculating the formulas in Table 13.

Table 13. Formulas for Calculating Storage Requirements

Consideration Factor	Calculation
Cartridges per day	# cartridges required per day equals: # megabytes written per day ÷ # of megabytes per cartridge *where*: # of megabytes written per day equals: objects created per day *x* object size in megabytes.
Cartridges per year	# cartridges required per year equals: total # of cartridges per day *x* workdays per year
Shelf-resident cartridges	# shelf-resident cartridges equals: # cartridges required per year *x* retention period in years
Storage group adjustment	storage group adjustment equals: # of storage groups *x* # of active drives Therefore, total number of cartridges required per day equals: # cartridges required per day + storage group adjustment
Libraries for library-resident cartridges	# libraries required to hold library-resident cartridges equals: # of days library resident *x* (# cartridges required per day ÷ # slots in the library)

Table 13. Formulas for Calculating Storage Requirements (continued)

Consideration Factor	Calculation
Note: # indicates a total number *x* indicates multiplication ÷ indicates division + indicates addition	

Cartridges per Day

The number of objects created per day should include only those objects stored on optical, tape, or both media types. If several objects of different sizes are to be written to optical, tape, or both media types, calculate the number of megabytes written per day for each object size and sum the results to get the total number of megabytes written per day. See Table 13 on page 69 for more information on this calculation.

Attention: You need to determine what value should be assigned to the time periods within your calculations. For example, the term *day* could be a calendar day or a workday depending on the requirements of your business. A week can be either a seven-day calendar week or a five-day work week (or in some environments, this time frame can even be less). A year might include all the days of the year (including weekends and holidays) or it might only include the regular workdays for your installation. Include these factors in your calculations. Remember that OSMC does not recognize the difference between workdays, weekends, or holidays. Take this factor into account in your calculations for resource planning.

Each cartridge can contain objects from only one Object storage group. Therefore, on the first day that optical, tape, or both types of storage are used, you will need at least one cartridge for each Object storage group. If you plan to create backup copies of objects, remember to calculate the number of cartridges needed for each Object Backup storage group (use the *cartridges per day* formula in Table 13 on page 69). On the first day that your installation creates backup copies, you will need at least one cartridge of the appropriate media type for each Object Backup storage group.

Adjusting for Storage Groups and Active Drives

If multiple drives are to be used for writing objects from one or more Object or Object Backup storage groups, increase the number of cartridges required per day by following the calculation for *storage group adjustment* in Table 13 on page 69.

Effectively Using Optical Volume Space

The usage of optical volume space is affected by the size of the objects and how the objects are written: chained by the storage management cycle or unchained by direct write to optical media. Table 14 on page 71 provides an estimate of optical volume usage for media used with a operator-accessible optical drive.

Table 14. Effective Optical Volume Usage for IBM Optical Disk Media

Object Size in KB	Effective Utilization	
	Data Written by Storage Management Cycle (Chained)	Data Written Directly to Optical Volume (Unchained)
40 000	100%	93%
20 000	100%	47%
10 000	100%	23%
5 000	100%	12%
4 000	100%	9%
3 000	84%	7%
2 000	56%	5%
1 000	28%	2%

Attention: In subsequent calculations, ensure that you use a value for the total number of cartridges *required-per-day* that is large enough to reflect your planned use of storage groups, multiple drives, and direct write to optical and or tape. The validity of those calculations depends on the accuracy of your total number of cartridges *required-per-day* estimate.

Related reading: For 3995 capacity information, see *3995 Introduction and Planning Guide*.

Cartridges per Year

Use the calculations in Table 13 on page 69 for *cartridges-per-year* to determine the number of cartridges needed to satisfy your yearly medium requirements for your storage environment.

Shelf-Resident Cartridges

Use the calculations in Table 13 on page 69 for *shelf-resident cartridges* to determine the number of shelf-resident cartridges needed to satisfy your yearly medium requirements for your pseudo library environments.

Determining Library Requirements

The number of libraries required for an OAM implementation is influenced by several factors:

- Number of libraries required to hold library-resident cartridges.
- Number of libraries required to satisfy the maximum retrieval rate of objects on optical, tape, or both types of storage.
- Number of libraries required for the storage management cycle to complete within the allotted processing period.

The largest of the three numbers represents the number of libraries that you should plan to install. The following guidelines concerning libraries can help you evaluate your library needs.

Libraries for Library-Resident Cartridges

To ensure that you correctly estimate the appropriate amount of libraries (optical, tape, or both) to hold all of your library-resident cartridges, see the calculation under *libraries for library-resident cartridges* in Table 13 on page 69.

Libraries for Maximum Retrieval Rate

Each 3995 optical library can handle up to 200 mounts per hour and still provide an acceptable response time. If mount activity exceeds this rate, you might experience long delays on retrieval because of queued requests. To correct this situation, consider either installing an additional optical library or keeping more objects on DASD or tape.

Libraries for Storage Management Cycle Processing

Your installation should include in its regular schedule a period of time during which the storage management cycle can run. For example, you might execute the storage management cycle every day during third shift. During this time, OAM moves objects between optical disk volumes, tape volumes, and DASD. If this processing period is short, it might be necessary to install additional libraries to prevent contention caused by the following situations:

- Several Object storage groups are processed concurrently (controlled by the MAXS parameter).
- Multiple drives are used concurrently for a given Object storage group.
  - Optical drive usage is controlled by the DRIVE STARTUP THRESHOLD storage group parameter in ISMF.
  - Tape drive usage is controlled by the use of the TAPEDRIVESTARTUP (threshold in MB) keyword on the SETOAM statement for each Object storage group.

Related reading: For information about using objects effectively for IBM 3995 media, see the *3995 Introduction and Planning Guide*.

XCF Resource Estimation

To best use the resources of the cross-system coupling facility (XCF), you should first use the default transport classes and run Resource Measurement Facility (RMF™) reports with XCF usage to determine if customization is needed. If you try to establish a configuration where the hardware is on the same system where the highest needs are for that library (storage group level, OSMC processing level, or user grouping), the cross-system overhead is reduced. OAM processing in an OAMplex increases XCF resource overhead with small messages used to communicate changes in the configuration during normal processing, and larger messages for object reads or writes that require cross-system processing.

Related reading: For more information, see "Using Appropriate Transport Classes within XCF" on page 209 and *z/OS RMF User's Guide*.

Concluding Resource Estimation

After your resource estimations have been calculated, compare those projections with the resources you have available. Determine the additional resources that you need to use OAM, and develop a schedule for obtaining those resources. You can order some items prior to OAM installation; other items might not be needed until later, as your use of objects increases. Make sure your project plan includes time to order, install, and test essential resources before OAM is installed.

Preparing the Physical Environment

OAM itself does not require changes to the physical environment. However, if you are using optical storage subsystems or tape library subsystems for the first time, you can prepare for their installation.

Related reading:

- For detailed information concerning optical storage subsystems, see the *LAN Channel Station Installation and Test*, and the *3995 Introduction and Planning Guide*.
- For information regarding the tape library dataservers, see *Magstar 3495 Tape Library Introduction and Planning Guide*, *IBM TotalStorage Enterprise Automated IBM TotalStorage Enterprise Automated Tape Library (3494) (3494) Introduction and Planning Guide*, and the *z/OS DFSMS OAM Planning, Installation, and Storage Administration Guide for Tape Libraries*.

Preparing for Installation and Customization

Once the conceptual groundwork for OAM has been completed, you are ready to install OAM and to translate the theoretical model into a functioning system.

Before you begin: Ensure that all hardware and software prerequisites have been met. For more information, see "Analyzing Your Processing Environment" on page 60.

The basic procedure for installing OAM consists of the following steps:

Subtask	Associated procedure (see . . .)
Prepare the processing environment to interface with OAM. 1. Change DB2 installation parameters. 2. Add the DB2 transport classes to the coupling facility resource management (CFRM) policy if you are setting up an OAMplex with DB2 data sharing. 3. Change CICS installation parameters and change non-CICS installations (Batch, TSO/E, IMS). 4. For new installations, implement the auto-delete installation exit and the Object Tape Volume Return to MVS Scratch Exit. 5. Modify the system libraries. 6. Verify DB2 installation and create DB2 databases and application plans. 7. Define user catalogs.	• "Changing DB2 Installation Parameters" on page 93 • "Changing CICS Installation Parameters" on page 95 • "Modifying the Installation Exit to Manage Deleted Objects" on page 97 • "Changing System Libraries" on page 97 • "Creating DB2 Databases for Object Tables and Directories" on page 134 • "Defining User Catalogs" on page 150

Subtask	Associated procedure (see . . .)
Define the PARMLIB CBROAM*xx* member if you are setting up an OAMplex or customizing the following: • Object tape volumes • Optical media • OSMC Put valid SETOAM, SETOPT, SETOSMC, or OAMXCF statements into the created member as appropriate. Add the OAM=*xx* specification to the OAM cataloged procedure.	• "SETOAM Statements for Object Tape Storage" on page 101 • "SETOPT Statements for Use in an Optical Environment" on page 121 • "SETOSMC Statements for Use in the OSMC Environment" on page 125 • "OAMXCF Statements in an OAMplex" on page 129
Specify the SMS definitions and programs that are used by OAM. To accomplish this, perform the following tasks: • Translate the business analysis into technical terms. • Create OAM definitions with ISMF.	"Specifying the SMS Definitions and Programs Used by OAM" on page 151
Validate and activate the SMS configuration.	"Validating and Activating the SMS Configuration" on page 171
Use the Installation Verification Program to verify the success of the OAM object installation.	"Verifying Object Support Installation With IVP" on page 172
After installation is complete, you can customize OAM.	Chapter 4, "Administering OAM," on page 177

To simplify the installation process, a library of sample jobs and other useful data sets (SAMPLIB) is shipped with the product.

Related reading: Appendix B, "Sample Library Members," on page 429 contains listings or prologs of many of the SAMPLIB members.

Planning to Program Applications for OAM

The *z/OS DFSMS OAM Application Programmer's Reference* describes the OSREQ macro, the programming interface provided by OAM. This document contains detailed information about programming applications which use OAM.

As you consider OAM programming applications, keep in mind the following items:

- Application design plays a significant role in OAM performance. For example, careful use of buffering can reduce virtual storage requirements.
- Application programs are responsible for synchronizing OAM-related DB2 databases (for example, using SYNCPOINT under CICS).
- The auto-delete installation exit can be programmed specifically for an application, as described in "Auto-Delete Installation Exit (CBRHADUX)" on page 573.
- ACS routines must be programmed.
- Maintenance of the auto-delete installation exit and ACS routines is generally the responsibility of the storage administration team. However, a particular application might require modification to use the exit and the ACS routines.

Planning to Administer OAM

Product implementation only *begins* with installation; your planning must also include preparation for ongoing administration of the product. The focal point of OAM administration is the storage administration team, which is responsible for the following tasks:

- Monitoring and maintaining the SMS configuration through ISMF
- Monitoring and maintaining DB2 databases
- Tuning OAM
- Establishing recovery procedures
- Destroying expired data

The success of an OAM implementation depends significantly on the quality of the support staff. The storage administration team should receive intensive training before OAM installation and encouragement to keep abreast of current technology through continuing education. Your IBM marketing representative can help you identify appropriate publications and training opportunities.

Related reading: Chapter 4, "Administering OAM," on page 177, provides tools and techniques for performing these functions.

Preparing to Operate OAM

Daily operation of the OAM system is the responsibility of the operations staff. Operator tasks are explained in Chapter 5, "Operating OAM and OTIS Address Spaces and OSMC Functions," on page 263. To ensure successful OAM operation, the operations staff should work closely with the storage administration team and the application team to coordinate support efforts. Be sure to update your installation's operating procedures manual to include OAM-related tasks.

Operators need to have in-depth knowledge about the hardware used by OAM, especially optical and tape storage devices. They should be encouraged to keep abreast of current technology through continuing education. Your IBM marketing representative can help you identify appropriate publications and training opportunities.

Related reading: For information concerning operator tasks related to the tape library dataservers, see *z/OS DFSMS OAM Planning, Installation, and Storage Administration Guide for Tape Libraries*.

OAM Planning Case Study

A large company is in the process of planning for OAM implementation. This case study documents part of their planning effort.

Object Characterization

During the business analysis phase, the planning team members determined that they will be processing two types of objects, which they refer to as summary objects and detail objects. Summary objects are small; detail objects are considerably larger. On an average workday, about 10 000 summary objects and 10 000 detail objects are created.

Establishing Performance Objectives and Availability Requirements

The planning team analyzed data usage patterns to establish performance objectives and availability requirements for their two object types. Summary objects are used for 30 calendar days, and response time must be fast during that period; however, at the end of 30 calendar days, the objects are no longer used and might be deleted. Detail objects have a more complex life cycle. During the first seven calendar days after creation, detail objects are accessed frequently, and fast response is needed. After that time, retrieval frequency drops, as does the response-time requirement. Detail objects are rarely used after 180 calendar days, but the company is required by law to keep them on file for five years (1 825 calendar days).

Table 15 summarizes the characteristics of the company's objects.

Table 15. Object Characteristics

Characteristics	Detail Objects	Summary Objects
Object size in bytes	64 000	3 000
Number created per workday	10 000	10 000
Number of workdays that fast retrieval is required (less than 1-second response time)	7	30
Number of calendar days that medium retrieval is required (less than 20-second response time)	180	—
Number of calendar days from creation after which the object is rarely accessed	180	—
Number of calendar days from creation after which the object can be deleted (5 years)	1 825	30
Maximum retrieval rate required (objects per hour) for fast retrieval	1 000	2 000
Maximum retrieval rate required (objects per hour) for medium retrieval	100	—
Maximum retrieval rate required (objects per hour) for slow retrieval	10	—
Number of backup copies required	1	0

Establishing Collections and Constructs

The planning team established two collections, one for each type of object. They developed storage classes (SC) to reflect the three service levels indicated by the business analysis. They created management classes (MC) to correspond to the transition points in the objects' life cycles (that is, when they expire or when their performance objectives change). Then they determined which storage and management classes would be the default initial class assignments for each collection. Finally, specifications were drafted for the ACS routines that control an object's storage group, storage class, and management class assignments.

Also, during the resource estimation phase, the planning team concluded that the 10 000 detailed objects that are being stored daily through the workweek must be backed up for disaster recovery purposes. The data contained within the detailed objects is critical business data that must be recovered in the event of a disaster.

SC Name **Description**

FASTPERF SC for objects with high-performance requirements (less than

1-second response time preferred). This storage class was designed to be the default initial storage class assignment for both summary and detail objects.

MEDPERF SC for objects with medium-performance requirements (less than 20-second response time preferred). This storage class was designed primarily for detail objects for which high performance is no longer necessary.

LOWPERF SC for objects with low-performance requirements (more than 20-second response time acceptable). This storage class was designed primarily for detail objects that are rarely retrieved.

MC Name	Description
EXP30	Thirty calendar days from the date of creation, objects with this management class should be processed by the storage management cycle. The expiration attributes in the definition for this management class indicate that objects in this class can be deleted after 30 calendar days. EXP30 was developed primarily for summary objects and is their default initial management class assignment.
TRAN7	Seven calendar days from the date of creation, objects with this management class should be processed by the storage management cycle. This class was developed primarily for detail objects. After seven calendar days, the performance objective for detail objects changes from fast to medium, and a new storage class assignment is needed. TRAN7 is the default initial management class assignment for detail objects.
TRAN180	On the 180th calendar day from the date of creation, objects with this management class should be processed by the storage management cycle. This class was developed primarily for detail objects. After 180 calendar days, the performance objective for detail objects changes from medium to low and a new storage class assignment is needed. TRAN180 should be assigned to detail objects that have a storage class assignment of MEDPERF.
EXP1825	Five years (1825 calendar days) from the date of creation, objects with this management class should be processed by the storage management cycle. The expiration attributes in the definition for this management class indicate that objects in this class can be deleted after five years. EXP1825 was developed for detail objects and should be assigned to all detail objects that have a storage class assignment of LOWPERF.

Tip: Management class definitions include parameters other than those shown in this case study (for example, backup requirements and retention period for an object since last use). Review all of the parameters before you attempt to classify the objects in your applications.

Coding ACS Routines to Implement Class Transitions

The company's technical staff was able to code ACS routines that use these classes, along with the installation's object-naming conventions, to implement class transitions. During every storage management cycle, OSMC checks each object that is scheduled for storage management processing to see if it is due for expiration. If it is, OSMC deletes it; otherwise, the management class assignment is used to determine if class transition is needed. For class transition, the ACS routines are invoked.

The general logic of the storage management cycle and the ACS routines is as follows (for objects created on day *X*):

1. For definitions of collections:
   - If the collection name is detail and the object name is Null, then SC=FASTPERF and MC=TRAN7.
   - If the collection name is summary and the object name is Null, then SC=FASTPERF and MC=EXP30.

   These default values are stored in collection name entry in the catalog when the first object is stored to that collection. When neither storage class nor management class is specified on a request to store an object into one of these collections, the object is assigned the default classes associated with that collection.
2. At *X* + 7 calendar days, objects in MC=TRAN7 are processed by the storage management cycle. MC=TRAN7 does not specify that these objects should be deleted, so the ACS routines are invoked. If an object's name begins with *D* (the naming convention for detail objects) and has SC=FASTPERF, the ACS routines change the class assignments to SC=MEDPERF and MC=TRAN180. This change in storage class can cause the object to be relocated in the object storage hierarchy. For example, the object might move from DASD to optical disk to a tape volume, or any combination therein.
3. At *X* + 30 calendar days, objects in MC=EXP30 are processed by the storage management cycle. The expiration attributes in the definition for MC=EXP30 specify that objects in this class should be deleted at *X* + 30 calendar days, so that the objects are deleted by OSMC.
4. At *X* + 180 calendar days, objects in MC=TRAN180 are processed by the storage management cycle. MC=TRAN180 does not specify that these objects should be deleted, so that the ACS routines are invoked. If an object's name begins with *D* (the naming convention for detail objects) and has SC=MEDPERF, the ACS routines change the class assignments to SC=LOWPERF and MC=EXP1825. The change in storage class are recorded in the object directory.

   You can conduct an analysis using DB2, SPUFI, or Query Management Facility (QMF™) to determine which volumes in the configuration presently located within real libraries contain only objects with a storage class intended for the shelf or pseudo library. Those volumes found can be ejected from the library and placed in their assigned shelf location. The DB2 analysis will query the object directory table for each storage group required. Query the storage class table to determine the storage class identifier with which to qualify queries.
5. At *X* + 1825 calendar days, objects in MC=EXP1825 are processed by the storage management cycle. The expiration attributes in the definition for MC=EXP1825 specify that objects in this class should be deleted at *X* + 1825 calendar days, so that the objects are deleted by OSMC.

Resource Estimation

Having completed the business analysis phase, the planning team used their object size and activity estimates to evaluate the DASD, tape, and optical storage resources that would be needed for OAM.

DASD Resources

During the resource estimation phase, the planning team used the formulas in Table 8 on page 66 to determine their DASD storage needs.

Calculating DASD Storage for an Object Storage Database

The following example calculates the DASD storage needed for one object storage database. These calculations would be repeated for each object storage database within OAM. The specific values for the example calculations are based on the following conditions:

- During each workday 10 000 objects, each 3 000 bytes long, are stored in database GROUP00. A second case is also shown in the example calculation for objects averaging 1 500 bytes long.
- During each workday 10 000 objects, each 64 000 bytes long, are stored in database GROUP00. A second case is also shown in the example calculation for objects averaging 9 000 bytes long.
- The 3 000-byte objects that have been in the database for 30 calendar days are deleted from the database.
- The 64 000-byte objects that have been in the database for seven calendar days are moved from the database to optical storage, where they will remain for five years (1 825 calendar days) before being deleted.
- New objects are stored in the database before any existing objects are deleted or moved.
- To allow for new objects exceeding the predicted maximum number, an extra 10% space contingency is added.
- The database for object storage resides on a 3390-type, DASD device.

Calculating the Number of Objects Stored on DASD, Optical, and Tape

The planning team began by calculating the number of objects that will be stored on DASD, tape, and optical storage.

1. The maximum number of small objects stored on DASD is determined as the number of summary objects created daily (10 000) plus the number of summary objects already resident in the database (10 000 x 30 days) plus the 10% contingency. The maximum number of small objects stored on DASD is identified in the formulas as the variable *ns*.

   Calculate the value of *ns* as:

   ns = (10 000 + (10 000 x 30)) x 1.1 = 341 000

2. The maximum number of large objects stored on DASD is determined as the number of detail objects created daily (10 000) plus the number of detail objects already resident in the database (10 000 x 7 days) + the 10% contingency. The maximum number of large objects stored on DASD is identified in the formulas as the variable *nl*.

   Calculate the value of *nl* as:

   nl = (10 000 + (10 000 x 7)) x 1.1 = 88 000

3. The number of objects that are stored within this Object storage group, but not within the small or large object tables, is determined as the number of summary objects retained within this Object storage group minus the number of summary objects on DASD, plus the number of detail objects retained within this Object storage group, minus the number of detail objects on DASD. Neither calculation can have a result less than zero.

   a. The number of summary objects retained within this Object storage group but not stored in the small object table is calculated as the number of summary objects stored each day, times the maximum number of days the objects are retained, minus the maximum number of summary objects stored on DASD (value of variable *ns* above).

      Calculate the number of small objects on optical and tape storage as:

os = ((10 000 x 30) x 1.1) − *ns* = 330 000 - 341 000 = 0

b. The number of detail objects retained within this Object storage group but not stored in the large object table is calculated as the number of detail objects stored each day, times the maximum number of days the objects are retained, minus the maximum number of detail objects stored on DASD (value of variable *nl* above).

   Calculate the number of large objects on tape and optical storage as:

   ol = ((10 000 x 1307) x 1.1) − *nl* = 14 377 000 − 88 000 = 14 289 000

c. The total number of objects retained on tape and optical storage on any given day is the sum of the number of summary objects on tape and optical (*os* above) plus the number of detail objects on tape and optical (*ol* above).

   Calculate the total number of objects retained on tape and optical storage as:

   ot = *os* + *ol* = 0 + 14 289 000 = 14 289 000

4. The total number of objects that need to be referenced in the GROUP00 database is the sum of the maximum number of small objects stored on DASD (*ns* above), plus the maximum number of large objects stored on DASD (*nl* above), plus the total number of objects retained on tape and optical (*ot* above). This value is used in the formulas as the variable *nt*.

   Calculate the value of *nt* as:

   nt = *ns* + *nl* + *ot*

   nt = 341 000 + 88 000 + 14 289 000 = 14 718 000

Calculate the storage needed for the object storage database data sets (see Table 16 on page 81).

Table 16. Storage Calculations for the Object Storage Database Data Sets

TABLE, INDEX, or DATA SET	CALCULATIONS
Object directory data set **GROUP00.OSMDTS**	tracks = *nt* ÷ (35 x *b*) example: 14 718 000 ÷ (35 x 12) = 35 043 cylinders = 35 043 ÷ 15 = 2336 **This results in 35 043 tracks or 2336 cylinders**
Object directory index 1 **GROUP00.OBJDIRX1**	tracks = *nt* ÷ (260 x *b*) example: 14 718 000 ÷ (260 x 12) = 4717 cylinders = 4717 ÷ 15 = 315 **This results in 4717 tracks or 315 cylinders**
Object directory index 2 **GROUP00.OBJDIRX2**	tracks = *nt* ÷ (166 x *b*) example: 14 718 000 ÷ (166 x 12) = 7389 cylinders = 7389 ÷ 15 = 493 **This results in 7389 tracks or 493 cylinders**
Object directory index 3 **GROUP00.OBJDIRX3**	tracks = *nt* ÷ (68 x *b*) example: 147 180 000 ÷ (68 x 12) = 18 037 cylinders = 18 037 ÷ 15 = 1203 **This results in 18 037 tracks or 1203 cylinders**
Small object table index **GROUP00.OBJT04X1**	tracks = *ns* ÷ (68 x *b*) example: 341 000 ÷ (68 x 12) = 418 cylinders = 418 ÷ 15 = 28 **This results in 418 tracks or 28 cylinders**
Small object table (object size 3000 bytes) **GROUP00.OSMOTS04**	tracks = (*ns* ÷ *b*) x 1.1 example: (341 000 ÷ 12) x 1.1 = 31 259 cylinders = 31 259 ÷ 15 = 2084 **This results in 31 259 tracks or 2084 cylinders**
Small object table (object size 1500 bytes) **GROUP00.OSMOTS04**	tracks = (*ns* ÷ *b*) ÷ "floor" (4074 ÷ (*aos* + 61)) x 1.1 "floor" = (4074 ÷ (1500 + 61)) = 2.6 (= 2 when rounded to down to the next lowest integer) example: (34 100 ÷ 12) ÷ 2 = 14 209 x 1.1 = 15 630 cylinders = 15 630 ÷ 15 = 1042 **This results in 15 630 tracks or 1042 cylinders**
Large object table index **GROUP00.OBJT32X1**	tracks = *nl* ÷ (65 x *b*) example: 88 000 ÷ (65 x 12) = 112 cylinders = 112 ÷ 15 = 8 **This results in 112 tracks or 8 cylinders**
Large object table **GROUP00.OSMOTS32**	cylinders = *nl* ÷ (32 746 ÷ (*aos* + 63) x 22) x 1.1 first calculating: (32 746 ÷ (64 000 + 63)) = approximately 0.511 example: 88 000 ÷ (0.511 x 22) = 7828 x 1.1 = 8611 **This results in 8611 cylinders**
Large object table (object size 9000 bytes) **GROUP00.OSMOTS32**	(32 746 ÷ (*aos* + 63)) results in: 32 746 ÷ 12 = 2.73 (= 2 when rounded down to the next lowest integer) example: 88 000 ÷ (2 x 22) = 2000 x 1.1 = 2200 **This results in 2200 cylinders**

Table 17 summarizes the storage space calculations.

Table 17. Sample Storage Space Calculation Results

Database Name Qualifiers	Tracks Needed	Cylinders Needed
GROUP00.OSMDTS	35 043	2 336
GROUP00.OBJDIRX1	4 717	315
GROUP00.OBJDIRX2	7 389	493
GROUP00.OBJDIRX3	18 037	1 203
GROUP00.OBJT04X1	418	28
GROUP00.OSMOTS04 (object size 3000 bytes)	31 259	2 084
GROUP00.OSMOTS04 (object size 1500 bytes)	15 630	1 042
GROUP00.OBJT32X1	112	8
GROUP00.OSMOTS32	—	8 611
GROUP00.OSMOTS32 (object size 9000 bytes)	—	2 200

It is important to remember that the object directory table has an entry for *every* object within that Object storage group. This directory includes objects in the 4 KB object table and in the 32 KB object table, plus objects on tape and optical storage. The 4 KB object table and the 32 KB object table have only the objects that are stored on DASD. When an object is stored directly on tape or optical storage, an entry is created in the object directory, but the object itself is not stored in either the 4 KB or the 32 KB object tables. For all objects stored directly on tape or optical storage, the calculations for small and large objects on tape or optical storage (see item 3 on page 79) will provide the values needed for the object directory space.

Optical Resources

During the resource estimation phase, the planning team used the formulas on page 69 to determine their optical storage needs. They used the object size and volume estimates that were developed during the business analysis phase (see Table 15 on page 76). The following assumptions were used for the calculation:

- Only the 10 000 detail objects would eventually be written to optical disk.
- The optical residence period is 180 calendar days from creation date minus the seven calendar days on DASD.

Table 18 on page 83 represents the optical resources calculated by the planning team for each of the media types.

Note: The free space available on double-density, quad-density, and 8*x*-density WORM platters might not match the formatted capacity. The hardware holds a certain percentage of sectors in reserve based on the media type.

Table 18. Optical Resource Requirements for Library Resident Data

MEDIA	SD WORM[2]	SD REWR[2]	DD WORM[2]	DD REWR[2]	QD WORM	QD REWR	8x WORM	8x REWR
MB of data to write per workday	625	625	625	625	625	625	625	625
Cartridge capacity for user data in KB	297 983	314 569	620 934 637 041[4]	637 041	1 122 469[1 4] 1 211 012[2] 1 273 011[2 4]	1 122 468[1] 1 273 011[2]	1 986 966[1 4] 2 319 786[2 4] 2 256 268[3] 2 526 904[3 4]	1 986 965[1] 2 319 786[2]
Disks used per workday	1.059	1.078	0.530	0.539	0.248	0.261	0.136[2] 0.125[3]	0.144[2] 0.132[3]
Calendar days the data is needed to be library resident	173	173	173	173	173	173	173	173
Cartridges needed to retain library resident data	184	187	92	94	43	45	24[2] 22[3]	25[2] 23[3]
Slots in the library	144	144	144	144	52 104 156 258	52 104 156 258	52 104 156 258	52 104 156 258
Libraries needed to hold library resident data	2	2	1	1	1	1	1	1

Note:
MB = megabyte (1 048 576 bytes)
GB = gigabyte (1 073 741 824) bytes
SD = single-density
DD = double-density
QD = quad-density
8x = 8*x*-density
REWR = rewritable media
WORM = write-once, read-many
[1]For 512-sector media
[2]For 1024-sector media
[3]For 2048-sector media
[4]For continuous composite WORM (CCW) media.
CCW media values are the same as for REWR media of the same density.

Estimating the Number of Libraries Required for Maximum Retrieval Rate

The next factor to consider in estimating libraries is the number of libraries needed to satisfy the maximum retrieval rate for objects on optical storage. The application work load (as estimated in Table 15 on page 76) has a maximum retrieval rate of 100 objects per hour. Even if each retrieval results in mounting a different disk, one

library is sufficient to satisfy this requirement. If you are making backup copies of objects, you need to plan for additional optical disks to accommodate them. The megabytes of data written per day is related to objects assigned to a management class that specifies an auto backup value of *yes*.

Tape Resources

To estimate the number of tape cartridges needed per workday, the planning team determines the amount of data to be backed up per workday. The amount of OAM data being backed up per workday is 572.2 MB (10 000 objects per day x 60 000 bytes per object = 600 000 000 bytes, which equates to 585 938 KB, or 572.2 MB).

The number of tape cartridges needed per workday is determined by the following factors:

- The amount of data written to tape per workday
- The type of tape cartridge
- The recording technology used on the tape cartridges
- The number of tape drives and tape volumes available on each system within an OAMplex, if writing backups to tape in a Parallel Sysplex. Also take into consideration the number of tape volumes needed if transitioning storage groups to tape.

Assuming the tape cartridges are filled to 100% of their estimated capacity, Table 19 shows the number of tape cartridges of each type of recording format combination that would be needed daily.

Table 19. The Number of Tape Cartridges Needed Per Workday

Media Type	MB Written To Tape Per Workday	Cartridge Capacity For User Data	# Tape Cartridges Used Per Workday
Cartridge System Tape (18-track format)	572.2	200 MB	2.86
Cartridge System Tape (36-track format)	572.2	400 MB	1.43
Enhanced Capacity Cartridge System Tape (36-track format)	572.2	800 MB	.715
IBM High Performance Cartridge Tape (128-track format)	572.2	10 GB	.056
IBM Extended High Performance Cartridge Tape (128-track format)	572.2	20 GB	.028
IBM High Performance Cartridge Tape (256-track format)	572.2	20 GB	.028
IBM Extended High Performance Cartridge Tape (256-track format)	572.2	40 GB	.014
IBM High Performance Cartridge Tape (384-track format)	572.2	30 GB	.019
IBM Extended High Performance Cartridge Tape (384-track format)	572.2	60 GB	.009
IBM Enterprise Tape Cartridge (EFMT1 recording technology)	572.2	300 GB	.002
IBM Enterprise Extended Tape Cartridge (EFMT2 recording technology)	572.2	500 GB	.0011

Chapter 3. Migrating, Installing, and Customizing OAM

This chapter explains how to install OAM, customize it for your business and processing environments, and verify that the installation is complete and correct. First, decide on your installation scenario: Are you installing OAM for the first time, migrating to a new release of OAM, merging separate OAM systems into an OAMplex, moving an OAM system to another system, or adding OAM systems to an OAMplex? Use the following roadmap to guide you to the correct procedure for your installation scenario.

Subtask	Associated procedure (see . . .)
Verifying Hardware and Software Prerequisites.	"Verifying Hardware and Software Prerequisites" on page 86
Preparing the Processing Environment.	"Preparing the Processing Environment" on page 86
Installing OAM for the first time.	• Table 21 on page 88 • "High-Level Installation and Migration Checklists" on page 88
Migrating to a new version of OAM.	• Table 20 on page 87 • "High-Level Installation and Migration Checklists" on page 88
Moving OAM to another system.	"Procedures for Moving OAM to Another System" on page 173
Merging OAMs into an OAMplex.	"Merging OAMs into an OAMplex" on page 174
Adding OAM systems to an OAMplex.	"Adding OAM Systems to an Existing OAMplex" on page 174

In addition to these basic installation requirements, this chapter also describes an optional auto-delete installation exit that you can use to further customize your installation.

To simplify the installation process, a library of sample jobs and other useful data sets (SAMPLIB) is shipped with the product. This chapter includes instructions for using SAMPLIB; Appendix B, "Sample Library Members," on page 429 contains listings of many of the SAMPLIB members. Before running any SAMPLIB job, remember to change the JCL to reflect your installation's requirements (for example, accounting information and data set names).

Related reading: See *z/OS MVS JCL Reference* for additional information.

Note: Unless otherwise indicated, once you migrate to the current release, you do not need to do anything to migrate backward to the previous release level other than to run the BIND jobs.

© Copyright IBM Corp. 1989, 2006

Verifying Hardware and Software Prerequisites

Before installing OAM, you must first verify that the hardware and software requirements specified in “Hardware” on page 60 and “Software” on page 61 have been met. Ensure that all the prerequisites have been installed and thoroughly tested to verify that they operate correctly in your processing environment before proceeding with any other installation steps.

Preparing the Processing Environment

For OAM to communicate with the rest of the processing environment, you must alter system software to interface with OAM which might entail these tasks:

- Changing DB2 installation parameters and modifying the computer facility resource manager (CFRM) policy if necessary
- Changing CICS installation parameters.
- Modifying the installation exit to manage deleted objects.
- Changing system libraries.
- Creating DB2 databases for object tables and directories.
- Creating optical configuration databases.
- Creating and binding DB2 packages.
- Creating OSR application plans, or creating LCS, ISMF, and OSR application plans.
- Creating OSMC application plans.
- Verifying DB2 installation.
- Defining user catalogs.
- IPLing the system.
- Specifying the SMS definitions and programs that OAM uses.

This chapter presents procedures for each of these tasks.

Preparing for Migration or Installation

Upon completion of any migration prerequisites, you should proceed with the following installation and migration checklist, paying particular attention to the guidance that is directed at installations that have had OAM installed previously.

Important: The term *migration* means to upgrade from one version of DFSMS to this current version. This assumes that you were previously using OAM for storing objects and that you will continue to use OAM for object storage upon installation of this current version or release. The term *installation* indicates that you have not installed OAM in any of the previous versions of DFSMS/MVS®, OS/390, or z/OS, and are therefore installing OAM for the first time with this version of the product.

Table 20 assists you with your migration from a previous version of DFSMS/MVS, OS/390, or z/OS to the current z/OS version. It describes which checklist steps must be performed, not performed, or verified, depending on which release or version you are migrating from. Use this information with the detailed checklist steps that follow it.

Table 20. Checklist for Migrating to a New Release of OAM

Checklist Steps	DFSMS/MVS 1.5	OS/390 V2R10	z/OS V1R3	z/OS V1R4	z/OS V1R5	z/OS V1R6	z/OS V1R7
Changing DB2 Installation Parameters	V	V	V				
Changing Customer Information Control System (CICS) Installation Parameters	V	V	V				
Modify the Installation Exit to manage Deleted Objects	V	V	V				
Changing System Libraries	P	P	P				
Creating DB2 Databases for Object Tables and Directories **CBRILOB SAMPLIB**	V P	V P	V P				
Creating OCDB: **Modify, then run:** **CBRSM150 SAMPLIB** **CBRSMB2 SAMPLIB** **CBRSMR13 SAMPLIB** **CBRSMR15 SAMPLIB** **CBRSMR18 SAMPLIB**	 N V P P P	 N N P P P	 N N N P P				
Creating and Binding DB2 Packages	P	P	P				
Creating OSR Application Plans*	P	P	P				
Creating OSMC Application Plans	P	P	P				
Creating LCS, ISMF, and OSR Application Plans	P	P	P				
DB2 Installation Verification	P	P	P				
Define User Catalogs	V	V	V				
Initial Program Load (IPL) the System	P	P	P				
Specify the SMS Definitions and Programs Used by OAM	V	V	V				
Perform the OAM Installation Verification Program	P	P	P				
Optionally, update OAM to support new tape devices	P	P	P				

*Perform only if NOT performing the Creating the LCS, ISMF, and OSR Application Plans step on page 148.
P = Perform
N = Do not perform
V = Verify (perform if necessary)

Table 21 on page 88 shows the appropriate steps to perform if you are installing OAM for the first time. Use this information with the checklist steps that follow it.

Table 21. Checklist for Installing OAM

Checklist Steps	New Installation (z/OS V1R8)
Changing DB2 Installation Parameters	P
Changing Customer Information Control System (CICS) Installation Parameters	P
Modify the Installation Exit to Manage Deleted Objects and Add the Object Tape Volume Return to MVS Scratch Exits	V
Changing System Libraries	P
Creating DB2 Databases for Object Tables and Directories	P
Creating OCDB: **Modify, then run:** **CBRSAMPL SAMPLIB**	P
Creating and Binding DB2 Packages	P
Creating OSR Application Plans*	P
Creating OSMC Application Plans	P
Creating LCS, ISMF, and OSR Application Plans	P
DB2 Installation Verification	P
Define User Catalogs	P
Initial Program Load (IPL) the System	P
Specify the SMS Definitions and Programs Used by OAM	P
Perform the OAM Installation Verification Program	P
Optionally, update OAM to support new tape devices	P
*Perform only if NOT performing the Creating the LCS, ISMF, and OSR Application Plans step on page 148. P = Perform V = Verify (perform if necessary)	

High-Level Installation and Migration Checklists

A number of steps are involved in the installation of OAM. A checklist to outline these steps and to assist in ensuring that all steps have been completed is provided. The detailed procedural steps follow this checklist.

Recommendation: Read this entire section first so you know what to expect in this installation. As you perform the installation, reread the appropriate segment for each step in the checklist prior to performing it. Use this checklist only as a guide, as it does not contain the detailed information you need to perform each step correctly. See the given page numbers.

Requirements: Before proceeding with this installation checklist, you should have verified the prerequisite hardware and software requirements (see “Hardware” on page 60 and “Software” on page 61 for more information).

If OAM has been previously installed, you must carefully analyze the following steps for your particular installation. You will be given additional migration guidance for each step indicating that you need only review the step to ensure that you have completed it in your previous installation, or that you should perform the step regardless of whether you completed it in your previous installation, or that you should not perform the step. Remember, however, that each installation is unique, and you must carefully study these materials to ensure that you are taking the appropriate action for your installation environment.

Related reading: If you already have OAM installed and are migrating to the current z/OS release, see *z/OS Migration* for the specific migration steps.

"Changing DB2 Installation Parameters" on page 93

__ Step 1. Evaluate and select appropriate values.

"Changing CICS Installation Parameters" on page 95

__ Step 2. Update or create CICS PLT.

__ Step 3. Update CICS CSD.

__ Step 4. Update CICS SIT.

__ Step 5. Connect DB2 to CICS.

__ Step 6. Copy CBRICONN to DFHRPL.

Note: Perform steps 2 through 6 only if CICS is installed on your system.

"Modifying the Installation Exit to Manage Deleted Objects" on page 97

__ Step 7. For a new installation, evaluate and implement the auto-delete installation exit. If you are migrating to a new release, you can reuse your existing auto-delete installation exit.

Note: Perform this step **only** if you are running OSMC for expiration processing.

"Changing System Libraries" on page 97

__ Step 8. Update PARMLIB:

__ a. Update IGDSMS*xx* PARMLIB member.

Note: Do **not** perform this step if you are using DASD-only storage (no optical volumes or tape devices) and you are not running OSMC for expiration processing.

__ b. Update IEFSSN*xx* PARMLIB member.

__ c. Update SMFPRM*xx* PARMLIB member.

__ d. Update IEAICS*xx* PARMLIB member.

__ e. Update CONSOL*xx* PARMLIB member.

__ Step 9. Create or update CBROAM*xx* PARMLIB members.

Note: Do **not** perform this step if you are using DASD-only storage (no optical volumes or tape devices).

__ Step 10. Update PROCLIB:

__ a. Modify, if necessary, then run CBRIPROC SAMPLIB job.

Note: Do **not** perform this step if you are using DASD-only storage (no optical volumes or tape devices) and you are not running OSMC for expiration processing.

__ b. Modify, if necessary, then run CBRAPROC SAMPLIB job.

Note: Perform this step **only** if you start the OAM address space.

__ Step 11. Verify or create device numbers.

Note: Do **not** perform this step if you are using DASD-only storage (no optical volumes or tape devices) and you are not running OSMC for expiration processing.

"Creating DB2 Databases for Object Tables and Directories" on page 134

__ Step 12. Add additional steps to the database creation jobs, if necessary:
(CBRIALC0 and CBRISQL0)

__ Step 13. Modify the OAM data set allocation jobs:
(CBRIALC0, CBRIALCX, CBRIALCY)

Note: If DB2 data sets are being placed in an SMS storage group, you must properly prepare the environment (that is, create ACS routines and the source control data set, and so on).

__ Step 14. Run the OAM data set allocation jobs:
(CBRIALC0, CBRIALCX, CBRIALCY)

__ Step 15. Modify the OAM database definition jobs:
(CBRISQL0, CBRISQLX, CBRISQLY)

__ Step 16. Run the OAM Database Definition Jobs:
(CBRISQL0, CBRISQLX, CBRISQLY)

Note:

- Remember to modify the SAMPLIB jobs for your installation JOB card requirements and DB2 subsystem name and to start DB2 before running the SAMPLIB jobs.
- Before z/OS V1R7, the CBRISQL0 sample job created UNIQUE indexes OBJDIRX1 and OBJDIRX2. In z/OS V1R7, CBRISQL0 was modified to create these indexes without the UNIQUE attribute to alleviate a potential OAM OSREQ error due to duplicate time stamp (RC8 RSN30020100). If your OAM Database was defined before z/OS V1R7, it is recommended that you drop UNIQUE indexes OBJDIRX1 and OBJDIRX2, and create them as non-UNIQUE per sample job "CBRISQL0" on page 443. See APAR II13964 for more information.

__ Step 17. Modify OAM LOB data set allocation and definition job. (CBRILOB)

Note: Perform this step ONLY if you intend to enable LOB support.

__ Step 18. Run the OAM LOB data set allocation and definition job. (CBRILOB)

Note: Perform this step ONLY if you intend to enable LOB support.

"Creating the Optical Configuration Database" on page 140

Note: Do **not** perform steps 18–21 if you are using DASD-only storage (no optical volumes or tape devices) and you are not running OSMC for expiration processing. If you choose not to execute these steps, then you need to modify the CBRPBIND job in SAMPLIB to validate the bind at run time (VALIDATE RUN) rather than validating the bind at bind time (VALIDATE BIND).

__ Step 19. Modify, if necessary, then run the CBRSAMPL SAMPLIB job (for first-time OAM installations).

Note: Do **not** perform this step if you are using DASD-only storage (no optical volumes or tape devices) and you are not running OSMC for expiration processing. If you choose not to execute this step, then you need to modify the CBRPBIND job in SAMPLIB to validate the bind at run time (VALIDATE RUN) rather than validating the bind at bind time (VALIDATE BIND).

Run Sample Migration Jobs as Required

Note: Do not perform these Migration Jobs at initial installation. Modify and run these steps for migration purposes.

__ Step 20. Run the CBRSM150 SAMPLIB job if you are migrating from a release earlier than DFSMS/MVS 1.5. See Table 20 on page 87.

Note:

- Do **not** perform this step at initial installation. Modify and run this step for migration purposes.
- Do not perform this step if you are using DASD-only storage (no optical volumes or tape devices) and you are not running OSMC for expiration processing. If you choose not to execute this step, then you need to modify the CBRPBIND job in SAMPLIB to validate the bind at run time (VALIDATE RUN) rather than validating the bind at bind time (VALIDATE BIND).

__ Step 21. Run the CBRSMB2 SAMPLIB job if you are migrating from a release earlier than OS/390 Version 2 Release 10. See Table 20 on page 87.

Note:

- Do **not** perform this step at initial installation. Modify and run this step for migration purposes.
- Do not perform this step if you are using DASD-only storage (no optical volumes or tape devices) and you are not running OSMC for expiration processing. If you choose not to execute this step, then you need to modify the CBRPBIND job in SAMPLIB to validate the bind at run time (VALIDATE RUN) rather than validating the bind at bind time (VALIDATE BIND).

__ Step 22. Run the CBRSMR13 SAMPLIB job if you are migrating from a release earlier than z/OS Version 1 Release 3. See Table 20 on page 87.

Note:

- After you run the CBRSMR13 job, you might need to run a DB2 reorganization after performing an ALTER to the table. Do **not** perform this step at initial installation. Perform this step for migration purposes only.
- Do not perform the SMR13A section of the CBRSMR13 sample job if you are using DASD-only storage (no optical volumes or tape devices) and you are not running OSMC for expiration processing. If you choose not to execute this step, then you need to modify the CBRPBIND job in SAMPLIB to validate the bind at run time (VALIDATE RUN) rather than validating the bind at bind time (VALIDATE BIND).

__ Step 23. Run the CBRSMR15 SAMPLIB job if you are migrating from a release earlier than z/OS Version 1 Release 5. See Table 20 on page 87.

Note:

- This job adds two new columns, OUNITNAM and DATACLAS to the DB2 TAPEVOL table. Do **not** perform this step at initial installation. Perform this step for migration purposes only.
- Do not perform this step if you are using DASD-only storage (no optical volumes or tape devices) and you are not running OSMC for expiration processing. If you choose not to execute these steps, then you need to modify the CBRPBIND job in SAMPLIB to validate the bind at run time (VALIDATE RUN) rather than validating the bind at bind time (VALIDATE BIND).

__ Step 24. Run the CBRSMR18 SAMPLIB job if you are migrating from a release earlier than z/OS V1R8. See Table 20 on page 87.

Note: Regardless of whether you intend to exploit the new LOB function or not, you must modify and run this CBRSMR18 SAMPLE job to create the new LOB indicator column in Object Directory tables.

"Merging Object Tables and OCDB for an OAMplex" on page 145

__ Step 25. Run the CBRSMERG SAMPLIB job.

Note: Do **not** perform this step at initial installation. Modify and run this step for migration purposes. This job should only be run if you plan to merge multiple optical configuration databases (OCDB) into a single shared OCDB for an OAMplex.

__ Step 26. Run the CBRSG100 SAMPLIB job.

Note: Do **not** perform this step at initial installation. Perform this step only when all of the following conditions exist: you are setting up an OAMplex; you currently have multiple OAMs running on separate MVS images in a sysplex; and you want to merge two or more separate OAMADMIN tables, object storage databases, or both.

"Creating and Binding DB2 Packages" on page 145

__ Step 27. Run the CBRPBIND SAMPLIB job.

"OSR Application Plans" on page 146

__ Step 28. Run the CBRIBIND SAMPLIB job.

__ Step 29. Run the CBRIGRNT SAMPLIB job.

"OSMC Application Plans" on page 147

__ Step 30. Run the CBRHBIND SAMPLIB job.

Note: Do **not** perform this step if you are using DASD-only storage (no optical volumes or tape devices) and you are not running OSMC for expiration processing.

__ Step 31. Run the CBRHGRNT SAMPLIB job.

Note: Do **not** perform this step if you are using DASD-only storage (no optical volumes or tape devices) and you are not running OSMC for expiration processing.

"LCS, ISMF, and OSR Application Plans" on page 148

__ Step 32. Run the CBRABIND SAMPLIB job.

Note: Do **not** perform this step if you are using DASD-only storage (no optical volumes or tape devices) and you are not running OSMC for expiration processing.

__ Step 33. Run the CBRAGRNT SAMPLIB job.

Note: Do **not** perform this step if you are using DASD-only storage (no optical volumes or tape devices) and you are not running OSMC for expiration processing.

"Verifying DB2 Installation" on page 149

__ Step 34. Verify that all application plans have been created.

__ Step 35. Verify that all application plans have been authorized.

"Defining User Catalogs" on page 150

__ Step 36. Evaluate and implement user catalogs and policies.

"IPL the System" on page 151

__ Step 37. IPL the system.

"Specifying the SMS Definitions and Programs Used by OAM" on page 151

__ Step 38. Define the base SCDS.

__ Step 39. Define libraries and drives in the optical configuration database.

Note: You must perform this step at initial installation. During migration, you might optionally perform this step if you are adding or changing libraries or drives. Do **not** perform this step if you are using only DASD or tape storage (no optical volumes, drives, or libraries), or if you are running OSMC for expiration processing.

__ Step 40. Define Object and Object Backup storage groups.

__ Step 41. Define storage classes.

__ Step 42. Define data classes.

__ Step 43. Define management classes.

__ Step 44. Define and test ACS routines.

__ Step 45. Validate and activate the SMS configuration.

__ Step 46. Run the OAM IVP if you are storing objects.

__ Step 47. Add new tape devices to the OAM object tape configuration.

Changing DB2 Installation Parameters

The following procedural steps provide details to assist you in the performance of the checklist steps from the "High-Level Installation and Migration Checklists" on page 88.

1 ***Evaluate and select appropriate values.***

You must perform this step at initial installation. For migration, you must verify or perform this step if you determine that it has not yet been completed in your current environment.

The following values are provided as guidance information in establishing a DB2 system for use with OAM. If you have other applications sharing a DB2 system with OAM, you should evaluate the following and select values appropriate for all applications.

Tip: These values are only suggestions and are given only for installation. You might need to change them for optimum performance.

2 ***LOB support***

Modify user LOB Value Storage (LOBVALA) and System LOB Value Storage (LOBVALS) fields from the DB2 installation panel DSNTIP7, Sizes Panel 2, to establish proper limits for the amount of storage that can be used for storing LOB values.

Buffer Pools and Max Connects

When you defined DB2 job DSNTIJUZ, you specified values for the following storage sizes installation parameters. Evaluate the values you specified and ensure that your selected values will provide optimum performance. Change the values as required.

```
MAX USERS         (NUMCONCR)  200
MAX TSO           (NUMCONTS)  100
MAX BATCH         (NUMCONBT)  100
MIN BP0 BUFFERS   (BUFMIN00)  200
MAX BP0 BUFFERS   (BUFMAX00)  300
MIN BP1 BUFFERS   (BUFMIN01)  200
MAX BP1 BUFFERS   (BUFMAX01)  300
MIN BP2 BUFFERS   (BUFMIN02)  100
MAX BP2 BUFFERS   (BUFMAX02)  200
MIN BP32K BUFFERS (BUFMIN32)   50
MAX BP32K BUFFERS (BUFMAX32)  100
```

Guideline: You can verify or modify the values using DB2 dialog installation or by DB2 Job DSNTIJUZ directly.

Related reading: See *DB2 Administration Guide* for additional information on storage sizes installation parameters.

EDM Pools: If the environmental descriptor management (EDM) function pool size is not large enough for the databases, DB2 errors are received. The following is suggested for EDM pool size:

```
EDM POOL      9 000    (20 storage groups)
EDM POOL     20 000   (100 storage groups)
```

Related reading: See *DB2 Administration Guide* for an explanation of EDM pool size.

DB2 Group Buffer Pools: Add the buffer pool information from "Buffer Pools and Max Connects" or the buffer pools used for the OCDB, OAMADMIN database, object directories, and object storage databases to the CFRM policy. Perform this step only if you are setting up an OAMplex and data sharing environment.

Related reading: For more information on buffer pools, see *DB2 Administration Guide* and *z/OS MVS Setting Up a Sysplex*.

Date and Time Routines

OAM does not require that dates and times be in a particular format; however, OAM returns and displays dates and times in ISO format only. The following example shows the ISO date and time format returned by OAM:

```
YYYY-MM-DD
```

Related reading: For more information regarding date and time formats, see *DB2 Administration Guide*.

Changing CICS Installation Parameters

If you plan to run OAM under CICS, make the following changes to your CICS installation before using OAM:

2 ***Update or create CICS PLT.***

You must perform this step at initial installation. For migration, you must verify or perform this step if you determine that it has not yet been completed in your current environment.

- If you have a program list table (PLT) to specify programs to be executed in the post-initialization phase of CICS startup, add the following entry:

  ```
  DFHPLT TYPE=ENTRY,PROGRAM=CBRICONN
  ```

  This entry names the OSR CICS initialization load module (CBRICONN) and invokes CBRICONN when CICS is initialized.
- If you do not have a PLT to specify programs for execution in the post-initialization phase of CICS startup, use one of the following to generate your CICS PLT:

  ```
  DFHPLT TYPE=INITIAL,SUFFIX=xx
  DFHPLT TYPE=ENTRY,PROGRAM=DFHDELIM
  DFHPLT TYPE=ENTRY,PROGRAM=CBRICONN
  DFHPLT TYPE=FINAL
  END
  ```

  Related reading: For additional information on DFHPLT, see *CICS Resource Definition Guide*.

3 ***Update CICS CSD.***

You must perform this step at initial installation. For migration, you must verify or perform this step if you determine that it has not yet been completed in your current environment.

If you are a new CICS Transaction Server (CICS TS) user, you must create and initialize a CICS System Definition (CSD) file. Define the OAM module CBRICONN and add the group to your CICS region group list.

```
DEFINE PROGRAM(CBRICONN) GROUP(xxx) LANGUAGE(ASSEMBLER) CEDF(NO)ADD GROUP(xxx) LIST(yyy)
```

For xxx, substitute the group name for your CSD OAM definitions (ie. OAM). For yyy, substitute the CICS region name for your OAM enabled CICS region (ie. CICSA).

Attention: CICS TS does not support macro definitions for the Processing Program Table (PPT) resource. If you are moving to CICS TS from an earlier release and you have macro level resource definitions for the PPT, you must migrate the resources to the CSD. See the 'CICS System Definition Guide' for information on how to do this.

Related Reading: For more information on the CSD, see *CICS System Definition Guide*.

4 ***Update CICS SIT.***

You must perform this step at initial installation. For migration, you must verify or perform this step if you determine that it has not yet been completed in your current environment.

Add the following entry to the CICS system initialization table (SIT) to supply initialization parameters to CICS:

```
PLTPI=vv,      *** POSTINITIALIZATION CONNECTION
```

where:

vv Specifies the suffix of the DFHPLT module

5 ***Connect DB2 to CICS.***

You must perform this step at initial installation. For migration, you must verify or perform this step if you determine that it has not yet been completed in your current environment.

CICS TS provides Resource Definition Online (RDO) support for DB2 resources. Define the following objects using RDO.

```
DB2CONN to connect DB2 to CICS.
DB2ENTRY for plan CBRIDBS.
```

These objects describe the global attributes of the CICS DB2 connection and the relationship between CICS transactions and DB2 resources (including application plans and command processors). See the *CICS Resource Definition Guide* for information on how to create these objects using RDO.

Attention: CICS TS Version 1 Release 3 and above do not support the use of DSNCRCT macro definitions to create the Resource Control Table (RCT). If you are moving to CICS TS, use CICS RDO to support DB2 resources instead of using DSNCRCT macros.

6 ***Copy CBRICONN to DFHRPL.***

You must perform this step at initial installation. For migration, you must verify or perform this step if you determine that it has not yet been completed in your current environment.

CBRICONN must be contained in a load library in the DFHRPL concatenation. CBRICONN is delivered in SYS1.LINKLIB. You might add SYS1.LINKLIB to your DFHRPL concatenation or copy CBRICONN into another load library in the concatenation. If you choose not to use SYS1.LINKLIB in your DFHRPL list, you

must remember to upgrade the copy of CBRICONN every time the module in SYS1.LINKLIB is changed due to maintenance or a new release of OAM.

Modifying the Installation Exit to Manage Deleted Objects

7 ***For a new installation, evaluate and implement the auto-delete installation exit. If you are migrating to a new release, you can reuse the auto-delete installation exit.***

Perform this step **only** *if you are running OSMC for expiration processing.*

One of the rules defined in the management class is the end of an object's life. OSMC can delete an object when its lifetime expires. An object can also expire through an explicit expiration date. If an object has an explicit expiration date, the explicit expiration date takes precedence over the management-class-defined lifetime. OSMC calls the auto-delete installation exit before it deletes any object. The auto-delete installation exit indicates by return code whether the object should be deleted. Also, the installation exit can record the deletion of an object so applications can be kept synchronized with the OAM object directory table. In an OAMplex, you should synchronize the instances of CBRHADUX across the OAMs to avoid one OAM deleting an object with the approval of the exit when there is another exit on another OAM that is set to deny the delete request.

Requirement: The sample auto-delete installation exit prevents objects from being deleted. If your previous installation of OAM relied on the sample auto-delete installation exit to allow objects to be automatically deleted, you *must* modify the code in this exit to continue automatic deletion. You also must modify the code in this exit to define or change your installation handling of deleted objects. For more information about the installation exit, see "Auto-Delete Installation Exit (CBRHADUX)" on page 573.

Changing System Libraries

After using SMP/E to install DFSMSdfp, change the system libraries using the following procedures. Some procedures are completed only if the installation uses optical storage. These procedures are identified in the text. Some procedures are completed only if the installation uses object tape storage. These procedures are also identified in the text. Unless otherwise noted, all other procedures must be completed.

8 ***Update PARMLIB.***

8a ***Update IGDSMSxx PARMLIB member.***

Perform the following steps if you want to automatically start the OAM address space during IPL. Do **not** *perform this step if you are using DASD-only storage (no optical volumes or tape devices), and do* **not** *start the OAM address space for processing objects.*

1. Update PARMLIB member IGDSMS*xx* to include the OAM-related keywords:

OAMPROC*(procname)*
: Optional parameter that specifies the procedure name to be used to start the OAM address space. Specify this keyword to start the OAM address space automatically during IPL. The procedure name is from 1 to 8 characters, and there is no default.

OAMTASK*(taskid)*
: Optional parameter that specifies the identifier to be used to start

the OAM address space. If you specify this keyword without the OAMPROC keyword, it is ignored. This identifier is from 1 to 8 characters, and there is no default. Code the OAMTASK keyword if you prefer to use an identifier other than the *procname* when starting the OAM address space. The START command uses the *taskid* identifier. The *taskid* corresponds to the *identifier* parameter of the MVS START command documented in the *z/OS MVS System Commands*. See "Starting OAM" on page 267 for examples of the OAM START command.

DB2SSID*(ssid)*

Optional parameter that specifies the name of the DB2 subsystem. OAM and ISMF use the specified DB2 subsystem name to connect to an appropriate DB2 subsystem. The subsystem name is from 1 to 4 characters, and there is no default.

The DB2SSID parameter is considered optional. If it is not specified, the system prompts you for a specification when object storage groups are in the current configuration. Indicating "NONE" for this parameter is acceptable; however, doing so allows OAM to be initialized without the DB2 subsystem connection or access to the configuration database. This specification might be appropriate for a tape library-only environment, but if object storage is required within the installation, a DB2 subsystem name other than "NONE" **must** be supplied.

Requirement: If a DB2 group name is specified instead of a DB2 subsystem name, which is supported in a data sharing environment, the DB2 subsystem startup ECB option is not supported by some earlier DB2 releases. In this situation, you must start the DB2 subsystem before initializing OAM.

The optional parameters, OAMPROC and OAMTASK, are used only when the OAM address space is to be started automatically as part of SMS initialization. OAM can be used as the procedure name, the task identifier, or both.

Related reading: For more information concerning this PARMLIB member and all its associated keywords, see *z/OS DFSMS Storage Administration Reference*.

8b ***Update IEFSSNxx PARMLIB member to initialize the OAM subsystem.***

Do **not** *perform this step at initial installation.*

1. Delete the *yyy*,CBRINIT entry in the IEFSSN*xx* member.

   where:
   yyy Is either OSM, or OAM.

   You must verify or perform this step if you determine it has not yet been completed in your current environment.

   ---

2. Add the OAM1 entry in the IEFSSN*xx* member:

```
| SUBSYS SUBNAME(OAM1) INITRTN(CBRINIT) INITPARM('[TIME=GMT][,MSG=x][,OTIS=x][,UPD=x][,MOS=nnn][,LOB=x]')
```

   where:
   TIME=GMT Specifies that the timestamp value in the object directory in DB2 is

to be based on GMT. If this option is omitted, or if any value other than GMT is specified, the object directory time stamp in DB2 is based on local time.

MSG=*x* Specifies the format for how the OAM message text appears:
- MSG=EM specifies that the message text is in mixed-case English. This is the default.
- MSG=EU specifies that the message text is in uppercase English.

OTIS=*x* Specifies whether OTIS should wait for JES to completely initialize before OTIS is started:
- OTIS=Y specifies that OTIS will not start until JES is completely initialized.
- OTIS=N specifies that OTIS will start independently from JES. This is the default.

UPD=*x* Specifies whether DB2 updates for the pending action date (ODPENDDT) and the last reference date (ODLREFDT) fields should be performed:
- UPD=Y specifies that the ODPENDDT and ODLREFDT fields should be updated on all OSREQ retrieves. This is the default.
- UPD=N specifies that the ODPENDDT and ODLREFDT fields should not be updated for any OSREQ retrieves.

  Restriction: If you use UPD=N, you cannot base transition criteria on the time since last use parameter in the ISMF management class definition.

MOS=*nnn* Specifies the maximum object size limit in MB. Valid values are 50–256. If this keyword is omitted, the maximum supported object size remains at 50MB. The maximum object size is checked when objects are initially stored through the OSREQ programming interface and is not checked on subsequent retrievals, in case the keyword was accidentally omitted or its value was changed.

LOB=*x* Specifies whether or not OAM exploits DB2 LOB support for large objects that exceed 32 KB (32640 bytes). LOB has the following options:
- LOB=A specifies that, for all storage groups, objects that exceed 32 KB are to be stored in a LOB storage structure when stored to DB2. LOB=A indicates to OAM that the installation has created LOB storage structures and associated V_OSM_LOB_BASE_TBL views for ALL object storage groups defined in the ACDS. This results in optimal performance when you want to store large objects(greater than 32 KB) to DB2, because OAM does not query DB2 to see if the LOB base table view exists. If the LOB base table view does not exist, the large object store fails.
- LOB=P indicates to OAM that the installation has created LOB storage structures and associated V_OSM_LOB_BASE_TBL views for a PARTIAL list of object storage groups defined in the ACDS. This requires OAM to query DB2 to see if the LOB base table view exists for a given object storage group for each large object stored. If the LOB base table view does exist for a given object storage group, large objects are stored in the associated LOB storage structure. If the LOB base table view does not exist, large objects are stored in the 32 KB data table.
- LOB=N specifies that objects that exceed 32 KB are to be stored in a 32 KB data table when stored to DB2. This is the default option.

OAM1 is the name of the subsystem, and CBRINIT is the name of the OSR initialization module executed at IPL time.

Rule: The OAM1 entry must follow the SMS entry. The OAM1 entry defines the OAM1 subsystem; you must add this entry even if you do not plan to start the OAM address space. To prevent a possible system abend, make certain that the subsystem name in the step above is different from the PROCLIB member used to start OAM.

8c ***Update SMFPRMxx PARMLIB member.***

You might perform this step at initial installation. For migration, you might verify or perform this step if you determine that it has not yet been completed in your current environment.

1. Verify and update if necessary the SMFPRM*xx* PARMLIB member to ensure it has been set up appropriately. For more information on this PARMLIB member, see "Changing SMF Recording" on page 571.

8d ***Update IEAICSxx PARMLIB member.***

Perform this step at initial installation.

Defining Report Performance Groups

For RMF to collect statistics about a given OAM transaction name, you must define a report performance group in the IEAICS*xx* member of PARMLIB for each transaction for which the installation wishes SRM and RMF to collect statistics.

To define a report performance group, add a SUBSYS specification to the IEAICS*xx* member of PARMLIB. Figure 12 is an example of a SUBSYS specification that defines a report performance group for some of the OAM transaction names associated with the OSREQ transaction class.

Related reading: For more information on the IEAICS*xx* member of PARMLIB, see *z/OS RMF User's Guide*.

```
SUBSYS=OAM,                          /* OAM REPORT PERF GROUP     */
  TRXCLASS=OSREQ,RPGN=400            /* OSREQ TRANSACTION CLASS   */
  TRXNAME=ACCESS,RPGN=401            /* OSREQ ACCESS              */
  TRXNAME=STOROPT,RPGN=421           /* OSREQ STORE TO OPTICAL    */
  TRXNAME=QUERY,RPGN=409             /* OSREQ QUERY               */
  TRXNAME=RETRVPO,RPGN=414           /* OSREQ RETRIEVE PRIMARY OPT*/
  TRXNAME=CHANGE,RPGN=402            /* OSREQ CHANGE              */
  TRXNAME=DELETEO,RPGN=405           /* OSREQ DELETE FROM OPTICAL */
  TRXNAME=UNACCESS,RPGN=423          /* OSREQ UNACCESS            */
```

Figure 12. IEAICSxx SUBSYS Specification for OSREQ Transactions

A complete OAM ICS SAMPLIB member is distributed with OAM. The name of the SAMPLIB is CBRICS00. This member defines a report performance group for each OAM transaction name. You can copy this SAMPLIB member into the IEAICS*xx* MEMBER of PARMLIB and edit it, as necessary.

8e ***Update CONSOLxx PARMLIB member.***

You might perform this step at initial installation. For migration, you might verify or perform this step if you determine that it has not yet been completed in your current environment.

The Action Message Retention Facility (AMRF) must be active for messages with descriptor code 3 (eventual action required) to be recalled through the use of the `D`

`R,L,KEY=OAM` command after the messages have rolled off the z/OS console. Activate AMRF at IPL by setting keyword `AMRF=Y` in the CONSOL*xx* PARMLIB member.

9 ***Create or Update CBROAMxx PARMLIB members.***

You must perform this step if you are storing objects on tape volumes, setting up an OAMplex, or customizing your OSMC or optical environments. Do ***not*** *perform this step if you are using DASD-only storage (no optical volumes or tape devices), and if you do not start the OAM address space for processing objects.*

This CBROAM*xx* member is invoked using the OAM=*xx* parameter in the OAM member of PROCLIB. You must create or update the CBROAM*xx* member to use object tape storage or an OAMplex. You can specify optional parameters that OAM can use with tape storage, optical storage, OSMC, and in an OAMplex. If you do not specify specific parameters, the defaults are used. You can include the CBROAM*xx* PARMLIB member in any data set that is specified in the concatenation list in SYS1.IPLPARM(LOAD*xx*).

Related reading: For information about using the CBROAM*xx* PARMLIB member in various environments, see the following topics:

- "SETOAM Statements for Object Tape Storage"
- "SETOPT Statements for Use in an Optical Environment" on page 121
- "SETOSMC Statements for Use in the OSMC Environment" on page 125
- "OAMXCF Statements in an OAMplex" on page 129

SETOAM Statements for Object Tape Storage

A CBROAM*xx* PARMLIB member contains SETOAM statements. The CBROAM*xx* member is processed during OAM address space initialization to establish the tape-related values for the object tape storage. Creating or updating the CBROAM*xx* PARMLIB member with SETOAM statements is required to use object tapes within your environment. If the SETOAM statement does not assign TAPEUNITNAME values to the Object Backup storage groups, the backup copies of the objects are stored on optical media. If no SETOAM statements exist in the CBROAM*xx* member of PARMLIB, the objects are stored on optical media by default.

Because an installation might want to tailor its object tape storage for different initializations of OAM, multiple CBROAM*xx* members might be created. In addition, multiple SETOAM statements might be supplied in one CBROAM*xx* PARMLIB member.

Use the SETOAM statement to determine whether backup objects are stored on tape volumes when they are written to an Object Backup storage group. The CBROAM*xx* PARMLIB member might contain one or more SETOAM statements. If the same parameter is specified multiple times on the same SETOAM statement, the last occurrence of the parameter is accepted. If the same parameter is specified multiple times on different SETOAM statements, the last occurrence on the last statement is accepted. If any syntactical errors are encountered in processing the statements in the CBROAM*xx* member of PARMLIB, OAM issues a message, and the OAM address space fails to initialize.

Related reading: See "Using the UPDATE Command to Set SETOAM, SETOSMC, and SETOPT Values" on page 368 for information on changing the SETOAM values dynamically, or on defining the values when the CBROAM*xx* PARMLIB member is not used at initialization.

Figure 13 is an example of a CBROAM*xx* PARMLIB member that can be used as a sample for your installation. See the syntax diagrams that follow Figure 13 for graphical depictions of the SETOAM statement. The descriptions of the keywords are found in the discussion of the SETOAM statement on "SETOAM Keyword Definitions" on page 103.

```
SETOAM DATACLASS(INMTL)
      DSNWITHSGNAME
      DEMOUNTWAITTIME(120)
      MAXTAPERETRIEVETASKS(2)
      MAXTAPESTORETASKS(2)
      MOUNTWAITTIME(5)
      TAPECAPACITY(CST18 55555)
      TAPECAPACITY(CST36 88888)
      TAPECAPACITY(ECCST 99999999)
      TAPECAPACITY(ESOTERIC1 7654321)
      TAPECAPACITY(ESOTERIC2 77766655)
      TAPECAPACITY(ESOTERICn 2147483646)
      TAPEEXPIRATION(2035/165)
      TAPEFULLTHRESHOLD(4096)
      TAPEDISPATCHERDELAY(30)
      TAPERECYCLEMODE(GROUP)
      OAMSCRATCHSYNCH(ENABLED)
      STORAGEGROUP(GROUP00
        DATACLASS(TAPEGRP)
        DEMOUNTWAITTIME(120)
        SGMAXTAPERETRIEVETASKS(2)
        SGMAXTAPESTORETASKS(1)
        TAPECOMPACTION
        TAPEDRIVESTARTUP(9999)
        TAPEEXPIRATION(2055/003)
        TAPEFULLTHRESHOLD(2048)
        TAPEPERCENTFULL(76)
        TAPEUNITNAME(3490))
```

Figure 13. CBROAMxx PARMLIB Member Sample

The syntax diagrams below show the syntax for the SETOAM statement. The first diagram shows the syntax for OAM global level parameters. The second diagram shows the subparameters for the STORAGEGROUP keyword parameter. For information regarding how to read syntax diagrams, see "How to Read Syntax Diagrams" on page xiii.

SETOAM Statement Syntax: OAM Global Level Parameters

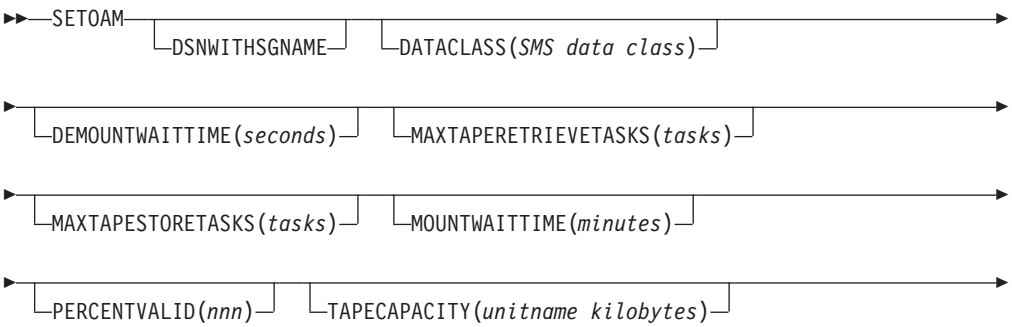

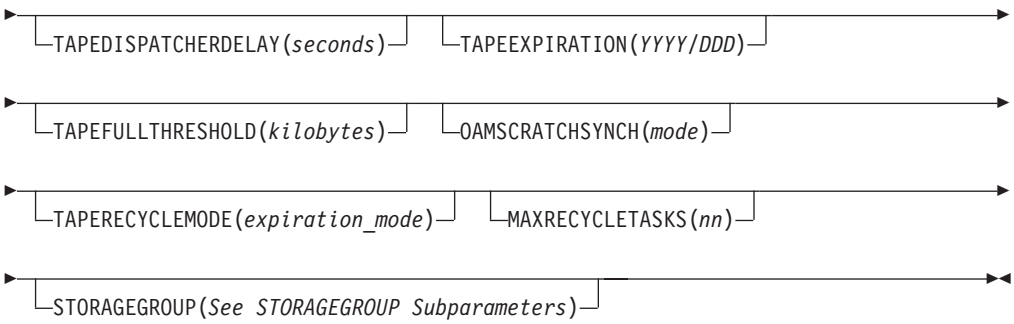

SETOAM Statement Syntax: STORAGEGROUP Subparameters

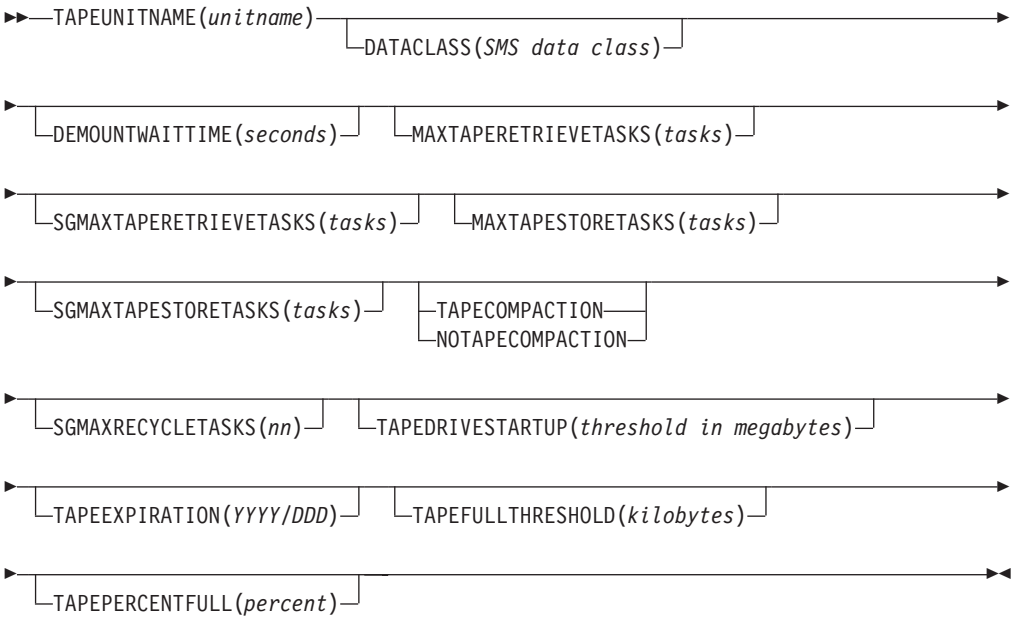

SETOAM Keyword Definitions

DATACLASS(*name*)

An optional parameter that specifies the SMS data class to be used for Object and Object Backup storage groups that do not have their own DATACLASS specification on the STORAGEGROUP subparameter of the SETOAM statement. If you specify DATACLASS at the OAM global level, but not at the storage group level, this specification of DATACLASS applies to each of the storage groups with a corresponding SETOAM statement which do not explicitly specify a DATACLASS. Using the DATACLASS keyword on the SETOAM statement at the global level allows the installation to affect Tape Device Selection Information, and volume expiration date for those Object or Object Backup storage groups which do not have an explicit DATACLASS keyword in their STORAGEGROUP subparameter list. (See the discussion on page 24 for details on TDSI.) There is NO global level OAM default DATACLASS.

In an IBM tape library environment, specify the SETOAM DATACLASS parameter using a data class that contains the new media type or recording technology. In addition, you can specify DATACLASS to take advantage of performance scaling or performance segmentation for the 3592 Model J or 3592 Model E05 in an IBM tape library environment and also in the stand-alone

environment. Use the performance options in the data class to improve the random retrieval rate of primary objects in Object storage groups. For objects written to Object Backup storage groups, you can specify a data class that does not specify performance scaling so that you can use the full capacity of the volume.

Recommendation: Do not allow ACS routines to assign or change the data class assignment of an OAM tape volume. The data class for OAM tape volumes is determined by the SETOAM statement of the CBROAM*xx* PARMLIB member at MVS scratch tape allocation. The SETOAM statement provides this information at the storage group level or at the OAM global level, and it best suits the requirements for the tape volume that is being allocated. Allowing ACS routines to alter this specification could create unexpected consequences (for example, no compaction of the data when the SETOAM statement specified compaction). It is your installation's responsibility to write the ACS routines so as to not alter the data class construct for OAM tape volumes.

DSNWITHSGNAME
An optional parameter that specifies that the object storage group name is to be appended to the OAM tape data set names (OAM.PRIMARY.DATA, OAM.BACKUP.DATA, OAM.BACKUP2.DATA). For example, if OAM receives a store request for a new object for storage group GROUP55, GROUP55 is appended as the low-level qualifier to the OAM.PRIMARY.DATA data set name: OAM.PRIMARY.DATA.GROUP55. The tape management system can parse the data set low-level qualifier (storage group) to determine from which pool a scratch volume should be selected for a mount request in the stand-alone (non system-managed tape) environment. By associating object storage group names with tape management scratch pools, specific media type volumes can be assigned to specific pool names and segregated, and thus, preventing a WORM volume request from being used for a rewritable volume request and vice versa.

Once DSNWITHSGNAME is specified, all new OAM object tape data set names for all tape storage groups will have the storage group appended; however, the data sets written in the original data set name format can be retrieved and if the tape is not filled, new objects will be written on these tapes until filled.

Note: The data set name format for each tape volume is tracked in the TAPEVOL table in the DSNFMT column. If the tape volume has a DSNFMT value of blank, then the data set name written on the volume is the original data set name format with no storage group name low-level qualifier or has no current OAM data set written on the tape. If a tape volume has a DSNFMT value of "G" for group, then the data set name written on the volume has the storage group name appended.

DEMOUNTWAITTIME(*seconds*)
An optional parameter that specifies the time, in seconds, that OAM waits before demounting and deallocating a tape drive that OAM is currently not using. For *seconds*, specify a decimal number between 1 and 9999. When the time interval expires, OAM rewinds and unloads the currently mounted tape cartridge and demounts and deallocates the device. The default for this optional parameter is 120 seconds.

Some circumstances might affect how this parameter is enforced:
- If a new tape drive allocation request comes in and OAM has already used the maximum number of tape drives (MAXTAPERETRIEVETASKS +

MAXTAPESTORETASKS), OAM ignores the DEMOUNTWAITTIME and deallocates this drive in order to allocate another.
- If OAM is canceled, a DEMOUNT occurs, and DEMOUNTWAITTIME is ignored.
- If a request to vary the drive offline is sent while the DEMOUNTWAITTIME is in effect for that drive in an OAM session, the drive cannot vary offline until the specified DEMOUNTWAITTIME elapses.
- If OAM finishes reading and writing to a tape before the DEMOUNTWAITTIME elapses, a demount, unload, rewind, or release of the allocated drive cannot take place until the specified DEMOUNTWAITTIME is complete.

MAXTAPERETRIEVETASKS(*tasks*)
An optional parameter that specifies the maximum number of tasks within the OAM address space that can concurrently read objects from tape. This parameter controls the maximum number of tape drives that can be concurrently allocated to the OAM address space for reading object data from tape. This parameter allocates tape drives for processing the following requests:
- OSREQ RETRIEVE requests, where the primary copy of the object being retrieved is stored on tape.
- OSREQ RETRIEVE requests, where VIEW=BACKUP or VIEW=BACKUP2 and the backup copy is on tape.
- Requests to read the primary copy of an object from tape during the OSMC storage management cycle.
- Requests to read a backup copy or the primary copy of an object from tape during the execution of the OSMC optical volume recovery utility.
- Single object recovery.
- OSREQ retrieve requests where the primary copy is on optical, but volume is not readable, access to backup is activated and the backup copy is on tape.

If one or more OAM applications are retrieving objects from multiple Object storage groups, and the primary copies of the objects are being retrieved from tape volumes, the number or tasks specified with this parameter should be greater than or equal to the maximum number of Object storage groups being read from concurrently. This parameter eliminates the need to constantly mount and demount tapes belonging to different Object storage groups to satisfy OSREQ RETRIEVE requests.

The default is 1, which allows at least one task to be attached for processing read requests from tape volumes. This default allows groups previously writing objects to tape, but no longer having an explicit SETOAM statement in the CBROAM*xx* member, to be able to retrieve their previously written objects if a CBROAM*xx* PARMLIB member was successfully processed during OAM initialization. A CBROAM*xx* PARMLIB member must be successfully processed during OAM initialization for OAM object tape storage to be active on the system.

MAXTAPESTORETASKS(*tasks*)
An optional parameter that specifies the maximum number of tape drives used for writing objects to tape volumes. Use this parameter to process the following:
- OSREQ STORE requests where the primary copy of the object is to be stored on tape.
- OSMC class transition processing where the primary copy of the object is to be stored on tape.
- Writing of backup copies of objects during the OSMC storage management cycle.

- Single object recovery.
- Producing backup copies if backups are directed to tape.
- MOVEVOL for backup copies if objects are directed to tape.

This parameter and the MAXTAPERETRIEVETASKS parameter control the maximum number of tape drives that can be concurrently allocated to the OAM address space. For *tasks*, specify a decimal number between 1 and 100. The number specified for *tasks* with the MAXTAPESTORETASKS parameter should be greater than the number of Object storage groups that OAM applications are using for storing objects to tape volumes. If the number is less than the number of Object storage groups for the OAM applications, OAM will be frequently mounting and demounting tape volumes belonging to different Object storage groups to satisfy OSREQ STORE requests. Also, if objects are being written to the Object Backup storage group during the storage management cycle for multiple storage groups, and the backup copies are being written to tape volumes, then the number of tasks specified with this parameter should encompass this activity. Specify the maximum number of concurrent storage groups by using MAXS= in the PARM field on the JCL EXEC statement in the OAM cataloged procedure. If the MAXTAPESTORETASKS parameter is not specified on any SETOAM statement, OAM sets the default to 1.

Guideline: You should verify that there are enough tape drives (specified in the TAPEUNITNAME keyword) available to handle the values assigned to the MAXTAPESTORETASKS and MAXTAPERETRIEVETASKS parameters of the SETOAM statement. How the drives are spread among the Object storage groups or the Object Backup storage group depends on the values assigned to the MAXTAPESTORETASKS, MAXTAPERETRIEVETASKS, TAPEDRIVESTARTUP, and the TAPEUNITNAME parameters for each Object and the Object Backup storage group. OAM drive allocations can exceed the value of MAXTAPERETRIEVETASKS (up to the total value of MAXTAPERETRIEVETASKS and MAXTAPESTORETASKS) due to DEMOUNTWAITTIME, even if no STOREs are being done. If there are not enough tape drives, and the recovery logic for allocation is not able to obtain a tape drive for this request, then the request fails. (See the discussion on page 118 for details on TAPEDRIVESTARTUP.)

MOUNTWAITTIME(*minutes***)**

An optional parameter that specifies the time, in minutes, that OAM waits for a tape volume to be mounted. For *minutes*, specify a decimal number between 1 and 120. When this interval expires, OAM issues message CBR6405D to the operator asking if the tape volume can be mounted. If the response is “Y”, OAM resets the timer for another *minutes* interval. If the next interval expires and the tape volume is still not mounted, the same message is sent to the operator. If the reply is “C” and the mount was for tape that was to be read, OAM ends the task, fails the request to retrieve the object, and the volume is marked as “lost”. If the operator replies “C” to this message and the mount was for a tape volume that was the target of a nonspecific (grouped) write request, a message is issued, and the volume is marked “lost” in the OAM internal control blocks, and the write request is retried on another volume. This processing applies to stand-alone, automated tape library dataservers, and manual tape libraries. If you do not specify this parameter on any SETOAM statement, the OAM default is five minutes. If this is a mount for an MVS scratch tape, and retry is attempted, the request fails.

Recommendation: Issue the F OAM,DISPLAY,LOSTVOL command to determine the volume serial number of each lost volume, both tape and optical. See "Displaying Volumes that Have LOSTFLAG Set" on page 356 for further information on this command.

OAMSCRATCHSYNCH(*mode*)
An optional parameter that specifies how OAM manages a tape volume that is being returned to OAM scratch status. Specify this parameter at the global level only.

Starting in z/OS V1R5, when an OAM tape is initially allocated to an Object or Object Backup storage group, that tape volume has its original unit name (OUNITNAM) and data class (DATACLAS) set to the TAPEUNITNAME and DATACLAS values that are associated with that Object or Object Backup storage group using the SETOAM statements in the CBROAM*xx* PARMLIB member. The values stored in these new fields are used when the volume is returned to OAM scratch status and during subsequent allocation of OAM scratch volumes.

The OUNITNAM and DATACLAS fields are new to the TAPEVOL table in z/OS V1R5. Therefore, any tapes that are initially allocated to an Object or Object Backup storage group on a pre-z/OS DFSMS V1R5 system do *not* have these fields filled in. These fields are blank. If the tape is returned to OAM scratch status, it is *not* subsequently assigned to an Object or Object Backup storage group because the unit name does not match, and the data class might not match if the volume resides in an IBM tape library.

Starting in z/OS V1R5, OAM optionally synchronizes these fields so that tape volumes that are returned to OAM scratch status can be reused even if they were originally allocated on a pre-z/OS DFSMS V1R5 system. The mechanism is the OAMSCRATCHSYNCH keyword for the SETOAM statement in the CBROAM*xx* PARMLIB member. For more information, see "Synchronizing OAM Scratch Tape" on page 244.

DISABLED
OAM does not check for blank DATACLAS and OUNITNAM fields in the TAPEVOL table and does not alter those fields. OAM also does not modify the UNITNAME field in the TAPEVOL table that is associated with this tape volume. If you omit the OAMSCRATCHSYNCH parameter, DISABLED is the default.

ENABLED
OAM synchronizes blank DATACLAS and OUNITNAM fields in the TAPEVOL table that is associated with a tape volume that is being returned to OAM scratch status, as follows:

- If the DATACLAS field is blank, OAM sets DATACLAS to the same value as the DATACLASS that was associated with the storage group for the volume before it was returned to scratch. If the OUNITNAM field is blank and the value in UNITNAME is a generic device, OUNITNAM and UNITNAME are both set to the same value as the UNITNAME that is associated with the storage group for the volume. (Generic devices include the 3480, 3480*x*, 3490, or 3590-1.)
- If OUNITNAM is blank and the value in UNITNAME is an esoteric device name, both OUNITNAM and UNITNAME remain unchanged.

PERCENTVALID(*nnn*)
You can only specify this keyword at the global (all storage groups) level. *nnn* represents the global default percentage of valid data threshold that is used to determine whether a full tape volume is a candidate for RECYCLE processing.

This SETOAM value is used only if the optional PV= keyword is not specified on the RECYCLE command. The PERCENTVALID value that is specified on the RECYCLE command takes precedence over the PERCENTVALID value in the SETOAM statement. Valid values for *nnn* are 0 - 100. The default is 0 if no value is specified.

TAPECAPACITY(*unitname kilobytes***)**
An optional parameter that specifies a unit name with a numeric value in kilobytes from 1 to 2 147 483 646. This parameter allows you to specify a tape capacity for tapes written using a general recording technology, as well as a different capacity for tapes written to drives associated with esoteric unit names. This parameter indicates the tape capacity desired for the three general specifications (CST18, CST36, or ECCST) and esoteric unit name specifications. All esoteric unit name specifications are verified as valid esoteric unit names that are defined to the system. The tape capacity specified on this parameter becomes the value at which OAM considers a tape volume filled.

If this parameter is not specified in the SETOAM statement, the following defaults are used:

- Standard 18-track recording technology defaults for CST18
- Standard 36-track recording technology defaults for CST36
- Enhanced capacity recording technology defaults for ECCST

If you specify the TAPECAPACITY parameter as part of the SETOAM statement, but do not specify CST18, CST36, or ECCST, or do not enter valid generic or esoteric unit names, OAM does not start and issues message CBR0325I.

If you specify a 3480, 3480*x*, or 3490 unit name on this parameter, OAM accepts it, but considers it to be an esoteric unit name. Generally, the needs of these unit types are covered by the CST18, CST36, or ECCST keywords so they do not normally need to be specified. However, if they are specified, OAM accepts them and ensures that they are valid unit names. If the esoteric unit name used with this parameter matches the *tapeunitname* subparameter on the SETOAM STORAGEGROUP parameter, OAM uses the tape capacity associated with the tapeunitname subparameter instead of any equivalent CST18, CST36, or ECCST specification for this parameter.

Use this parameter at the OAM global level. However, you can specify a desired tape capacity at the storage group level by specifying an esoteric unit name on the *tapeunitname* subparameter on the SETOAM STORAGEGROUP parameter with the *tapecapacity* parameter.

Example: If esoteric TAPE1 is specified on the *tapecapacity* parameter (such as, TAPECAPACITY(TAPE1 5000000)), when the SETOAM STORAGEGROUP(*storagegroupname* TAPEUNITNAME(TAPE1) is used on the same SETOAM statement, the storage group uses the tape capacity of 5 000 000.

If the tape capacity value in the Tape Volume Table is different than that specified on the *tapecapacity* parameter of the SETOAM statement, the value of the SETOAM statement is used for the duration of the OAM session, or until changed or deleted on the SETOAM statement. The Tape Volume Table capacity is not changed after it is initially set during the first time the volume was written to. This is to avoid a changing capacity and a volume fluctuating between full or not full based on a differing capacity. If the capacity in the

Tape Volume Table must be changed, you can use SPUFI to dynamically perform this update and OAM will accept it. The free space and percent full calculations for the volume are based on the updated capacity and are recalculated when the volume is written to again as a partial volume, or when OAM is restarted.

Attention: Use caution when you use SPUFI to update fields in the DB2 tables because you might get unexpected results.

Restriction: With the support of the 3590 Model E and later devices, even if the device is in 3490E emulation mode, the capacity of the media is derived from the hardware; therefore, you do not need to specify the SETOAM TAPECAPACITY keyword. Also, specifying this keyword is not valid with a 3590 Model B or a device that emulates a 3590 Model B (3590-1).

TAPEDISPATCHERDELAY(*seconds***)**
An optional parameter that specifies a numeric value of 1 through 60 and can be used at the global level only. This specifies that OAM wait a specified number of seconds before demounting a tape volume, even if other work is available for this drive. This delay allows time for a new read request to come into OAM that requires the currently mounted tape volume. This delay can greatly reduce the number of mounts and demounts of volumes for certain applications. This keyword provides function similar to the OPTICALDISPATCHERDELAY keyword associated with the SETOPT statement in the CBROAMxx PARMLIB member.

The OAM tape dispatcher will delay processing of a unit of work for a specific period of time only when all of the following conditions are met:

- A nonzero tape dispatcher delay value has been specified with the TAPEDISPATCHERDELAY keyword on the SETOAM statement in the CBROAMxx PARMLIB member.
- A read request for an object on a currently mounted tape volume has just been completed.
- There is no request for the currently mounted tape volume waiting to be processed on the OAM tape dispatcher queue.
- The OAM tape dispatcher has found a request for another tape volume and is about to dispatch this unit of work.

If another read request for the currently mounted tape volume arrives within the delay interval, that unit of work will be dispatched immediately upon arrival. If no read request for the currently mounted volume arrives within the delay interval, another request for a different tape volume is dispatched.

TAPEEXPIRATION(*YYYY/DDD***)**
An optional parameter that specifies the year and date (*YYYY/DDD*) assigned to the data sets on OAM object tape volumes used for expiration purposes where:

- *YYYY* is a four-digit number that specifies a year from 1900 through 2155, and
- *DDD* is a three-digit number that specifies a day from 001 through 366.

The TAPEEXPIRATION date overrides the expiration date defined in the DATACLASS parameter for the data sets residing on the tape volume.

If you specify the TAPEEXPIRATION date for the data sets residing on the OAM object tape volume as the current date or a date preceding the current system date, the data sets are considered previously expired and are therefore eligible for immediate replacement. OAM issues the CBR0317I message to

allow you to change the TAPEEXPIRATION value in the SETOAM statement in the CBROAM*xx* PARMLIB member being used if necessary.

Expiration dates of 1999/365 and 1999/366 are considered “never-scratch” dates. Data sets with these expiration dates are not deleted or written over. Check with your tape management system to determine what ″never-scratch″ date should be specified as the TAPEEXPIRATION date and for other policy-type specifications that are needed in the tape management system to indicate that the tapes and data are being externally managed by OAM. For example, if you are using DFSMSrmm to manage OAM objects on tape, the following vital record specifications, shown in TSO/E format, might be appropriate:

```
RMM ADDVRS DSNAME('OAM.PRIMARY.DATA') COUNT(99999) LOCATION(HOME)
RMM ADDVRS DSNAME('OAM.BACKUP.DATA') COUNT(99999) LOCATION(HOME)
RMM ADDVRS DSNAME('OAM.BACKUP2.DATA') COUNT(99999) LOCATION(HOME)
RMM ADDVRS DSNAME('OPEN') JOBNAME(oamtaskname) COUNT(99999) LOCATION(HOME
RMM ADDVRS DSNAME('ABEND') JOBNAME(oamtaskname) COUNT(99999) LOCATION(HOME)
```

The above DSNAME examples are data set names without DSNWITHSGNAME specified in the SETOAM statement. If DSNWITHSGNAME were specified, the storage group name would be appended as the data set name's low level qualifier. The JOBNAME value is the name of the job and started task for the OAM address space that opens the tape data sets.

TAPEFULLTHRESHOLD(*kilobytes***)**
An optional parameter that specifies a numeric value of 0 through 999 999 representing the number of kilobytes of available free space allowed for any volume belonging to any object tape storage group in the configuration. When the number of kilobytes of free space for a tape volume falls below the TAPEFULLTHRESHOLD parameter specified at the OAM global level, the volume is marked full and is not used for any further write requests. The default value for this parameter is zero.

It is important to select a threshold value the allows tape volumes to be marked full in a consistent manner. Consider the size of the objects stored, and if the size of the objects is consistent, select a threshold value that is slightly larger than that size. If volumes are not being selected for new objects and they are not being marked full, increase the value of this parameter.

During OAM initialization, the tape volume full status is checked with the TAPEFULLTHRESHOLD parameter (if specified at the global level) to determine the volume’s free space and the TAPEPERCENTFULL subparameter (if specified at the storage group level) to determine the volume’s percent full status. The volume full status is changed from full to not full if:

- Free space for the volume is greater than the TAPEFULLTHRESHOLD parameter value and the volume percent full value is less than the TAPEPERCENTFULL subparameter.

The volume full status is changed from not full to full if:

- Free space for the volume is less than or equal to the TAPEFULLTHRESHOLD parameter value or the volume percent full value is equal to or greater than the TAPEPERCENTFULL subparameter value.

TAPERECYCLEMODE(*expiration_mode***)**
Expired volumes are dispositioned according to the value that you specify with the TAPERECYCLEMODE keyword. Volumes are expired when they are selected by the OSMC Shelf Manager or if they are processed by the MOVEVOL utility with the RECYCLE option.

Restriction: If your tape management system does not allow overwriting tape volumes or data sets by another of the same name, you cannot use the GROUP or OAMSCRATCH option.

GROUP
Leaves the tape volume in the currently assigned Object or Object Backup storage group. OAM writes the CBR2166I message to the console log for each expired tape volume. If you omit the TAPERECYCLEMODE parameter, GROUP is the default.

The following record fields are reset for expired tape volumes in the DB2 TAPEVOL table:
- **Expiration date** is reset to `01-01-0001`.
- **Full status** is set to `N`.
- **Last block ID** is reset to `0`.
- **Freespace** is set to the volume's capacity.
- **Percent full** is reset to `0`.
- **Number of logical kilobytes written** is reset to `0`.
- **Number of physical kilobytes written** is reset to `0`.
- **Number of logical kilobytes deleted** is reset to `0`.
- **Number of logical blocks written** is reset to `0`.
- **Readable status** is reset to `Y`.
- **Writable status** is reset to `Y`.
- **Backup type** is reset to the backup type (`1` or `2`) that is currently associated with the storage group.

MVSSCRATCH
Removes all knowledge of the tape volume from the OAM inventory and returns the tape volume to the MVS scratch pool. OAM writes the CBR2165I message to the console log for each expired tape volume that is purged from the OAM inventory. In an OAMplex, the OAM member that initially releases the tape volume issues CBR2165I. Then the other OAM members each issue a CBR7404I message indicating that the tape volume is no longer known to that member.

Guideline: Because OAM does not interface with the tape management system, you need to use message automation or manually return the tapes to MVS scratch status. For information on how DFSMSrmm releases tape volumes from OAM, see "Deleting Recycled Tape and Optical Volumes from OAM" on page 236.

OAMSCRATCH
Leaves the tape volume under OAM control as an available scratch tape volume to be reassigned to an Object or Object Backup storage group to be reused and rewritten from load point with new data. A message, CBR2164I, is written to the hardcopy console log for each tape volume that completes expiration processing and is reassigned to OAM scratch status. You can reassign this tape volume to any Object or Object Backup storage group that requires a scratch volume with the same attributes.

The following record fields are reset for expired tape volumes in the DB2 TAPEVOL table:
- **Storage group name** is set to `*SCRTCH*`.
- **Volume type** is set to `S`.
- **Expiration date** is reset to `01-01-0001`.
- **Full status** is set to `N`.
- **Last block ID** is reset to `0`.
- **Freespace** is set to the volume's capacity.
- **Percent full** is reset to `0`.

- **Number of logical kilobytes written** is reset to `0`.
- **Number of physical kilobytes written** is reset to `0`.
- **Number of logical kilobytes deleted** is reset to `0`.
- **Number of logical blocks written** is reset to `0`.
- **Tape compaction status** is reset to blank.
- **Device EPI value** is reset to `0`.
- **Readable status** is reset to `Y`.
- **Writable status** is reset to `Y`.
- **Backup type** is set to blank.
- The **unit name** is reset as follows:
  - If the **original unit name** is non-blank, the **unit name** is reset to the value in the **original unit name**.
  - If the **original unit name** is blank, the **unit name** is reset according to the installation's specifications for SETOAM OAMSCRATCHSYNCH.
- The **original unit name** is reset as follows:
  - If the **original unit name** is non-blank, it is unchanged.
  - If the **original unit name** is blank, the **unit name** is reset according to the installation's specifications for SETOAM OAMSCRATCHSYNCH.
- The **data class** is reset as follows:
  - If the **data class** is non-blank, it is unchanged.
  - If the **data class** is blank, it is set according to the installation's specifications for SETOAM OAMSCRATCHSYNCH.

MAXRECYCLETASKS(*nn*)
Can be specified at the global level. The *nn* is the maximum number of MOVEVOL tasks that can be run concurrently by the RECYCLE function. Valid values for *nn* are 0 - 15. The default is 1 if no value is specified. A value of 0 indicates that no RECYCLE operations can be run at the storage group or global level.

STORAGEGROUP(*name*)
An optional parameter that specifies tape related parameters for a specific Object or Object Backup storage group which is in the active configuration, and which was previously defined using the ISMF storage group application. This parameter on the SETOAM statement provides additional information beyond what was specified using ISMF for the Object or Object Backup storage group to which it pertains. At times, the information overrides what was specified using ISMF. For example, if the Object Backup storage groups has a valid SETOAM statement, the backup copies of objects are written on tape regardless of the optical disk libraries supplied in the ISMF definition of the Object Backup storage group. For *name*, specify the name of an Object or Object Backup storage group. The parameter listed below applies to the name of the Object or Object Backup storage group that you specify.

SGMAXRECYCLETASKS(*nn*)
An optional parameter that you can specify at the storage group level. The *nn* is the maximum number of MOVEVOL tasks that can be run concurrently by the RECYCLE function for a storage group. The value for SGMAXRECYCLETASKS cannot exceed the value for MAXRECYCLETASKS. Valid values for *nn* are 0 - 15. The default is 1 if no value is specified. A value of 0 indicates that no RECYCLE operations can be run at the storage group level specified.

If you only want to recycle volumes from one group, the setting for all other groups would be 0 to ensure that the group with a non-zero value receives all the recycling processing.

If you specify a value for a group that is higher than the value for another group, the system selects more of the volumes to recycle from the group with the higher value. However, RECYCLE processing might be working with the original order of volumes that are sorted by the amount of valid data for each volume, and might select volumes from other groups to satisfy the limit before it processes the higher-value group.

SGMAXTAPERETRIEVETASKS(*tasks*)
An optional parameter you can be specify at the storage group level only. When you specify this keyword at a storage group level, it is identical to the MAXTAPERETRIEVETASKS keyword. This keyword SGMAXTAPERETRIEVETASKS is the preferred naming convention, however, for compatibility the MAXTAPERETRIEVETASKS keyword continues to be maintained.

SGMAXTAPERETRIEVETASKS(*tasks*) and its alternate MAXTAPERETRIEVETASKS(*tasks*) provide an optional subparameter of the STORAGEGROUP parameter that specifies the maximum number of tape drives used for reading objects from tape volumes belonging to a specific Object or Object Backup storage group. This parameter specifies the maximum number of tasks within the OAM address space that can concurrently read objects from tape for the storage group specified with the STORAGEGROUP parameter. The SGMAXTAPERETRIEVETASKS subparameter and the SGMAXTAPESTORETASKS subparameter control the maximum number of tape drives that can be concurrently allocated to the OAM address space for reading from and writing to tape volumes belonging to the specified Object or Object Backup storage group. For tasks, specify a decimal number between 1 and 100. The value specified with the SGMAXTAPERETRIEVETASKS keyword (or MAXTAPERETRIEVETASKS subparameter of the STORAGEGROUP parameter for a specific Object or Object Backup storage group) cannot exceed the global maximum number of tape retrieve tasks specified with the MAXTAPERETRIEVETASKS parameter of the SETOAM statement. If it does exceed, an error message is issued, and OAM initialization is terminated. If you do not specify this subparameter on any SETOAM statement, the OAM default is 1.

SGMAXTAPESTORETASKS(*tasks*)
An optional parameter that you can specify at the storage group level only. This keyword is identical to the MAXTAPESTORETASKS keyword when specified at a storage group level. This keyword SGMAXTAPESTORETASKS is the preferred naming convention, however the keyword MAXTAPESTORETASKS is maintained for legacy compatibility.

SGMAXTAPESTORETASKS(*tasks*) and its alternate MAXTAPESTORETASKS(*tasks*) provide an optional subparameter of the STORAGEGROUP parameter that specifies the maximum number of tape drives used for writing objects to tape volumes belonging to a specific Object or Object Backup storage group. This parameter specifies the maximum number of tasks within the OAM address space that can concurrently write objects to tape volumes belonging to the Object or Object Backup storage group specified with the STORAGEGROUP parameter. This subparameter and the SGMAXTAPERETRIEVETASKS subparameter control the maximum number of tape drives that can be concurrently allocated to the OAM address space for writing to and reading from tape volumes belonging to the specified Object or Object Backup storage group. For tasks, specify a decimal number between 1 and

100. The value specified with the SGMAXTAPESTORETASKS keyword (or the MAXTAPESTORETASKS subparameter of the STORAGEGROUP parameter for a specific Object or Object Backup storage group), cannot exceed the global maximum number of tape store tasks specified with the MAXTAPESTORETASKS parameter of the SETOAM statement. If it does exceed, an error message is issued, and OAM initialization is terminated.

TAPEUNITNAME(*unitname***)**
A required subparameter of the STORAGEGROUP parameter that specifies the type of tape drive that OAM uses when writing data to or reading data from an Object or Object Backup storage group. This TAPEUNITNAME is the MVS unit name that OAM uses to initially allocate a scratch tape when an object is stored to this Object or Object Backup storage group and stored on a tape volume. For *unitname*, specify the name of a valid MVS esoteric (group of devices defined to a group name) or a generic unit name. Valid generic unit names are:

- 3480—a base 3480 device
- 3480*x*—a 3480 device with the IDRC feature, or a base 3490 device
- 3490—a 3490E device
- 3590-1—a 3590 device (or a device that emulates a 3590-1)

The unit name specified is associated with each tape volume used for output during the process of writing objects to tape that belong to a specified Object or Object Backup storage group. This unit name is saved in the corresponding rows in the TAPEVOL table for each of these tape volumes, and is used during later allocations of these tape volumes for either reading or writing processing.

TAPEUNITNAME is a required keyword, and is specified for all allocations. In the automated tape library dataservers and manual tape libraries, this information might be used by the ACS filter routines, but is not required for device allocation. In the stand-alone environment, this information is **critical** in the allocation decision making process.

Notes:

1. Even though a tape unit name is specified for the group, the ACS routines (for environment ALLOC), can override the TAPEUNITNAME specification by assigning the allocation to a Tape storage group, thereby steering the allocation into an ATLDS or an MTL.
2. When OAM requests a mount for a generic tape with a TAPEUNITNAME of 3480, it accepts the 3480 tape drive chosen regardless of whether that tape drive has IDRC. MVS Allocation does not use the JCL or dynamic allocation parameter for compaction when determining device eligibility. If tape compaction is requested, and the tape is mounted on a 3480 tape drive that does not have IDRC, allocation fails. To prevent this failure, OAM does not allow tape compaction with a generic TAPEUNITNAME of 3480. OAM uses the NOTAPECOMPACTION keyword with all data for this TAPEUNITNAME.

Using Esoteric Unit Names: To ensure that objects written on any drive in the esoteric group can be read on any drive in the same esoteric group, OAM does not allow a mixed esoteric unit name that consists of different device types; for example, 3590-1 and 3490E. Avoid using an esoteric unit name that consists of tape drives that write in different recording technologies; for example, a 3590 Model H and a 3590 Model E. Depending on which emulation mode is being used, both

drives appear as though they have the same device type (3590-1 or 3490E). However, the read/write request might fail if MVS allocation selects an incompatible tape drive.

DATACLASS(*name*)
An optional subparameter of the STORAGEGROUP parameter that specifies the SMS data class to be associated with this Object or Object Backup storage group. Usage of the DATACLASS keyword on the SETOAM statement allows an installation to affect things such as, TDSI, and the tape volume expiration date on an individual Object or Object Backup storage group level. If you do not specify DATACLASS on the SETOAM statement for a *specific* storage group, but you do specify DATACLASS at the global level of the SETOAM statement, the global OAM DATACLASS specification applies to the specific storage group.

In an IBM tape library environment, specify the SETOAM DATACLASS parameter using a data class that contains the new media type or recording technology. In addition, you can specify DATACLASS to take advantage of performance scaling for the 3592 Model J in an IBM tape library environment and also in the stand-alone environment. Use the performance scaling attribute in the data class to improve the random retrieval rate of primary objects in Object storage groups. For objects written to Object Backup storage groups, you can specify a data class that does not specify performance scaling so that you can use the full capacity of the volume.

Recommendation: Do not allow ACS routines to assign or change the data class assignment of an OAM tape volume. The data class for OAM tape volumes is determined by the SETOAM statement of the CBROAM*xx* PARMLIB member at MVS scratch tape allocation. The SETOAM statement provides this information at the storage group level or at the OAM global level, and it best suits the requirements for the tape volume being allocated. Allowing ACS routines to alter this specification could create unexpected consequences (for example, no compaction of the data when the SETOAM statement specified compaction). It is your installation's responsibility to write ACS routines to not alter the data class construct for OAM tape volumes.

DEMOUNTWAITTIME(*seconds*)
An optional subparameter of the STORAGEGROUP parameter. It specifies the time, in seconds, that OAM waits before demounting and deallocating a tape drive (allocated for the storage group specified with the STORAGEGROUP parameter), that OAM is currently not using. For *seconds*, specify a decimal number between 1 and 9999. When the time interval expires, OAM rewinds and unloads the currently mounted tape cartridge and demounts and deallocates the device. The default for this optional parameter is 120 seconds.

Some circumstances might affect how this parameter is enforced:
- If a new tape drive allocation request arrives and OAM has already used the maximum number of tape drives (MAXTAPERETRIEVETASKS + MAXTAPESTORETASKS), then OAM ignores the DEMOUNTWAITTIME and deallocates this drive to allocate another.
- If OAM is canceled, a DEMOUNT occurs, and DEMOUNTWAITTIME is ignored.
- If a request to vary the drive offline is sent while the DEMOUNTWAITTIME is in effect for that drive in an OAM session, the drive cannot vary offline until the specified DEMOUNTWAITTIME elapses.

- If OAM finishes reading and writing to a tape before the DEMOUNTWAITTIME elapses, a demount, unload, rewind, or release of the allocated drive cannot take place until the specified DEMOUNTWAITTIME is complete.

MAXTAPERETRIEVETASKS(*tasks*)
An optional subparameter of the STORAGEGROUP parameter that specifies the maximum number of tape drives used for reading objects from tape volumes belonging to a specific Object or Object Backup storage group. This parameter specifies the maximum number of tasks within the OAM address space that can concurrently read objects from tape for the storage group specified with the STORAGEGROUP parameter. This subparameter and the MAXTAPESTORETASKS subparameter control the maximum number of tape drives that can be concurrently allocated to the OAM address space for reading from and writing to tape volumes belonging to the specified Object or Object Backup storage group. For *tasks*, specify a decimal number between 1 and 100.

The value specified with the MAXTAPERETRIEVETASKS *subparameter* of the STORAGEGROUP parameter for a specific Object or Object Backup storage group cannot exceed the global maximum number of tape retrieve tasks specified with the MAXTAPERETRIEVETASKS *parameter* of the SETOAM statement. If it does, an error message is issued, and the SETOAM statement is rejected. If you do not specify this subparameter on any SETOAM statement, the OAM default is 1.

MAXTAPESTORETASKS(*tasks*)
An optional subparameter of the STORAGEGROUP parameter that specifies the maximum number of tape drives used for writing objects to tape volumes belonging to a specific Object or Object Backup storage group. This parameter specifies the maximum number of tasks within the OAM address space that can concurrently write objects to tape volumes belonging to the Object or Object Backup storage group specified with the STORAGEGROUP parameter. This subparameter and the MAXTAPERETRIEVETASKS subparameter control the maximum number of tape drives that can be concurrently allocated to the OAM address space for writing to and reading from tape volumes belonging to the specified Object or Object Backup storage group. For *tasks*, specify a decimal number between 1 and 100.

The value specified with the MAXTAPESTORETASKS *subparameter* of the STORAGEGROUP parameter for a specific Object or Object Backup storage group, cannot exceed the global maximum number of tape store tasks specified with the MAXTAPESTORETASKS *parameter* of the SETOAM statement. If it does, an error message is issued, and the SETOAM statement is rejected.

Requirement: To use more than one tape drive for a storage group to write object data to tape, the TAPEDRIVESTARTUP threshold must be low enough to trigger the startup of the additional tape drive. This threshold is a value (in megabytes) of write data pending for this storage group. See the discussion concerning TAPEDRIVESTARTUP on page 118 for more information.

TAPECOMPACTION | NOTAPECOMPACTION
Specify either the optional TAPECOMPACTION or NOTAPECOMPACTION subparameter of the STORAGEGROUP parameter. These parameters specify whether the objects for this storage group are to be written in compacted or noncompacted format. See Table 22 on page 117 for an example of this selection process.

TAPECOMPACTION specifies that the compaction feature of the tape drive is enabled when OAM is writing objects to tape which belong to the specified

Object or Object Backup storage group. This parameter is ignored if the unit name specified with the TAPEUNITNAME parameter is a mixed esoteric group.

If you specify an esoteric unit name for a mixed esoteric group that consists of at least one IBM 3480 tape drive without the IDRC feature and one IBM 3480 or 3490 tape drive with the IDRC feature, the TAPECOMPACTION keyword is ignored and the NOTAPECOMPACTION keyword is assumed.

To enable tape compaction, perform one of the following tasks as appropriate:

- Specify the TAPECOMPACTION keyword on the SETOAM statements in the CBROAM*xx* PARMLIB member.
- Omit the TAPECOMPACTION and the NOTAPECOMPACTION keywords on the SETOAM statements in the CBROAM*xx* PARMLIB member and specify a DATACLASS on the SETOAM statement. In the definition of the data class (specified with the DATACLASS keyword on the SETOAM statement), specify a COMPACTION option of "YES".
- Omit the TAPECOMPACTION and NOTAPECOMPACTION keywords on the SETOAM statements in the CBROAM*xx* PARMLIB member and do not specify a DATACLASS keyword on the SETOAM statements. Instead, specify the COMPACT=YES option in the DEVSUP*xx* PARMLIB member processed during IPL.

NOTAPECOMPACTION specifies that the compaction feature of the tape drive is disabled when OAM is writing objects to tape belonging to the specified Object or Object Backup storage group.

If you do not specify this subparameter on any SETOAM statement, the OAM default for the specified Object or Object Backup storage group is determined from the DATACLASS associated with this storage group. To use either tape compaction or no tape compaction, specify the DATACLASS with either TAPECOMPACTION or NOTAPECOMPACTION. If no DATACLASS is associated with this storage group or if the DATACLASS associated with this storage group has a blank TAPECOMPACTION specification, then whether tapes added to this storage group will use the compaction feature is determined by the DEVSUP parameter defaults provided during the allocation process.

Table 22. Example of the TAPECOMPACTION / NOTAPECOMPACTION Selection Process

Was TAPECOMPACTION or NOTAPECOMPACTION specified?	
YES	Do what is specified.
NO	Check data class specification.
Was DATACLASS specified?	
YES	Was compaction either YES or NO? **YES** Do what is specified. **NO** Do what is specified.
NO	DATACLASS was not specified, did not apply, or had a blank compaction specification. Consider the DEVSUP specification.
Is there a DEVSUP specification?	
YES	Do what is specified.
NO	If 3480, NOTAPECOMPACTION used. If 3480*x* or 3490, TAPECOMPACTION used. If 3590-1, TAPECOMPACTION used.

Requirement: If you want to change the TAPECOMPACTION | NOTAPECOMPACTION attribute associated with the storage group and you want OAM to only write data in the new format, you must update the tape volume table using the MODIFY OAM,UPDATE,VOLUME,*volser*,WRITABLE,N command (or by using SPUFI while the OAM address space is not active) to mark the existing tape volumes in the storage group unwritable. You can update the SETOAM TAPECOMPACTION parameter by using the MODIFY OAM,UPDATE,SETOAM,*scope*,TCOMP,Y command or by updating the CBROAM*xx* member of PARMLIB and restarting the OAM address space.

TAPEDRIVESTARTUP(*threshold in megabytes***)**
An optional subparameter of the STORAGEGROUP parameter that specifies the drive startup threshold used for writing objects to tape volumes belonging to a specific Object or Object Backup storage group. The parameter indicates when OAM is to start the use of another tape drive for writing objects to tape volumes belonging to the storage group specified with the STORAGEGROUP parameter. When the number of MB of object data waiting to be written to tape is divided by the number of tape drives currently writing object data to tape exceeds the threshold specified by *threshold in megabytes*, OAM attempts to use another tape drive to write object data to the specified Object or Object Backup storage group.

However, the maximum number of tape drives being used by OAM to write object data to a specific Object or Object Backup storage group is limited by the value specified with the MAXTAPESTORETASKS subparameter of the STORAGEGROUP parameter on the SETOAM statement. The limit specified with this subparameter will never be exceeded.

Additionally, the maximum number of tape drives being used by OAM to write object data to all Object or Object Backup storage groups is limited by the value specified with the global MAXTAPESTORETASKS parameter of the SETOAM statement. The limit specified with this parameter will never be exceeded.

For *threshold in megabytes (MB)*, specify a decimal number between 1 and 9999. If you do not specify this subparameter on any SETOAM statement, the OAM default is 9999.

Requirement: Drive startup threshold in an optical environment is determined differently than the threshold in a tape storage environment. See the discussion concerning "DRIVE STARTUP THRESHOLD" on page 153 for more information.

TAPEEXPIRATION(*YYYY/DDD***)**
An optional subparameter of the STORAGEGROUP parameter that specifies the year and date (*YYYY/DDD*) assigned to the data sets on OAM object tape volumes belonging to a specific Object or Object Backup storage group for expiration purposes where:
- *YYYY* is a four-digit number that specifies a year from 1900 through 2155
- *DDD* is a three-digit number that specifies a day from 001 through 366

The TAPEEXPIRATION date for the data sets on the tape volumes belonging to the Object or Object Backup storage group overrides the expiration date defined in the DATACLASS parameter for these data sets.

If you specify the TAPEEXPIRATION date for the data sets on the tape volumes belonging to the specific Object or Object Backup storage group as the current date or a date preceding the current system date, the data sets are considered previously expired and are therefore eligible for immediate

replacement. OAM issues the CBR0317I message to allow you to change the TAPEEXPIRATION value in the SETOAM statement of the CBROAM*xx* PARMLIB member being used, if necessary.

Expiration dates of 1999/365 and 1999/366 are considered “never-scratch” dates. Data sets with these expiration dates are not deleted or written over. Check with your tape management system to determine what ″never-scratch″ date should be specified as the TAPEEXPIRATION date and for other policy-type specifications that are needed in the tape management system to indicate that the tapes and data are being externally managed by OAM. For example, if you are using DFSMSrmm to manage OAM objects on tape, the following vital record specifications, shown in TSO/E format, might be appropriate:

```
RMM ADDVRS DSNAME('OAM.PRIMARY.DATA') COUNT(99999) LOCATION(HOME)
RMM ADDVRS DSNAME('OAM.BACKUP.DATA') COUNT(99999) LOCATION(HOME)
RMM ADDVRS DSNAME('OAM.BACKUP2.DATA') COUNT(99999) LOCATION(HOME)
RMM ADDVRS DSNAME('OPEN') JOBNAME(oamtaskname) COUNT(99999) LOCATION(HOME
RMM ADDVRS DSNAME('ABEND') JOBNAME(oamtaskname) COUNT(99999) LOCATION(HOME)
```

The above DSNAME examples are data set names without DSNWITHSGNAME specified in the SETOAM statement. If DSNWITHSGNAME were specified, the storage group name would be appended as the data set name's low level qualifier. The JOBNAME value is the name of the job and started task for the OAM address space that opens the tape data sets.

TAPEFULLTHRESHOLD(*kilobytes***)**
An optional subparameter of the STORAGEGROUP parameter that specifies a numeric value of 0 through 999 999 representing the number of KB of available free space allowed for each volume belonging to the Object storage group specified in the STORAGEGROUP parameter. When the number of KB of free space for a tape volume falls below the TAPEFULLTHRESHOLD subparameter for the storage group to which that volume belongs, the volume is marked full and is not used for any further write requests. The default value for this parameter is zero.

Recommendation: You should select a threshold value that allows tape volumes to be marked full in a consistent manner. Consider the size of the objects stored, and if the size of the objects is consistent, select a threshold value for the storage group that is slightly larger than that size. If volumes are not being selected for new objects and they are not being marked full, increase the value of this parameter.

During OAM initialization, the tape volume full status is checked with the TAPEFULLTHRESHOLD subparameter to determine the volume’s free space and the TAPEPERCENTFULL subparameter to determine the volume’s percent full status. The volume full status is changed from full to not full if:

- Free space for the volume is greater than the TAPEFULLTHRESHOLD subparameter value and the volume percent full value is less than the TAPEPERCENTFULL subparameter.

The volume full status is changed from not full to full if:

- Free space for the volume is less than or equal to the TAPEFULLTHRESHOLD subparameter value or the volume percent full value is equal to or greater than the TAPEPERCENTFULL subparameter value.

TAPEPERCENTFULL(*percent***)**
An optional subparameter of the STORAGEGROUP parameter that specifies

the percent full utilization used for writing objects to tape volumes belonging to a specific Object or Object Backup storage group. This parameter indicates at what percent of utilization OAM stops writing objects to tape volumes belonging to the storage group specified with the STORAGEGROUP parameter on the SETOAM statement.

When the tape volume utilization percentage for a tape volume belonging to an Object or Object Backup storage group reaches or exceeds the threshold specified by *percent*, OAM stops writing objects to the tape volume. The tape volume is marked full and another tape volume belonging to the specified Object or Object Backup storage group is selected for the continuation of writing objects to that storage group. If there are no tape volumes in the storage group with enough space to accommodate the object to be written, or if TAPEDRIVESTARTUP processing is attempting to start an additional tape drive and an additional scratch tape is required to start that drive, an OAM scratch tape is added to the group. If there are no OAM scratch tapes available, then an MVS scratch tape is requested and added to the Object or Object Backup storage group.

For *percent*, specify a decimal number between 1 and 100. If you do not specify this subparameter on any SETOAM statement, the OAM default is 100.

The TAPEPERCENTFULL subparameter is retroactive for the Object and the Object Backup storage groups defined in the ACDS. Whenever OAM is started and the TAPEPERCENTFULL for an Object or Object Backup storage group which is currently defined in the ACDS has been changed since the last time OAM was started, that new TAPEPERCENTFULL value is applied to all tapes which currently belong to the subject STORAGEGROUP. This situation means that several changes might be made to the tape volume table rows for the volumes in the storage group:

- The free space (FRESPACE) for a volume might increase or decrease depending on whether the TAPEPERCENTFULL is increased or decreased.
- The volume full indicator (FULL) might change from full to not full, or from not full to full, depending on whether the TAPEPERCENTFULL is increased or decreased.

The adjustment is made to all affected tapes regardless of whether the tapes were previously marked full, unreadable, or unwritable. If new volumes are added to the storage group, they conform to the new TAPEPERCENTFULL value specified on the SETOAM statement that is being used for the current OAM initialization.

Requirement: If you modify the TAPEPERCENTFULL value using the MODIFY OAM,UPDATE command, a volume you have marked full might be subsequently marked not full. This is because the volume's current tape full percentage is less than the value of the TAPEPERCENTFULL parameter on the SETOAM statement. If you intend to mark the volumes in an Object or Object Backup storage group as full, then you must increase the value of the volume's percent full value (PFULL) to 100.

NOT Programming Interface information

Note: OAM can mark a tape volume full when:

- An 18-track tape reaches sector 69.
- A 36-track tape reaches sector 1 on the second wrap. This is done to prevent OAM from falling into EOV processing.

End of NOT Programming Interface information

For optical storage, specify the volume full threshold parameter to determine the threshold value for an optical volume. See "VOLUME FULL THRESHOLD" on page 154 for information on the volume full threshold parameter for optical volumes.

SETOPT Statements for Use in an Optical Environment

The SETOPT statement and its associated keywords of the CBROAM*xx* PARMLIB member define rules at a global and storage group level used by OAM in an optical environment.

Requirement: Creating or updating the CBROAM*xx* PARMLIB member with SETOPT statements is required to return rewritable optical volumes to a common scratch pool or to reinitialize the volumes to their original storage group affiliation.

Related reading: See "Using the UPDATE Command to Set SETOAM, SETOSMC, and SETOPT Values" on page 368 for information on changing the SETOPT values dynamically or on defining the values when the CBROAM*xx* PARMLIB member is not used at initialization.

Sample SETOPT Statement

Figure 14 shows examples of SETOPT statements in the CBROAM*xx* PARMLIB member that can be used as samples for your installation. The descriptions of each of the keywords are found in the discussion of the SETOPT statement (see "SETOPT Keyword Definitions" on page 122).

```
SETOPT OPTICALREINITMODE(GROUP)
       OPTICALDISPATCHERDELAY(4)
       MOUNTWAITTIME(3)
       UNLOADDRIVES(6)
       UNLOADTIMER(120)
       STORAGEGROUP(GROUP02)
       STORAGEGROUP(GROUP01 OPTICALREINITMODE(GROUP))

              OR

SETOPT OPTICALREINITMODE(GROUP)
       OPTICALDISPATCHERDELAY(3)
       SCRENTRYTHRESHOLD(5000)
       STORAGEGROUP(GROUP02 OPTICALREINITMODE(OAMSCRATCH))
```

Figure 14. CBROAMxx PARMLIB Member Samples Using the SETOPT Statement and Optional Parameters

Rule: If you specify the STORAGEGROUP option, you *must* also specify *objectstoragegroup*. All other parameters under STORAGEGROUP are optional.

The syntax for the SETOPT statement follows.

SETOPT Statement Syntax: OAM Global Level Parameters

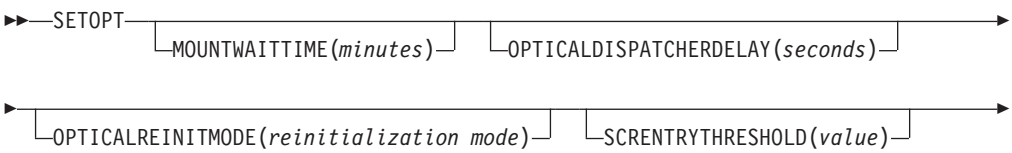

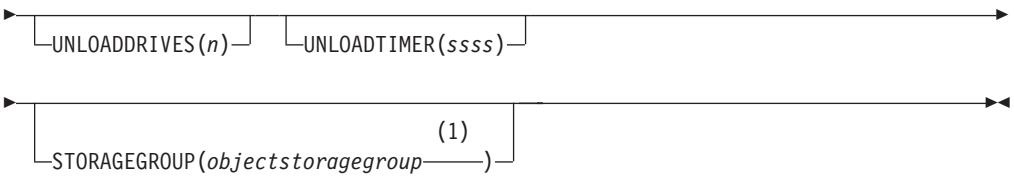

Notes:

1 See STORAGEGROUP Subparameters

SETOPT Statement Syntax: STORAGEGROUP Subparameters



SETOPT Keyword Definitions

The following keywords are defined as they pertain to the OAM SETOPT statement.

MOUNTWAITTIME

Specifies the amount of time (in minutes) that can pass while a volume is waiting to be mounted on an operator-accessible drive within an optical library. After this time has expired, message CBR4426D is issued to allow the operator to retry or to cancel the volume mount request.

This value can be any numeric value from 1 to 9999. If the operator retries the mount request, the value specified in the MOUNTWAITTIME parameter is used for the retry. The default value of this parameter is five minutes.

Because this parameter can be changed dynamically, the new value assigned to the MOUNTWAITTIME is used for any currently executing volume mount request. The time of the initial mount request is compared to the value specified in the MOUNTWAITTIME parameter and is deducted from the specified parameter value. For example, if a volume mount request has been waiting for one minute and the MOUNTWAITTIME is changed to indicate a wait time of two minutes from a previous value of three, the volume mount request has only have one more minute to finish before CBR4426D is issued. If a retry is requested after CBR4426D is issued, and the MOUNTWAITTIME is dynamically changed after the reply to retry the request, the minutes specified in the MOUNTWAITTIME parameter are compared to the time of the most recent reply to this message to determine the exact wait time.

OPTICALDISPATCHERDELAY

Specifies the number of seconds that the OAM optical dispatcher is to delay processing of certain requests to minimize flipping of optical disk cartridges in an automated optical storage library. The OAM optical dispatcher delays processing of a unit of work for a specific period of time, when ALL of the following conditions are true:

- A read request for an object on a currently mounted optical disk volume has just been completed.
- No request for the currently mounted optical disk volume is waiting to be processed on the OAM optical dispatcher queue.
- The OAM optical dispatcher has found a read request for another optical disk volume (either the opposite side of the currently mounted volume or for an unmounted optical disk volume) and is about to dispatch this unit of work.

- A nonzero optical dispatcher delay value has been specified with the OPTICALDISPATCHERDELAY keyword on the SETOPT statement in the CBROAM*xx* PARMLIB member.

In this situation, the OAM optical dispatcher delays the dispatching of this selected unit of work (for the number of seconds specified by the installation) expecting that another read request for the currently mounted optical disk volume will arrive within this delay interval. The OAM optical dispatcher delays dispatching of the selected unit of work for up to the number of seconds specified with the OPTICALDISPATCHERDELAY keyword on the SETOPT statement in the CBROAM*xx* PARMLIB member.

If another read request for the currently mounted optical disk volume arrives within the delay interval, that unit of work is dispatched immediately upon arrival. If no read request for the currently mounted optical disk volume arrives within the delay interval another request for a different optical disk volume (either the opposite side of the currently mounted optical disk volume or an unmounted optical disk volume) is dispatched.

You can use the OPTICALDISPATCHERDELAY value to circumvent a performance problem when IBM optical disk libraries (IBM 3995 optical libraries) are used with certain microfiche replacement applications. The problem involves the constant servicing of requests for data on both sides of an optical disk cartridge resulting in the cartridge being constantly flipped over to access data on the opposite side of the optical disk cartridge. This constant flipping of the cartridge results in longer response times for requests to read data from each side of the optical disk cartridge.

Valid value *seconds* specifies the number of seconds that the OAM optical dispatcher is to delay dispatching of specific units of work under the circumstances described above. Valid values for seconds is a decimal number between 1 and 60. If you need to use this parameter, use a low value between 1 and 5.

OPTICALREINITMODE

Specifies reinitialization mode for rewritable optical cartridges. The following values are valid:

GROUP

Expired rewritable optical cartridges remain assigned to the original Object or Object Backup storage group when reinitialized. This option is the default.

OAMSCRATCH

Expired rewritable optical cartridges revert to *SCRTCH* storage group when reinitialized. These cartridges are available to be reassigned to any Object or Object Backup storage group.

Use the OPTICALREINITMODE keyword to determine whether an optical cartridge at reinitialization should maintain its storage group affiliation or revert to a scratch storage group. A cartridge's reinitialization mode is set according to any OPTICALREINITMODE option in effect when OSMC Shelf Space Manager selects the cartridge for reinitialization, not according to the options in effect when the optical cartridge is physically reinitialized.

When the MOVEVOL command with the RECYCLE option completes and all of the objects have been successfully moved off of the optical volumes, the volumes are either assigned to their current Object or Object Backup storage group or returned to OAM scratch, depending on the SETOPT

OPTICALREINITMODE statement that is specified in the CBROAM*xx* member of PARMLIB. When an optical volume is returned to OAM scratch, it is available to be reassigned to any Object or Object Backup storage group. Rewritable optical media is marked for reinitialization and the cartridge is physically reformatted the next time that the cartridge is mounted on a drive to reclaim the used space on the cartridge. WORM optical media is not physically reformatted because the used space cannot be reclaimed on WORM media.

To understand how the OPTICALREINITMODE keyword affects the optical volumes at reinitialization, it is important to understand the reinitialization process itself. The following information gives you a overview of the process.

An optical media cartridge contains two logical optical disk volumes, each optical volume is assigned a unique volume serial number (*volser*). The optical media types are either WORM or rewritable.

Shelf Space Manager (a component of OSMC) processes expired optical disk cartridges as follows:

- For WORM cartridges:
  - If all objects on both *volsers* have been deleted and both *volsers* are full and no objects have been written to this cartridge in the past 24 hours, then the cartridge is ejected if it is library-resident. Message CBR2153I is issued to inform the installation that all of the objects on the WORM cartridge were expired and the cartridge was removed from the OAM Optical Configuration Database (OCDB). The WORM cartridge no longer contains valid data; you can dispose of it according to federal, state, and local laws.
- For rewritable cartridges:
  - If all objects on both *volsers* are deleted and no objects were written to this cartridge in the last 24 hours, then the volume empty (VOLEMPTY) indicators in the OAM volume table in the OCDB for both *volsers* contained in the cartridge are set to indicate that the cartridge is ready to be reinitialized. Message CBR2154I is issued to inform the installation that this rewritable cartridge will be reinitialized the next time it is mounted on an optical drive.
- For all cartridges:
  - The expiration date needs to be the current day or earlier.

Tip: You can use the MODIFY OAM,UPDATE,VOLUME command to update the volume expiration date. See “Updating Fields in the DB2 Volume Table and the Tape Volume Table” on page 377 for more information on this command.

When a rewritable optical cartridge that is selected by Shelf Space Manager for reinitialization is mounted, both sides of the cartridge are reformatted. The volumes on the reformatted cartridge retain their original volume serial numbers. With the SETOPT statements, you can specify whether the reinitialized cartridge should maintain its storage group affiliation (default) or revert to the scratch storage group.

SCRENTRYTHRESHOLD
Specifies the amount of free space, in KB, that will determine a WORM optical volume’s eligibility to be assigned as a scratch volume. If a new WORM optical volume has less free space than specified, a message is issued to validate the entry or labeling of the volume as a scratch cartridge. The default value is 0.

UNLOADDRIVES
Specifies that the number of optical drives specified by *n* are desired to be empty, unloading drives if necessary, when the value of UNLOADTIMER has been reached. *n* is a numeric value from 1 to 6. This keyword can be specified at the global level only.

UNLOADTIMER
Specifies the period of inactivity, in seconds, to wait before unloading the optical drives specified in UNLOADDRIVES. *ssss* is a numeric value from 1 to 9999. This keyword can be specified at the global level only.

STORAGEGROUP
Specifies the name of an Object or Object Backup storage group that was previously defined using ISMF. This is the name of the storage group to which the following subparameters apply.

OPTICALREINITMODE
Reinitialization mode for rewritable optical cartridges belonging to this Object or Object Backup storage group. If this keyword is not specified for a given storage group, the reinitialization mode for rewritable optical cartridges belonging to that storage group is set per the OPTICALREINITMODE set at the global level.

A cartridge's reinitialization mode is set according to any OPTICALREINITMODE option in effect when OSMC Shelf Space Manager selects the cartridge for reinitialization—not according to the options in effect when the optical cartridge is physically reinitialized.

Valid values for the OPTICALREINITMODE option are:

GROUP
Expired rewritable optical cartridges remain assigned to the original Object or Object Backup storage group when reinitialized. This option is the default.

OAMSCRATCH
Expired rewritable optical cartridges belonging to this Object or Object Backup storage group revert to *SCRTCH* storage group when reinitialized. These cartridges are available to be reassigned to any Object or Object Backup storage group.

SETOSMC Statements for Use in the OSMC Environment

The SETOSMC statement and its associated keywords of the CBROAM*xx* PARMLIB member determine the valid values of settings for various OSMC processing. They associate an Object storage group with the Object Backup storage groups that store the first or second backup copies of objects. The SETOSMC statement determines which Object Backup storage groups are to contain the first and second copies of the objects that are associated with an Object storage group. If you do not provide global or a storage group level SETOSMC SECONDBACKUPGROUP(secondbackupgroupname) statement, OAM cannot create second backup copies.

You can create or update this PARMLIB member for second backup copies of objects. Figure 15 on page 126 shows examples of SETOSMC statements in the CBROAM*xx* PARMLIB member that you can use as samples for your installation. You can specify both the STORAGEGROUP subparameters FIRSTBACKUPGROUP and SECONDBACKUPGROUP in a single SETOSMC STORAGEGROUP statement, as shown in the second example in Figure 15 on page 126. The descriptions of the keywords are found in the discussion of the "SETOSMC Keyword Definitions" on page 126.

Related reading: For information about dynamically updating SETOSMC parameters, see "Updating SETOSMC Values" on page 373.

```
SETOSMC FIRSTBACKUPGROUP(global_1st_bugroup)
        SECONDBACKUPGROUP(global_2nd_bugroup)
        STORAGEGROUP(objsg
                     FIRSTBACKUPGROUP(1st_bugrp))
        STORAGEGROUP(objsg
                     SECONDBACKUPGROUP(2nd_bugrp))
        CYCLEWINDOW(STARTSTOP)

              OR

SETOSMC STORAGEGROUP(objsg
                     FIRSTBACKUPGROUP(1st_bugrp)
                     SECONDBACKUPGROUP(2nd_bugrp))
```

Figure 15. CBROAMxx PARMLIB Member Samples Using the SETOSMC Statement and Optional Parameters

Note: You can use the SETOSMC statement at both the global level and at the storage group level. If you specify parameters without an *objsg* name, OAM provides the defaults for all Object storage groups in the configuration. If you specify parameters with an *objsg* name, OAM provides the specific Object Backup storage groups to be used for that Object storage group's backup copies.

The syntax for the SETOSMC statement follows.

SETOSMC Statement Syntax: OAM Global Level Parameters

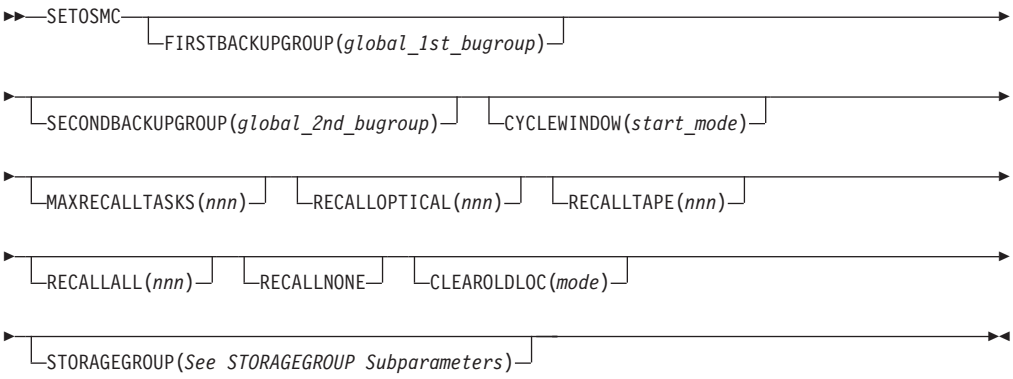

SETOSMC Statement Syntax: STORAGEGROUP Subparameters

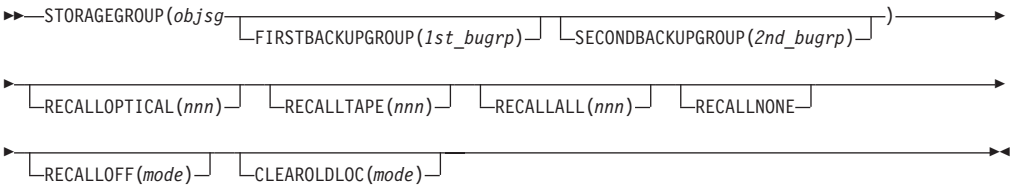

SETOSMC Keyword Definitions

The following keywords are defined as they pertain to the CBROAM*xx* PARMLIB member SETOSMC statement:

FIRSTBACKUPGROUP(*global_1st_bugroup***)**
Specifies the default Object Backup storage group that OSMC uses to store the first backup copy of objects when:

- The Object storage group to which the object belongs is not specified in a SETOSMC statement on the FIRSTBACKUPGROUP parameter, and
- The management class that is assigned to the object specifies that a backup copy is to be written.

SECONDBACKUPGROUP(*global_2nd_bugroup***)**
Specifies the default Object Backup storage group that OSMC uses to store the second backup copy of objects when:

- The Object storage group to which the object belongs is not specified in a SETOSMC statement on the SECONDBACKUPGROUP parameter, and
- The management class that is assigned to the object specifies that more than one backup copy is to be written.

CYCLEWINDOW(*start_mode***)**
Specifies the start window mode for the OSMC storage management cycle for a given Object or Object Backup storage group. You can choose either the default STARTONLY mode or the STARTSTOP mode for the CYCLE START and CYCLE STOP times. The START/ONLY mode defines only the start time for processing the storage group. The START/STOP mode defines both the start and end times for processing the storage group. You can use this keyword at the global level only. The CYCLEWINDOW keyword is valid for storage groups that were started automatically.

To start the storage management cycle for an Object storage group automatically, specify the Cycle Start Time, End Time, and OSMC Processing System fields in the ISMF Object Storage Group Define/Alter panel. For an Object Backup storage group, specify the Cycle Start Time, End Time, and OSMC Processing System fields in the ISMF Object Backup Storage Group Define/Alter panel.

Restriction: If you manually start the storage management cycle by issuing one of the following commands, the CYCLEWINDOW mode and the start and stop times for the storage group cycle are ignored:

- MODIFY OAM,START,STORGRP,*group_name*
- MODIFY OAM,START,OSMC

STARTONLY
Uses the storage group's defined cycle start and end times as a start window only. OSMC starts processing the storage group at the defined start time. If you initialize OSMC before or during the times that this start window specifies, processing for that storage group completes, regardless of how much time it takes. If you omit the CYCLEWINDOW parameter, STARTONLY is the default mode.

STARTSTOP
Uses the storage group's defined cycle start and end times to automatically begin processing that storage group. OSMC starts processing the storage group at the defined start time and stops processing the storage group at the defined end time. Processing stops in the same way as if you had issued a STOP command for that storage group. No new work is scheduled, and all work in progress is allowed to complete.

STORAGEGROUP(*objsg*)
Specifies the name of an Object storage group that was previously defined using ISMF. This is the name of the storage group to which the following subparameters apply:

FIRSTBACKUPGROUP(*1st_bugrp*)
Specifies the Object backup group to which the first backup copy of an object belonging to *objectstoragegroup* is directed when that object is associated with a management class that specifies that a backup copy is to be written.

SECONDBACKUPGROUP(*2nd_bugrp*)
Specifies the Object backup group to which the second backup copy of an object belonging to *objectstoragegroup* is directed when that object is associated with a management class that specifies that more than one backup copy is to be written.

MAXRECALLTASKS(*nnn*)
Specifies the maximum number of RECALL tasks that can be run concurrently. Valid values are 0–255. The default is 0. A value of 0 indicates that no RECALL operations are to be run. This applies to both implicit (recalls through SETOSMC enablement) and explicit (recalls through OSREQ macro requests with the RECALL keyword) recalls.

RECALLOPTICAL(*nnn*)
Specifies that objects residing on optical devices are recalled to DB2 for *nnn* days when retrieved. Valid values are 0–255. The default is 0. The object's pending action date in the object directory is set to today's date + the number of days specified in *nnn*. A value of 0 indicates that the RECALL is for the current day only. On the next OSMC cycle the object is restored to removable media. This applies to implicit recalls only. This keyword can be specified at the global level or at the storage group level.

RECALLTAPE(*nnn*)
Specifies that objects residing on tape devices are recalled to DB2 for *nnn* days when retrieved. Valid values are 0–255. The default is 0. The object's pending action date in the object directory is set to today's date + the number of days specified in *nnn*. A value of 0 indicates that the RECALL is for the current day only. On the next OSMC cycle the object is restored to removable media. This applies to implicit recalls only. This keyword can be specified at the global level or at the storage group level.

RECALLALL(*nnn*)
Specifies that objects residing on optical or tape devices are recalled to DB2 for *nnn* days when retrieved. Valid values are 0–255. The default is 0. The object's pending action date in the object directory is set to today's date + the number of days specified in *nnn*. A value of 0 indicates that the RECALL is for the current day only. On the next OSMC cycle the object is restored to removable media. This applies to implicit recalls only. This keyword can be specified at the global level or at the storage group level.

RECALLNONE
Specifies that objects residing on optical or tape devices are not recalled to DB2 when retrieved. This applies to implicit recalls only. This keyword can be specified at the global level or at the storage group level.

RECALLOFF(*mode*)
Specifies whether objects residing on tape or optical devices are to be recalled to DB2 when retrieved. This keyword can be specified at the storage group level only, and allows recall processing to be disabled at the storage group

level regardless whether the RECALL parameter is specified on the OSREQ RETRIEVE request. This keyword applies to both implicit and explicit recalls. Valid values for *mode* are:

OFF
Explicit and implicit recalls are enabled. This is the default.

ON
Explicit and implicit recalls are disabled.

CLEAROLDLOC(*mode***)**
Specifies whether OAM is to retain the original volume location information when OSMC processing transitions objects from optical or tape media to DB2 DASD. Values for *mode* are:

OPT
Specifies that previous volser and sector location values be cleared in the object directory when an optical object transitions from optical media to DB2.

TAPE
Specifies that previous volser and blockid location values be cleared in the object directory when an optical object transitions from tape media to DB2.

BOTH
Specifies that previous volser and sector or blockid location values be cleared in the object directory when an optical or tape object transitions from tape or optical media to DB2.

NONE
This is the default. Specifies that previous volser and sector or blockid location values be left unchanged in the object directory when an optical object transitions from tape or optical media to DB2.

Old location values are cleared only when an object transitions from optical or tape to DB2 DASD during an OSMC cycle. The old location values are not cleared when an object is recalled to DB2 DASD, even if CLEAROLDLOC is active.

OAMXCF Statements in an OAMplex

To use OAM in a Parallel Sysplex, in which multiple OAMs share a common DB2 database and communicate between instances of OAM, it is necessary for each instance of OAM that is to be part of an OAMplex to join an XCF group. Creating or updating the CBROAM*xx* PARMLIB member to include the OAMXCF statements is required to assign OAM instances to an XCF group. Each OAM that joins the group must supply the XCF group name and a member name for that instance of OAM in the sysplex. Keywords for the OAMXCF statement for that instance of OAM in the OAMplex are provided in the CBROAM*xx* PARMLIB member that allow specification of the XCF group and member name to become part of the XCF group. All instances of OAM that join the same XCF become an OAMplex. The scope of the OAMplex must match the scope of the DB2 sharing group. See “Using the UPDATE Command to Set OAMXCF Values” on page 376 for information on changing the OAMXCF values dynamically and on defining the values when the CBROAM*xx* PARMLIB member is not used at initialization.

In the Parallel Sysplex, using transaction shipping through XCF, it is possible for a transaction to take too long to complete or for a response to never be returned for completion. OAM fails requests after a certain amount of time in order to free a user from a wait state. The XCFTIMEOUT keyword, available in the OAMXCF statement, allows you to customize timeout values for your environment. These

various timeout values (in seconds) specify the length of time that an instance of OAM in the sysplex is to wait for completion of a transaction that was shipped to another instance of OAM in the sysplex. If a response is not received within the specified timeout value, OAM fails the request, returning a nonzero return and reason code to the caller. Many factors determine the expected response time for a transaction, such as optical compared to tape, reads compared to writes, and automated compared to manual environments. OAM provides different timeout values for different transaction types and environments.

Related reading: For the procedure for adding OAMs to an OAMplex, see "Adding OAM Systems to an Existing OAMplex" on page 174.

Figure 17 on page 175 is an example of an OAMXCF statement in the CBROAM*xx* PARMLIB member that can be used as a sample in your installation. The descriptions of these keywords are found in the discussion of the "OAMXCF Keyword Definitions."

The syntax for the OAMXCF statement follows.

OAMXCF Statement Syntax

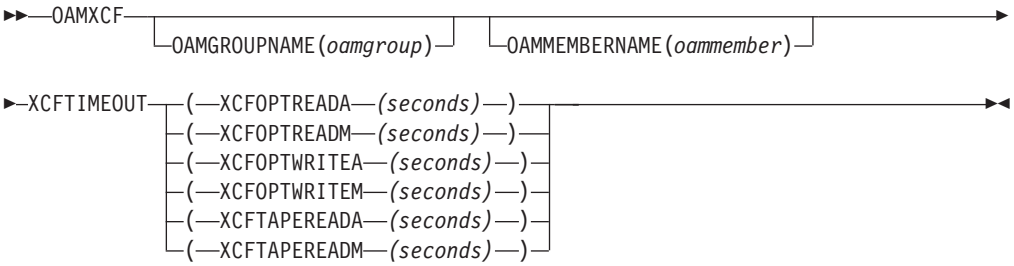

OAMXCF Keyword Definitions

The following keywords are defined as they pertain to OAMXCF statements:

OAMGROUPNAME
Identifies the XCF group name that all instances of OAM within this OAMplex are to join. An XCF group name is 1–8 characters long. Valid characters are A–Z, 0–9, and national characters ($, #, @). If OAMGROUPNAME is specified, then OAMMEMBERNAME becomes a required keyword. If OAMXCF statements exist in the CBROAM*xx* PARMLIB member, both OAMMEMBERNAME and OAMGROUPNAME are required.

OAMMEMBERNAME
Identifies the specific XCF member name that is to be associated with this instance of OAM in the Parallel Sysplex, when this OAM joins the OAM group in the sysplex. An XCF member name is 1–16 characters long. Valid characters are A–Z, 0–9, and national characters ($, #, @). If OAMMEMBERNAME is specified, then OAMGROUPNAME becomes a required keyword. If OAMXCF statements exist in the CBROAM*xx* PARMLIB member, both OAMMEMBERNAME and OAMGROUPNAME are required.

XCFTIMEOUT
Identifies the number of seconds (1 to 999 999) that this instance of OAM waits for a response that indicates the completion of a shipped transaction from another instance of OAM in an OAMplex.

Tip: Seconds=0 indicates that OAM is to wait indefinitely for a shipped transaction completion response from another instance of OAM in the OAMplex. This value is the default. The maximum value is 999 999 seconds, which is approximately 11.5 days.

The following are valid timeout values:

(XCFOPTREADA(*seconds***))**
Indicates the number of seconds that an OAM originating an optical read request, which is shipped to another OAM within the OAMplex that owns the library where the object resides for processing, should wait for completion of the read request.

(XCFOPTREADM(*seconds***))**
Indicates the number of seconds that an OAM originating an optical read request for a shelf-resident volume, which is shipped to another OAM within the OAMplex that owns the library where the object resides for processing, should wait for completion of the read request.

(XCFOPTWRITEA(*seconds***))**
Indicates the number of seconds that an OAM originating an optical write request targeted for an object storage group that contains real (automated) optical libraries, which is shipped to another OAM within the OAMplex that owns the optical library defined to the object storage group for processing, should wait for completion of the write request.

(XCFOPTWRITEM(*seconds***))**
Indicates the number of seconds that an OAM originating an optical write request targeted for an object storage group that contains pseudo libraries, which is shipped to another OAM within the OAMplex that owns the pseudo library defined to the object storage group for processing, should wait for completion of the write request.

(XCFTAPEREADA(*seconds***))**
Indicates the number of seconds that an OAM originating a tape read request targeted for an automated tape library dataserver, which is shipped to another OAM within the OAMplex that owns the library in which the object resides for processing, should wait for completion of the read request.

(XCFTAPEREADM(*seconds***))**
Indicates the number of seconds that an OAM originating a tape read request targeted for an MTL, which is shipped to another OAM within the OAMplex that owns the library in which the object resides for processing, should wait for completion of the read request.

Adding the OAM Object Tape Return to the MVS Scratch Volume Exit Routines to the PROGxx Member

If you are using a tape management system other than DFSMSrmm, then you may need to add the module name of the installation exit routine provided by the tape management system with the OAM Object Tape Return to the MVS Scratch Volume dynamic exit point (CBRUXTVS_EXIT). For example, if your tape management system uses the DFSMShsm Tape Volume Exit (ARCTVEXT), you may specify the following EXIT statement in the PROGxx PARMLIB member:

```
EXIT ADD EXITNAME(CBRUXTVS_EXIT)
MODNAME(ARCTVEXT)
STATE(ACTIVE)
```

You may associate multiple exit routines to the CBRUXTVS_EXIT dynamic exit point by specifying multiple EXIT ADD statements.

Updating the PROCLIB

11 ***Update PROCLIB.***

You must perform this step both for migration and at initial installation.

Sample jobs are provided in SAMPLIB to assist you in making the needed additions to PROCLIB. Before running each SAMPLIB member:

- Update the JOB statement.
- Verify that the system name specified is the same as the name of your DB2 subsystem.
- Ensure that the high-level qualifier on the `//OUT DD JCL` statement matches the naming standard at your installation.

11a ***Modify, if necessary, then run CBRIPROC SAMPLIB job.***

You must perform this step for migration at initial installation.

Change and run SAMPLIB member CBRIPROC (see "CBRIPROC" on page 430) to create member OTIS in PROCLIB.

If the DB2 load module library containing DSNALI is not in the LNKLST concatenation, either include the DB2 load module library in the SYS1.LINKLIB concatenation (LNKLST*xx*) or add a STEPLIB DD to this procedure.

If a STEPLIB is used, then that concatenation must be APF-authorized.

11b ***Modify, if necessary, then run CBRAPROC SAMPLIB job.***

Perform this step **only** *if you need to start the OAM address space. The OAM address space is needed for writing objects to tape or optical storage, or if you are running OSMC for expiration processing. Do* **not** *perform this step if you are using DASD-only storage (no optical volumes or tape devices) and you are not running OSMC.*

If the installation will use OAM objects, modify and run SAMPLIB member CBRAPROC (see "CBRAPROC" on page 430) to create member OAM in PROCLIB.

If you do not modify CBRAPROC, the following member is created as the default:

```
//OAM PROC OSMC=YES,MAXS=2,UNLOAD=9999,EJECT=LRW,RESTART=YES
//IEFPROC EXEC PGM=CBROAM,REGION=0M,
//PARM=('OSMC=&OSMC,APLAN=CBROAM,MAXS=&MAXS,UNLOAD=&UNLOAD',
//      'EJECT=&EJECT,RESTART=&RESTART')
//SYSABEND DD SYSOUT=A
```

If you are storing objects on tape volumes or an OAMplex, you must update this job step to include 'OAM=&OAM', and you must supply the default OAM=*xx* (where *xx* is the low order suffix of your CBROAM*xx* PARMLIB member) specification on the PROC statement as the following example indicates:

```
//OAM PROC OSMC=YES,MAXS=2,UNLOAD=9999,OAM=xx,EJECT=LRW,RESTART=YES
//IEFPROC EXEC PGM=CBROAM,REGION=0M,
//PARM=('OSMC=&OSMC,APLAN=CBROAM,MAXS=&MAXS,UNLOAD=&UNLOAD',
//      'OAM=&OAM,EJECT=&EJECT,RESTART=&RESTART')
//SYSABEND DD SYSOUT=A
```

With the PARM=*keyword*, you can specify values for the following parameters:

APLAN Specifies the name of the DB2 application plan for LCS. CBROAM is the name of the DB2 application plan specified when an SQL BIND command was issued for the LCS optical configuration database request modules (DBRMs).

EJECT Specifies which volumes are ejected from an optical library when the library is full and there is a request to add additional volumes to the library. The valid parameter values on this keyword are as follows:

- LRW—least recently written date for the volume. The volumes are ejected based on how long it has been since an object has been written on the volumes, regardless of how often objects are being read from the volume. The volumes which have the oldest least recently written date are ejected to make room for the additional volumes requested. This is the default parameter.
- LRM—least recently mounted date for the volume. The volumes which are in the slot for the longest time without being mounted are ejected to make room for the additional volumes requested.

MAXS The MAXS parameter in the OAM cataloged procedure specifies the maximum number of Object or Object Backup storage group tasks that can be processed concurrently during an OSMC storage management cycle. If storage management cycles for groups overlap, you can use the MAXS parameter to limit resource consumption. When determining the value for MAXS, take into consideration the number of optical and tape drives that are available for storage management processing to avoid drive contention. If MAXS is not specified, a default of 2 is assigned. See "OAM Cataloged Procedure Parameter (MAXS)" on page 158 for more information about the MAXS parameter.

Requirement: If concurrent processing includes Object storage groups writing to tape volumes, you must specify the correct corresponding (global level) MAXTAPERETRIEVETASKS and MAXTAPESTORETASKS values on the SETOAM statement. For more information concerning these keywords, see MAXTAPERETRIEVETASKS on page 105, and MAXTAPESTORETASKS on page 105.

OAM OAM=*xx* specifies the suffix of the CBROAM*xx* PARMLIB member that OAM should process during OAM address space initialization. The two alphanumeric characters (*xx*) must immediately follow the OAM=*keyword* in the PARM field. If the two characters immediately following the OAM=*keyword* are invalid or not specified, error message CBR0025I is issued. OAM only reads PARMLIB member CBROAM*xx* if the OAM=*keyword* is specified on the PARM field of the JCL EXEC statement in the OAM cataloged procedure. If no OAM=*keyword* is specified on the PARM field of the JCL EXEC statement, no PARMLIB member is read by OAM and object tape storage is not active. If the object tape storage is not active, OAM cannot read any objects back or write any new objects to tape until OAM is initialized with a valid OAM=*xx* specification, and a valid corresponding CBROAM*xx* PARMLIB member. OAM processes PARMLIB member CBROAM*xx* during OAM address space initialization.

OSMC Specifies whether to initialize OSMC when OAM initializes. When YES, OSMC initializes when OAM initializes; when NO, OSMC is

prevented from initializing when OAM initializes. (Operator commands requiring OSMC do not execute; the storage management cycle does not run.)

RESTART Specifies whether OAM should automatically restart when it receives notification that a new SCDS is activated. The valid parameter values on this keyword are as follows:

- **Yes**—If RESTART=YES is specified, when OAM is notified that an SCDS activation has occurred, OAM automatically restarts. This value is the default. How soon OAM is notified of the SCDS activation depends on the time interval that is specified with the INTERVAL keyword in the IGDSMS*xx* PARMLIB member.
- **No**—If RESTART=NO is specified, when OAM is notified that an SCDS activation has occurred, OAM continues processing normally. Message CBR0092I is issued to acknowledge that a new SCDS has been activated. The installation should ensure that the OAM RESTART command be issued if an OAM address space restart is necessary. See "Restarting the OAM Address Space" on page 366 for details concerning this command.

UNLOAD Unloads the least recently used 3995 optical disk drive, inside an IBM 3995 optical library, after the number of seconds of inactivity specified on the keyword. This unload only occurs if no available optical drives are within this library. That is, there are no empty online and operational drives. Thus, during periods of inactivity, you can cause at least one drive to be ready to accept the next mount request without first having to do a demount.

The valid parameter values on this keyword are as follows:

- 0 to 9998 specifies the number of seconds of inactivity before the demount might occur.
- 9999 specifies that the cartridge is not to be demounted during periods of inactivity. This is the default.

Restriction: The UNLOAD keyword applies only to 3995 optical disk drives that are library-resident.

12 ***Verify or create device numbers.***

You must perform this step both for migration and at initial installation. Do **not** *perform this step if you are not using or do not plan to use optical devices.*

Define 3995 device numbers, as well as CTC device numbers, using the hardware configuration definition (HCD).

Related reading: For more information, see "Defining 3995 Device Numbers" on page 394 and *z/OS HCD User's Guide*.

Creating DB2 Databases for Object Tables and Directories

Sample jobs for creating databases are provided in SAMPLIB to help install OAM. These sample jobs help you create the DB2 databases, create the application plans, grant authority to use the application plans, and access the databases. Before running the sample jobs, you must:

- Change the JOB statement to meet your installation's requirements.
- Verify that the user ID that is specified on the JOB statement has the correct authority to perform the requested operations.

- Add a JOBLIB for the appropriate DSNLOAD if it is not in the linklist.
- Verify that the subsystem name specified with the SYSTEM keyword on the DSN command is the name of your DB2 subsystem.
- Change the plan name on the RUN statement to match your current DB2 version and release level.
- Start DB2.

If you choose to have SMS manage your DB2 VSAM data sets, create an ACS routine for the VSAM DB2 allocations. Enable the Object and or the Object Backup storage group, enable the volumes, and then validate and activate the SCDS.

Note: When planning for larger data object support (greater than 50MB) keep in mind that:

- If large object support (LOB) is not enabled, objects larger than 32640 bytes are stored in multiple rows in the 32 KB DB2 table. For example, a 256 MB object takes more than 8000 rows to store in the 32 KB table. You might have to increase the number of DB2 locks specified (per user and table space) in order to prevent lock escalations and timeouts. Ensure that the tables used to store the larger objects have the required capacity.
- If LOB is enabled, objects larger than 32640 bytes are stored directly into DB2 in a LOB column with each BLOB as a varying length string up to the OAM maximum object size of 256 MB.

Object Databases

Before OAM can operate, you must create object storage databases. These databases contain either objects or information about objects. OAM requires a separate object storage database for each storage group.

Understanding Object Databases:

NOT Programming Interface information

This segment documents information that is provided to help you diagnose OAM problems.

OAM allows multiple DB2 databases to be used for object storage. Each object storage database has an object directory table space, a 4 KB Object Storage Table space, and a 32 KB Object Storage Table space. Within each table space is one table (an object directory table, a 4 KB Object Storage Table, and a 32 KB Object Storage Table, respectively). Each database has three indexes into the object directory table and one index into each of the object storage tables. The high-level qualifier on the object storage database must match the high-level qualifier on the object storage definition in the SCDS that was created using ISMF and the high-level qualifier and package name in PBIND.

LOB support adds the LOB storage database structure to the 4 KB and 32 KB object storage table hierarchy. This structure consists of a LOB base table and a LOB auxiliary table. The LOB base table resembles a 32 KB table with the addition of a ROWID column and changing the OTOBJ column datatype from 'long varchar' to BLOB. The LOB auxiliary table contains the actual BLOB object represented by the OTOBJ column in the LOB base table. The LOB auxiliary table is managed exclusively by DB2 and is transparent to OAM.

Note: Reference to the LOB storage structure refers to both the LOB base table and the LOB auxiliary table.

Object storage administration uses one additional database. The object storage administration database name is OAMADMIN. This database contains a management class table space, a storage class table space, and a collection name table space. Within each table space is one table (a management class table, a storage class table, and a collection name table, respectively). The management class table and the storage class table each have one index, and the collection name table has three indexes.

Each OAM DB2 object storage database has its own separately defined set of VSAM data sets. There is one VSAM data set for each table space, and one VSAM data set for each index within the database.

Attention: The information from the OAMADMIN tables is crucial to the operation of OSMC. **IBM strongly advises against altering these tables.**

End of NOT Programming Interface information

Understanding the Database Creation Jobs: Three jobs are supplied in SAMPLIB to assist you in defining the databases to DB2 that are required in your installation (CBRISQL0, CBRISQLX, and CBRISQLY). Three jobs are supplied in SAMPLIB to assist in allocating the VSAM data sets needed for each of the object storage databases you require (CBRIALC0, CBRIALCX, CBRIALCY).

The job CBRILOB is provided in SAMPLIB to create the LOB Storage Structure, which is required if LOB support is to be enabled. You must modify CBRILOB to include the desired LOB enabled storage groups. This job is only required for storage groups that are to be LOB enabled.

SAMPLIB member CBRISQL0 job allocates and defines the object storage databases. SAMPLIB member CBRIALC0 allocates the data sets needed for each object storage database. There is no minimum number of databases or views that must be created. Additionally, there is no maximum limit to the number of object storage databases you might have in your installation. These jobs can be run multiple times to define as many object storage groups and data sets as are required to suite your environment.

SAMPLIB members CBRIALCX, CBRIALCY, CBRISQLX, and CBRISQLY allocate the data sets and define the databases required for object administration. These four SAMPLIB jobs must be modified and executed successfully before OSR or OSMC can be used. SAMPLIB members CBRIALCX and CBRIALCY must be run before SAMPLIB members CBRISQLX and CBRISQLY.

Each step number in all the SAMPLIB jobs is unique. Within the jobs that allocate and define the object storage databases, each step number corresponds to the database name qualifier for the data sets being allocated, and to the database name being defined to DB2.

Related reading: For more information on the SAMPLIB jobs, see these topics:
- "CBRIALC0" on page 431
- "CBRIALCX" on page 434
- "CBRIALCY" on page 437
- "CBRILOB" on page 438
- "CBRISQL0" on page 443
- "CBRISQLX" on page 447
- "CBRISQLY" on page 450

For you to use an OAM object storage database, the allocate job step must be executed, followed by the related DB2 database definition job step. Modify to include the required storage groups and then run the CBRIALCX, CBRIALCY and CBRISQLX, CBRISQLY jobs and the database definition job steps (CBRISQL0) that correspond to the allocation job steps previously run (CBRIALC0). For more information, see step **15** on page 139.

13 ***Add additional steps to the Database Creation Jobs.***

You must perform this step at initial installation. For migration, you must verify or perform this step if you determine that it has not yet been completed in your current environment.

After you have identified the databases needed in your installation, locate the SAMPLIB jobs that contain the steps that will allocate the data sets and define the databases. Add steps for each storage group as needed within the jobs. The remaining jobs and steps must be modified before they are executed.

14 ***Modify the OAM Data Set Allocation Jobs.***

You must perform this step at initial installation. For migration, you must verify or perform this step if you determine that it has not yet been completed in your current environment.

All allocation jobs must be modified as follows:

1. Change the JOB statement to meet your installation's requirements.

   _____

2. Change *cat_name* to the DB2 catalog name used in your installation.

   _____

Modify individual allocation job steps as follows:

1. Change *vol_ser* to the volume serial numbers of the volumes where the data sets will reside.

   _____

2. Change *pri_alloc sec_alloc* to the number of cylinders (or tracks) needed for the initial size and the secondary extent size for the data set. The entire statement can be changed to TRACKS(*pri_alloc sec_alloc*) if the data set is not expected to be large. This space allocation must be individually determined for each data set needed by the database. See "Estimating Resource Requirements" on page 62 for information about database space allocation calculations.

   _____

3. Add allocations for each object storage group defined in your installation.

   _____

The allocation job CBRIALCX and CBRIALCY must be modified as above. See, "CBRIALCX" on page 434, and "CBRIALCY" on page 437 for more information.

If you choose to have SMS manage your DB2 VSAM data sets, create an ACS routine for the VSAM DB2 allocations. Enable the storage group, enable the volumes, then validate and activate the SCDS.

15 ***Run the OAM Data Set Allocation Jobs.***

You must perform this step at initial installation. For migration, you must verify or perform this step if you determine that it has not yet been completed in your current environment.

After the allocation jobs have been modified, they must be run to successful completion before proceeding. If an error occurs within a particular step, correct the error and rerun either the entire job or just the failing job step.

Run CBRIALC0 for as many groups as needed; then, run CBRIALCX and CBRIALCY. (Because the delete/define refers to specific volume serials, the storage group must be defined with GUARSPACE=YES.) For more information on these SAMPLIB jobs, see "CBRIALC0" on page 431, "CBRIALCX" on page 434, and "CBRIALCY" on page 437.

16 ***Modify the OAM Database Definition Jobs.***

You must perform this step at initial installation. For migration, you must verify or perform this step if you determine that it has not yet been completed in your current environment.

After the data sets have been allocated, run the jobs and steps that define the databases to DB2. The jobs and steps related to data set allocation must be modified before they are executed. Sample jobs are shown in Appendix B, "Sample Library Members," on page 429 and reside in SAMPLIB.

For all database definition jobs for the object storage databases, change the JOB statement to meet your installation's requirements.

Modify all database definition job steps as follows:

1. Change "DB2" in the statement DSN SYSTEM(DB2) to the subsystem ID for DB2 in your installation.

   _____

2. Change the data set name in the statement LIB('DB2.RUNLIB.LOAD') to the data set name used for the DB2.RUNLIB.LOAD data set in your installation.

   _____

3. Change *cat_name* to the DB2 catalog name used in your installation. This must be the same name that was used as the *cat_name* in the allocation job.

   _____

4. Change the *auth_id* to the IDs authorized to the respective group.

   _____

5. Change the PLAN name on the RUN statement to match your current DB2 version and release level.

   _____

The database definition jobs CBRISQLX and CBRISQLY must be modified as previously described in the data set allocations job CBRIALCX and CBRIALCY. For OSR or OSMC to run, the CBRISQLX and CBRISQLY jobs must complete successfully.

Related reading: For more information on these SAMPLIB jobs, see "CBRISQLX" on page 447, "CBRISQLY" on page 450, "CBRIALCX" on page 434, and "CBRIALCY" on page 437.

17 ***Run the OAM Database Definition Jobs.***

You must perform this step at initial installation. For migration, you must verify or perform this step if you determine that it has not yet been completed in your current environment.

Note: Before z/OS V1R7, the CBRISQL0 sample job created UNIQUE indexes OBJDIRX1 and OBJDIRX2. In z/OS V1R7, CBRISQL0 was modified to create these indexes without the UNIQUE attribute to alleviate a potential OAM OSREQ error due to duplicate time stamp (RC8 RSN30020100). If your OAM Database was defined before z/OS V1R7, it is recommended that you drop UNIQUE indexes OBJDIRX1 and OBJDIRX2, and create them as non-UNIQUE per sample job "CBRISQL0" on page 443. See APAR II13964 for more information.

The DB2 subsystem must be active before starting any of the database definition jobs. All object storage database definition job steps and the object administration database definition job must complete successfully.

Run job CBRISQL0 as many times as needed for the groups used in your installation. Then run jobs CBRISQLX and CBRISQLY.

Related reading: For more information on these SAMPLIB jobs, see "CBRISQLX" on page 447 see "CBRISQL0" on page 443, "CBRISQLY" on page 450, and "CBRISQLY" on page 450.

Creating the Optical Configuration Database

If you plan to start the OAM address space, you must create the optical configuration database. This database contains the Library table, the Drive table, the Slot table, the Volume table, the Deleted Object table, and the Tape Volume table.

Sample jobs are provided to help you create the optical configuration database, create the application plans, and grant authority for the application plans to be used.

18 ***Modify, if necessary, and then run the CBRSAMPL SAMPLIB job.***

You must perform this step at initial installation. For migration, verify that this step was performed during the original OAM installation. If this step was not performed during the original OAM installation, perform this step when you migrate from a previous release. Do **not** *perform this step if you are using DASD-only storage (no optical volumes or tape devices).*

Member CBRSAMPL in SAMPLIB (see "CBRSAMPL" on page 452) creates the optical configuration database.

You must make the following changes before running the job:

- In the CREATE STOGROUP statement, add:
  - Your volume serial numbers (VOLUMES parameter).
  - The name of your ICF catalog (use 6 characters in the VCAT parameter).

The following summarizes the changes you can make:

- Choose a name for the DB2 storage group and use that name for each STOGROUP parameter.

- Change a catalog password (PASSWORD parameter) in the CREATE STOGROUP statement.

Browse the output to ensure that the job completed successfully. Each SQL statement executed should have an SQLCODE of 0. Check that the final statement of the sample job (COMMIT) has executed.

Attention: The optical configuration database is a single DB2 database with six tables. Avoid creating two optical configuration databases with two sets of tables. Two optical configuration databases can be mistakenly created by running sample job CBRSAMPL twice under two different user IDs. The user ID associated with the job is the user ID supplied by the system programmer with the USER= keyword on the JOB statement.

You might decide to move the data from one media type to another for migration purposes. For example, you might want to move data residing on 12-inch optical media to 5.25-inch optical media to upgrade your installation. This option is available with the Move Volume utility, and is discussed in more depth in "Starting the Move Volume Utility" on page 288. No changes are required to any application program that invokes the OSREQ macro.

Requirement: Use ISMF to define the tape or optical libraries and optical drives to OAM.

19 ***Run the CBRSM150 SAMPLIB job if you are migrating from a release before DFSMS/MVS 1.5.***

Do **not** *perform this step at initial installation. You must perform this step when migrating from a pre-DFSMS/MVS 1.5 release to z/OS V1R5. Do* **not** *perform this step if you are using DASD-only storage (no optical volumes or tape devices).*

CBRSM150 adds a new MEMBER column in the LIBRARY, DRIVE, VOLUME, and TAPEVOL tables in the optical configuration database. It also adds a new PLIBRARY column to the VOLUME table and primes the field with the value in the LIBRARY table if the volume record is shelf-resident.

20 ***Run the CBRSMB2 SAMPLIB job if you are migrating from a release before OS/390 V2R10.***

Do **not** *perform this step at initial installation. You must perform this step when migrating from a release before OS/390 V2R10 (unless the 3590-1 SPE was already installed) to z/OS V1R5. Do* **not** *perform this step if you are using DASD-only storage (no optical volumes or tape devices).*

CBRSMB2 modifies the Optical Configuration Database by adding a new EPI column to the TAPEVOL table.

21 ***Run the CBRSMR13 SAMPLIB job if you are migrating from a release before z/OS V1R3.***

Do **not** *perform this step at initial installation. You must perform this step when you migrate from a release before z/OS V1R3 to z/OS V1R5.*

The jobs included with the CBRSMR13 SAMPLIB member of PARMLIB modify the object directories. Two jobs are included with this SAMPLIB: SMR13A and SMR13B:

- SMR13A migrates from the DFSMS/MVS 1.5 or OS/390 V2R10 version of the Optical Configuration Database (OCDB) to the z/OS V1R3 version, which supports multiple Object Backup storage groups and the second backup copies of objects. This job adds a new column BKTYPE to the existing VOLUME table. It also adds a new column BKTYPE to the existing TAPEVOL table.
- SMR13B migrates from the base version of the OAM object directory tables to the z/OS V1R3 version, which supports second backup copies of objects. This job adds new columns ODBK2LOC and ODBK2SEC to the existing object directory tables.

Follow these steps to run the CBRSMR13 jobs:

1. For recovery purposes, create a DB2 image copy of the existing VOLUME and TAPEVOL tables prior to executing the SMR13A migration job.

   For recovery purposes, create a DB2 image copy of the existing object directory tables prior to executing the SMR13B migration job.

   _____

2. Execute the SMR13A and SMR13B migration jobs.

   _____

3. After you run the CBRSMR13 jobs, if you perform an ALTER to the table, you might need to run a DB2 REORG.

   _____

Result: The OCDB is at the z/OS V1R3 level. You can use multiple Object Backup storage groups and second copies of backup objects.

Related reading: See "CBRSMR13" on page 465 for the SMR13A and SMR13B SAMPLIB jobs.

22 ***Run the CBRSMR15 SAMPLIB job if you are migrating to z/OS V1R5.***

Do **not** *perform this step at initial installation. You must perform this step when you migrate from any earlier release to z/OS V1R5 DFSMS.*

The CBRSMR15 SAMPLIB job performs the migration from the z/OS V1R3 version of the OCDB to the z/OS V1R5 version. The CBRSMR15 SAMPLIB job adds two new columns, OUNITNAM and DATACLAS, to the DB2 TAPEVOL table. The OUNITNAM field represents the original esoteric associated with a tape volume that OAM is recycling or expiring. The DATACLAS field represents the data class that is associated with the tape volume. The information in these fields allocate the tape volume to an Object or Object Backup storage group after OAM returns the volume to OAM scratch status.

An OAM scratch tape volume must have valid OUNITNAM and DATACLAS values to satisfy an outstanding write request. If OAM is operating at z/OS V1R5 level, tape volumes introduced into this table will have valid values filled in the TAPEVOL table. However, tape volumes that were introduced into the TAPEVOL table before z/OS V1R5 are primed as BLANKS. To reuse those OAM scratch volumes, your installation must either manually update the OUNITNAM and DATACLAS fields, or enable OAMSCRATCHSYNCH mode using the SETOAM statement.

Perform the following steps to run the CBRSMR15 SAMPLIB job and initialize the OUNITNAM and DATACLAS fields:

1. For recovery purposes, create a DB2 image copy of the existing TAPEVOL table before executing the CBRSMR15 migration job.

---

2. Run the CBRSMR15 SAMPLIB job to add two new columns, OUNITNAM and DATACLAS, to the TAPEVOL table.

---

3. To reuse tape volumes that have been returned to OAM scratch status, your installation must perform one of the following steps:
   - Manually update the OUNITNAM and DATACLAS fields in the TAPEVOL table.
     a. If you are using OAM object tape in an IBM Automated Tape Library and opt to return these tape volumes to OAM scratch upon expiration, determine the appropriate esoteric name to insert into the OUNITNAM field. The unit name associated with the tape volumes is the actual device type of the volume.
     b. If you are not using OAM object tape in an IBM Automated Tape Library, you can copy the value that is currently in the UNITNAME field to the OUNITNAM field.
     c. Set the DATACLAS value based on the Object or Object Backup storage group to which the tape volume belongs.
   - Enable the SETOAM OAMSCRATCHSYNCH statement in the CBROAM*xx* PARMLIB member. For more information, see "Enabling SETOAM OAMSCRATCHSYNCH Mode" on page 244.

---

4. Determine how you want to initialize the OUNITNAM and DATACLAS fields in the TAPEVOL table, as follows:
   - Leave the OUNITNAM and DATACLAS fields blank.
     – If you enable OAMSCRATCHSYNCH mode, when the tape volume is returned to OAM scratch status, these fields are filled in with the information that is provided on the SETOAM statement for the tape volume's storage group.
   - Copy the value that is in the UNITNAME field into the OUNITNAM field.
   - Set the OUNITNAM and DATACLAS fields in the tape volume record based on the Object or Object Backup storage group to which the volume belongs.

Result: The OCDB is at the z/OS V1R5 level. You can expire and recycle object tape volumes that belong to Object and Object Backup storage groups, and optical volumes that belong to Object Backup storage groups.

Recommendation: Multiple Object or Object Backup storage groups might have the same tape unit name but a different data class for the tape volume. To ensure that the selected volume is compatible with the data class for the storage group, save the data class for the volume. If the volume is returned to OAM scratch, you can reuse that data class for subsequent allocations of the volume to a new storage group.

Related reading: For more information, see the following topics:
- "Object Tape and Optical Volume Management" on page 49
- "CBRSMR15" on page 469
- The "Improved Volume Management" topic in *z/OS Migration*

23 ***Run the CBRSMR18 SAMPLIB job if you are migrating to z/OS V1R8.***

Do **not** *perform this step at initial installation. You must perform this step when you migrate from any earlier release to z/OS V1R8 DFSMS.*

To enable OAM to use LOB support in DB2, a migration job, CBRSMR18, is supplied to add a new column to the DB2 Object Directory tables to indicate whether or not a DASD resident object resides in a LOB storage structure. Whether the installation intends to exploit the new LOB function or not, you must modify and run the CBRSMR18 migration job.

Related reading: For more information, see the following topics:
- "Object Tape and Optical Volume Management" on page 49
- "CBRSMR18" on page 441
- *z/OS Migration*

Merging Object Tables and OCDB for an OAMplex

24 ***Run the CBRSMERG SAMPLIB job.***

Do **not** *perform this step at initial installation. Perform this step when all of the following conditions exist: you are setting up an OAMplex, you have multiple OAMs running on separate MVS images in a sysplex, and you want to merge two or more separate OCDBs. Do* **not** *perform this step if you are using DASD-only storage (no optical volumes or tape devices) or if you are running OSMC for expiration processing.*

CBRSMERG performs a database merge of the OAM configuration databases for use with DB2 data sharing in an OAMplex. You might use this sample job or some other DB2 method to perform this database merging. For more information on this SAMPLIB member, see "CBRSMERG" on page 471.

25 ***Run the CBRSG100 SAMPLIB job.***

Do **not** *perform this step at initial installation. Perform this step only when all of the following conditions exist: you are setting up an OAMplex; you have multiple OAMs running on separate MVS images in a sysplex; and you want to merge two or more separate OAMADMIN tables, object storage databases, or both.*

CBRSG100 performs a catalog and database merge of OAM databases and catalogs for use with DB2 data sharing in an OAMplex. You might use this sample job or some other DB2 method to perform the catalog and database merging. For more information on this SAMPLIB member, see "CBRSG100" on page 478.

Creating and Binding DB2 Packages

26 ***Run the CBRPBIND SAMPLIB job.***

You must perform this step both for migration and at initial installation.

CBRPBIND performs a DB2 BIND of DBRMs to create the packages needed to access the OAM Object storage group tables. The use of the DB2 packages allows user defined qualifiers for the object storage groups table definitions. CBRPBIND must be modified and run prior to running the CBRABIND, CBRHBIND, or CBRIBIND jobs. It is currently written for the existing 100 Object storage groups with high-level qualifiers of GROUP00–GROUP99, so it needs to be modified for your installation requirements.

CBRPBIND now uses the VALIDATE(RUN) instead of the VALIDATE(BIND) statement. For VALIDATE(BIND), DB2 verifies the authorization at bind time. For VALIDATE(RUN), DB2 verifies the authorization initially at bind time, but if the authorization check fails, DB2 rechecks it at run time.

Statements embedded within various OSR and OSMC packages now reference the V_OSM_LOB_BASE_TBL view. However, these views might not be known to DB2 if either LOB support is disabled (default, LOB=N in IEFSSNxx Parmlib member) or LOB support is only partially enabled (LOB=P in IEFSSNxx Parmlib member). Each storage group that does not have the V_OSM_LOB_BASE_TBL created must use VALIDATE(RUN); otherwise, bind authorization occurs at bind time and the bind fails.

However, it might be desirable to use the VALIDATE(BIND) statement for each object storage group that you want to VERIFY that a V_OSM_LOB_BASE_TBL

view has indeed been created. This is not required and should only be used as a precautionary measure to ensure that the LOB view has been created. The bind fails if the LOB view is not created.

Related reading: For more information on the CBRPBIND SAMPLIB job, see "CBRPBIND" on page 488.

OSR Application Plans

For OSR to function correctly, you must create the OSR application plan, bind it to DB2, and grant authority for the plan to be used.

27 ***Run the CBRIBIND SAMPLIB job.***

If you are **not** *planning to create the optical configuration database but you do plan to store objects without starting the OAM address space, you must perform this step both for migration and at initial installation. If you plan to create the optical configuration database, skip this step and proceed to step* **29** .

Creating the OSR Application Plan: You must create the OSR application plan, bind it to DB2, and grant authority for the plan to be used. SAMPLIB members CBRIBIND and CBRIGRNT are provided for this purpose. CBRIBIND binds the packages created in CBRPBIND to the OSR application plan. You need to modify this job to include the high level qualifiers for the installation's storage groups (currently setup for GROUP00-GROUP99). This step is not required if you plan to create the optical configuration database and start the OAM address space. The OSR application plan for the optical or tape environment is provided as part of the CBRABIND and CBRAGRNT jobs. After execution, the job output should contain the following message about CBRIDBS:

```
DSNT200I BIND FOR PLAN CBRIDBS SUCCESSFUL
```

Recommendation: If you do not plan to use OSMC, see the information on the required application plan CBRHSMSI under "OSMC Application Plans."

Related reading:

- If you do not receive this message, see "OAM Diagnostic Aids" in the *z/OS DFSMSdfp Diagnosis* for more information.
- For information on the DSN FREE subcommand, see the *DB2 Command Reference*.
- For more information about the DB2 catalog tables, see the *DB2 SQL Reference*.

28 ***Run the CBRIGRNT SAMPLIB job.***

If you are **not** *planning to create the optical configuration database but you do plan to store objects without starting the OAM address space and you have previously run CBRIBIND, you must perform this step both for migration and at initial installation. If you plan to create the optical configuration database, skip this step and proceed to step* **29** .

Granting Authority: You must grant applications the authority to use plan CBRIDBS and to access the databases. The statements that grant this authority are shown in SAMPLIB. Also see "Examples of Granting and Revoking Privileges" in *DB2 Administration Guide*.

Completion of a successful grant is indicated by the following message in the job output:

```
DSNT400I SQL CODE=000, SUCCESSFUL EXECUTION
```

Recommendation: If you have applications containing application plans also using the modules identified in the CBRIBIND SAMPLIB job, you must rerun the BIND and GRANT jobs for these *other* applications you have installed as well. The IBM SAA® ImagePlus Object Distribution Manager, the IBM Report Data Archive and Retrieval System (RDARS), and the Item Access Facility CICS application (IAFC), are examples of applications that bind OAM and Object Distribution Manager modules into a common plan.

Related reading: If you do not receive this message, see "OAM Diagnostic Aids" in *z/OS DFSMSdfp Diagnosis* for more information.

OSMC Application Plans

To use OSMC in your installation, you must create the OSMC application plans, bind them to DB2, and grant authority for those plans to be used. If you are not using OSMC, you must create the application plan for CBRHSMSI, bind it to DB2 and grant authority for it to be used (modify the CBRHBIND and CBRHGRNT sample jobs to include only the statements for CBRHSMSI).

29 ***Run the CBRHBIND SAMPLIB job.***

You must perform this step both for migration and at initial installation.

Creating the OSMC Application Plans: After creating the databases for OSR, you must create the OSMC application plans. Member CBRHBIND in SAMPLIB is provided for this purpose. After running the job, the following DB2 messages should appear in the job output:

```
DSNT200I BIND FOR PLAN CBRHSMSI SUCCESSFUL
DSNT200I BIND FOR PLAN CBRHOBJP SUCCESSFUL
DSNT200I BIND FOR PLAN CBRHSOBP SUCCESSFUL
DSNT200I BIND FOR PLAN CBRHSVOL SUCCESSFUL
DSNT200I BIND FOR PLAN CBRHSBKV SUCCESSFUL
DSNT200I BIND FOR PLAN CBRHRDAS SUCCESSFUL
DSNT200I BIND FOR PLAN CBRHWDAS SUCCESSFUL
DSNT200I BIND FOR PLAN CBRHDUPD SUCCESSFUL
DSNT200I BIND FOR PLAN CBRHSBCC SUCCESSFUL
DSNT200I BIND FOR PLAN CBRHSPCC SUCCESSFUL
DSNT200I BIND FOR PLAN CBRHORCL SUCCESSFUL
DSNT200I BIND FOR PLAN CBRHCNTL SUCCESSFUL
```

Recommendation: The user ID associated with the CBRHBIND job must be the same as the user ID associated with the CBRISQL0 job, because the SQL statements in the OSMC application plans contain unqualified DB2 table names. When an unqualified DB2 table name is encountered during the BIND process, DB2 assumes the unqualified table name is the authorization ID of the binder.

Related reading:

- If you do not receive these messages, see "OAM Diagnostic Aids" in the *z/OS DFSMSdfp Diagnosis* for more information.
- For additional information on binding a DB2 application plan, see *DB2 Application Programming and SQL Guide*.

30 ***Run the CBRHGRNT SAMPLIB job.***

You must perform this step both for migration and at initial installation.

Granting Authority: To grant authority to use the application plans, run SAMPLIB member CBRHGRNT. There are no changes other than user data that you add to the JCL. If you do not grant this authority, OSMC will not initialize, because it is not authorized to use the application plans.

LCS, ISMF, and OSR Application Plans

After creating the database for LCS, you must create and bind the LCS (CBROAM), ISMF (CBRISMF), and OSR (CBRIDBS) application plans. You must also grant authority for the plans to be used.

31 ***Run the CBRABIND SAMPLIB job.***

If you plan to create the optical configuration database and to start the OAM address space to store objects, you must perform this step for both migration and at initial installation. Do **not** *perform this step if you are using DASD-only storage (no optical volumes or tape devices), or if you are running OSMC for expiration processing.*

Creating the LCS, ISMF, and OSR Application Plans: Member CBRABIND binds the packages created in CBRPBIND to the LCS, ISMF, and OSR application plans. Modify this sample job to include the storage group high level qualifiers for the installation (currently set up for GROUP00–GROUP99). This job also includes the addition of the CBRUTIL plan.

After you run the job, the following DB2 messages should appear in the job output:

```
DSNT200I BIND FOR PLAN CBROAM SUCCESSFUL
DSNT200I BIND FOR PLAN CBRISMF SUCCESSFUL
DSNT200I BIND FOR PLAN CBRIDBS SUCCESSFUL
```

Recommendation: The user ID associated with the CBRABIND job must be the same as the user ID associated with the CBRSAMPL job, because the SQL statements in the LCS and ISMF application plans contain unqualified DB2 table names. When an unqualified DB2 table name is encountered during the BIND process, DB2 assumes the unqualified table name is the authorization ID of the binder.

Related reading:

- If you do not receive these messages, see "OAM Diagnostic Aids" in the *z/OS DFSMSdfp Diagnosis* for more information.
- For additional information on binding a DB2 application plan, see *DB2 Application Programming and SQL Guide*.

32 ***Run the CBRAGRNT SAMPLIB job.***

If you plan to create the optical configuration database and to start the OAM address space to store objects and you have created the application plans using CBRABIND in step **31** *, you must perform this step for both migration and at initial installation. Do* **not** *perform this step if you are using DASD-only storage (no optical volumes or tape devices), or if you are running OSMC for expiration processing.*

Granting Authority: To grant authority for these application plans to be used, run member CBRAGRNT. There are no changes other than user data that you add to

the JCL. If you do not grant this authority, the OAM address space will not start, because it is not authorized to use the CBROAM application plan, and ISMF and OSR will be unable to gain access to the optical configuration database.

Recommendation: If you have applications containing application plans also using the modules identified in the CBRIBIND SAMPLIB job, you must rerun the BIND and GRANT jobs for these *other* applications you have installed as well. The IBM SAA ImagePlus Object Distribution Manager, the IBM Report Data Archive and Retrieval System (RDARS), and the Item Access Facility CICS application (IAFC), are examples of applications that bind OAM and Object Distribution Manager modules into a common plan.

Verifying DB2 Installation

After creating all required databases and application plans, and after granting authorization for the entire OAM system (OSR, LCS, and OSMC), do the following verification process:

33 ***Verify that all application plans have been created.***

You must perform this step both for migration and at initial installation.

Use SPUFI to enter the following command:

```
SELECT * FROM SYSIBM.SYSPLAN
  WHERE NAME = 'xxxxxxxx';
```

Substitute each of the following plan names for the xxxxxxxx on the WHERE clause:

```
CBROAM      CBRHSVOL    CBRHDUPD    CBRISMF
CBRHSMSI    CBRHSBKV    CBRHSBCC    CBRUTIL
CBRHOBJP    CBRHRDAS    CBRHSPCC    CBRHORCL
CBRHSOBP    CBRHWDAS    CBRIDBS     CBRHCNTL
```

You must perform this step if you are going to use DASD-only storage (not optical volumes or tape devices).

Use SPUFI to enter the following command:

```
SELECT * FROM SYSIBM.SYSPLAN
  WHERE NAME = 'xxxxxxxx';
```

Substitute each of the following plan names for the xxxxxxxx on the WHERE clause:

```
CBRHSMSI
CBRIDBS
```

Execute the SELECT statement once for each plan. After each execution, one row of information should be returned. See the *DB2 SQL Reference* manual for a detailed description of the information that should be returned.

34 ***Verify that all application plans have been authorized.***

You must perform this step both for migration and at initial installation.

Use SPUFI to enter the following command:

```
SELECT * FROM SYSIBM.SYSPLANAUTH
  WHERE NAME = 'xxxxxxxx';
```

Substitute each of the following plan names for the xxxxxxxx on the WHERE clause:

```
CBROAM      CBRHSVOL    CBRHDUPD    CBRISMF
CBRHSMSI    CBRHSBKV    CBRHSBCC    CBRUTIL
CBRHOBJP    CBRHRDAS    CBRHSPCC    CBRHORCL
CBRHSOBP    CBRHWDAS    CBRIDBS     CBRHCNTL
```

You must perform this step if you are going to use DASD-only storage (not optical volumes or tape devices).

Use SPUFI to enter the following command:

```
SELECT * FROM SYSIBM.SYSPLANAUTH
  WHERE NAME = 'xxxxxxxx';
```

Substitute each of the following plan names for the xxxxxxxx on the WHERE clause:

```
CBRHSMSI
CBRIDBS
```

Execute the SELECT statement once for each plan. After each execution, one row of information should be returned.

If no information is returned, access authority to the application plan specified on the SELECT statement has not been successfully granted.

Related reading: For more information, see "OAM Diagnostic Aids" in the *z/OS DFSMSdfp Diagnosis* and *DB2 SQL Reference*.

Defining User Catalogs

35 ***Evaluate and implement user catalogs and policies.***

You must perform this step at initial installation. For migration, you must verify or perform this step if you determine that it has not yet been completed in your current environment.

OAM collection names are defined by entries in a user catalog or catalogs. The collection entries in this catalog are made automatically by OAM when the first object is stored to a new collection. Define and maintain the catalogs or catalog aliases using IDCAMS and your installation's standard catalog maintenance procedures. Because access to the collection name entries is essential to OAM operation, ensure that these user catalogs are included in your standard backup and recovery procedures. If you are in an OAMplex, you should have a shared catalog for the collection entries to avoid errors with collections in the DB2 table that are not in the catalog. It is possible to maintain separate catalogs, but that is not the preferred method due to the inconvenience factor.

If no new collections are created, there is no need to share a catalog. It is necessary, in this case, to make sure that all OAMs within the same OAMplex have identical catalog entries in their respective catalogs.

Performance Considerations

For each OSREQ request to OAM by an application program, OAM verifies the collection name supplied by the application. To minimize the time required to verify the collection name, the following recommendation is made:

Shared Catalog — Use unshared catalogs whenever possible to avoid I/O operations to the master and user catalogs. You can use the AMS ALTER command to set catalog SHAREOPTIONS to (3 3), which defines them as unshared. Alternatively, you can place catalogs on unshared volumes. For more information on the AMS ALTER command, see *z/OS DFSMS Access Method Services for Catalogs*.

Attention: If you use SHAREOPTIONS option (3 3) and the catalog resides on a shared device, you must ensure that the catalog is accessed from only one system, or unpredictable damage to the catalog might occur.

IPL the System

36 ***IPL the system.***

You must perform this step both for migration and at initial installation.

Use the new I/O configuration definition to IPL the system. The following messages are issued and can be used as verification that the IPL of the system is successful.

```
CBR8001I OAM1 subsystem initialization starting.
```

Note: If your installation is not using OAM for storing objects and is strictly using OAM for tape storage management, the following message can be ignored when it is displayed in response to IPLing the system:

```
CBR8007I No DB2 SSID or the DB2 SSID value of "NONE" has been specified.  OTIS
         subsystem cannot successfully initialize.

CBR8002I OAM1 subsystem initialization completed.
```

Specifying the SMS Definitions and Programs Used by OAM

At this point, OAM is installed; however, you must complete several more steps before you can run applications:

- Define hardware devices, such as optical libraries and optical drives.
- Define OAM-related SMS constructs, such as storage class, management class, storage group, and data class. These constructs express your storage management policy.
- Develop ACS routines to assign constructs to objects. The ACS routines implement your storage management policy.

To complete these tasks, you must first translate your installation's business needs into technical terms. Once that has been accomplished, use ISMF to create construct definitions and programs in the system.

During installation, customization, and testing, it is reasonable to expect that you must adjust the configuration definitions through ISMF. You might also need to perform OAM operator tasks, such as entering optical disks or tape cartridges into associated libraries.

Related reading: For more information, see the following topics:
- Chapter 4, "Administering OAM," on page 177
- Chapter 5, "Operating OAM and OTIS Address Spaces and OSMC Functions," on page 263
- *z/OS DFSMS OAM Planning, Installation, and Storage Administration Guide for Tape Libraries*

Translating the Business Analysis into Technical Definitions

The SMS definitions are the mechanisms by which the results of your business analysis are implemented. The ideal groups, classes, and cycles identified during analysis must be translated into practical terms. This section discusses the OAM-related SMS parameters and how they can be used to customize OAM for your needs.

As in any translation process, compromises and approximations must be made. For example, you might have to make trade-offs between performance and cost (DASD versus optical versus tape storage) as you implement your storage management policy.

Be alert to the subtle factors that can influence system performance and, therefore, should be considered during this translation process. For example:
- The number of class transitions for a given object during its lifetime can have a significant effect on work load.
- The effective data transfer rate is faster for a single large object than for multiple small objects.

The choice you make for any single parameter has the potential to affect many other parameters. Be prepared to adjust those choices after installation, as you tune and refine your system.

Naming Conventions

Naming conventions are an essential part of managing storage through SMS. For example, the ACS routines use names as part of the processing for evaluating class change requests.

Storage Group Parameters

The following storage group parameters are important when you define Object or Object Backup storage groups for objects stored on optical storage:
- DRIVE STARTUP THRESHOLD
- VOLUME FULL THRESHOLD
- MARK VOLUME FULL AT FIRST WRITE-FAILURE OPTION

The following storage group parameters also play an important role in controlling the storage management cycle for Object and Object Backup storage groups:
- CYCLE START TIME
- CYCLE END TIME
- OSMC PROCESSING SYSTEM NAME

Related reading: For more information about these parameters, see the information that follows in this section and see "Defining Storage Groups" in *z/OS DFSMS Storage Administration Reference*.

DRIVE STARTUP THRESHOLD: This parameter indicates that OAM needs to start another optical drive to manage additional write requests for a specific Object or Object Backup storage group. When the number of requests to write objects to this Object or Object Backup storage group divided by the number of drives processing write requests for this storage group exceeds this threshold, OAM starts using an additional optical disk drive for writing to this storage group if one is available.

Note: Tape drive startup thresholds are not determined in the same manner as the thresholds in an optical environment. The drive startup threshold for tape drives is specified in megabytes, while the drive startup threshold for optical volumes is specified by the number of write requests. For information of how the tape drive startup thresholds are determined, see the discussion concerning TAPEDRIVESTARTUP on page 118.

While your planning is typically oriented toward the OSMC storage management cycle, other OSMC functions (for example, Volume Recovery, Move Volume utility, and others) cause objects to be written into specific Object or Object Backup storage groups as well. If you plan to use these other types of OSMC functions, you need to consider and account for the drives these other types of OSMC functions require in addition to the drives required by the OSMC storage management cycle when determining the appropriate value for the threshold.

Exceeding the DRIVE STARTUP THRESHOLD: Figure 16 is an example of how OAM manages additional write requests for optical when the threshold is exceeded.

```
SCENARIO:

# OF WRITE REQ.   # OF DRIVES           DRIVE STARTUP THRESHOLD
FOR STRGPA        CURRENTLY RUNNING     FOR STRGPA

12                1                     17

During the storage management cycle, more write requests are created
for STRGPA that exceed the DRIVE STARTUP THRESHOLD set for this storage
group.  The following occurs:

# OF WRITE REQ.   # OF DRIVES           DRIVE STARTUP THRESHOLD
FOR STRGPA        CURRENTLY RUNNING     FOR STRGPA

30                2                     17

OAM starts another drive to handle the excess requests for this
storage group as it continues to process requests on the first drive.
When the number of write requests drops below the threshold,
the number of drives decreases.
```

Figure 16. Another Drive is Started When DRIVE STARTUP THRESHOLD is Exceeded

This parameter allows you to control the number of drives used concurrently for writing objects on optical volumes within a storage group. Setting the DRIVE STARTUP THRESHOLD to the maximum of 9999 with no more than one volume mounted for a storage group increases the likelihood that OAM will write the objects sequentially. The default value for DRIVE STARTUP THRESHOLD is 17.

Improving Performance with Low DRIVE STARTUP THRESHOLD Value: Using a low DRIVE STARTUP THRESHOLD value can allow objects to write concurrently during the storage management cycle, resulting in improved performance and reduced cycle time for the storage group. If more than one drive is used for writing, then the writing of an object to a volume is interspersed with

the writing of other objects to their respective volumes. Objects for only one storage group reside on the two optical volumes on an optical disk. Spreading data across volumes makes those volumes unavailable for other storage groups.

You can choose different DRIVE STARTUP THRESHOLD values for different storage groups, allowing you to choose independently between drive write concurrency and the volume-fill characteristic for each of the groups.

The determination of the DRIVE STARTUP THRESHOLD is the same for both Object and Object Backup storage groups.

Recommendation: Make certain that you have enough usable optical disks per storage group (scratch or already assigned to the storage group) to be used simultaneously for the write requests to the storage group once the DRIVE STARTUP THRESHOLD is crossed. OAM does not issue any message to request additional space for a storage group when the DRIVE STARTUP THRESHOLD is crossed and additional space for the storage group is not available. If the DRIVE STARTUP THRESHOLD is crossed, and there are no usable optical disks available, it is as if the threshold were never crossed; OAM continues to perform the write requests on the existing busy disks. Performance is slower than it would have been if additional space had been available when the threshold was crossed.

Table 23 contains information to help you select a value for DRIVE STARTUP THRESHOLD, based on average object size and the number of drives on which concurrent activity is permitted. If your average object size is slightly larger or smaller than the size shown in the table, adjust the DRIVE STARTUP THRESHOLD value accordingly.

Table 23. Recommended Values for DRIVE STARTUP THRESHOLD

Average Object Size in Bytes	Activity on One Drive Only	Activity on Two Drives	Activity on Three Drives
3 000	>= 4680	2340–4679	1560–2339
4 000	>= 3600	1800–3599	1200–1799
5 000	>= 2880	1440–2879	960–1439
8 000	>= 1800	900–1799	600–899
16 000	>= 864	432–863	288–431
32 000	>= 432	216–431	144–215
40 000	>= 360	180–359	120–179
64 000	>= 216	108–215	72–107
100 000	>= 144	72–143	48–71
128 000	>= 108	54–107	36–53
256 000	>= 48	24–47	16–23
512 000	>= 24	12–23	8–11
1 000 000	>= 9	5–8	3–4
2 000 000	>= 5	3–4	2

VOLUME FULL THRESHOLD: OAM does not select full volumes to satisfy a write request. You might choose to eject full volumes from a library (for example, using ISMF to obtain a list of all full volumes in a library, then using the EJECT line operator) to streamline processing.

Thus, it is important to select a threshold value that allows the volumes to be marked full in a consistent manner. You must consider the size of the objects stored into the group. If the size of the objects is consistent, choose a threshold that is slightly larger than that size. The VOLUME FULL THRESHOLD is set on a storage group basis. When the number of available kilobytes on a volume falls below the VOLUME FULL THRESHOLD for the storage group to which that volume belongs, the volume is marked full and will not be used for any later write requests. If you find that volumes are not being selected for new objects and they are not being marked full, increase the value for this parameter.

Additionally, during OAM initialization, a volume previously set to FULL=Y with the MODIFY OAM,UPDATE command might be subsequently marked not full. This is because the volume's current tape-full percentage is less than the value of the TAPEPERCENTFULL parameter on the SETOAM statement. If you intend to mark the volumes in an Object or Object Backup storage group unavailable as candidates for write requests, you could mark them as WRITABLE=N because the writable status of the volume does not change during OAM initialization.

Note: The combination of the TAPEFULLTHRESHOLD parameter (either at the global or storage group level) and the TAPEPERCENTFULL parameter on the SETOAM statement determines the percent-full-utilization percentage and the tape-full-threshold factor for a tape volume at the storage group level. See the discussions on pages 119 and 119 for more information.

MARK VOLUME FULL AT FIRST WRITE-FAILURE OPTION: As an alternative to, or in addition to VOLUME FULL THRESHOLD, consider using the MARK VOLUME FULL AT FIRST WRITE-FAILURE OPTION parameter. If the application using the storage group stores objects that have a wide variety of sizes, use this parameter so the volumes are marked full as determined by the ability of the volume to contain the object. If there is insufficient space on the volume for the object, choosing this parameter causes a volume to be marked full and an alternate volume to be chosen. For example, a request to write an object larger than 30 KB causes the demount of a volume with a full threshold of 20 KB if there is less than 30 KB free, space, in preference to a volume that contains sufficient space. If only the VOLUME FULL THRESHOLD parameter is used, the volume is not marked full; if the MARK VOLUME FULL AT FIRST WRITE-FAILURE OPTION parameter is used, the volume is marked full.

An additional side effect of not marking volumes full is the potential for additional volume mounts. A volume is selected according to its ability to contain the next object written with the intent of filling that volume. If there is a small amount of free space, the volume might be mounted to write one object. If the next object does not fit on that volume, it is demounted to mount another volume that is capable of containing the next object.

CYCLE START TIME and CYCLE END TIME: As defined on page 55, the storage management cycle ensures that every object scheduled for processing is placed in the correct level of the object storage hierarchy, is deleted, expired, or backed up, and, if necessary, is flagged for action during a later storage management cycle. There are five methods by which management cycles can be controlled:

- **Manual Start (All Groups)**

  You can start the storage management cycle manually for all storage groups by using the MODIFY OAM, START, OSMC operator command. START OSMC

starts all groups that either have the system name or no system name specified as the OSMC processing system. (See "Starting OSMC Functions" on page 269 for command syntax.)

- **Manual Start (Individual Group)**

  You can start the storage management cycle manually for an individual storage group by using the MODIFY OAM,START,STORGRP operator command. Using this approach, you can directly control the processing sequence, such as using this technique to give priority to a storage group with many objects.

- **Manual Stop**

  You can stop the storage management cycle manually by using the MODIFY OAM,STOP,OSMC command. (See "Stopping OSMC" on page 381 for command syntax.)

- **Manual Stop (Individual Group)**

  You can stop the storage management cycle manually for an individual Object or Object Backup storage group by using the MODIFY OAM,STOP,STORGRP operator command.

- **Cycle Start Window**

  You can start the storage management cycle automatically for Object and Object Backup storage groups by specifying CYCLE START TIME and CYCLE END TIME parameters in the storage group definitions. If using the automatic startup in an OAMplex, you should specify an OSMC processing system name to avoid multiple starts for the same storage group on different systems. If you start OSMC during the window delimited by those times, the storage management cycle is started for that storage group. This is the usual method for controlling storage management cycles. You can also indicate that no automatic processing for the storage group is to be performed by specifying NONE for the CYCLE START TIME and leaving the CYCLE END TIME blank.

  The SETOSMC CYCLEWINDOW keyword interacts with the CYCLE START TIME and CYCLE END TIME parameters in the following ways:

  – If SETOSMC CYCLEWINDOW is not specified, STARTONLY is the default mode for the cycle start window.
  – If you specify the SETOSMC CYCLEWINDOW(STARTONLY) keyword in the CBROAM*xx* member, CYCLE START TIME and CYCLE END TIME describe a window during which the storage management cycle might start. These cycle times do not define the length of the processing period. The storage management cycle might continue to run after the specified CYCLE END TIME has passed. Consider adjusting the start time or times if the processing for one group extends into the start time for another; otherwise, resource contention can become severe enough to affect the total time that it takes to perform storage management cycle processing for all groups.
  – If you specify the SETOSMC CYCLEWINDOW(STARTSTOP) keyword in the CBROAM*xx* member, CYCLE START TIME and CYCLE END TIME describe a window during which the storage management cycle starts and ends. The storage management cycle ends at the specified stop time. Although OSMC stops processing new work for this storage group, this group can continue to finish what work it has started.

  Related reading: For more information on the SETOSMC CYCLEWINDOW keyword, see "SETOSMC Keyword Definitions" on page 126.

All Object or Object Backup storage group definitions must define a window where the storage management cycle starts for the storage group, or indicate that no automatic processing be performed for the storage group. Consider the following issues as you select window start and end times for each storage group:

- Number of optical drives
- Number of tape drives
- Number and size of objects moving through the hierarchy
- Backup requirements
- Time required to process the group
- Impact on end users who might be doing retrievals
- Storage management cycles for other groups
- Application usage patterns
- General maintenance operation requirements

Processing during the storage management cycle for a group does not require use of an optical or tape drive under the following conditions:
- The storage group does not specify a library.
- There is no class transition that requires moving an object to optical or tape storage.
- No objects require backup.

Storage management cycle processing requires at least one drive if any objects are moved or backed up to optical or tape storage. (See "DRIVE STARTUP THRESHOLD" on page 153 and *TAPEDRIVESTARTUP* on page 118 for other considerations.) If a storage management cycle is in process on more than one Object or Object Backup storage group at a time and the number of groups exceeds drive availability, frequent volume mounts occur in an attempt to satisfy the requests to write objects to optical and or tape volumes. For example, when objects are written to a mounted volume for one group, that volume must be demounted to allow the mounting of another volume to accept the objects for a different group. Unless you limit resource consumption during the storage management cycle by some other means, you must not specify overlapping start windows for more groups than you have drives. (See "OAM Cataloged Procedure Parameter (MAXS)" on page 158.)

If an object requires more than one backup copy, the first and second backup copies are written to separate Object Backup storage groups. Objects are written to backup volumes in the Object Backup storage group specified in the SETOSMC statement for the Object storage group to which they belong, or, if a SETOSMC statement is not specified, the backup copies are written to backup volumes in the default Object Backup storage group specified.

More than one Object storage group can use the same Object Backup storage group for the same backup copy (first or second); therefore, first backup copies of objects from one group can reside on the same volume as first backup copies from other groups and second backup copies of objects from one group can reside on the same volume as second backup copies from other groups. These objects are written during the storage management cycle for the group containing the object. If some groups require object backup, but some do not, consider processing groups that require object backup concurrently with groups that do not require object backup.

Recommendation: Process the storage management cycle for an Object storage group while other activity for the objects in the Object storage group is light. For example, specify a cycle start window during a period when applications are not accessing data heavily. You must consider the effect of concurrent object use in a group during the storage management cycle for that group. DB2 performs deadlock detection on tables (directory tables in particular) that are shared by tasks performing the storage management cycle processing and by user tasks requesting

OAM functions through the application interface. The potential for DB2 deadlocks is much greater if an application is accessing data in a group during the storage management cycle for that group.

OSMC Processing System Name

The OSMC processing system name specifies the system where the OSMC processing for an Object or Object Backup storage group is to be performed. This name is used within an OAMplex where multiple instances of OAM are running in a Parallel Sysplex sharing a common configuration and DB2 database. When the OSMC cycle window occurs, the system specified in the OSMC processing system name of the storage group is where the storage group automatically starts. If the OSMC processing system name is left blank, the storage group cycle runs on all systems in an OAMplex during the cycle window.

If you use the MODIFY OAM,START,OSMC command to start a full OSMC cycle, the storage groups with an OSMC processing system name that matched the system where the command was entered are started. Also, storage groups with no specified OSMC processing system name are started.

If you use the MODIFY OAM,START,STORGRP command, the storage group specified is started on the system when the command was entered. Any specification in the OSMC processing system name for that storage group is ignored.

Recommendation: The system name that you specify for a storage group should be the same system where the hardware associated with the object storage group is connected. If the Object storage group has libraries associated with it that are owned by different OAMs in the OAMplex, then determine if there is a higher volume of data localized to one instance of OAM and use that system as the OSMC processing system name. You might need to modify and tune this information to meet performance objectives for your installation.

OAM Cataloged Procedure Parameter (MAXS)

The MAXS parameter in the OAM cataloged procedure specifies the maximum number of Object or Object Backup storage group tasks that can be processed concurrently during an OSMC storage management cycle. If storage management cycles for groups overlap, you can use the MAXS parameter to limit resource consumption. When determining the value for MAXS, take into consideration the number of optical and tape drives that are available for storage management processing to avoid drive contention. If MAXS is not specified, a default of 2 is assigned. (See the discussion of MAXS on page 132.)

If you plan to use these other types of OSMC functions (such as MOVEVOL, RECOVERY or RECYCLE commands), you need to consider and account for the resources these other types of OSMC functions require first, and then distribute the remaining resources for the OSMC storage management cycle with MAXS.

Optical and tape device availability are the resources most likely to cause contention. Writing active data to optical media during the storage management cycle is done on an Object storage group boundary. No active data is mixed between groups; therefore, each group being processed requires a different optical volume. Concurrent requests for different volumes are likely to result in concurrent requests for optical drives. For example, if you have a single, four-drive library and there are concurrent storage management cycles for four storage groups requiring the writing of data to optical media, all four drives are used. If there are concurrent requests to retrieve data from optical volumes during the cycle, those

requests and the processing performed during the storage management cycle contend for resources and detract from the performance of each of the functions. Consider using the MAXS parameter with DRIVE STARTUP THRESHOLD to limit resource consumption for writing objects to optical media during storage management cycles, thereby leaving resources available to mount volumes for retrieval requests.

For object tape volumes, the limits set in the parameters and subparameters of the SETOAM statement for TAPEDRIVESTARTUP, MAXTAPESTORETASKS, and MAXTAPERETRIEVETASKS limit resource contention regarding tape library dataservers. These parameters can work with the MAXS parameter resulting in effective resource utilization of the entire storage management environment. For more information on these and other parameters associated with the SETOAM statement, see the discussion on page 101.

The default value for MAXS is two. This default was chosen as a reasonable value when the configuration includes one library with four optical drives and two stand-alone drives. This default allows for concurrent storage management processing for two storage groups and it also allows for overlapping the writing of backup copies to stand-alone drives with the writing of primary optical copies to the library drives. Also, it leaves spare library drives available for retrieve requests and as alternate drives in case of a drive failure.

MAXS could possibly be increased to four when a second library is added to the configuration. Do *not* set MAXS to a value larger than the number of optical or tape drives that are available for storage management processing. Before increasing the value of MAXS, you should verify that there is sufficient processing capacity available to manage the increased work load, because processing requirements are heavier for small objects than for large ones. Also, you need to consider the tuning guidance described in "Tuning OAM" on page 196.

In addition, it is necessary to assign Object and Object Backup storage groups across the libraries in such a way that the library work loads are balanced. This storage assignment prevents any library from becoming a bottleneck.

Storage Class and Management Class Parameters

The OAM-related parameters for defining storage and management classes are described in "Defining Storage Classes" on page 167 and "Defining Management Classes" on page 168. The parameters are not inherently difficult to understand; however, implementing them effectively can be challenging.

During the translation process, establish parameter values for each class; then, evaluate the entire set of classes to ensure that the performance, retention, backup, and processing cycles they define correspond to the requirements established during the business analysis phase.

ACS Routine Input Variables

Automatic class selection routines are used to implement your installation's storage management policy. These routines must be written using the ACS programming language, a high-level language that uses relational statements to determine class and storage group assignments.

Related reading: The *z/OS DFSMS Storage Administration Reference* contains detailed information about the ACS programming language and the use of ISMF to define and to validate ACS routines.

The ACS routines use three values for the &ACSENVIR variable that are specific to objects. See Table 24 on page 161 and Table 25 on page 161 for a diagram of these variables. Using these values, you can distinguish object selection from data set selection. These values are as follows:

&ACSENVIR='STORE'

The storage class, management class, and perhaps the storage group routines are invoked because of an application's request to store an object. Variable &DSN contains the collection name.

If variable &MEMN (*object name*) is null, the ACS routines are invoked to specify a storage class, management class, storage group for the collection named in &DSN. Therefore, you must supply ACS routines that select a storage class, management class, and Object storage group for the collection. The storage class and management class supplied by the ACS routines become the default classes for the collection. The storage group selected indicates in which Object storage group the collection is to be a member. All objects in the collection are stored in the storage group that you select.

If variable &MEMN is not null, this ACS invocation validates the storage class and management class specified by the application for the object named in variable &MEMN. ACS routines ensure that the stated class is acceptable for use with this object, and if not, should substitute an acceptable one. This does not affect the class specifications for the collection.

When neither storage class nor the management class is specified on a request to store an object into an existing collection, the object is assigned the default classes associated with that collection.

Attention: When an object is assigned the default classes associated with the collection, the ACS routines are *not* invoked, and it is possible to store an object with a name that does not conform to the requirements in the ACS CHANGE or CTRANS environments. *Subsequent attempts to process that object will fail.*

&ACSENVIR='CHANGE'

ACS is invoked to validate an application's request to change the storage class or management class for the object named in variable &MEMN that is part of the collection named in variable &DSN. ACS routines should ensure that the stated class is acceptable for use. The appropriate ACS routine is invoked based on the combination of storage class (SC) and management class (MC) specifications included on the application request:

- If only MC is specified, the management class ACS routine is invoked, using the requested MC and the existing SC.
- If only SC is specified, both the storage class and management class ACS routines are invoked, using the requested SC and the existing MC.
- If MC and SC are specified, management class and storage class ACS routines are invoked, using the requested MC and SC.

&ACSENVIR='CTRANS'

During a storage management cycle, ACS is invoked because a class transition event has occurred for the object named in variable &MEMN that is part of the collection named in variable &DSN. Variables &MGMTCLAS, and &STORCLAS have the names of the classes to which the object is assigned. ACS routines should select the new classes. These

new classes can change the placement of the object in the hierarchy and can change the management of the object (including creation of a new transition event).

Table 24. Constructs Verified or Changed through ACS Routines Invoked by the &ACSENVIR Variables—All OAM Environments

ACS ROUTINES INVOKED (&ACSENVIR)	STORE	CHANGE	CTRANS	*ALLOC
DATA CLASS	NO	NO	NO	YES
STORAGE CLASS	**YES	***YES	YES	YES
MANAGEMENT CLASS	**YES	***YES	YES	NO
STORAGE GROUP	**YES	NO	NO	YES

Notes:

- *ACS environment of ALLOC is invoked by MVS during allocation.
- **When storing the first object into a new *collection* through the STORE request, the ACS routines for storage class, management class, and perhaps the storage group are entered.
- ***The ACS routines for management class and storage class are entered for *objects* only when an explicit management class, storage class, or both are specified on a CHANGE request. (See the ***CHANGE Environment Only*** graphic for more information.)

Table 25. Constructs Verified or Changed through ACS Routines Invoked by the &ACSENVIR Variables—Change Environment Only

ACS ROUTINES INVOKED (OSREQ SPECIFIES)	STORAGE CLASS ONLY	MANAGEMENT CLASS ONLY	STORAGE CLASS AND MANAGEMENT CLASS
STORAGE CLASS CHANGED	YES	NO	YES
MANAGEMENT CLASS CHANGED	NO	YES	YES

In addition to &ACSENVIR, ACS routines might also use the following:

- Read-Write Variables
  - &MGMTCLAS
  - &STORGRP
  - &STORCLAS
  - &SYSNAME
  - &SYSPLEX
- Read-Only Variables
  - &DSN
  - &HLQ
  - &LLQ
  - &MEMHLQ
  - &MEMLLQ
  - &MEMN
  - &MEMNQUAL
  - &NQUAL
  - &RETPD
  - &SIZE

Tip: &SIZE is valid **only** for STORE requests. &SIZE contains the object size converted to kilobytes (KB) and rounded up to the next highest 1 KB if the object size is not at a KB boundary (KB=1 024 bytes).

Related reading: For detailed information about ACS variables, see the *z/OS DFSMS Storage Administration Reference*.

Storing Objects in a Collection

When the first object is stored in a collection with an OSREQ STORE, the Object storage group for that collection is derived by the SMS Storage Group ACS routine, and the collection name catalog entry is defined with the default management class and storage class. After an object is stored, the collection name entry in the catalog helps to locate the object. (See Figure 7 on page 28 for a diagram of the process of storing an object.) The catalog entry for the collection name contains a directory token that determines which DB2 database contains the object directory entry for the object. If a collection name entry from the collection name table is lost, objects in that collection will not be processed by the storage management cycle.

Creating OAM Definitions with ISMF

After the translation process has been completed, it is necessary to define all the OAM elements to the system. ISMF provides a series of panels through which SMS parameters can be defined.

Grant DB2 authority to the OAM configuration databases to the ISMF user who will be creating the optical constructs.

Related reading:

- You might also want to read Appendix A, "Sample Optical Hardware Configurations," on page 387 before you begin using ISMF to familiarize yourself with hardware configuration issues and the CTC / 3995 device numbers needed for the library.
- For detailed information about using ISMF, see *z/OS DFSMS Using the Interactive Storage Management Facility*.
- For ISMF information about tape volumes and libraries, see *z/OS DFSMS OAM Planning, Installation, and Storage Administration Guide for Tape Libraries*.

Defining an SCDS

37 ***Define the base SCDS.***

You must perform this step at initial installation. During migration, you might optionally perform this step if you are creating additional SCDSs.

The procedure for defining a source control data set is provided in the *z/OS DFSMS Storage Administration Reference*. It is possible to define several source control data sets describing different configurations; however, only one SCDS can be activated at any time.

38 ***Define libraries and drives in the optical configuration database.***

You must perform this step at initial installation if you are using optical storage in your hierarchy. During migration, you might optionally perform this step if you are adding or changing libraries or drives.

Defining optical libraries and optical drives in the optical configuration database results in data being entered in the DB2 tables. It is therefore necessary that the TSO ID of the user entering the ISMF definitions has access to DB2.

Related reading:

- For a more comprehensive discussion of defining optical libraries and optical disk drives or for other topics such as deleting, altering, or copying optical libraries or drives, see Appendix A, "Sample Optical Hardware Configurations," on page 387.
- For ISMF information regarding tape libraries, see *z/OS DFSMS OAM Planning, Installation, and Storage Administration Guide for Tape Libraries*.

Defining Storage Groups and Relating the Libraries to the Storage Groups

39 ***Define Object and Object Backup storage groups.***

You must perform this step at initial installation. During migration, you might perform this step if you are adding or changing storage groups, or adding libraries to your configuration.

Use the Storage Group Application Selection panel to specify one of the following storage group types:

STORAGE GROUP TYPE	DESCRIPTION
OBJECT	Contains primary objects.
OBJECT BACKUP	Contains backup copies of objects.

Use the Object Storage Group Define panel to specify the following:

DESCRIPTION
Provide a free-form description of this storage group (up to 120 characters).

QUALIFIER
For Object storage groups, specify the name of the DB2 object storage database to be used for the object directory and the DASD high level qualifier of the storage group. This qualifier must also be defined as a package in the CBRPBIND job to create the package. This package must also be in the CBRHBIND and CBRABIND or CBRIBIND jobs to bind the package to the OSMC, OAM, and OSR plans.

CYCLE START TIME
For Object and Object Backup storage groups, specify the beginning of a window of time when OSMC can begin daily processing for this storage group. You must specify a value of from 0 to 23, or NONE for all Object storage group definitions. A value of from 0 to 23 represents an hour of the day. Specify an hour of the day as 00 for midnight, 01 for 1 A.M., 23 for 11 P.M., and so on. The hour of the day value for CYCLE START TIME must be different from the hour of the day value for CYCLE END TIME. A value of NONE indicates that no automatic processing for the storage group be performed. When NONE is specified, the CYCLE END TIME value must be blank. See "CYCLE START TIME and CYCLE END TIME" on page 155 for more information about this parameter.

CYCLE END TIME
For Object and Object Backup storage groups, specify the end of a window of time when OSMC can either begin or end daily processing for this storage group, depending on the mode defined in the CYCLEWINDOW keyword in the SETOSMC statement in the CBROAM*xx* PARMLIB member. You must specify a value from 0 to 23, or blank (depending on your specification for CYCLE START TIME) for all Object storage group definitions. A value of from 0 to 23 represents an hour of the day and is required when a value from 0 to 23 was specified for CYCLE START TIME. Specify an hour of the day as 00 for midnight, 01 for 1 A.M., 23 for 11 P.M., and so on. The hour of the day value for CYCLE END TIME must be different from the hour of the day value for CYCLE START TIME. A value of blank is required when NONE has been specified for CYCLE START TIME. See "CYCLE START TIME and CYCLE END TIME" on page 155 for more information about this parameter.

LIBRARY NAMES
Specify the names of the optical disk libraries in your configuration (either one to eight pseudo or real optical libraries) that can contain volumes belonging to this Object or Object Backup storage group to which objects are written.

VOLUME FULL THRESHOLD
For Object or Object Backup storage groups, specify the number of free kilobytes to be used as a threshold for optical volumes that belong to this storage group. When the number of free kilobytes falls below this threshold, the volume is marked full and no more objects are placed on the volume. See "VOLUME FULL THRESHOLD" on page 154 for more information about this parameter.

If the optical volume table of contents is full, the volume is marked full regardless of what is specified in this parameter.

DRIVE STARTUP THRESHOLD

For Object or Object Backup storage groups, specify the point at which OAM starts using an additional optical disk drive for writing. When the number of requests to write objects to this Object or Object Backup storage group divided by the number of optical drives processing write requests for this storage group exceeds this threshold, OAM starts using an additional optical disk drive for writing. The default value for DRIVE STARTUP THRESHOLD is 17.

See "DRIVE STARTUP THRESHOLD" on page 153 for more information about this parameter, including a table of recommended values, based on average object size.

OSMC PROCESSING SYSTEM NAME

For Object and Object Backup storage groups, specify on which system OSMC processing is to run when this storage group is automatically started during the OSMC cycle window specified in the storage group definition. Specifying an OSMC processing system name avoids contention by preventing the storage group from being started automatically on multiple systems concurrently within an OAMplex.

MARK VOLUME FULL AT FIRST WRITE-FAILURE OPTION

For Object or Object Backup storage groups, specify whether the volume should be marked full at first write-failure.

If you specify **Y** (YES), OAM marks full an optical or tape volume in this Object or Object Backup storage group the first time an object cannot be written on this volume because there is not enough space remaining on the volume.

If you specify **N** (NO), OAM marks an optical volume in this Object or Object Backup storage group full only when the number of available kilobytes in the user data area falls below the VOLUME FULL THRESHOLD.

If the optical volume table of contents is full, the volume is marked full regardless of what is specified in this parameter.

If you specify **N** (NO), OAM marks full a tape volume in this Object or Object Backup storage group only when the number of available kilobytes falls below the TAPEFULLTHRESHOLD that is specified on the SETOAM statement in CBROAM*xx* member of PARMLIB.

See "MARK VOLUME FULL AT FIRST WRITE-FAILURE OPTION" on page 155 for more information about this parameter.

SMS STORAGE GROUP STATUS

For Object or Object Backup storage groups, specify **Y** (YES) for this parameter. This specification displays another panel where you can specify one of the following values on the SMS Storage Group Status panel for the system running OAM if it is not in an OAMplex, or for the systems in an OAMplex:

ENABLE Applications can store and retrieve objects in the group; OSMC can process the group.

DISNEW Applications can retrieve objects from the group, but cannot store objects into the group; OSMC can process the group.

DISALL Applications can neither store nor retrieve objects in the group; OSMC can process the group.

NOTCON Neither applications nor OSMC can process objects in the group.

Attention: In a *nonOAMplex* environment, use the SMS Storage Group Status panel to allow status to be specified for each system defined to SMS. You should specify an option **other than** NOTCON for the one system that will be running OAM, and you must specify the NOTCON option for all other systems. If you specify more than one system as other than NOTCON for an Object or Object Backup storage group, a message is issued during OAM initialization and the storage group is ignored by OAM.

Also, storage group enablement status should not be confused with library connectivity. Changing the connectivity of a library does not automatically change the enablement status of any associated storage group. Storage group definitions might need to be updated to provide the correct storage group enablement status should the library connectivity be changed.

Defining Storage Groups to Direct Data to Specific Optical Media Types

With the IBM 3995 multifunction optical disk drives, a customer can choose to populate a single library with both WORM and rewritable optical media. This configuration allows the customer to direct data for a particular application to the WORM media while directing data for another application to the rewritable media on the same optical device.

To achieve this control over which media type is used for a specific application's data (objects) residing in the same optical library dataserver as another application's data, it is recommended that the following steps be completed:

- Define one or more Object storage groups for the application that wishes to have its objects stored on WORM media and one or more Object storage groups for the application that wishes to have its objects stored on rewritable media. Also include the library name associated with the library model in the Object storage group definition for each application.
- Enter the media into the 3995 optical library dataserver. The optical disk volumes residing on the WORM or rewritable media should be associated with one of the Object storage groups set up for the application that requires its data to be stored on the specific media type.
- Update the SMS storage group ACS routine to insure that the data belonging to the individual applications is assigned to the appropriate Object storage groups that only have WORM or rewritable optical disk volumes associated with them.
- Make certain there are sufficient optical disk volumes with available space and of the appropriate media type assigned to each Object storage group at all times.
- Make certain there are NO OAM scratch optical disk volumes in the multifunction 3995 Optical Library Dataserver. An OAM scratch optical disk volume can be assigned by OAM to any Object storage group when the Object storage group encounters an 'out-of-space' condition. All optical disk volumes should be preassigned to a given Object storage group based on the media type of the optical disk volume.

Another way for you to direct data belonging to different applications to different types of media is:

- Having two or more multifunction 3995 Optical Library Dataservers and populate one with WORM media and the other with rewritable media.

- Defining one or more Object storage groups for the application or applications for which you want data stored on either WORM or rewritable media, and including the library name associated with the multifunction library in the Object storage group definition.
- Using the Default Media Type option to restrict the media type that can be entered into a specific optical library dataserver. See the discussion on page 407 for more information on the Default Media Type option.

Defining Storage Classes

40 ***Define storage classes.***

You must perform this step at initial installation. During migration, you must perform this step if you are adding or modifying storage classes for object tape storage.

OAM interprets the parameters used to define the storage class in an attempt to apply the stated performance objective. The following parameters are used by OAM as an indication of the performance objective for the object:

INITIAL ACCESS RESPONSE SECONDS (IARS)
: Specify a performance objective relative to the elapsed time (in seconds) that can be tolerated before the first byte of data is made available for an application's request to retrieve an object. Use from 1 to 4 characters to specify a valid value of 0 to 9999. A value of 0 causes the object to be written to DASD storage, and a value of greater than 0 causes the object to be written to removable media storage. Any OAM request that tries to use a storage class with a blank value for this parameter will fail.

SUSTAINED DATA RATE (SDR)
: A subparameter of the storage class parameter that specifies which removable media, optical or tape, is used to accept the primary copy of the object, once the Initial Access Response Seconds parameter determines that the object should be written to removable media. If the SDR is greater than or equal to three, the primary copy of the object is stored on a tape volume. If the SDR for the object is less than three, the primary copy of the object is stored on an optical disk volume.

OAM attempts to meet the performance objective by placing the object at a level in the storage hierarchy that comes closest to the objective. Avoid using performance objectives that force objects to be written directly to optical storage. Writing objects directly to optical media without staging them through DASD can degrade system performance and significantly increase the number of optical disks needed per day due to inefficient optical VTOC directory space utilization. See Table 14 on page 71 for detailed information about the effects of writing objects directly to optical media.

AVAILABILITY
: Specify a value for this parameter (STANDARD or CONTINUOUS), even though it is ignored for objects.

Defining Data Classes

41 ***Define data classes.***

You must perform this step if you are using object to tape storage in your environment and want to direct your tape related Object writes to an ATLDS or an MTL.

You need to specify a DATACLASS to be used to direct work requests to an ATLDS or an MTL. This DATACLASS must be added to the CBROAM*xx* PARMLIB member for each storage group that is directing Object tape writes to the ATLDS or MTL.

Related reading:

- See "Understanding the Data Class Construct" on page 24 for more details concerning data classes.
- See *z/OS DFSMS Storage Administration Reference* for details on how to define your data classes for your installation.

Defining Management Classes

42 ***Define management classes.***

You must perform this step at initial installation. During migration, you might optionally perform this step if you are adding management classes.

Pages 1 through 3 of the Management Class Define panel are primarily for DFSMShsm's management of data sets. OAM uses the following subset of those parameters to manage objects in the same manner that DFSMShsm manages data sets.

Related reading: See "Defining Management Classes" in *z/OS DFSMS Storage Administration Reference* more information.

EXPIRATION ATTRIBUTES

Specify when an object can be deleted automatically by OAM, if approved by the auto-delete installation exit.

Note: A value of NOLIMIT for the EXPIRATION ATTRIBUTES means OAM will not automatically delete the objects that are associated with this management class. Those objects must be explicitly deleted by the application, using the application interface to OAM.

Related reading:

- See "Auto-Delete Installation Exit (CBRHADUX)" on page 573 and *z/OS DFSMS Installation Exits* for information about the installation exit.
- See *z/OS DFSMS Storage Administration Reference* for a detailed discussion of the relationships between the EXPIRATION ATTRIBUTES and the RETENTION LIMIT values.

EXPIRE AFTER DAYS NONUSAGE

Specify when the object is to be automatically deleted by OAM relative to the elapsed time since it was last referenced, or if the object has not been referenced (such as the case of an object stored today, because its last reference date is set to today's date), the elapsed time since it was created.

Note: Do not use UPD=**N** on the OAM1 statement in the IEFSSN*xx* member of PARMLIB if this option is used in your management class.

EXPIRE AFTER DATE/DAYS

Specify when the object is to be automatically deleted by OAM, relative to the elapsed time since it was created or on an explicit date.

RETENTION LIMIT
Specify the retention limit allowed on explicit parameters on the application interface to OAM.

AUTO BACKUP
Specify whether you want to back up the object by writing one or two copies of the object. The backup copies are made during the OSMC storage management cycle. If you set AUTO BACKUP=**Y** and the number of backup copies specified in NUMBER OF BACKUP VERSIONS (DATA SET EXISTS) is 0 or 1, and you have not specified a SECONDBACKUPGROUP keyword on any SETOSMC statement in the CBROAM*xx* member of PARMLIB, then OSMC schedules a single backup copy of the object to be written. If you set AUTO BACKUP=**Y** and the number of backup copies that is specified in NUMBER OF BACKUP VERSIONS (DATA SET EXISTS) is 2 or above, and you have specified a SECONDBACKUPGROUP keyword on any SETOSMC statement in the CBROAM*xx* member of PARMLIB, then OSMC schedules two backup copies of the object to be written.

BACKUP FREQUENCY
Specify when you want the first backup copy to the object be written. If you set AUTO BACKUP=Y and BACKUP FREQUENCY = 0, OAM schedules the first backup copy to be written immediately after the primary copy of the object is successfully stored. Otherwise, any backup copies are made during the first storage management cycle after the object is stored, or during the first storage management cycle after a new management class is assigned for the object.

OAM suggests you use the immediate object backup cautiously as it might impact the performance of storing and retrieving primary copies of objects.

NUMBER OF BACKUP VERSIONS (DATA SET EXISTS)
Specify the number of backup versions to be made for an object when OSMC processing is done for an Object storage group.

Valid values for the NUMBER OF BACKUP VERSIONS (DATA SET EXISTS) field are as follows:

- 0—creates one backup copy

  Note: When AUTO BACKUP=Y in the management class construct, ISMF/SMS will not accept a value of "0" for the number of backup versions.
- 1—creates one backup copy
- ≥2—creates two backup copies

Page 4 of the Management Class Define panel is not used for data sets; it is used for objects to define an event that causes OAM to invoke ACS for the purpose of selecting a new storage class or management class. These class transition events are:

TIME SINCE CREATION
Specify the time (YEARS, MONTHS, and DAYS) that must elapse relative to the date the object was created. The YEARS, MONTHS, and DAYS attributes can be used separately or in combination. A maximum date of 9999/12/31 will be used if TIME SINCE CREATION results in a date exceeding the maximum.

TIME SINCE LAST USE
Specify the time (YEARS, MONTHS, and DAYS) that must elapse relative

to the date the object was last referenced, or if the object has not been referenced (such as the case of an object stored today, because its last reference date is set to today's date), the elapsed time since it was created is used. The YEARS, MONTHS, and DAYS attributes can be used separately or in combination. A maximum date of 9999/12/31 will be used if TIME SINCE LAST USE results in a date exceeding the maximum.

Restriction: Do not use UPD=N on the OAM1 statement in the IEFSSN*xx* member of PARMLIB if this option is used in your management class.

PERIODIC
Specify that a class transition will occur at a regular period, based on the calendar (regardless of when the object was created or referenced). This parameter has five attributes, which can be used either separately or in combination:

MONTHLY ON DAY
Specify FIRST, LAST, or a number from 1 to 31 indicating the day of the month on which class transition should occur; leave blank if unused.

QUARTERLY ON DAY
Specify FIRST, LAST, or a number from 1 to 92 indicating the day of the quarter on which class transition should occur; leave blank if unused.

QUARTERLY IN MONTH
Specify a number from 1 to 3 indicating the month in each quarter on which class transition should occur; leave blank if unused.

YEARLY ON DAY
Specify FIRST, LAST, or a number from 1 to 366 indicating the day of the year on which class transition should occur; leave blank if unused. For example, choosing the number 366 allows the transition to occur on 1/1 of the next year. In the event of a leap year, OSMC causes the transition to occur on 12/31 of the current year.

YEARLY IN MONTH
Specify a number from 1 to 12 indicating the month of the year on which class transition should occur; leave blank if unused.

Restriction: You cannot specify the TIME SINCE CREATION, TIME SINCE LAST USE, and PERIODIC attributes together.

An object's management class association can change as a result of an application request or a class transition. Should a change occur, OAM applies the new management criteria. This might result in a variety of actions, such as:
- Up to two backup copies might be made where one did not exist before.
- An object's lifetime might be decreased or increased.
- A new class transition event can cause the invocation of ACS routines in the future.

As you define management classes and prepare and review your implementation of class transition using the Automated Class Selection routines, it is critical to analyze the end result of your class transitions to avoid processing inefficiencies, unexpected results, or both.

The usage of TIME SINCE CREATION and TIME SINCE LAST USE attributes must be carefully studied to ensure that one of the class transitions in a series of class transitions assigns a management class, which causes the next class transition to occur **in the future** or the object to expire. Ensuring a management class is assigned to cause the next class transition to occur in the future is accomplished through your extensions to the operating system in the Management Class Automatic Class Selection routine.

Restriction: Do not use the TIME SINCE LAST USE or the TIME SINCE LAST REFERENCE attributes if you are using the new parameter (UPD=N) on the CBRINIT line in the IEFSSN*xx* PARMLIB member with no pending action date. See "Updating the IEFSSNxx PARMLIB member" on page 98 for more information.

If your implementation allows for a series of class transitions that do not result in a class transition scheduled in the future, or do not result in an object expiring and being deleted, the results of the storage management cycle might be affected. Depending on the number of objects processed, operational conditions, or possible processing interruptions due to contention, it is likely that processing will be seriously degraded. This could potentially force the storage management process into a loop that attempts to identify a future date for class transition processing or expiration for one or more objects.

If at any time an object's management class results in the object's expiration date being set to 9999/12/31 while that object is on removable media, that volume's expiration date will be set to 9999/12/31. This will cause the volume to never expire, even if the object's management class changes at a later date allowing the object to expire. Be aware of the affects of expiration dates that can be set by a management class, even if it is being used as an interim management class for an object. This expiration date can be modified using the MODIFY OAM,UPDATE command.

Defining Automatic Class Selection

43 ***Define and test ACS routines.***

You must perform this step at initial installation. During migration, you might optionally perform this step if you have made changes in the SMS definitions and programs used by OAM.

You must supply ACS routines. "Automatic Class Selection" on page 492 contains listings of source code for sample ACS routines. There can be only one set of ACS routines and exits in an active configuration. This set applies to both objects and data sets. Installation exits are optional and allow you to perform functions that are not permitted in the ACS routines (for example, writing GTF records).

Related reading:

- See *z/OS DFSMS Storage Administration Reference* and *z/OS DFSMS Implementing System-Managed Storage* for information on using ISMF to define ACS routines.
- See *z/OS DFSMS Installation Exits* for information on writing ACS installation exits.

Validating and Activating the SMS Configuration

44 ***Validate and activate the SMS configuration.***

You must perform this step at initial installation. During migration, you might optionally perform this step if you have made changes in the SMS definitions and programs used by OAM.

You cannot use OAM until a configuration containing all the elements described in this chapter have been defined and activated.

Only one SCDS can be activated at any time. Activating another SCDS or reactivating the current SCDS while OAM is running might cause OAM to restart. How soon OAM is notified of the SCDS activation depends on the time interval specified with the INTERVAL keyword in the IGDSMS*xx* PARMLIB member. OAM restarts if RESTART=YES is specified on the OAM procedure JCL parameter. During this reinitialization, all libraries and drives are set to either online or offline according to the attributes defined in the SCDS that caused OAM to restart. After the restart completes, all libraries and drives should be displayed and set to the desired operational status.

Related reading: See *z/OS DFSMS Storage Administration Reference* for information about validating and activating the configuration that you have just defined.

Verifying Object Support Installation With IVP

45 ***Run the OAM Installation Verification Program for object support***

You must perform this step at initial installation and at migration.

The OAM Installation Verification Program (OAMIVP) verifies that OAM object support is successfully installed and operational. This program activates the OSREQ macro, and allows dummy objects to be tested by having the storage administrator perform OSREQ functions against them without having to perform an explicit OSREQ ACCESS to connect the macro to OAM, or without having to perform an OSREQ UNACCESS to disconnect the macro. Run this job (see "OAM Installation Verification Program and OAMUTIL" on page 489 for a sample of this job), and perform some OSREQ functions as a test to insure the product is successfully installed.

Adding New Tape Devices to the OAM Object Tape Configuration

46 ***Add new tape devices to the OAM object tape configuration***

You must perform this step when installing new tape devices.

To migrate to and implement new tape devices in the OAM object tape configuration, follow the instructions in *z/OS Migration* or in the publication for the new tape device. These publications describe the procedures for migrating to the software support in a stand-alone environment, an IBM tape library, or an OAM object tape user in an OAMplex.

Specialized OAM Installation Procedures

It might be necessary to move the OAM application from one system to another to accommodate changes within an installation's storage management policy. The following information can assist you in moving OAM from one system to another (SYS1 and SYS2 are used as example system names).

Procedures for Moving OAM to Another System

This section provides information on moving OAM from one OAM system to another OAM system, *neither of which is part of an OAMplex*. To merge OAMs into an OAMplex, perform the procedure in "Merging OAMs into an OAMplex" on page 174.

The following steps are necessary when moving the entire OAM application from one single system to another single system. These steps can be followed after the installation and migration steps have been completed, should you need to move OAM from one system to another.

__ Step 1. Install OAM and DB2 on system SYS2 by following the procedures in "High-Level Installation and Migration Checklists" on page 88.

_____

__ Step 2. Make copies of the OAM DB2 databases from system SYS1 using DB2 utilities. The OAM DB2 databases are the Object Storage Databases, Object Administration Database, and the Optical Configuration Database described in Appendix C, "Understanding OAM Databases," on page 509.

_____

__ Step 3. Copy the Integrated Catalog Facility (ICF) catalog where the collections reside from system SYS1 using the Export function of Access Method Services (IDCAMS). For more information on this Export function, see *z/OS DFSMS Access Method Services for Catalogs*.

_____

__ Step 4. Start DB2 on system SYS2.

_____

__ Step 5. Move the copies of the OAM DB2 databases to system SYS2 using DB2 utilities.

_____

__ Step 6. Move the copies of the collection definitions to the Integrated Catalog Facility (ICF) on system SYS2 using the Import function of Access Method Services (IDCAMS).

_____

__ Step 7. Delete all of the optical library and drive definitions from system SYS1 using the ISMF Optical Library Application.

_____

__ Step 8. If system SYS2 is not defined in the SCDS, then from system SYS1 add it as a valid system under the Control Data Set Definition Application of ISMF.

_____

__ Step 9. Move the SCDS from system SYS1 to system SYS2 by using the copy function of DFSMSdss™. This only needs to be done if system SYS2 is not part of the same complex that is sharing the SMS SCDS.

_____

__ Step 10. Using the ISMF Storage Group Application on system SYS2, alter the Object and Object Backup storage group definitions to change the connectivity of SYS1 to not connected and the connectivity of system SYS2 to enabled.

_____

__ Step 11. Using the ISMF Optical Library Application on system SYS2, alter the library definitions connectivity from system SYS1 to system SYS2. This is only applicable for the controlling libraries. Altering these models automatically alters any connected library expansion units associated with the controlling libraries.

Tip: You might need to delete and redefine all the 3995 operator-accessible drives.

__ Step 12. Using the ISMF Optical Library Application on system SYS2, redefine all of the library definitions. Using the ISMF Optical Drive Application on system SYS2, redefine all of the drive definitions associated with the libraries. If the definitions do not exist in the DB2 optical configuration database tables, they are added, but if they do exist, the information is updated in the DB2 tables. The information is added to the SCDS.

__ Step 13. Activate this SCDS from system SYS2. Activation might be done from the operator console by using the SETSMS SCDS (source control data set name) command or by using the Activate Configuration option of ISMF.

__ Step 14. Start OAM.

Merging OAMs into an OAMplex

Perform the following two steps if you wish to merge OAMs into an OAMplex.

__ Step 1. Modify and run the CBRSMERG SAMPLIB job. CBRSMERG merges OAM configuration databases for use with DB2 data sharing. See "Run the CBRSMERG SAMPLIB job" on page 145 for details.

__ Step 2. Modify and run the CBRSG100 SAMPLIB job. CBRSG100 merges the collection name catalogs and also the DB2 object databases to use DB2 data sharing. See "Run the CBRSG100 SAMPLIB job" on page 145 for details.

Adding OAM Systems to an Existing OAMplex

This section provides information on adding OAM systems to an existing OAMplex. When you initialize OAM, it looks for the OAMXCF statement in the CBROAMxx PARMLIB member. If the OAMXCF statement exists, this OAM system joins the XCF group, which means that it joins the OAMplex. Each OAM system in the OAMplex share the DB2 databases (object storage and optical configuration databases).

__ Step 1. Update the IGDSMS*xx* PARMLIB member for each OAM system that you are adding to the OAMplex. For more information, see "Changing System Libraries" on page 97.

a. Add the DB2SSID parameter to the IGDSMS*xx* PARMLIB member. The DB2SSID parameter specifies the name of the DB2 system.

b. Add the OAMPROC and OAMTASK parameters to IGDSMS*xx* only if you need to start the OAM address space to initialize SMS on the new system.

c. Issue the SET=SMS*xx* command to update the SMS information.

__ Step 2. Update the OAMXCF statement in the CBROAM*xx* PARMLIB member to include the XCF group name and OAM member name for each OAM system that you are adding to the OAMplex. Each OAM system has a unique OAMMEMBERNAME and belongs to the same OAMGROUPNAME. For more information, see "OAMXCF Statements in an OAMplex" on page 129.

```
OAMXCF OAMGROUPNAME(OAMGRP1)
       OAMMEMBERNAME(OAMSYS1)
       XCFTIMEOUT(XCFOPTREADA(20) XCFOPTREADM(50)
                  XCFOPTWRITEA(150) XCFOPTWRITEM(150)
                  XCFTAPEREADA(40) XCFTAPEREADM(50))
```

Figure 17. CBROAMxx PARMLIB Member Samples Using the OAMXCF Statement and Optional Parameters

__ Step 3. Set up an OAM PROC with the OAM=*xx* parameter for the new system, where *xx* is the low-order suffix of your CBROAM*xx* PARMLIB member. For more information, see step **11b** in "Updating the PROCLIB" on page 132.

__ Step 4. Set the OSMC processing system to the desired system for each Object and Object Backup storage group.

__ Step 5. Update all the Object and Object Backup storage groups so that they are enabled to each system where OAM is running. For more information, see "Defining Storage Groups and Relating the Libraries to the Storage Groups" on page 163.

__ Step 6. Ensure that the DB2 tables are in a data sharing group. Contact your DB2 administrator to set up the data sharing group.

__ Step 7. If applications connect to DB2 and call OAM, the DB2SSID and the data sharing group that they connect to must be the same, or else the "Connects to two DB2s from one TCB" error displays. Contact your DB2 administrator for assistance with this step.

__ Step 8. Run the CBRSMERG and CBRS100 jobs to merge the OAMs into the OAMplex at this point. For more information, see "Merging OAMs into an OAMplex" on page 174.

__ Step 9. Start OAM on each system in the OAMplex. Display the `DISPLAY SMS,OAMXCF` command on each system to verify that they joined the OAMplex successfully.

Result: Now all of the OAM systems belong to the OAMplex.

Chapter 4. Administering OAM

This chapter discusses the following typical OAM administrative tasks.

Topic	Page
Monitoring and Maintaining the Optical Configuration using ISMF	177
Monitoring and Maintaining Optical Volumes	182
Monitoring and Maintaining SMS Construct Definitions	192
Monitoring DB2 Databases	195
Tuning OAM	196
Measuring OAM Transaction Performance Using SMF	211
Identifying OAM Transaction Activity Using RMF	213
Establishing Recovery Procedures	222
Using the Move Volume Utility	225
Expiring Tape and Optical Volumes	238
Processing Object Expiration	245
Destroying and Deleting Expired Data	246
Invoking the OSREQ Macro Through the OSREQ TSO/E Command Processor	253

Attention: Unless OAM is completely stopped, do not do any of the following:

- Stop or start table spaces or indexes related to the OAM databases.
- Start DB2 in maintenance mode.
- Run DB2 utilities against the OAM related databases.
- Update any of the DB2 tables related to the OAM databases.

Monitoring and Maintaining the Optical Configuration using ISMF

ISMF Library Management makes it possible to monitor and maintain information associated with the optical configuration and the source control data set. The following information concerning ISMF deals only with its role in an optical storage environment. Although ISMF is used to manage tape libraries and their volumes, it is not discussed in this document in an attempt to prevent redundancy of material found in the *z/OS DFSMS OAM Planning, Installation, and Storage Administration Guide for Tape Libraries*.

ISMF Library Management

The library management dialog allows you to generate lists of libraries or drives, or to display the attributes of a single library or drive. You can use the dialog to alter the definitions that were defined when OAM was installed or to add new definitions. For example:

Optical Library Configuration:

- Add, remove, or alter libraries and library drives
- Add, remove, or alter operator-accessible drives
- Redefine channel attachment

© Copyright IBM Corp. 1989, 2006

Related reading: For detailed information about using ISMF, see *z/OS DFSMS Using the Interactive Storage Management Facility*.

Typical ISMF Library Management Procedures

This section discusses the effects of some typical configuration maintenance tasks.

Defining an Optical Library or Optical Disk Drive

The first time that you define an optical library or optical disk drive, the corresponding ISMF DEFINE panel requires that you enter all the attributes for that device in the appropriate panel fields based on the name of the library or drive. When you enter all the information, OAM adds a row that contains that information to the library or drive table in the optical configuration database. An optical library or optical disk drive definition is also added to the specified SCDS in which the DEFINE occurs.

Subsequent definitions of the same optical library or optical disk drive into a new SCDS result in the REDEFINE panel being displayed with all the attributes associated with that device displayed as read in from the library or drive table. The optical library or optical disk drive definition is added to the specified SCDS.

Related reading: For more detail on defining optical libraries and optical disk drives with ISMF, see "Sample ISMF Session for an IBM 3995 Optical Library Dataserver" on page 402.

SCDS Activation and Restart

Only one SCDS can be activated at any time. Activating another SCDS or reactivating the current SCDS while OAM is running might cause OAM to restart. During this reinitialization, all libraries and drives are set to either online or offline according to the attributes defined in the SCDS that caused OAM to restart. After the restart completes, all libraries and drives should be displayed and set to the desired operational status.

Deleting an Optical Library or Optical Disk Drive

Deleting an optical library or optical disk drive definition does not delete the entries from the optical configuration database. Instead, upon deletion, the device definition is removed from the specified SCDS. If you must delete an optical library or optical disk drive from the optical configuration database, use QMF, SPUFI, or a similar tool.

Related reading: For more detail on deleting optical libraries and optical disk drives with ISMF, see "Deleting an Optical Library" on page 426, and "Deleting an Optical Disk Drive" on page 427.

Altering an Optical Library or Optical Disk Drive

Altering an optical library or optical disk drive results in an update to the corresponding database row to reflect the changes. Within the specified SCDS, the online status of the definition associated with the device is updated to reflect any change made to the online status.

The function used to alter an optical library or optical disk drive definition is only available when OAM is *not* running. This function prevents OAM from overwriting a change initiated from an ISMF Library Management dialog.

Related reading: For more detail on altering optical libraries and optical disk drives with ISMF, see "Altering a 3995 Optical Library" on page 418, and "Altering an Optical Disk Drive" on page 424.

Auditing an Optical Library

You can use the AUDIT line operator on the Optical Library List to perform inventory tasks against an entire 3995 optical library. The physical location of all the optical volumes associated with a 3995 optical library (full library audit) can be verified using the AUDIT line operator. The 3995-C3A, and pseudo optical libraries cannot be audited.

You also can audit an optical library using the MODIFY OAM,AUDIT operator command. See "Auditing a Volume" on page 379 for more information.

Because the library audit might take a long time, a confirmation panel is displayed, asking you to confirm the AUDIT request. To confirm, type in "Y", then press ENTER. See Figure 18 for the Confirm Audit Request panel.

```
  Panel  Utilities  Help
------------------------------------------------------------------------------
                            CONFIRM AUDIT REQUEST
Command ===>

To Confirm Audit of the Following Library:

   Library Name:  LIB1


   Enter "/" to select option      Perform Audit



   Note: If Audit is performed, Audit requests will be interspersed with other
         requests to the library. Audit may take a long time to complete.
         Use the HELP command for more information on Audit processing.




Use ENTER to Perform Operation;
Use HELP Command for Help; Use END Command to Exit.
```

Figure 18. Confirm Library Audit Request Panel

AUDIT execution can be a lengthy process. During AUDIT execution, other activity in the library is **not** quiesced, and OAM prioritizes AUDIT requests lower than other requested functions. The following activities are examples of activities that OAM can still process while AUDIT is in progress:

- Requests to read objects from optical volumes within the library that is being audited.
- Requests to write objects to optical volumes within the library that is being audited.
- Optical volume ejects from the library that is being audited.

It might take **several** hours for you to receive notification that a full library audit or an extensive volume list audit has completed. Therefore, when scheduling an audit, be sure to take work load and time factors into consideration.

When you receive a completion message, you can enter the LISTVOL line operator to display the Mountable Optical Volume List for all optical volumes in the audited library. Check the VOLUME ERROR STATUS column for the results of the audit. OAM also issues messages for errors found. If you log off the TSO/E session before completion, the messages are stored in a broadcast data set and displayed

the next time you log on. See Table 28 on page 189 for information on the AUDIT completion messages and the results displayed in the VOLUME ERROR STATUS column.

Related reading: For more information about auditing a tape library using the AUDIT line operator, see *z/OS DFSMS OAM Planning, Installation, and Storage Administration Guide for Tape Libraries*.

Remapping an Optical Library

OAM keeps an inventory of the optical volumes in the optical configuration database (OCDB). At the same time, the controller in the IBM 3995 optical library maintains an inventory of the optical volumes, which is called the *outboard inventory*. Usually these two volume inventories match, but there are some unusual conditions where they might go out of synchronization. Use the library audit and remap functions to synchronize the volume inventories in the OCDB and outboard inventory.

If audits or other functions indicate volume locations are incorrect, you can use the REMAP line operator to reconstruct the optical library's outboard inventory, by verifying the identity of each volume in the optical library.

REMAP also detects and corrects any discrepancies between the outboard inventory and the volume table in the optical configuration database. The REMAP line operator is not available for tape libraries.

You also can use the MODIFY OAM,REMAP operator command to remap an optical library. See "Remapping an Optical Library" on page 380 for more information on the syntax and parameters for this command.

Enter the REMAP line operator next to a 3995 optical library on the Optical Library List. REMAP checks for the following conditions:

- The CDS name is "ACTIVE".
- The optical library is a real 3995 library. (You cannot use REMAP with a 3995-C3A or a pseudo library of any kind.)
- The optical library is online and operational.
- At least one internal drive is online and operational. The drive cannot be pending offline.

If these checks are successful, the REMAP Confirmation panel is displayed, asking you to confirm the REMAP. To confirm, type in "Y", then press ENTER. If the REMAP is accepted, the message REMAP SCHEDULED is displayed. Once the REMAP process is started, it must run to completion. There is no REMAP cancel function.

Recommendation: REMAP execution can take from 30 to 80 minutes to complete a full library depending on the number of online drives in the library. Therefore, when scheduling a REMAP, be sure to take work load and time factors into consideration. Also, once a REMAP is started, stopping OAM DOES NOT cancel REMAP processing. If you stop OAM in an attempt to cancel or stop a REMAP request, the library controller inventory must be rebuilt, and the REMAP continues to process in the library. There is no option of canceling a REMAP request once it is started.

When you issue a REMAP request for a library, all work in progress for the library is allowed to complete. However, new work requests and work requests scheduled but not yet started are rejected (except for drive vary requests that were queued

prior to the REMAP request). Cartridges in the internal drives are demounted. If the library has an operator-accessible drive, upon completion of work in progress, the cartridge is demounted and the drive becomes unavailable for activity until the REMAP processing is complete. If an internal drive cartridge demount fails, REMAP processing fails; however, if the demount fails on the operator-accessible drive, REMAP processing continues on the internal drives.

Once you issue REMAP, the library controller reconstructs its inventory by going to each slot in the library. It verifies the identity of the cartridge in that slot by inserting that cartridge in a drive and reading both volume serial numbers. When the new inventory is complete, the host reads the inventory and compares all the inventory records with the volume records, and the volume records with the inventory. Updates are made to the appropriate host tables or the cartridge is ejected if the table cannot be corrected. Host volume records that indicate a volume is in the library but cannot be found in the outboard inventory are marked as shelf-resident and the volume status is updated as lost. All duplicate cartridges are marked by the library controller, causing the host to schedule the cartridge for eject. You are notified of the start of REMAP, all ejected cartridges, and of the completion of REMAP through a message to your TSO/E logon session.

When you receive a completion message, you can enter the LISTVOL line operator to display the Mountable Optical Volume List for all optical volumes in the remapped library. Check the VOLUME ERROR STATUS column, described in Table 26, for error messages issued for errors detected by the REMAP operation.

Table 26. Remap Results That Appear in the VOLUME ERROR STATUS Column

Result	Meaning
NO ERROR	Either no error occurs during the REMAP, or shows the initial status of the VOLUME ERROR STATUS column.
LOST VOLUME	A record in the volume table indicates a volume is in the optical library, but the volume cannot be found in the outboard inventory for that optical library.

The error messages are issued to the ISMF user who invoked the REMAP line operator. The messages contain the serial number (volser) of the volume for which the error was found and text indicating the type of error found. If you log off the TSO/E session before completion, the messages are stored in a broadcast data set and displayed the next time you log on. REMAP also might update the VOLUME LOCATION, VOLUME LIBRARY NAME, and MEDIA TYPE columns.

Types of Discrepancies that REMAP Resolves

Table 27 shows how REMAP resolves various discrepancies.

Table 27. Discrepancies REMAP Resolves between the Outboard Inventory and the Optical Configuration Database

Cause	Resolution
A cartridge has a media error. Possible causes are damaged media, the volume is a duplicate, or the cartridge is unformatted.	The cartridge is ejected from the optical library to allow it to be inspected.
The row in the volume table in the OCDB indicates the volume should be in another real optical library.	The volume is ejected from this library.
The paired volumes of a cartridge do not match the paired volumes in the OCDB.	The cartridge is ejected.

Table 27. Discrepancies REMAP Resolves between the Outboard Inventory and the Optical Configuration Database (continued)

Cause	Resolution
A volume physically resides in the library, but no row for that volume is found in the OCDB.	The cartridge is ejected.
The row in the volume table in the OCDB indicates the volume is on the shelf, but is physically residing in the library.	The volume location is changed to state the volume is residing in the library. The library name also is corrected if it differs from the library in which the volume resides.
The OCDB has a row for the volume but the outboard inventory does not have the corresponding volume.	The volume is lost. The VOLUME ERROR STATUS column for the volume is updated to say "LOST VOLUME". The volume is given a pseudo library name. The volume location is changed to "SHELF".
The volume media type in the OCDB is not compatible with the library device type.	The media type is corrected.

Monitoring and Maintaining Optical Volumes

You can use the Mountable Optical Volume Application available from the Volume List Selection menu to maintain and verify optical volumes within the optical library.

Related reading: For information about using ISMF and the Mountable Tape Volume Application with tape libraries and volumes, see *z/OS DFSMS OAM Planning, Installation, and Storage Administration Guide for Tape Libraries*.

ISMF Mountable Optical Volume Application

A mountable optical volume resides on one side of an optical disk cartridge. The ISMF Mountable Optical Volume Application allows you to maintain optical volumes in an optical library through the use of the AUDIT, EJECT, and RECOVER line operators, or through the use of the AUDIT command. You can use line operators and commands to perform audits against volume lists, single volumes, or full libraries, eject optical disks from the library, and recover data stored on an optical disk that can no longer be read.

Restriction: You cannot use the ISMF RECOVER line operator to recover from second backup copies of objects. To recover a primary volume from the second object backup copy, use the MODIFY OAM command. See "Starting the OAM Volume Recovery Utility" on page 278 for further details on this procedure.

Generating a Mountable Optical Volume List

With the Mountable Optical Volume Application, you can generate a volume list of optical volumes for the following types of optical media:

3995 5.25-inch, single-density, WORM
3995 5.25-inch, double-density, WORM
3995 5.25-inch, quad-density, WORM
3995 5.25-inch, 8*x*-density, WORM
3995 5.25-inch, single-density, rewritable
3995 5.25-inch, double-density, rewritable
3995 5.25-inch, quad-density, rewritable
3995 5.25-inch, 8*x*-density, rewritable

Note: Double-, quad-, and 8*x*-density WORM also includes continuous composite WORM (CCW) media. WORM is write-once-read-many media. REWR is rewritable media.

Related reading: *z/OS DFSMS Using the Interactive Storage Management Facility* describes all the columns in the Mountable Optical Volume Selection Entry panel.

Completing the Mountable Optical Volume Selection Entry Panel

Follow these steps to bring up the Mountable Optical Volume Selection Entry panel.

1. Select option 2, VOLUME, from the ISMF Primary Option menu. ISMF displays the Volume List Selection menu.

2. Select option 2, MOUNTABLE OPTICAL, to generate a list of mountable optical volumes. ISMF displays the Mountable Optical Volume Selection Entry panel, shown in Figure 19.

```
  Panel  Utilities  Help
------------------------------------------------------------------------------
               MOUNTABLE OPTICAL VOLUME SELECTION ENTRY PANEL
Command ===>

Select Source to Generate Volume List . . 2   (1 - Saved list, 2 - New list)

     1 Generate from a Saved List
         List Name  . .

     2 Generate a New List from Criteria Below
         Volume Serial Number . . . *         (fully or partially specified)
         Library Name . . . . . . . *         (fully or partially specified)
         Storage Group Name . . . . *         (fully or partially specified)
         Optical Media Type . . . . ALL       (See help for valid value)




       Enter "/" to select option     _ Respecify View Criteria
                                      _ Respecify Sort Criteria

Use ENTER to Perform Selection;
Use HELP Command for Help; Use END Command to Exit.
```

Figure 19. Mountable Optical Volume Selection Entry Panel

This section describes only the fields used to generate a new list (option 2).

GENERATE A NEW LIST FROM CRITERIA BELOW

Complete the following fields if you selected option 2 (default) for SELECT SOURCE TO GENERATE VOLUME LIST:

VOLUME SERIAL NUMBER

Enter a full or partial serial number of the volume or volumes to include in the list. The default value is an asterisk.

To include a single volume, enter a fully qualified volume serial number of 1 to 6 characters:

```
     VOLUME SERIAL NUMBER ===> SYS001
```

For a partially qualified volume serial number, use asterisks as global volume serial number characters or percent signs as place holders.

For example, to include a range of volumes, enter a partially qualified volume serial number by using one or two asterisks as global volume serial number characters:

```
VOLUME SERIAL NUMBER ===> SYS*
```

Two asterisks are the maximum number of volume serial number characters allowed.

Use a single asterisk to specify all volumes that fit your other selection criteria:

```
VOLUME SERIAL NUMBER ===> *
```

This field is primed with the last value used. The default is *

LIBRARY NAME
Enter the 1 to 8 character name of an optical library, or a partially qualified name. This field is primed with the last value used. The default value is an asterisk.

STORAGE GROUP NAME
Enter the 1 to 8 character name of an SMS Object or Object Backup storage group, in the same way as you would for a volume serial number. This field is primed with the last value used. The default value is an asterisk.

OPTICAL MEDIA TYPE
Enter the 3 to 8 character name of the optical media type on which the volume resides. **ALL** is the default value. This field is primed with the last value used. Use the following values for optical media types:

3995WORM	3995 single-, double-, quad-, and 8*x*-density, WORM, optical disk volumes
3995REWR	3995 single-, double-, quad-, and 8*x*-density, rewritable, optical disk volumes
3995-1	3995 single-density, WORM and rewritable, optical disk volumes
3995-1WO	3995 single-density, WORM, optical disk volumes
3995-1RW	3995 single-density, rewritable, optical disk volumes
3995-2	3995 double-density, WORM and rewritable, optical disk volumes
3995-2WO	3995 double-density, WORM, optical disk volumes
3995-2RW	3995 double-density, rewritable, optical disk volumes
3995-4	All 3995 quad-density, rewritable or WORM, optical disk volumes
3995-4RW	All 3995 quad-density, rewritable, optical disk volumes
3995-4WO	All 3995 quad-density, WORM, optical disk volumes
3995-8	All 8*x*-density, rewritable or WORM, optical disk volumes

3995-8RW	All 3995 8*x*-density, rewritable, optical disk volumes
3995-8WO	All 8*x*-density, WORM, optical disk volumes
ALL	Select all available optical media types.

Final Step: Generating the List

After entering the information you want on the Mountable Optical Volume Selection Entry panel, you are ready to generate the list. Press the ENTER key to display the volumes that meet your selection criteria. Figure 20 and Figure 21 show columns 14 through 21 of the Mountable Optical Volume list. Scroll the list to see all the columns.

```
  Panel  Utilities  Help
------------------------------------------------------------------------------
                        MOUNTABLE OPTICAL VOLUME LIST
Command ===>                                                 SCROLL ===> HALF
                                                         Entries 1-7 of 7
Enter line operators below:                              Data Columns 14-16 of 21
    LINE       VOLUME                              MEDIA
    OPERATOR   SERIAL  SHELF LOCATION             TYPE      VOLUME ERROR STATUS
   ---(1)----  -(2)--  -----(14)---------------  --(15)--  ---------(16)-------
               SYS090  COMPUTER CENTER LIB 7     3995-1WO  NO ERROR------------
               SYS092  COMPUTER CENTER LIB 7     3995-1RW  NO ERROR------------
               SYS093  ------------------------  3995-1RW  --------------------
               SYS095  OFFSITE                   3995-2RW  VOLUME NOT FOUND----
               SYS096  SHELF 2                   3995-2WO  WRONG VOLUME IN SLOT
               SYS097  SHELF 2                   3995-2WO  NO ERROR------------
   ----------  ------  -----------  BOTTOM OF DATA  -----  --------------------




Use HELP Command for Help; Use END Command to Exit.
```

Figure 20. Mountable Optical Volume List, Columns 14 through 16

```
  Panel  Utilities  Help
------------------------------------------------------------------------------
                        MOUNTABLE OPTICAL VOLUME LIST
Command ===>                                                 SCROLL ===> HALF
                                                         Entries 1-7 of 7
Enter line operators below:                              Data Columns 17-21 of 21

    LINE       VOLUME  CAPACITY  VOLUME       ENTER OR    PSEUDO    OAM INSTANCE
    OPERATOR   SERIAL  (IN MB)   CREATE DATE  EJECT DATE  LIB NAME  MEMBER NAME
   ---(1)----  -(2)--  --(17)--  ---(18)---  ---(19)---   --(20)--  ---(21)-----
               SYS090       320  1992/07/29  1992/07/29   --------  ------------
               SYS092       320  1992/10/22  1992/10/22   --------  ------------
               SYS093       320  1992/10/22  1992/11/22   --------  ------------
               SYS095       640  1992/11/04  1992/11/04   --------  ------------
               SYS096       640  1992/11/10  1992/11/10   PLIB2     OAMIMEMBER1
               SYS097       640  1992/12/20  1992/12/20   PLIB1     OAMIMEMBER2
   ----------  ------   -------  BOTTOM  OF  DATA  ----   --------  ------------



Use HELP Command for Help; Use END Command to Exit.
```

Figure 21. Mountable Optical Volume List, Columns 17 through 21

Related reading: For information on columns 1–13 on the Mountable Optical Volume list, see *z/OS DFSMS Using the Interactive Storage Management Facility*.

SHELF LOCATION
The physical location of the optical volume that resides outside (shelf-resident) of an optical library.

MEDIA TYPE
Displays the type of optical media upon which an optical volume resides. The MEDIA TYPE field applies to all optical volumes. The valid values are:

3995-1WO 3995 single-density, WORM, optical disk media

3995-1RW 3995 single-density, rewritable, optical disk media

3995-2WO 3995 double-density, WORM, optical disk media

3995-2RW 3995 double-density, rewritable, optical disk media

3995-4RW 3995 quad-density, rewritable, optical disk media

3995-4WO 3995 quad-density, WORM, optical disk media

3995-8WO 3995 8*x*-density, WORM, optical disk media

3995-8RW 3995 8*x*-density, rewritable, optical disk media.

UNKNOWN The REMAP function encountered an unknown MEDIA TYPE when it processed volumes in a 3995 library. "UNKNOWN" only occurs with the display of "LOST VOLUME" in the VOLUME ERROR STATUS column.

???????? If the value cannot be displayed because of an error, the following columns (which depend upon a valid MEDIA TYPE) display question marks: FREE SPACE, %USED, and VOLUME ERROR STATUS

VOLUME ERROR STATUS
Shows the error status of individual optical volumes. The VOLUME ERROR STATUS shows the status after the volume is audited, or the volume status after the remapping of a 3995 optical library.

CAPACITY (IN MB)
Shows the raw unformatted capacity in megabytes of the optical disk volume.

VOLUME CREATE DATE
Shows the date that the volume was created and initially labeled in the form YYYY/MM/DD, where YYYY is the year, MM is the month of the year, and DD is the day of the month.

ENTER OR EJECT DATE
The date that the volume was entered into the optical library if the volume is currently library-resident. If the volume is currently shelf-resident, this date is when the volume was last ejected from an optical library. The format is YYYY/MM/DD, where YYYY is the year, MM is the month of the year, and DD is the day of the month.

PSEUDO LIB NAME
The name of the pseudo library if the volume is a shelf-resident volume. This field should match the library name field when the volume is shelf-resident. If the volume is library-resident, this name is the target pseudo library to which the volume is assigned when it is ejected from the real library.

OAM MEMBER INSTANCE NAME
The instance of OAM in an OAMplex that is currently managing and controlling this volume. If the volume is library-resident, this name is the member associated with the OAM where the optical library is currently physically online. If the volume is shelf-resident and the member name is not blank, the volume is currently mounted on an operator-accessible drive, which is currently online to the OAM identified by this member name.

Viewing and Sorting a List

You can sort and tailor a list with the View and Sort options on the Mountable Optical Volume List Selection Entry panel.

Related reading: *z/OS DFSMS Using the Interactive Storage Management Facility* discusses the View and Sort options in more detail.

Maintaining and Verifying the Volume List

You can use the AUDIT, EJECT, and RECOVER line operators, and the AUDIT command, to maintain and verify optical volumes in your optical library, and if errors are found, you can reconstruct an accurate list using the REMAP line operator. The line operators affect individual volumes. In contrast, the commands affect all eligible volumes on the Mountable Optical Volume list, except for the optical volumes that you choose to hide. You can issue an audit from the host application through ISMF Library Management or Mountable Optical Volume Application.

Press PF1 on the Mountable Optical Volume list for help information about the line operators and list commands.

Related reading: For more information on auditing and remapping optical libraries, see the following topics:

- "Remapping an Optical Library" on page 180
- "Auditing an Optical Library" on page 179

Verifying Optical Volumes Using Audit

AUDIT can be invoked as an ISMF line operator on the Mountable Optical Volume List panel (Single Volume AUDIT) or the Optical Library List panel (Full Library AUDIT). The storage administrator uses the AUDIT line operator to verify the physical location of an optical volume. The audit compares the volume information maintained in the optical configuration database and the optical library outboard inventory with the actual location of the optical volume. AUDIT does not just compare the optical configuration database with the outboard inventory; it actually causes the volume to be mounted and reads the volume serial number to verify that the volume is in its assigned storage location.

Tip: You also can use the MODIFY OAM,AUDIT,VOLUME command to audit a volume. See "Auditing a Volume" on page 379 for more information.

When you invoke the AUDIT line operator successfully, AUDIT SCHEDULED is displayed on the Mountable Optical Volume list. If the volume is successfully scheduled for an audit, the volume has ***AUDIT** displayed in the line operator column. Audits that are not successfully scheduled have **¬AUDIT** or **?AUDIT** in the line operator column. ISMF also displays a short message explaining why the audit is not scheduled (see Table 30 on page 190 for more information).

AUDIT can also be invoked as an ISMF command to audit all the eligible optical volumes on the Mountable Optical Volume List (Volume List AUDIT). ISMF is an important part of the AUDIT scheme because it allows you to start with an entire optical volume list, and by using sorting and filtering capabilities, you reduce that list to a subset of volumes; for example, all the volumes in storage group *x*. You can then use the AUDIT command to request an audit of all volumes in that subset list. (The AUDIT command does not affect volumes that you have hidden using the HIDE line operator.)

AUDIT functions help you ascertain the physical location of optical volumes by verifying whether or not a library volume resides in the location that is listed for that volume in the optical library outboard inventory. The library controller maintains the internal library location of the cartridges in the outboard inventory. The host also identifies which library contains each cartridge in the volume table. If the host record or records do not match the controller inventory when OAM performs an audit, then you must correct the records, the inventory, or both. The AUDIT functions do not perform any corrective actions; their purpose is verification only. See "Remapping an Optical Library" on page 180 for a description of corrective actions that you can take if the audit is unsuccessful.

Notes:

1. The AUDIT function is available for the 3995 with the exception of the 3995-C3A models and pseudo optical libraries.
2. AUDIT functions only process volumes that are known to OAM. If an unknown volume is in the library, the AUDIT functions do not detect this condition. REMAP functions are necessary to locate and eject the unknown volume.
3. AUDIT functions from the host application and the 3995 dynamic console are not the same. In a z/OS installation, the AUDIT function that is available from the 3995 dynamic console is intended for use during hardware service; AUDIT functions that are issued from the 3995 dynamic console do not communicate with OAM at the host. The AUDIT function from the 3995 dynamic console performs the same hardware function as a library REMAP. In a z/OS installation, issue the AUDIT functions from the host application and not from the 3995 dynamic console; otherwise, the host and the library controller can differ. This manual describes only the command functions available from the host application through ISMF Library and Volume applications and z/OS operator commands.

   You can find further information about commands from the 3995 dynamic console in the *3995 Model 153, 151 Operator Guide* or the *3995 Operator Guide for C-Series Models*.

ISMF AUDIT provides three scopes:
- Single volume audit (AUDIT line operator)
- Volume list audit (AUDIT command)
- Full library audit (AUDIT line operator)

For each volume audited, three conditions must be present:
- Volume must be obtained from its assigned storage slot.
- Volume must be mounted.
- Internal label of the volume must be read and verified as matching the entry for that storage slot/volume combination in the outboard inventory.

When you receive an audit completion message, you can use the REFRESH command to update the Mountable Optical Volume list with the same selection criteria. The results of the audit are shown in the VOLUME ERROR STATUS column and you also receive a message with the error results. If you log off before the results are obtained, messages are stored in the users broadcast data set and displayed during the next logon process. VOLUME ERROR STATUS contains only the last error found; no history is kept. No attempts are made to fix the problems at the time of detection because, based on the error found, the software is unable to determine exactly what the corrective action should be. Use REMAP, discussed in "Remapping an Optical Library" on page 180, to correct the problems. Table 28 on page 189 lists possible results of auditing an optical volume.

Table 28. Auditing Results That Appear in the VOLUME ERROR STATUS Column

Result	Meaning
NO ERROR	Either no error occurs during the audit, or shows the initial status of the VOLUME ERROR STATUS column.
NOT IN THE LIBRARY	The volume has an entry in the optical configuration database, but no corresponding entry in the outboard inventory.
VOLUME NOT FOUND	The volume was not found in its assigned storage slot. Either the slot is empty or another volume was found.
VOLUME IN WRONG SLOT	This volume was found while auditing another volume or when attempting to mount another volume.
MEDIA ERROR	An error occurred when the volume serial number was read.

Notes:
1. You cannot audit optical volumes that are on a shelf.

When you request an AUDIT, you must specify all volsers to be audited, even if two of the volsers represent opposite sides of the same cartridge. When you specify a full library AUDIT using the AUDIT line operator, all volume serial numbers listed in the host inventory as residing in that library are audited.

Whenever a full library AUDIT or a volume list AUDIT is requested, a confirmation panel is displayed. This panel gives you the opportunity to confirm or deny the audit request. To confirm, type in **Y**, then press ENTER. See Figure 22 for the Confirm Audit Request panel.

```
  Panel  Utilities  Help
------------------------------------------------------------------------------
                           CONFIRM AUDIT REQUEST
Command ===>

Number of Volumes to be Audited: 97


Specify the Following:
   Enter "/" to select option      Perform Audit



   Note: If Audit is Performed, Audit Requests will be Interspersed with other
          Requests, with the Audit Request having low priority.









Use ENTER to Perform Operation;
Use HELP Command for Help; Use END Command to Exit.
```

Figure 22. Confirm Optical Volume Audit Panel

When you receive an audit completion message, you can use the REFRESH command to update the Mountable Optical Volume List with the same selection criteria. The results of the audit are shown in the VOLUME ERROR STATUS column, discussed in Table 28. If you log off before completion, resulting messages are stored in your broadcast data set and displayed at the next logon.

Related reading: For information concerning using the AUDIT line operator with tape libraries, see *z/OS DFSMS OAM Planning, Installation, and Storage Administration Guide for Tape Libraries*.

AUDIT Messages

After confirming the audit request, a generic message is displayed on the Mountable Optical Volume List indicating whether all, some, or none of the optical volumes were scheduled for an audit. Table 29 explains the meaning of the generic AUDIT messages.

Table 29. Generic AUDIT Messages

Generic AUDIT Message	Meaning
AUDIT SCHEDULED	All optical volumes were successfully scheduled for audit.
SELECTED AUDIT SCHEDULED	Only the eligible optical volumes were scheduled by ISMF for audit. Optical volumes on the shelf or in an optical library are ineligible for audit.
PARTIAL AUDIT SCHEDULED	At least one optical volume was rejected by OAM and at least one optical volume was successfully scheduled for the audit.
NO VOLUMES SELECTED	None of the optical volumes were eligible for the audit by ISMF.
AUDIT FAILED	All the optical volumes were rejected for the audit by OAM.

The AUDIT command shows in the LINE OPERATOR column for each individual optical volume whether the audit was successfully scheduled, as shown in Table 30.

Table 30. Specific AUDIT Messages

AUDIT Message	Meaning
*AUDIT	The optical volume was scheduled for an audit.
¬AUDIT	The optical volume was not eligible for audit.
?AUDIT	The audit request for the optical volume was rejected.

The AUDIT command functions provide a message history for each optical volume, and ISMF log entries about rejected audit requests.

Related reading: See “Handling OAM Scheduling Errors” on page 191 for details.

Ejecting Optical Disks

The EJECT line operator schedules the mountable optical disk to be moved to the input/output station of the optical library. When you submit the line operator successfully, EJECT SUBMITTED is displayed on the Mountable Optical Volume List. After the eject completes, OAM issues a completion message.

When an optical disk is ejected, the operator might be prompted on the system console to supply a shelf location and a pseudo library to assign the ejected volume to. Ejected optical disks are stored according to the optical shelf conventions established at your computer site. The information on the shelf location and the pseudo library is stored in the OCDB for later use when the optical disk needs to be obtained from the shelf and a drive selected for its use.

When the optical disk is obtained from the shelf, it is mounted within an operator-accessible drive, or within a library if no outstanding mount exists for the cartridge.

After receiving the EJECT completion message, you can use the REFRESH command to update and view the shelf location and pseudo library information for an optical volume in the SHELF LOCATION column.

Related reading: See "Ejecting an Optical Disk" on page 309 for more information on the EJECT command, including command syntax.

Recovering Optical Disks

The RECOVER line operator allows you to invoke the Volume Recovery utility to recover data stored on an optical disk that can no longer be read. When you successfully enter the RECOVER line operator against an optical volume serial number, RECOVER SUBMITTED is displayed on the Mountable Optical Volume list. Subsequent processing is the same as that performed when an operator command is used to invoke the Volume Recovery utility.

Before you enter the RECOVER line operator, become familiar with the prerequisites and the dialogue that occurs with the system operator.

Restriction: You cannot use the ISMF RECOVER line operator to recover from second backup copies of objects. Use the MODIFY OAM command to recover a primary volume from the second object backup copy. See "Starting the OAM Volume Recovery Utility" on page 278 for further details on this procedure.

Related reading: For more information on the Volume Recovery utility, see "Recovering an Entire Optical Cartridge or Tape Volume" on page 223.

Handling OAM Scheduling Errors

The following information provides assistance in handling OAM scheduling errors.

Message History for AUDIT Commands

The AUDIT command or line operator provides a message history for each optical volume. Enter the MESSAGE line operator next to any optical volume serial number to display the short message for the specific volume. Press PF1 to display the additional long message.

ISMF Log Entries about Rejected Requests

OAM schedules AUDIT, REMAP, and EJECT requests. If OAM rejects the requests, or an error occurs during the scheduling of the request, the OAM errors are recorded as ISMF log entries. An example of a rejected request is an ?AUDIT in the LINE OPERATOR column for a specific optical volume. See the feedback area of the ISMF log entry for the return codes and reason codes for OAM errors. The ISMF log entries are in the ISPF Transaction Log.

Related reading: For the meaning of the OAM return and reason codes, see the *z/OS DFSMSdfp Diagnosis*.

Errors After a Request is Scheduled

If discrepancies are found after issuing an AUDIT command, they are noted and related to you by the following means:

- Scheduling error messages for full library audits are issued to you via the z/OS SEND interface unless the scheduling error occurred prior to any volumes from the library being successfully scheduled and that error was severe enough to

prevent any other volumes in the library from also being scheduled. This early detected severe error is reported on the ISMF help panel. SEND messages contain the volser (if known) of the volume for which the error was found and text that indicates the type of error found in attempting to validate an audit request.

If the scope of the audit is volume list or single volume, scheduling errors are not reported to you via the z/OS SEND interface. These errors are indicated on return to the ISMF panel from which the AUDIT was initiated and can be interrogated by using the ISMF message and help panels.

- Errors incurred while attempting to perform the physical audit for any of the three audit scopes, single volume, volume list, or full library are reported to you via the z/OS SEND interface.
- After auditing a volume, the error status field (ERRSTAT) of the OCDB volume record is updated. As notification that the audit is complete and the error status fields can be reviewed, a completion message is sent to you through your TSO/E logon session. If you are not logged on when OAM issues these errors or completion messages, they are saved in the SYS1.BRODCAST data set. You will receive these messages the next time you log on to TSO/E.

Related reading: For more information about the ISMF message and help panels, see *z/OS DFSMS Storage Administration Reference*.

Monitoring and Maintaining SMS Construct Definitions

ISMF Library Management makes it possible to monitor and make changes to the SMS constructs.

Related reading: For detailed information about using SMS constructs and ISMF options for storage administrators, see *z/OS DFSMS Storage Administration Reference*.

Changing SMS Construct Definitions

As installation requirements change, it might be necessary to update definitions of the storage classes, management classes, storage groups, data class, and ACS routines. You can modify definitions for these constructs using the ISMF ALTER panels for all OAM object environments.

Perform these updates with caution because objects that do not require processing after the definition is changed are not affected by the change, even though they are assigned to the class to which the new definition applies. The updated definitions are used *only* for objects entering the system, or processed by the system, after the change. This situation is particularly true in changes to management class definitions that affect retention, backup, or class transition.

Maintaining Storage Class Definitions

A new storage class might be needed to define the performance requirements of a new application. In addition, you need to add or modify management class definitions and the ACS routines to manage objects that use the new storage class.

Storage class definitions might be changed to accomplish the following functions:

- Add storage classes.
- Alter the INITIAL ACCESS RESPONSE SECONDS to store data on removable media (optical or tape volumes depending on the Sustained Data Rate) instead of DASD space.

Maintaining Management Class Definitions

When the need for a new object cycle is recognized, it usually leads to the definition of a new set of management classes for the phases in the new cycle. It becomes necessary to add statements to the ACS routine to process the transitions for the new management classes.

Consider the effect of the changed management class definitions on objects that currently exist. The change of a management class might imply conversion action which is not supported by OSMC. For example, a transition rule could be changed to cause the schedule date to occur a month earlier. OSMC would not process the object until the scheduled date assigned using the previous transition rule, which is a month later than is specified by the updated definition.

Management class definitions might be changed to accomplish the following functions:

- Add management classes.
- Alter backup requirements.
- Change retention criteria.
- Modify class transition parameters.

Maintaining Object Storage Group Definitions

New Object storage groups might be needed for physical separation of new types of objects. In addition to defining the new Object storage groups, you might need to change the installation's object naming conventions and modify the ACS routines to use the new naming conventions to assign objects to the new storage groups.

Object and Object Backup storage group construct definitions might be changed to accomplish the following functions:

- Define a different storage management cycle start window.
- Change DRIVE STARTUP threshold for optical.
- Change the criteria used to determine when optical volumes are marked full.
- Add a real or pseudo optical library.
- Remove an optical library (for migration to a newer library or media).
- Change the OSMC processing system name.
- Change system connectivity.

Modifying Data Class Definitions

You might need to define or modify data classes for objects stored in Object and Object Backup storage groups to use new tape devices, for example.

Data class definitions might be changed to accomplish the following functions:

- Specify a media type for a tape device.
- Specify a recording technology for a tape device.
- Specify performance scaling for a tape device.

Recommendation for 3592 tape devices: If you are not using the performance scaling option, run in 3590-1 emulation mode to use the tape volumes effectively because OAM uses the full capacity of the volume. If you run in 3490E emulation mode, OAM might run out of tape blockids before it uses the full capacity of the volume, depending on the capacity value and the size of the objects being written.

Modifying Default Storage and Management Classes

Tip: Although IBM strongly advises against direct modification of the DB2 tables, it is sometimes necessary. Back up relevant data be backed up before modifying

the DB2 tables. Also, quiesce any system activity that might be active for the collection or storage group so the application does not receive errors if it attempts to access the collection data while changes are made.

You can use the following procedure to change the default storage class, management class, or both for an existing object storage group's collection ID.

1. Delete the collection definition from the catalog:

```
DELETE COLLECTION_NAME NONVSAM CATALOG ('CATALOG_NAME') –
       FILE (DD1)  PURGE NOSCRATCH
```

2. Change the storage class, or management class, or both in the DB2 collection table to the desired value.

   Ensure that these values in the SMS CDS are valid.

3. Add the collection entry back to the catalog:

```
DEFINE NVSAM (NAME(COLLECTION_NAME) COLLECTION RECATALOG)
```

   This creates a collection entry without a management or storage class.

4. Use OSREQ RETRIEVE to retrieve an existing object in the collection, or OSREQ STORE to store a new object into the collection. This command updates the catalog version.

5. Verify that the catalog matches DB2.

```
LISTCAT CATALOG('CATALOG_NAME') FILE(DD1) ALL NVSAM
```

The new default storage class, or management class, or both only applies to new objects stored after these changes are complete.

Related reading: For details on using the OSREQ macro, see *z/OS DFSMS OAM Application Programmer's Reference*.

Changing ACS Routines

As mentioned above, ACS routines might need to be changed to implement changes in storage group, management class, storage class, or data class definitions. Defining new storage groups, storage classes, management classes, and data classes has no effect unless the ACS routines are changed to select those new constructs.

ACS routines can be changed to accomplish the following functions:

- Provide initial class defaults for new collections.
- Cause an object to move differently in the hierarchy by assigning a different storage class at class transition.

Tip: Defining new classes does not always mean new values for parameters; a new class can have the same parameters as an existing class. A new class might be created to make the relationship between a class and an application more

understandable. This action makes it possible to modify parameters later to fit the needs of one application without affecting other applications. For example, adding a new management class that has the same backup parameter as an existing class allows you to change the backup parameter later for the new application's objects without changing the backup requirements for other objects associated with the original class.

Attention: Changing existing constructs might not affect all objects associated with those constructs. Only those objects being stored or encountering a class transition after the construct definition is changed is affected. A change to storage class or management class takes effect at the next storage management cycle only if the object needs management (such as class transition). For example, a change in the INITIAL ACCESS RESPONSE SECONDS parameter in a storage class might not cause any or all objects with that storage class to move within the storage hierarchy.

Monitoring DB2 Databases

You can use the following techniques to obtain information about performance and space allocation of DB2 databases, tables, and indexes that are used by OAM:

- DB2 RUNSTATS utility
- DB2 STOSPACE utility
- SQL statements

DB2 RUNSTATS Utility

RUNSTATS is a DB2 utility that scans a table space or indexes to gather information about space utilization and index efficiency. The information gathered is stored in the DB2 system tables and used by the SQL optimizer to select the best access paths during the bind process.

Run RUNSTATS to help evaluate the design of the database and determine when the REORG utility should be run for specific table spaces or indexes.

The output from RUNSTATS consists of DB2 updates to any or all of the following tables, depending on whether RUNSTATS was executed for a table space, indexes, or both:

- SYSIBM.SYSCOLUMNS
- SYSIBM.SYSINDEXES
- SYSIBM.SYSTABLES
- SYSIBM.SYSTABLESPACE
- SYSIBM.SYSTABLEPART
- SYSIBM.SYSINDEXPART

By doing a global SELECT on the SYSIBM tables that were updated by RUNSTATS, you can determine what action, if any, should be taken to improve the performance of the system.

Attention:

1. Use caution. When RUNSTATS is active, no requests can be made to the affected tables.
2. After using RUNSTATS, rebind application plans that use the tables or indexes that were the subject of the RUNSTATS. This rebuild allows the DB2 optimizer to take advantage of new information about the structure of indexes.

3. After rebinding, examine the PLAN_TABLE output from the SQL EXPLAIN statement to ensure that all indexes are used. If PLAN_TABLE indicates that indexes are *not* used, override the DB2 catalog statistics, using the procedure specified in *DB2 Administration Guide*.

DB2 STOSPACE Utility

The DB2 STOSPACE utility determines the amount of space allocated for DB2 storage groups and their related table spaces and indexes. The utility updates DB2 system tables with the information it gathers.

Output from this utility consists of DB2 updates to the following tables:

- SYSIBM.SYSINDEXES
- SYSIBM.SYSTABLESPACE
- SYSIBM.SYSSTOGROUP

After STOSPACE execution is complete, use an SQL SELECT to view the tables that STOSPACE changed.

Related reading: For RUNSTATS and STOSPACE utility syntax and usage notes, see *DB2 Utility Guide and Reference*.

SQL Statements

SQL statements can be used to determine the contents of various tables. You should be familiar with these tables to learn about the OAM databases as they relate to DB2.

Related reading: For a complete listing of the DB2 system tables and what they contain, see *DB2 SQL Reference*.

Tuning OAM

Tuning OAM is largely a matter of tuning its various components. Remember that application design, although not under the control of the storage administration team, plays a significant role in OAM performance and efficiency.

Tuning OAM Connections to DB2

When tuning OAM, there are a finite number of connections to DB2 from a batch environment that you need to consider. A number of functions, which are initiated by operator commands or automatically (for example, storage management cycle), might each result in multiple connections to DB2. OAM also establishes connections to process application requests. All of these connections established by OAM are in addition to the other necessary batch connections on your system. The total of all these connections at any given point in time must not exceed the DB2 limit because exceeding the limit causes OAM processing to fail.

The amount of concurrent function requests made of OAM control the tuning of OAM connections to DB2. Tuning OAM can involve limiting the number of concurrent functions requested automatically or by operator commands. A storage management cycle, for example, might establish three, four, or more connections to DB2 that persist for a good portion of the processing for each Object storage group. When deriving a value for MAXS, consider the number of connections, because MAXS controls the number of storage groups that the storage management cycle processes concurrently. While other calculations might seem to accommodate a larger number for MAXS, you must remember the DB2 limitation and adjust

MAXS accordingly. Each installation is unique and must be tuned independently based upon actual experience; however, as a general guideline, as MAXS is increased above 10, the effectiveness of concurrency is diminished and might severely constrain processing in OAM or cause OAM processing to be unsuccessful. In an OAMplex, contention can increase with DB2 data sharing. When working with this type of environment, consider all the OAMs within the OAMplex when determining the storage group processing cycles and MAXS values for each instance of OAM.

Tuning the DB2 Databases

It is important to run the DB2 utility RUNSTATS on all of the databases after a significant number of objects are stored and volumes are defined. Running this utility is likely to decrease the length of the DB2 instruction path and to improve performance.

Performance is generally improved when DB2 uses an index to locate an object or object directory entry in a DB2 table. The index scan access path provides more direct access to the data than the table scan access path.

For example, if the DB2 utility RUNSTATS is run on a storage group with only one collection-name and object-name or only one collection-name and pending-action-date, DB2 can choose the table scan access path for operations such as OSREQ DELETE of an object and OSMC object processing. On the other hand, if the DB2 utility RUNSTATS is run after there are a significant number of objects in the Object storage group, the index scan access path can be chosen by DB2.

After running DB2 utility RUNSTATS, rebind the OAM application plans.

OAM databases can use the following facilities:
- REORG utility—reorganizes table spaces and indexes
- DB2 trace facilities—report on various internal system events
- Index, table space, and buffer pool tuning options—allow control of performance-related factors
- Concurrency control mechanisms (locks)—can be manipulated to increase concurrency or to improve performance

DB2 performance can be significantly affected by providing channel separation and DASD device separation when allocating DB2 logs, the directory, and object databases for each Object storage group. Resource Measurement Facility (RMF) can be used to monitor channel and device activity for tuning database and log allocation.

Table spaces are created with primary and secondary space. The secondary space is used when there is no more primary space. The secondary space is allocated from the DB2 storage group containing the primary space.

You must monitor the extension of table spaces into the secondary allocation to determine when to reorganize the individual database table spaces. It might be necessary to add volumes to the DB2 storage group so that additional extensions of the table spaces can occur.

Related reading: For more information about tuning DB2 databases, see *DB2 Administration Guide* and *z/OS RMF User's Guide*.

Segmented Table Spaces

OAM specifies segmented table spaces in sample jobs and instructions for creating tables. This takes advantage of capabilities of segmented table spaces when doing INSERTs. The space maps for segmented table spaces provide a "guaranteed space" capability to find space in a table. Partitioned and simple table spaces lack this ability; however, there are instances where partitioned table spaces have definite advantages (see "Partitioning Table Spaces" for more information).

OAM stores objects on DASD in DB2 tables. In most environments, a relatively static quantity of data is stored overall. New objects are usually stored in both a time-sequenced manner and with object names which cause inserts to occur in timestamp order. Data is constantly being deleted from DASD as it is moved by class transition to optical or tape, or simply expiring. In general, large blocks of space become free in the object tables during each OSMC cycle. This space is best reused when segmented table spaces are used as DB2 does not have to search on a target page to determine if there is space prior to insertion. The space maps are able to pinpoint available and sufficient space. This permits managing tables at a predetermined size with greatly reduced maintenance.

Some installations experience significantly longer processing time when segmented table spaces are not used which causes increased search activity and more time consuming searches for available space. This reduced performance, primarily when using simple table spaces, can only be managed by constant management of the table space (reorganization activity and reallocation) to assure that there is always both space in the current extent of the data set that contains the DB2 table and sufficient extents available to guarantee space for storing objects. The use of segmented table spaces reduces the need for such manual management.

Restriction: Do not use simple table spaces with OAM object tables or object directory tables. Space searches and space reuse in simple table spaces consume a much greater proportion of processing time.

Partitioning Table Spaces

Partitioned table spaces permit large tables to be split into smaller entities which are managed more easily using DB2 utilities. Operations such as IMAGE COPY and REORG are more efficient and consume less total aggregate processing time when performed on smaller entities when tables are larger than 2 GB.

Partitioned table spaces are recommended when:
- Tables become very large
- Data might be relatively static for long periods of time
- DB2 maintenance must be minimized
- Any combination of these reasons

Backup and recovery actions for DB2 tables and table spaces are necessary under all circumstances. Regular IMAGE COPY operations and proper safeguard of DB2 logging is necessary to provide contingency for outages of any type.

Reorganizing tables is a different matter. Under circumstances where an object table or object directory table can be managed at a stable total allocation, segmented table spaces nearly eliminate any need to reorganize tables using the REORG operation. OAM uses DB2 indexes for all SELECTs and INSERTs as a consequence of its underlying design. The use of indexes removes the requirement for the tables to be in strict cluster index order. When a table is relatively new and is loaded with data, the RUNSTATS utility should be used to be certain that DB2 has good information on the order within the table in its catalog tables. Following

RUNSTATS, a BIND with the EXPLAIN parameter should be performed to determine if DB2 is using the indexes. After this initial use of RUNSTATS, avoid the further use of the RUNSTATS utility. Over time with deletes of older objects and reuse of space for new objects, the object directory and object tables tend not to be in strict cluster sequence. It is not important that OAM object and object directory tables be in cluster sequence and regularly reorganized. OAM access to data is entirely though DB2 indexes. The initial "decision" by DB2 to use indexes when a table is created is maintained, and indexes are used for access, as long as RUNSTATS utility is not used when tables are not maintained in cluster index sequence. The use of RUNSTATS without reorganizing a table could result in DB2 discontinuing use of indexes.

The advantages described here are best used when segmented table spaces are used for objects and object directory entries. As stated, simple table spaces should not be used for OAM. There are circumstances when the INSERT performance differences between segmented and partitioned table spaces are not as important as minimizing the work load of DB2 maintenance activity. It is the decision of the installation whether to accept less possible performance and use partitioned table spaces based on their unique operating circumstances.

Partitioning Object Storage Tables

Because of the large amount of data that can be stored in the OAM object storage tables (the 4 KB object storage table, the 32 KB object storage table and the LOB storage structure) associated with each Object storage group, you might choose to partition the DB2 table spaces containing each of these tables. The 4 KB object storage table, the 32 KB object storage table, and LOB storage structure are each stored in separate DB2 table spaces. You might partition the DB2 table space containing any or all of these tables.

Related reading: For information about the advantages and disadvantages of partitioned table spaces, see *DB2 Administration Guide*.

Partitioning the 4 KB Object Storage Tables

During OAM installation and customization (using the default SAMPLIB members provided with the product), OAM creates a nonpartitioned unique clustered index on the 4 KB object storage table using a composite key consisting of both:

- Collection ID column (OTCLID) in ascending order
- Object name column (OTNAME) in ascending order

You might change the DB2 table space containing the 4 KB object storage table into a partitioned table space. If you do so, decide which column or columns on the 4 KB object storage table to use for the partitioning key. The following two examples of columns in the 4 KB object storage table might be used for the partitioning key:

- Collection ID column (OTCLID)
- Object name column (OTNAME)

OAM does not update the value of the collection ID column (OTCLID) in a row in the 4 KB object storage table, so this column might be used in a partitioning key. OAM does not update the value of the object name column (OTNAME) in a row in the 4 KB object storage table, so this column might be used in a partitioning key. If you use the object name column (OTNAME) as the partitioning key, remember that DB2 only uses the first 40 bytes of the partitioning key to actually partition the data.

Another option to partition the 4 KB table is by adding a column that you use only as the partitioning key.

1. Determine the data type of the column and the value to be inserted into the column.

   ---

2. Alter the 32 KB table to add this column before the OTOBJ column.
   - For example, one option could be to make this column a timestamp that is set when a row is inserted into the table when the object is created. You would then partition the table based on the selected time periods.
   - Another option could be to make the partitioning column a partition ID. You could specify a DB2 trigger that calculates the value of the partition ID.

   ---

3. If you add a new column to the 4 KB table, you must drop and recreate the views that were created at installation. To drop and recreate the views, run sample job CBRISQL0, as the following example shows:

   ```
   DROP VIEW osg_hlq.V_OSM_04K_OBJ_TBL;
   CREATE VIEW osg_hlq.V_OSM_04K_OBJ_TBL AS SELECT ALL * FROM
   osg_hlq.OSM_04K_OBJ_TBL;
   ```

   The *osg_hlq* in the DROP and CREATE statements is the high-level qualifier for the object storage group for the 4 KB table.

To create the DB2 table space containing the 4 KB object storage table as a partitioned table space, you must modify the CREATE TABLESPACE SQL statements by adding a NUMPARTS clause for the HLQ.OSMOTS04 table spaces in the CBRISQL0 job in SYS1.SAMPLIB.

If you create the DB2 table space containing the 4 KB object storage table as a partitioned table space, you must define a partitioned index on the 4 KB object storage table. The partitioned index can be created by adding a CREATE INDEX SQL statement to the CBRISQL0 sample job in SYS1.SAMPLIB.

If you create the DB2 table space containing the 4 KB object storage table as a partitioned table space, the partitioned index must also be the clustering index. Therefore, the default index that OAM creates on the 4 KB object storage table (HLQ.OBJT04X1) cannot be a clustering index. In this case, you must change the default index that OAM creates on the 4 KB object storage table (HLQ.OBJT04X1) to a nonclustered index by removing the CLUSTER keyword from the CREATE INDEX SQL statement for the HLQ.OBJT04X1 index in the CBRISQL0 sample job in SYS1.SAMPLIB.

If you create the DB2 table space containing the 4 KB object storage table as a partitioned table space, there must still be a unique nonpartitioned index on the composite key in order for OAM to function properly that consists of both:
- Collection ID column (OTCLID) in ascending order
- Object name column (OTNAME) in ascending order

Note: Having a partitioned index and a nonpartitioned index on the 4 KB object storage table might diminish some of the benefits of partitioning the 4 KB object storage table.

In addition to changing the SQL statements contained in the CBRISQL0 sample jobs in SYS1.SAMPLIB, also update the CBRIALC0 job in SYS1.SAMPLIB. Include IDCAMS (access method services) DEFINE CLUSTER commands to preallocate a

VSAM linear data set (LDS) for each of the partitions that you plan on having for each partitioned table space containing the 4 KB object storage table associated with each Object storage group. Also use the IDCAMS DEFINE CLUSTER command to preallocate a VSAM linear data set for each partition comprising the partitioned index that you plan to create. The data set names associated with each VSAM linear data set must conform to DB2 data set naming conventions as specified in the *DB2 Administration Guide* for OS/390 or z/OS.

DB2 free space search algorithms are not as efficient for partitioned table spaces as they are for segmented table spaces. As a result of partitioning the DB2 table spaces that contain the OAM 4 KB object storage tables, you might impact the performance when small objects are being stored to DB2 DASD.

By partitioning the DB2 table space containing the OAM 4 KB object storage table, you are accepting the following responsibilities:
- That OSREQ STORE performance, when storing small objects to DB2 DASD, might not be as fast as when using a segmented table space for the OAM 4 KB object storage table.
- That OSMC transition of small objects to DB2 DASD might not be as fast as when using a segmented table space for the OAM 4 KB object storage table.
- To create and manage each of the underlying VSAM linear data sets associated with each partition of the partitioned table space.
- To create and manage each of the underlying VSAM linear data sets associated with each partition of the partitioned index.

Partitioning the 32 KB Object Storage Tables

During OAM installation and customization (using the default SAMPLIB members provided with the product), OAM creates a nonpartitioned unique clustered index on the 32 KB object storage table using a composite key consisting of both:
- Collection ID column (OTCLID) in ascending order
- Object name column (OTNAME) in ascending order

You might change the DB2 table space containing the 32 KB object storage table into a partitioned table space. If you do so, you need to decide what column or columns on the 32 KB object storage table to use for the partitioning key. The following two examples of columns in the 32 KB object storage table might be used for the partitioning key:
- Collection ID column (OTCLID) or
- Object name column (OTNAME)

Because OAM does not update the value of the collection ID column (OTCLID) in a row in the 32 KB object storage table, this column might be used in a partitioning key. OAM does not update the value of the object name column (OTNAME) in a row in the 32 KB object storage table, so this column might be used in a partitioning key. If you use the object name column (OTNAME) as the partitioning key, remember that DB2 only uses the first 40 bytes of the partitioning key to actually partition the data.

Another option to partition the 32 KB table is by adding a column that you use only as the partitioning key.

1. Determine the data type of the column and the value to be inserted into the column.

   _____

2. Alter the 4 KB table to add this column before the OTOBJ column.

- For example, one option could be to make this column a timestamp that is set when a row is inserted into the table when the object is created. You would then partition the table based on the selected time periods.
- Another option could be to make the partitioning column a partition ID. You could specify a DB2 trigger that calculates the value of the partition ID.

---

3. If you add a new column to the 32 KB table, you must drop and recreate the views that were created at installation. To drop and recreate the views, run sample job CBRISQL0, as the following example shows:

```
DROP VIEW osg_hlq.V_OSM_32K_OBJ_TBL;
CREATE VIEW osg_hlq.V_OSM_32K_OBJ_TBL AS SELECT ALL * FROM
osg_hlq.OSM_32K_OBJ_TBL;
```

   The *osg_hlq* in the DROP and CREATE statements is the high-level qualifier for the object storage group for the 32 KB table.

To create the DB2 table space containing the 32 KB object storage table as partitioned table space you must modify the CREATE TABLESPACE SQL statements by adding a NUMPARTS clause for the HLQ.OSMOTS32 table spaces in the CBRISQL0 job in SYS1.SAMPLIB.

If you create the DB2 table space containing the 32 KB object storage table as a partitioned table space, you must define a partitioned index on the 32 KB object storage table. The partitioned index can be created by adding a CREATE INDEX SQL statement to the CBRISQL0 sample job in SYS1.SAMPLIB.

If you create the DB2 table space containing the 32 KB object storage table as a partitioned table space, the partitioned index must also be the clustering index. Therefore, the default index that OAM creates on the 32 KB object storage table (HLQ.OBJT32X1) cannot be a clustering index. In this case, you must change the default index that OAM creates on the 32 KB object storage table (HLQ.OBJT32X1) to a nonclustered index by removing the CLUSTER keyword from the CREATE INDEX SQL statement for the HLQ.OBJT32X1 index in the CBRISQL0 sample job in SYS1.SAMPLIB.

If you create the DB2 table space containing the 32 KB object storage table as a partitioned table space, there must still be a unique nonpartitioned index on the composite key in order for OAM to function properly that consists of the following:
- Collection ID column (OTCLID) in ascending order
- Object name column (OTNAME) in ascending order
- Object segment (OTSEG) in ascending order

Note: Having a partitioned index and a nonpartitioned index on the 32 KB object storage table might diminish some of the benefits of partitioning the 32 KB object storage table.

In addition to changing the SQL statements contained in the CBRISQL0 sample job in SYS1.SAMPLIB, also update the CBRIALC0 job in SYS1.SAMPLIB. Include IDCAMS DEFINE CLUSTER commands to preallocate a VSAM linear data set (LDS) for each of the partitions that you plan on having for each 32 KB object storage table associated with each Object storage group. Also use the DEFINE CLUSTER command to preallocate a VSAM linear data set for each partition comprising the partitioned index that you plan to create. The data set names

associated with each VSAM linear data set must conform to DB2 data set naming conventions as specified in the *DB2 Administration Guide* for OS/390 or z/OS.

DB2 free space search algorithms are not as efficient for partitioned table spaces as they are for segmented table spaces. As a result of partitioning the DB2 table spaces that contain the OAM 32 KB object storage tables, you might impact the performance when large objects are being stored to DB2 DASD.

By partitioning the DB2 table space containing the OAM 32 KB object storage table, you are accepting the following responsibilities:

- That OSREQ STORE performance when storing large objects to DB2 DASD might not be as fast as when using a segmented table space for the OAM 32 KB object storage table
- That OSMC transition of large objects to DB2 DASD might not be as fast as when using a segmented table space for the OAM 32 KB object storage table
- To create and manage each of the underlying VSAM linear data sets associated with each partition of the partitioned table space
- To create and manage each of the underlying VSAM linear data sets associated with each partition of the partitioned index

Partitioning the LOB Storage Structures

During OAM installation and customization (using the default SAMPLIB members provided with the product), OAM creates a nonpartitioned unique clustered index on the LOB storage structure using a composite key consisting of both:

- Collection ID column (OTCLID) in ascending order
- Object name column (OTNAME) in ascending order

You might change the DB2 table space containing the LOB storage structure into a partitioned table space. If you do so, decide which column or columns on the LOB storage structure to use for the partitioning key. The following two examples of columns in the LOB storage structure might be used for the partitioning key:

- Collection ID column (OTCLID)
- Object name column (OTNAME)

OAM does not update the value of the collection ID column (OTCLID) in a row in the LOB storage structure, so this column might be used in a partitioning key.

OAM does not update the value of the object name column (OTNAME) in a row in the LOB storage structure, so this column might be used in a partitioning key. If you use the object name column (OTNAME) as the partitioning key, remember that DB2 only uses the first 40 bytes of the partitioning key to actually partition the data.

Another option to partition the LOB storage structure is by adding a column that you use only as the partitioning key.

1. Determine the data type of the column and the value to be inserted into the column
2. Alter the LOB storage structure to add this column before the OTOBJ column.
   - For example, one option could be to make this column a timestamp that is set when a row is inserted into the table when the object is created. You would then partition the table based on the selected time periods.
   - Another option could be to make the partitioning column a partition ID. You could specify a DB2 trigger that calculates the value of the partition ID.

3. If you add a new column to the LOB storage structure, you must drop and recreate the views that were created at installation. To drop and recreate the views, run excerpt from sample job CBRILOB, as the following example shows:

   ```
   DROP VIEW osg_hlq.V_OSM_LOB_BASE_TBL;
   CREATE VIEW osg_hlq.V_OSM_LOB_BASE_TBL AS SELECT ALL * FROM
   osg_hlq.OSM_LOB_BASE_TBL;
   ```

   The *osg_hlq* in the DROP and CREATE statements is the high-level qualifier for the object storage group for the LOB storage structure.

To create the DB2 table space containing the LOB storage structure as a partitioned table space, you must modify the CREATE TABLESPACE SQL statements by adding a NUMPARTS clause for the HLQ.OSMLBTS and table spaces in the CBRILOB job in SYS1.SAMPLIB.

If you create the DB2 table space containing the LOB storage structure as a partitioned table space, you must define a partitioned index on the LOB storage structure. The partitioned index can be created by adding a CREATE INDEX SQL statement to the CBRILOB sample job in SYS1.SAMPLIB.

If you create the DB2 table space containing the LOB storage structure as a partitioned table space, the partitioned index must also be the clustering index. Therefore, the default index that OAM creates on the LOB storage structure (HLQ.OBJT04X1) cannot be a clustering index. In this case, you must change the default index that OAM creates on the LOB storage structure (HLQ.OTLOBX1) to a nonclustered index by removing the CLUSTER keyword from the CREATE INDEX SQL statement for the HLQ. OTLOBX1 index in the CBRILOB sample job in SYS1.SAMPLIB.

If you create the DB2 table space containing the LOB storage structure as a partitioned table space, there must still be a unique nonpartitioned index on the composite key in order for OAM to function properly that consists of both:

- Collection ID column (OTCLID) in ascending order
- Object name column (OTNAME) in ascending order

Note: Having a partitioned index and a nonpartitioned index on the LOB storage structure might diminish some of the benefits of partitioning the LOB storage structure.

In addition to changing the SQL statements contained in the CBRILOB sample job in SYS1.SAMPLIB, also include IDCAMS (access method services) DEFINE CLUSTER commands to preallocate a VSAM linear data set (LDS) for each of the partitions that you plan on having for each partitioned table space containing the LOB storage structure associated with each object storage group. Also use the IDCAMS DEFINE CLUSTER command to preallocate a VSAM linear data set for each partition comprising the partitioned index that you plan to create. The data set names associated with each VSAM linear data set must conform to DB2 data set naming conventions as specified in the *DB2 Administration Guide*.

DB2 free space search algorithms are not as efficient for partitioned table spaces as they are for segmented table spaces. As a result of partitioning the DB2 table spaces that contain the OAM LOB storage structures, you might impact the performance when small objects are being stored to DB2 DASD.

By partitioning the DB2 table space containing the OAM LOB storage structure, you are accepting the following responsibilities:

- OSREQ STORE performance, when storing small objects to DB2 DASD, might not be as fast as when using a segmented table space for the OAM LOB storage structure.
- OSMC transition of small objects to DB2 DASD might not be as fast as when using a segmented table space for the OAM LOB storage structure.
- To create and manage each of the underlying VSAM linear data sets associated with each partition of the partitioned table space.
- To create and manage each of the underlying VSAM linear data sets associated with each partition of the partitioned index.

Tuning Object Retrieval Response Time

The OAM response time for retrieval of objects might be a key factor in the performance of your application, especially if the application is intended for interactive use. The minimum time to retrieve an object from an unmounted cartridge in an optical library is typically 15 to 30 seconds. These times increase when the resource is attached to a different OAM in an OAMplex and cross-system processing is required. Understand the retrieval response time requirements for your applications and monitor the actual response time achieved.

The key to providing the required response time is to assign objects to storage classes that have an adequate INITIAL ACCESS RESPONSE SECONDS value defined and to management classes that do not cause a transition to a slower storage class until the frequency of retrieving the objects is reasonably low. The primary attributes of a management class that can be used to control transition are TIME SINCE CREATION and TIME SINCE LAST USE.

Restriction: Do not use TIME SINCE LAST USE if the UPD=N option is used on the OAM1,CBRINIT statement in IEFSSN*xx* PARMLIB member.

Use the OSREQ QUERY function to obtain the estimated retrieval response time for an object. The OSREQ QUERY function also provides descriptive information concerning objects residing on the following storage media:
- Direct access storage device (DASD)
- An optical disk volume inside of an optical library
- An optical disk volume on the shelf
- A tape volume inside an IBM automated tape library dataserver
- A shelf-resident tape volume (a tape volume that resides outside an IBM automated tape library dataserver)

OAM returns this descriptive information, along with the primary, backup, and secondary backup retrieval order keys, in the Query Element List. QUERY searches the object directory for a match on the specific name in the NAME keyword and returns a single query element. You can perform a generic search for each object whose name matches the partially qualified name specified in the NAME keyword. The search returns a query element for each object found. The output of a QUERY might be used as the input to an OSREQ RETRIEVE request.

Additionally, for library-resident objects whose retrieval can be predicted in advance, you might want to fetch the objects before they are needed for interactive use. This can be done by performing the following activities:
- Using the OSREQ macro to change objects' storage classes to storage classes having a nonzero value for INITIAL ACCESS RESPONSE SECONDS (stored on removable media—tape or optical)
- Running the storage management cycle to move the objects to the proper level of the object storage hierarchy

Tip: You can use the PERIODIC attribute of the management class to prefetch the objects to DASD to improve performance on subsequent retrievals. For example, on the first day of each month, you can assign the objects to a management class that moves the objects to a faster storage class just before you use the objects. See page 170 for a discussion of the attributes for this parameter.

Related reading:

- For more information concerning the Query Element List, see *z/OS DFSMS OAM Application Programmer's Reference*.
- For a discussion of how drive availability between libraries can affect object retrieval response time, see "Balancing Library Usage" on page 209.

Recalling Objects to DB2 DASD

When objects residing on optical or tape media are retrieved, they can be recalled to DB2 for up to 255 days beyond the day of retrieval, thereby providing improved performance for subsequent retrieves of those objects. If you anticipate increased demand for an object, you can specify, through OSREQ or SETOSMC keywords, how long to keep it on DB2 DASD when retrieving it. After the specified number of days have elapsed the objects are restored back to their original location as part of the OSMC storage management cycle.

For each OSREQ RETRIEVE request for an object residing on optical or tape media, OAM determines whether or not a recall to DB2 DASD is required, either explicitly through the RECALL keyword on the OSREQ RETRIEVE, or implicitly through SETOSMC keywords in the CBROAMxx PARMLIB member. If a recall is specified, OAM initiates a recall request to the OSMC component to write a full copy of the object to DB2 DASD at the same time the OSR component of OAM services the object retrieval. The objects location field will be updated to "R" indicating it is on DB2. The objects pending action date will be set to the current date + the number of days the object is to be recalled. Because these OSMC recall tasks can consume considerable resources, you may wish to use the MAXRECALLTASKS keyword on the SETOSMC statement to limit the number of recalls that can run simultaneously.

Automatic class selection routines are not invoked when the recalled object is copied to DB2 DASD, nor are they invoked when the object is restored to its original location and the DB2 copy is deleted after the specified number of days.

Recalls are processed asynchronously with the actual RETRIEVE request so that the RETRIEVE is not delayed while recall processing takes place. For each object that is recalled, an OSMC task is started in the background. This can result in subsequent RETRIEVES for an object with recall processing still pending. In most cases the cartridge will still be mounted on the drive, reducing any delays on subsequent retrievals. To increase the chances of the volume still being mounted, use the TAPEDISPATCHERDELAY function described in "SETOAM Keyword Definitions" on page 103 and the and OPTICALDISPATCHERDELAY function described in "SETOPT Keyword Definitions" on page 122.

See "Updating SETOSMC Values" on page 373 and "Updating SETOAM Values" on page 369 for information on specifying recall to DB2 DASD.

Refer to *z/OS DFSMS OAM Application Programmer's Reference* for information on using the optional RECALL keyword on an OSREQ RETRIEVE request to initiate an explicit recall.

Tuning the Storage Management Cycle

The storage management cycle moves objects between DASD, optical, and tape media, writes backup copies of objects, deletes expired objects, and expires optical cartridges when all the optical cartridge expiration criteria have been set. It should be run when the application work load is at a minimum.

You can obtain the shortest storage management cycle by making the best use of the library drives or operator-accessible drives in your SMS configuration. Your intent should be to process as many Object or Object Backup storage groups concurrently and use as many drives concurrently as possible without introducing contention for drives by different storage groups (which causes unnecessary mounts and demounts of cartridges).

OAM provides the following controls for tuning the storage management cycle:

- The DRIVE STARTUP threshold attribute of each Object storage group definition and each Object Backup storage group definition determines the number of optical drives that are used concurrently for that storage group.
- The TAPEDRIVESTARTUP threshold optional subparameter of the STORAGEGROUP parameter on the SETOAM statement, determines when OAM is to start additional tape drives for writing object data to tape volumes that belong to the Object and Object Backup storage groups. Consider the MAXTAPESTORETASKS keyword (for the OAM global level) and SGMAXTAPESTORETASKS keyword (for the storage group level) with TAPEDRIVESTARTUP threshold for further controls within the storage management cycle..

  Restriction: Do not specify a number greater than the number of tape drives available to OAM for the combined MAXTAPESTORETASKS, MAXTAPERETRIEVETASKS, SGMAXTAPESTORETASKS, and SGMAXTAPERETRIEVETASKS subparameters. This specification can cause a system to go into allocation recovery and attempt to allocate tape drives after all tape drives are in use causing system problems.
- The CYCLE START TIME and CYCLE END TIME attributes of each Object or Object Backup storage group control the window in which the storage management cycle begins processing and (optionally, stops processing) the storage group.
- The MAXS parameter of the OAM cataloged procedure controls the number of storage groups that the storage management cycle processes concurrently.
- The UPD=N option on the OAM1 statement in IEFSSN*xx* member of PARMLIB reduces unnecessary retrieval and update of objects' directory entries during the OSMC cycle if your installation's management classes do not use the TIME SINCE LAST USE or EXPIRE AFTER DAYS USAGE parameters.
- In an OAMplex, the OSMC processing system name for each Object or Object Backup storage group controls where OSMC processing is done for that storage group. Using this parameter and separating hardware between storage groups can balance workload across systems for OSMC processing. Localize hardware and highest usage to reduce XCF overhead.

If your processing includes making object backups on operator-accessible optical disk drives, run as many Object storage groups concurrently as there are usable operator-accessible optical drives. If backup copies are not being made, you might be able to run as many Object storage groups concurrently as there are usable library drives in the configuration. Remember that in determining the number of Object storage groups to run concurrently, there are DB2 limitations which must be taken into account. See "Tuning OAM Connections to DB2" on page 196 for additional information on these DB2 limitations.

Remember that OSMC functions other than the storage management cycle you start (for example, Volume Recovery utility, Move Volume utility, and others) are consumers of resources as well and need to be considered in your usage of the MAXS and DRIVE STARTUP threshold controls.

To avoid contention for drives within any one library, analyze the windows for processing each Object storage group. For example, if volumes for eight storage groups all reside in the same single optical library with four drives and MAXS=10, then the windows for the groups should be set so that no more than four overlap at any given time.

Recommendation: Consider all OAMs within an OAMplex when making decisions that affect those resources.

Attention: If you plan on using the CBRHADUX installation exit that is shipped with the SAMPLIB or plan on editing or creating your own CBRHADUX installation exit that does not allow expiration of objects, using this exit can cause OSMC performance problems if you have not properly established your expiration criteria in your SMS management classes.

If you do not plan on expiring objects and have established your CBRHADUX installation exit to return with an indication that no expiration is allowed, you must make sure that your SMS management class has expiration criteria that does not cause OSMC to continually pick objects to be expired. Always be sure that your management class sets the expiration criteria to NEVER expire if you do not plan to expire OAM objects.

Considerations for Larger Data Objects

If larger objects are spread across multiple storage groups, you can avoid virtual storage shortages in OAM address space when running your OSMC storage management cycle by limiting the number of storage groups that can be run concurrently. For example, if the maximum object size (specified in the IEFSSN*xx* with the MOS=*nnn* keyword) is 100MB, processing a maximum of 10 object storage groups at a time is recommended. For a maximum object size of 256MB, a maximum of four storage groups for concurrent processing is recommended. The maximum number of storage groups processed can be set using MAXS= in the PARM field on the JCL EXEC statement in the OAM cataloged procedure. The default value is MAXS=2.

You should also determine the maximum object size of any other storage groups you have and adjust the MAXS= parameter accordingly. If, for example, you have only five storage groups with the potential to contain 100MB objects, you could specify more than five additional storage groups.

In general, OSMC will process concurrently up to 15MB of data per storage group with the possibility of processing 15MB plus the largest object size in the storage group. When processing multiple storage groups concurrently, ensure that the total amount of storage across all storage groups stays around 1GB. This will allow the remaining 1GB to be used for other OAM address space functions. The use of a monitoring tool during the initial OSMC storage cycles can help you avoid problems resulting from virtual storage constraints.

Balancing Library Usage

OAM attempts to balance drive use within a given library; however, in a system with multiple libraries, the level of activity can vary greatly among libraries. Activity can be affected by the assignment of Object or Object Backup storage groups to libraries, the frequency of retrieval of objects from optical or tape cartridges, and the availability of scratch cartridges.

If one library has much more activity than the others, the response time for work on that library can be lengthened. You should monitor the number of cartridge mounts in each library by examining the console log.

To balance the work load, reassign Object or Object Backup storage groups to other libraries, and eject and move the cartridges to the corresponding libraries. Also, for an Object storage group that is defined to be resident in multiple libraries, cartridges in the Object storage group can be ejected from the overly active library and entered into another library assigned to the Object storage group.

When determining which volume to use for a write request, OAM attempts to find the volume that is available to the storage group and that has the least amount of free space, but enough space for the object that is to be written. If a new library is added to a configuration and the new library is added to an existing Object or Object Backup storage group definition, it is a good idea to move some of the partially used volumes that belong to the Object or Object Backup storage group instead of populating a new library only with scratch or unused grouped volumes. This will help to distribute the read and write workload across the libraries.

Using Appropriate Transport Classes within XCF

In an OAM Parallel Sysplex environment, cross-coupling facility (XCF) message services send requests and data between instances of OAM within an OAMplex. XCF messaging services, a function within XCF, uses transport classes to send XCF messages and data through the coupling facility between the various systems within a sysplex environment.

Transport classes are used by XCF messages service to group messages that are to be sent between systems within a Parallel Sysplex. Messages are assigned to transport classes based on the group name (defining specific transport classes to OAM, for example), the message size, or both. Each transport class has its own resources that consist of buffers and one or more inbound and outbound paths. In most cases, it is more efficient to pool the resources and have the transport classes based on message size, rather than on group name.

XCF message buffers are managed by correctly selecting the size of the messages most frequently sent from specific buffer pools and by specifying an adequate upper limit for the size of the buffer pool. Multiple default transport classes of various sizes are assigned to the multiple buffers in the coupling facility. XCF determines which transport class is to be used depending on the size of the message or object in the buffer being transported.

XCF attempts to optimize the use of transport classes by selecting a class that is large enough to handle all the data being transported. For example, if a message or data is being sent from one instance of OAM to another OAM system within an OAMplex through the coupling facility using XCF message services that is 5 KB in size, XCF might use the 5 KB default transport class to send the message. XCF tries to select the best fit transport class for the buffer size. However, XCF might also choose the 5 KB transport class to handle a 2 KB message if that is the best fit

available at the time. The 5 KB default transport would be large enough to handle the request; however, the buffer is not being used efficiently.

It is possible to create customized transport classes based on message size (or object size) to use specifically for your own data by defining transport classes based on message or object size and assigning them based on the OAM XCF group name along with the default transport classes. Defining your own transport classes allows you to determine the best fit for your objects to optimize the use of the transport class for your group class buffer size.

Recommendation: Customizing your own transport classes works best if your installation has standard object sizes. Additionally, you would want to create smaller transport classes for OAM to handle the smaller messages used to communicate configuration updates. In this case, you would have the best fit transport classes for your data and messages.

Perform the following steps to determine if there is a legitimate need for user-defined transport classes:

1. Use the XCF default transport classes assigned to the buffers first to determine if they sufficiently accommodate the size of your data and are being used in an efficient manner.
2. Modify your configuration (storage group, library, and drive definitions) to best utilize your resources and reduce unnecessary XCF messaging for processing transactions. Some libraries span several storage groups, which might increase the need to send messages using XCF. Update your configuration to minimize the frequency and the amount of data that needs to be transported. For OSMC processing, try to run OSMC on the OAM that is managing and controlling the hardware associated with both the Object storage group being processed and the Object Backup storage group. If different storage groups are being processed on multiple OAMs concurrently and backup copies of objects need to be written, you should have hardware available to the Object Backup storage groups on each OAM that is doing the processing.
3. Run RMF reports for XCF activity and analyze the reports to determine which default transport classes are used with what buffer size and how often the transport classes are used.

Recommendation: If your average object size is larger, consider using a CTC direct connection for transporting XCF messages and data to improve performance.

If you determine, after you have performed the previous steps, that there is sufficient need to define specific transport classes to the OAMplex to optimize the use of system resources, defined transport classes can be used along with the XCF defaults.

Related reading:

- For more information about an OAMplex, see "OAMplex" on page 4.
- For more information about Parallel Sysplexes, see *z/OS Parallel Sysplex Overview*.
- For information on how to calculate message buffer space, see *z/OS MVS Setting Up a Sysplex*.
- For information about RMF reports, see *z/OS RMF User's Guide*.

Measuring OAM Transaction Performance Using SMF

OAM uses system management facility (SMF) recording for gathering OAM statistical information to allow customers to measure the performance of OAM at the application programming interface level (the OSREQ macro interface).

The OAM SMF record allows the collection of statistical information about OAM usage for planning and diagnosis purposes such as:

- Information system usage accounting and charge back to user departments
- Performance analysis and monitoring to make certain that their information systems are as finely tuned as possible
- Capacity planning to determine when to procure additional hardware resources, such as storage devices (DASD, tape, optical) and media
- Potential problem determination data

The OAM SMF record subtypes are assigned to almost all OAM activities. The MVS system operator or system programmer can dynamically select the OAM SMF record subtypes to be recorded. The following activities have associated subtype records:

- Invocations of OSR functions:
  - ACCESS
  - CHANGE
  - DELETE
  - QUERY
  - RETRIEVE
  - STORE
  - UNACCESS
- Invocations of OSMC storage management activities:
  - Storage group processing
  - DASD space management processing
  - Volume recovery utility
  - Single object recovery utility
  - Library space management
  - Move volume utility
  - Single object recall utility
  - Immediate Backup Copy
  - Tape Recycle
- Library control system (LCS) optical library activities
  - Optical library varies online
  - Optical library varies offline
  - Optical drive varies online
  - Optical drive varies offline
  - Optical cartridge entry
  - Optical cartridge eject
  - Optical cartridge label
  - Optical cartridge audit
  - Optical cartridge mount
  - Optical cartridge demount
  - Optical write
  - Optical read
  - Optical logical delete
  - Optical physical delete
- LCS object tape activities:
  - Object tape write

– Object tape read
– Object tape demount
– Object tape logical delete

Related reading:

- For more information regarding the OSREQ macro, see *z/OS DFSMS OAM Application Programmer's Reference*.
- For more information about SMF, see Appendix D, "OAM System Management Facility Records," on page 535, and *z/OS MVS System Management Facilities (SMF)*.

OAM SMF Record Subtypes

OAM records SMF records in the SMF data sets to account for OAM activity. The OAM SMF record is a type 85 (X'55'). The OAM SMF record begins with a standard 48-byte SMF record header. Each OAM SMF record contains three sections:

- Standard 48-byte SMF record header
- 112-byte OAM product section
- Variable length OAM data section

Table 31 lists the OAM SMF record subtypes.

Table 31. Record Subtypes and Descriptions

Record Subtype	Record Size	Description
1	324	OSREQ Access
2	324	OSREQ Store
3	324	OSREQ Retrieve
4	324	OSREQ Query
5	324	OSREQ Change
6	324	OSREQ Delete
7	324	OSREQ Unaccess
32	336	OSMC Storage Group Processing
33	336	OSMC DASD Space Management
34	336	OSMC Volume Recovery Utility
35	336	OSMC Move Volume Utility
36	296	OSMC Single Object Recovery Utility
37	184	OSMC Library Space Management
38	288	OSMC Single Object Recall Utility
39	136	OSMC Immediate Backup
40	268	OSMC Tape Recycle
64	256	LCS Optical Drive Vary Online
65	256	LCS Optical Drive Vary Offline
66	256	LCS Optical Library Vary Online
67	256	LCS Optical Library Vary Offline
68	284	LCS Optical Cartridge Entry
69	284	LCS Optical Cartridge Eject
70	284	LCS Optical Cartridge Label

Table 31. Record Subtypes and Descriptions (continued)

Record Subtype	Record Size	Description
71	284	LCS Optical Volume Audit
72	284	LCS Optical Volume Mount
73	284	LCS Optical Volume Demount
74	variable (min = 416, max = 32 744)	LCS Optical Write Request
75	416	LCS Optical Read Request
76	380	LCS Optical Logical Delete Request
77	variable (min = 380, max = 32 744)	LCS Optical Physical Delete Request
78	variable (min = 380, max = 32 744)	LCS Object Tape Write Request
79	416	LCS Object Tape Read Request
87	228	LCS Object Tape Volume Demount (OAM usage)
88	380	LCS Object Tape Logical Delete Request

Related reading: For more information about SMF records, see Appendix D, "OAM System Management Facility Records," on page 535.

OAM SMF Start and End Time Accuracy

Each OAM SMF record has a function start and end time in the common OAM product section. The start and end times are in fields R85PSTRT and R85PENDT respectively, and they are presented in z/Architecture™ STORE CLOCK (STCK) instruction format.

The starting time of the OAM function is obtained as soon as possible so that the elapsed time of the function includes as much OAM processing time as possible.

The ending time of the OAM function is obtained as soon as possible to the end of the function so that the elapsed time of the function includes as much OAM processing time as possible. However, because the function end time (in field R85PENDT) is set and the elapsed time (in field R85PRESP) is calculated prior to passing the record to SMF for recording, the elapsed time does not include the time required to invoke SMF and the time required to copy the record into the SMF buffers.

Identifying OAM Transaction Activity Using RMF

Resource Measurement Facility (RMF) can assist you in analyzing your business environment if you are processing objects. RMF allows the installation to obtain reports on workload and transaction activity against specific report performance groups that are defined in the IEAICS*xx* PARMLIB member. These reports provide an installation with the ability to monitor and obtain a quick snapshot of OAM's performance at a given time. The RMF transaction reporting assists customers using OAM for a variety of applications in performance monitoring, analysis, and tuning.

Two report types are obtainable from RMF:
- RMF Monitor I Workload Activity Report

- RMF Monitor II Transaction Activity Report

Related reading: For complete information about the Resource Measurement Facility, see *z/OS RMF User's Guide*.

OAM Transaction Classes

OAM passes a transaction completion message to the MVS/System Resource Manager (SRM) containing the following information:

- A subsystem name of "OAM"
- A transaction class name (OSREQ or OSMC)
- A transaction name (also referred to as report performance group)
- The transaction start time in z/Architecture STORE CLOCK (STCK) instruction format

Two OAM transaction classes are used for RMF:

OSREQ The OSREQ transaction class represents invocation of the OSREQ macro (the programming interface provided by OAM).

OSMC The OSMC transaction class represents activities performed by the OAM storage management component (OSMC).

Table 32 describes the transaction names associated with the OSREQ transaction class.

Table 32. OSREQ Transaction Names

Transaction Name	Description
ACCESS	Represents completion of an OSREQ ACCESS macro invocation.
CHANGE	Represents completion of an OSREQ CHANGE macro invocation.
DELETED	Represents completion of an OSREQ DELETE macro invocation.
DELETEDB	Represents completion of an OSREQ DELETE macro invocation where the primary copy of the object resided on DASD and a backup copy of the object was also deleted during the OSREQ DELETE processing.
DELETEO	Represents completion of an OSREQ DELETE macro invocation where the primary copy of the object resided on optical.
DELETEOB	Represents completion of an OSREQ DELETE macro invocation where the primary copy of the object resided on optical and a backup copy of the object was also deleted during the OSREQ DELETE processing.
DELETET	Represents completion of an OSREQ DELETE macro invocation where the primary copy of the object resided on tape.
DELETETB	Represents completion of an OSREQ DELETE macro invocation where the primary copy of the object resided on tape and a backup copy of the object was also deleted during the OSREQ DELETE processing.
QUERY	Represents completion of an OSREQ QUERY macro invocation where the object name was a fully-qualified object name. Objects on DASD, optical, or tape can be queried.

Table 32. OSREQ Transaction Names (continued)

Transaction Name	Description
QUERYG	Represents completion of an OSREQ QUERY macro invocation where the function performed was a generic query as a result of a partially qualified object name (one containing an asterisk in the low-level qualifier) being specified on the OSREQ QUERY macro.
RETRVBO	Represents completion of an OSREQ RETRIEVE request where the backup copy of the object was retrieved from optical due to the VIEW=BACKUP1 (for the first backup copy) or VIEW=BACKUP2 (for the second backup copy) keyword being specified on the OSREQ RETRIEVE macro.
RETRVBT	Represents completion of an OSREQ RETRIEVE request where the backup copy of the object was retrieved from tape due to the VIEW=BACKUP1 (for the first backup copy) or VIEW=BACKUP2 (for the second backup copy) keyword being specified on the OSREQ RETRIEVE macro.
RETRVPD	Represents completion of an OSREQ RETRIEVE request where the primary copy of the object was retrieved from DASD.
RETRVPO	Represents completion of an OSREQ RETRIEVE request where the primary copy of the object was retrieved from optical.
RETRVPOO	Represents completion of an OSREQ RETRIEVE request where the following conditions exist: • The primary copy resides on an optical disk volume. • The optical disk volume that the primary copy resides on is unreadable, in an offline library, or in a nonoperational library. • A backup copy of the object exists. • A backup copy of the object resides on an optical volume. • The Access Backup facility is active. • A backup copy of the object was retrieved from the optical volume and returned to the application program.
RETRVPOT	Represents completion of an OSREQ RETRIEVE request where the following conditions exist: • The primary copy resides on an optical disk volume. • The optical disk volume that the primary copy resides on is unreadable, in an offline library, or in a nonoperational library. • A backup copy of the object exists. • A backup copy of the object resides on a tape volume. • The Access Backup facility is active. • A backup copy of the object was retrieved from the tape volume and returned to the application program.
RETRVPT	Represents completion of an OSREQ RETRIEVE request where the primary copy of the object was retrieved from tape.
RETRVPTO	Represents completion of an OSREQ RETRIEVE request where the following conditions exist: • The primary copy resides on a tape volume. • The tape volume that the primary copy resides on is unreadable, in an offline library, or in a nonoperational library. • A backup copy of the object exists. • A backup copy of the object resides on an optical volume. • The Access Backup facility is active. • A backup copy of the object was retrieved from the optical volume and returned to the application program.

Table 32. OSREQ Transaction Names (continued)

Transaction Name	Description
RETRVPTT	Represents completion of an OSREQ RETRIEVE request where the following conditions exist: • The primary copy resides on a tape volume. • The tape volume that the primary copy resides on is unreadable, in an offline library, or in a nonoperational library. • A backup copy of the object exists. • A backup copy of the object resides on a tape volume. • The Access Backup facility is active. • A backup copy of the object was retrieved from the tape volume and returned to the application program.
STORDASD	Represents completion of an OSREQ STORE macro invocation where the object was stored on DASD.
STOROPT	Represents completion of an OSREQ STORE macro invocation where the object was stored on optical.
STORTAPE	Represents completion of an OSREQ STORE macro invocation where the object was stored on tape.
UNACCESS	Represents completion of an OSREQ UNACCESS macro invocation.

Table 33 describes the transaction names associated with the OSMC transaction class.

Table 33. OSMC Transaction Names

Transaction Name	Description
DASDREAD	Represents completion of reading an object by way of an SQL SELECT statement from the 4 KB table, 32 KB table, or LOB storage structure by OSMC during the OSMC storage management cycle or the OSMC Volume Recovery utility.
DASDWRIT	Represents completion of writing an object by way of an SQL INSERT statement to either the 4 KB table, 32 KB table, or LOB storage structure by OSMC during the OSMC storage management cycle.
DIRDEL	Represents completion of deleting a row by using an SQL DELETE statement from the Object Directory Table during the OSMC storage management cycle or the OSMC DASD space management function.
DIRUPD	Represents completion of updating a row in the Object Directory Table by OSMC during any one of the following OSMC functions: • OSMC storage management cycle • OSMC Volume Recovery utility • OSMC single object recovery utility • OSMC Move Volume utility
OBJEXPIR	Represents the expiration of an object by OSMC during OSMC storage management cycle or OSMC DASD space management facility.
OBJMOVE	Represents the completion of processing an object by the OAM Move Volume utility.

Table 33. OSMC Transaction Names (continued)

Transaction Name	Description
OBJPROC	Represents the completion of processing an object (other than expiration of the object) by OSMC during the OSMC storage management cycle.
OBJRECVS	Represents the completion of processing an object by the OAM single object recovery utility.
OBJRECVV	Represents the completion of processing an object by the Volume Recovery utility.

Related reading: For more information about using RMF and OAM transactions, see *z/OS RMF User's Guide*.

RMF Monitor I Workload Activity Report

In order for RMF to receive these messages from SRM and for a RMF Monitor I Workload Activity Report to be generated, the following criteria must be met:

- RMF must be initialized.
- An RMF Monitor I session must be active and collecting system workload activity.
- Report performance groups (transaction names associated with the different transaction class name) must be defined in the installation control specifications (ICS) located in the IEAICS*xx* PARMLIB member of PARMLIB.
- The ICS, containing the report performance groups for the OAM transaction names, must be activated by using the *SET ICS=xx* command at the MVS system console.

Because OAM transaction names are defined as report performance groups in the ICS, and RMF only reports on report performance groups in the type 1 subreport (performance group period) and the type 2 subreport (performance group), then:

- The WKLD(PERIOD) RMF option must be in effect requesting reporting by *performance group period* (type 1 subreport) on the Workload Activity Report **or**,
- The WKLD(GROUP) RMF option must be in effect requesting reporting by *performance group* (type 2 subreport) on the Workload Activity Report.

The following fields appear on the Monitor I Workload Activity Report containing valid data for OAM transactions performed against the report performance groups that are defined in the ICS:

AVERAGE TRANSACTIONS
The average number of active transactions during the interval

MPL The average number of transactions resident in central storage during the interval

ENDED TRANS
The number of transactions that ended during the interval

AVG TRANS TIME
The average elapsed time of ended transactions

STD DEV
The standard deviation of the average elapsed time of ended transactions

Figure 23 on page 218 is an example of the Sample RMF Monitor I Workload Activity Report, which shows OAM transaction completions for various report

performance groups.

```
                                        W O R K L O A D   A C T I V I T Y
                                                                                                                                PAGE    1
           MVS/ESA                  SYSTEM ID 3090            DATE 09/01/93           INTERVAL 12.26.657
           SP5.2.0                  RPT VERSION 5.2.0         TIME 11.15.26           IPS = IEAIPS04
        OPT = IEAOPT00                        SUMMARY BY PERFORMANCE GROUP   SERVICE DEFINITION COEFFICIENTS     SU/SEC=1162.3
        ICS = IEAICSTU                                                       IOC =  5.0  CPU = 10.0  SRB = 10.0  MSO =  3.0000
              TIME                      AVERAGE ABSORPTION,                                                          AVG TRANS. TIME,
PGN  PGP  DMN SLICE  INTERVAL SERVICE   AVG TRX SERV RATE,     PAGE-IN RATES      STORAGE         TRANSACTIONS     STD. DEVIATION
              GROUP                     TCB+SRB SECONDS, %                                                             HHH.MM.SS.TTT
0000 ALL  ALL ALL     IOC       1,170   ABSRPTN        11    SINGLE      0.02   AVERAGE  101.33   AVG       7.00   TRX 000.00.00.000
                      CPU       25423   TRX SERV       11    BLOCK       0.03                     MPL       7.00   SD  000.00.00.000
                      MSO       20602   TCB           2.1    HSP         0.00   TOTAL    709.80   ENDED        0
                      SRB       11766   SRB           1.0    HSP MISS    0.00   CENTRAL  709.80   END/SEC   0.00   QUE 000.00.00.000
                      TOT       58961   TCB+SRB%      0.4    EXP SNGL    0.00   EXPAND     0.00   #SWAPS       2
                      PER SEC      78                        EXP BLK     0.00                                         TOT 000.00.00.000
SUBSYS = OAM         TRXCLASS =             ACCTINFO = NO
USERID =              TRXNAME =
0001 ALL  ALL ALL     IOC       23091   ABSRPTN         8    SINGLE      0.01   AVERAGE  142.10   AVG      22.99   TRX 000.00.00.000
                      CPU       31226   TRX SERV        8    BLOCK       0.07                     MPL      22.99   SD  000.00.00.000
                      MSO       74840   TCB           2.6    HSP         0.00   TOTAL   3,268.5   ENDED        0
                      SRB       10387   SRB           0.8    HSP MISS    0.00   CENTRAL 3,268.5   END/SEC   0.00   QUE 000.00.00.000
                      TOT       139.5K  TCB+SRB%      0.4    EXP SNGL    0.00   EXPAND     0.00   #SWAPS       0
                      PER SEC      186                        EXP BLK     0.00                                         TOT 000.00.00.000
0002 ALL  ALL ALL     IOC       17730   ABSRPTN     1,577    SINGLE      2.48   AVERAGE  343.16   AVG       0.12   TRX 000.00.01.924
                      CPU       40034   TRX SERV    1,522    BLOCK       1.40                     MPL       0.12   SD  000.00.03.470
                      MSO       80126   TCB           3.4    HSP         0.00   TOTAL     41.46   ENDED       61
                      SRB       4,399   SRB           0.3    HSP MISS    0.00   CENTRAL   41.46   END/SEC   0.08   QUE 000.00.11.126
                      TOT       142.3K  TCB+SRB%      0.4    EXP SNGL    0.00   EXPAND     0.00   #SWAPS      86
                      PER SEC      190                        EXP BLK     0.00                                         TOT 000.00.13.050
0003 ALL  ALL ALL     ZEROS
THRU
0099

SUBSYS = OAM         TRXCLASS = OSREQ       ACCTINFO = NO
USERID =              TRXNAME =
0400 ALL  ALL ALL     IOC             0   ABSRPTN         0    SINGLE      0.00   AVERAGE    0.00   AVG       0.00   TRX 000.00.00.616
                      CPU             0   TRX SERV        0    BLOCK       0.00                     MPL       0.00   SD  000.00.01.248
                      MSO             0   TCB           0.0    HSP         0.00   TOTAL      0.00   ENDED       51
                      SRB             0   SRB           0.0    HSP MISS    0.00   CENTRAL    0.00   END/SEC   0.06   QUE 000.00.00.000
                      TOT             0   TCB+SRB%      0.0    EXP SNGL    0.00   EXPAND     0.00   #SWAPS       0
                      PER SEC         0                        EXP BLK     0.00                                         TOT 000.00.00.000

SUBSYS = OAM         TRXCLASS =             ACCTINFO = NO
USERID =              TRXNAME = ACCESS
```

Figure 23. Sample RMF Monitor I Workload Activity Report (Part 1 of 4)

```
                                   W O R K L O A D   A C T I V I T Y
                                                                                                                    PAGE    2
           MVS/ESA                  SYSTEM ID 3090            DATE 09/01/93           INTERVAL 12.26.657
           SP5.2.0                  RPT VERSION 5.2.0         TIME 11.15.26           IPS = IEAIPS04
        OPT = IEAOPT00                        SUMMARY BY PERFORMANCE GROUP   SERVICE DEFINITION COEFFICIENTS     SU/SEC=1162.3
        ICS = IEAICSTU                                                       IOC =  5.0  CPU = 10.0  SRB = 10.0  MSO =  3.0000
              TIME                     AVERAGE ABSORPTION,                                                          AVG TRANS. TIME,
PGN  PGP  DMN SLICE  INTERVAL SERVICE  AVG TRX SERV RATE,     PAGE-IN RATES      STORAGE         TRANSACTIONS     STD. DEVIATION
              GROUP                    TCB+SRB SECONDS, %                                                             HHH.MM.SS.TTT
0401 ALL  ALL ALL    IOC           0   ABSRPTN         0    SINGLE      0.00   AVERAGE    0.00   AVG       0.00   TRX 000.00.01.039
                     CPU           0   TRX SERV        0    BLOCK       0.00                      MPL       0.00   SD  000.00.00.178
                     MSO           0   TCB           0.0    HSP         0.00   TOTAL      0.00   ENDED       16
                     SRB           0   SRB           0.0    HSP MISS    0.00   CENTRAL    0.00   END/SEC   0.02   QUE 000.00.00.000
                     TOT           0   TCB+SRB%      0.0    EXP SNGL    0.00   EXPAND     0.00   #SWAPS       0
                     PER SEC       0                        EXP BLK     0.00                                        TOT 000.00.00.000
0402 ALL  ALL ALL    ZEROS

SUBSYS = OAM         TRXCLASS =             ACCTINFO = NO
USERID =             TRXNAME = DELETED
0403 ALL  ALL ALL    IOC           0   ABSRPTN         0    SINGLE      0.00   AVERAGE    0.00   AVG       0.00   TRX 000.00.00.062
                     CPU           0   TRX SERV        0    BLOCK       0.00                      MPL       0.00   SD  000.00.00.079
                     MSO           0   TCB           0.0    HSP         0.00   TOTAL      0.00   ENDED        5
                     SRB           0   SRB           0.0    HSP MISS    0.00   CENTRAL    0.00   END/SEC   0.00   QUE 000.00.00.000
                     TOT           0   TCB+SRB%      0.0    EXP SNGL    0.00   EXPAND     0.00   #SWAPS       0
                     PER SEC       0                        EXP BLK     0.00                                        TOT 000.00.00.000
0404 ALL  ALL ALL    ZEROS
THRU
0408
SUBSYS = OAM         TRXCLASS =             ACCTINFO = NO
USERID =             TRXNAME = QUERY
0409 ALL  ALL ALL    IOC           0   ABSRPTN         0    SINGLE      0.00   AVERAGE    0.00   AVG       0.00   TRX 000.00.00.667
                     CPU           0   TRX SERV        0    BLOCK       0.00                      MPL       0.00   SD  000.00.01.259
                     MSO           0   TCB           0.0    HSP         0.00   TOTAL      0.00   ENDED        5
                     SRB           0   SRB           0.0    HSP MISS    0.00   CENTRAL    0.00   END/SEC   0.00   QUE 000.00.00.000
                     TOT           0   TCB+SRB%      0.0    EXP SNGL    0.00   EXPAND     0.00   #SWAPS       0
                     PER SEC       0                        EXP BLK     0.00                                        TOT 000.00.00.000
SUBSYS = OAM         TRXCLASS =             ACCTINFO = NO
USERID =             TRXNAME = QUERYG
```

Figure 23. Sample RMF Monitor I Workload Activity Report (Part 2 of 4)

```
                                W O R K L O A D   A C T I V I T Y
                                                                                                                PAGE    3
           MVS/ESA                 SYSTEM ID 3090            DATE 09/01/93           INTERVAL 12.26.657
           SP5.2.0                 RPT VERSION 5.2.0         TIME 11.15.26           IPS = IEAIPS04
        OPT = IEAOPT00                      SUMMARY BY PERFORMANCE GROUP   SERVICE DEFINITION COEFFICIENTS     SU/SEC=1162.3
        ICS = IEAICSTU                                                     IOC =  5.0  CPU = 10.0  SRB = 10.0  MSO =  3.0000
              TIME                    AVERAGE ABSORPTION,                                                        AVG TRANS. TIME,
PGN  PGP  DMN SLICE  INTERVAL SERVICE  AVG TRX SERV RATE,     PAGE-IN RATES      STORAGE         TRANSACTIONS     STD. DEVIATION
              GROUP                    TCB+SRB SECONDS, %                                                             HHH.MM.SS.TTT
0410 ALL  ALL ALL    IOC           0   ABSRPTN         0    SINGLE      0.00   AVERAGE    0.00   AVG       0.00   TRX 000.00.01.305
                     CPU           0   TRX SERV        0    BLOCK       0.00                      MPL       0.00   SD  000.00.00.000
                     MSO           0   TCB           0.0    HSP         0.00   TOTAL      0.00   ENDED        1
                     SRB           0   SRB           0.0    HSP MISS    0.00   CENTRAL    0.00   END/SEC   0.00   QUE 000.00.00.000
                     TOT           0   TCB+SRB%      0.0    EXP SNGL    0.00   EXPAND     0.00   #SWAPS       0
                     PER SEC       0                        EXP BLK     0.00                                        TOT 000.00.00.000
0411 ALL  ALL ALL    ZEROS
THRU
0412

SUBSYS = OAM         TRXCLASS =             ACCTINFO = NO
USERID =              TRXNAME = RETRVPD
0413 ALL  ALL ALL    IOC           0   ABSRPTN         0    SINGLE      0.00   AVERAGE    0.00   AVG       0.00   TRX 000.00.00.162
                     CPU           0   TRX SERV        0    BLOCK       0.00                      MPL       0.00   SD  000.00.00.208
                     MSO           0   TCB           0.0    HSP         0.00   TOTAL      0.00   ENDED        2
                     SRB           0   SRB           0.0    HSP MISS    0.00   CENTRAL    0.00   END/SEC   0.00   QUE 000.00.00.000
                     TOT           0   TCB+SRB%      0.0    EXP SNGL    0.00   EXPAND     0.00   #SWAPS       0
                     PER SEC       0                        EXP BLK     0.00                                        TOT 000.00.00.000
0414 ALL  ALL ALL    ZEROS
THRU
0419

SUBSYS = OAM         TRXCLASS =             ACCTINFO = NO
USERID =              TRXNAME = STORDASD
0420 ALL  ALL ALL    IOC           0   ABSRPTN         0    SINGLE      0.00   AVERAGE    0.00   AVG       0.00   TRX 000.00.01.735
                     CPU           0   TRX SERV        0    BLOCK       0.00                      MPL       0.00   SD  000.00.03.672
                     MSO           0   TCB           0.0    HSP         0.00   TOTAL      0.00   ENDED        5
                     SRB           0   SRB           0.0    HSP MISS    0.00   CENTRAL    0.00   END/SEC   0.00   QUE 000.00.00.000
                     TOT           0   TCB+SRB%      0.0    EXP SNGL    0.00   EXPAND     0.00   #SWAPS       0
                     PER SEC       0                        EXP BLK     0.00                                        TOT 000.00.00.000
0421 ALL  ALL ALL    ZEROS
THRU
0422

SUBSYS = OAM         TRXCLASS =             ACCTINFO = NO
USERID =              TRXNAME = UNACCESS
```

Figure 23. Sample RMF Monitor I Workload Activity Report (Part 3 of 4)

```
                                W O R K L O A D   A C T I V I T Y
                                                                                                                PAGE    4
           MVS/ESA                 SYSTEM ID 3090            DATE 09/01/93           INTERVAL 12.26.657
           SP5.2.0                 RPT VERSION 5.2.0         TIME 11.15.26           IPS = IEAIPS04
        OPT = IEAOPT00                      SUMMARY BY PERFORMANCE GROUP   SERVICE DEFINITION COEFFICIENTS     SU/SEC=1162.3
        ICS = IEAICSTU                                                     IOC =  5.0  CPU = 10.0  SRB = 10.0  MSO =  3.0000
              TIME                    AVERAGE ABSORPTION,                                                        AVG TRANS. TIME,
PGN  PGP  DMN SLICE  INTERVAL SERVICE  AVG TRX SERV RATE,     PAGE-IN RATES      STORAGE         TRANSACTIONS     STD. DEVIATION
              GROUP                    TCB+SRB SECONDS, %                                                             HHH.MM.SS.TTT
0423 ALL  ALL ALL    IOC           0   ABSRPTN         0    SINGLE      0.00   AVERAGE    0.00   AVG       0.00   TRX 000.00.00.051
                     CPU           0   TRX SERV        0    BLOCK       0.00                      MPL       0.00   SD  000.00.00.053
                     MSO           0   TCB           0.0    HSP         0.00   TOTAL      0.00   ENDED       17
                     SRB           0   SRB           0.0    HSP MISS    0.00   CENTRAL    0.00   END/SEC   0.02   QUE 000.00.00.000
                     TOT           0   TCB+SRB%      0.0    EXP SNGL    0.00   EXPAND     0.00   #SWAPS       0
                     PER SEC       0                        EXP BLK     0.00                                        TOT 000.00.00.000
```

Figure 23. Sample RMF Monitor I Workload Activity Report (Part 4 of 4)

RMF Monitor II Transaction Activity Report

The data in the RMF Monitor II Transaction Report is collected by SRM and passed to RMF when an RMF Monitor I session that is measuring workload activity is active. Thus, the transaction activity report can only be obtained when an RMF Monitor I session, requesting workload activity using the WKLD option is running at the same time as the report requested.

Figure 24 shows a sample of the RMF Monitor II Transaction Activity report of OAM transaction completions for various report performance groups.

```
                                  CPU=  3 UIC=183 PFR=   0           TRX      T
11:24:28  ICS=IEAICSTU  IPS=IEAIPS04     ACCT    PERF    TRANS  AVG TRANS TIME
SUBSYS  TRXCLASS   USERID     TRXNAME    INFO   GRP PER   RATE   HHH.MM.SS.TTT
                                            C   2   1   0.079  000.00.00.134
                                                    2   0.004  000.00.00.699
                                                    3   0.041  000.00.05.426
OAM     OSREQ                               NO R 400   1   0.118  000.00.00.616
OAM                              ACCESS     NO R 401   1   0.037  000.00.01.039
OAM                              DELETED    NO R 403   1   0.011  000.00.00.062
OAM                              QUERY      NO R 409   1   0.011  000.00.00.667
OAM                              QUERYG     NO R 410   1   0.002  000.00.01.305
OAM                              RETRVPD    NO R 413   1   0.004  000.00.00.162
OAM                              STORDASD   NO R 420   1   0.011  000.00.01.735
OAM                              UNACCESS   NO R 423   1   0.039  000.00.00.051
```

Figure 24. Sample RMF Monitor II Transaction Activity Report

Activating an Installation Control Specification

SRM must be notified that a new ICS is in effect, after the IEAICS*xx* member is updated with the OAM transaction names that need statistics compiled for them. To notify SRM about the new ICS, the system operator should issue the MVS SET system command:

```
SET ICS=xx
```

The *xx* in the SET ICS=*xx* command refers to the low-order suffix of the IEAICS*xx* PARMLIB member that contains the SUBSYS specification for the OAM RMF transaction names.

Initializing RMF and Starting a Monitor I Session

To start RMF and a Monitor I session at the same time, the system operator should issue the following command at any MVS system console:

```
START RMF.A
```

Because RMF must be collecting workload activity statistics, specify one of the following the RMF WKLD options:

- On the START RMF command issued at an MVS system console, **or**
- In the RMF PARMLIB member ERBRMF*xx* that is processed by RMF during initialization. If not specified, the default is ERBRMF00.

Recommendation: Remember the WKLD(PERIOD) RMF option must be in effect requesting reporting by performance group period or the WKLD(GROUP) RMF option must be in effect requesting reporting by performance group on the Workload Activity Report.

Starting and Ending an RMF Monitor II Session

To start an RMF Monitor II session:

1. Log on to TSO/E.
2. Enter `RMFMON`.

To end the RMF Monitor II Session:

- Enter the stop command `Z`.

You can then log off of TSO/E or continue to do other TSO/E work.

Obtaining an RMF Monitor II Transaction Activity Report

To obtain the RMF Monitor II Transaction Activity Report, perform one of the following actions:

- Press the PF12 key to select the Transaction Activity Data menu item from the RMF DISPLAY MENU, **or**
- Enter the command `TRX OAM` on the RMF DISPLAY MENU to display the transaction activity report containing statistics for all transactions associated with the subsystem name OAM.

Note: On the first invocation of the SYSEVENT macro following an IPL, message CBR7012 is returned indicating a return code of "8". You should expect this return code as it indicates that SRM has not yet acquired data storage buffers for recording transaction completion messages. The initial failing request is not reported to RMF.

Related reading: For complete information about the TRX command and other RMF Monitor II menu items and display commands, see *z/OS RMF User's Guide*.

Establishing Recovery Procedures

As part of your disaster recovery plan, establish and test procedures for recovering these entities:

- DB2 object storage databases and the optical configuration database
- Single objects
- An entire optical or tape volume
- Collection name entries in a catalog
- Automatic access to backup

Recovering DB2 Databases

The recoverable structure of data in DB2 is the table space. To ensure recoverability, make an image copy when creating each table space in the optical configuration database and all the table spaces in each of the object storage databases. Your installation determines how often to make backup copies, based on the usage of each table space. Use this original image copy as a base, and make subsequent periodic incremental image copies of each table space.

At specified intervals (best defined based on the usage of each table space), perform a MERGECOPY on the base (original, full-image copy) and subsequent incremental-image copies to establish a new base. After creating the new base level, perform subsequent incremental image copies in relation to this new base.

The main benefit of periodically using MERGECOPY to create a new base is the time savings at the time of the failure. Merge copies can be time-consuming, so it is best to do them on a timely, convenient basis.

To recover a table space, merge the contents of the DB2 recovery log with the most recent full-image copy of the table space. Because each change made to the database is recorded in the DB2 recovery log, the merge restores the table space to its last point of consistency prior to system failure.

Notes:

1. In DB2, *point of consistency* is a term that designates a time when all recoverable data accessed by an application program is consistent with other data. It is also known as *syncpoint* or *commit point*.
2. The entries within the DB2 collection name table are synchronized with a corresponding collection name entry in the catalog. Therefore, recovery of the DB2 collection name table must result in a table consistent with the catalog.
3. If any action is taken that permanently removes an entry from the DB2 collection name table, the corresponding entry must be deleted from the catalog. After a collection entry is removed from the DB2 collection name table and the catalog, objects contained within the collection are no longer accessible or managed by OSMC.

Related reading: For directions regarding how to make these image copies, see *DB2 Administration Guide*.

Recovering Single Objects from Removable Media

OAM contains a single object recovery utility for recovering a single object from removable media. You can use either the first or the second backup copy for single object recovery as determined by the settings of the SETOSMC statements in the active CBROAM*xx* member of PARMLIB. The system creates a new primary copy from a backup copy (if one exists) using the following criteria:

- If the primary object resides on optical disk, OAM uses a backup copy (on either optical disk or tape) to create a new optical primary copy.
- If the primary object resides on tape, a backup copy (on either optical disk or tape) is used to create a new tape primary copy.
- If the primary object resides on DASD, OAM uses a backup copy (on either optical disk or tape) to create a new DASD primary copy.

The operator starts the single object recovery utility to copy the object. For further information on this procedure, see "Starting Object Recovery for Single Objects" on page 285.

Recovering an Entire Optical Cartridge or Tape Volume

OAM contains the Volume Recovery utility that recovers the objects from an unusable optical or tape volume to a usable volume. The Volume Recovery utility is used if an optical or tape volume is rendered unreadable, either because of physical damage, or because the volume cannot be found. The Volume Recovery utility is used for two types of volume recovery:

- Volumes containing primary objects belonging to an Object storage group can be recovered from the first or second backup copies of the objects (optical or tape).
- Backup volumes belonging to an Object Backup storage group can be recovered from the primary copies of the objects (DASD, optical, or tape). All storage groups that contain objects that need to be recovered must be defined as part of the ACDS configuration.

To recover a primary optical or tape volume, all of the backup volumes containing either the first or the second backup copies of the objects on the primary volume are needed, whether they are optical or tape. The media from which the backup copy is retrieved for the recovery depends on the volume on which the selected backup copy resides.

If you specified the DELETE option, you can delete recovered tape and optical volumes after all data on those volumes has been recovered successfully.

Example: OAM might have run one storage management cycle for the storage group after OAM was initialized with a CBROAM*xx* PARMLIB member that contained a particular SETOAM statement. This SETOAM statement specified a tape unit name for an Object Backup storage group that caused OAM to write backups for that group to tape. Another time, OAM might have run a storage management cycle for the storage group after OAM was initialized, and the system invoked the START OAM command with one of these three options:

- Without a CBROAM*xx* PARMLIB member
- With a CBROAM*xx* PARMLIB member that contained no SETOAM statements
- With a SETOAM statement that did not specify a tape unit name that was associated with an Object Backup storage group

Any one of these options causes OAM to write backups to an optical volume.

When recovering a backup volume, every Object storage group must be searched for primary objects having backup copies residing on the backup volume being recovered. The primary copy for each of these objects can be on DASD, optical, or tape. As a result, the Volume Recovery utility must identify the optical volumes as well as the tape volumes that are needed for recovery. If both optical and tape volume are requested for the recovery, the operator must reply that both types are available for the recovery to continue. The operator starts the recovery utility to copy the data.

The Volume Recovery operation is similar to that of Movevol, and, as such, it's performance can also be enhanced by employing the same techniques used to tune the Movevol environment. Refer to "Analyzing Resources and Tuning OAM for MOVEVOL Usage" on page 231.

Related reading: For more information on the Volume Recovery utility, see "Starting the OAM Volume Recovery Utility" on page 278 and "Stopping a Volume Recovery that is in Progress" on page 383.

Recovering Collection Name Catalog Entries

OAM attempts to keep collection name catalog entries current. However, OAM cannot keep the catalog entries current if the catalog entries do not exist or if the catalog is unusable (for example, because of I/O errors). Recovery of the catalog might be required. Standard catalog recovery procedures apply to recovering catalog entries for collection names. Those procedures usually involve making an image copy (for example, IDCAMS EXPORT) at certain intervals and restoring that copy (for example, IDCAMS IMPORT) to recover an unusable catalog.

If collection name catalog entries were added after the image copy was made, restoring an image copy does not complete the recovery; you must also recreate those added entries. When a collection name entry from the collection name table is lost, objects in that collection will not be processed in a storage management cycle. If you do not have a program or program product to apply a journal of those additions, you can use IDCAMS to recatalog those individual entries.

Related reading: For further information on using IDCAMS with collection name entries in the catalog, see the *z/OS DFSMS Access Method Services for Catalogs*.

Accessing Backup Objects Automatically

OAM allows your application to automatically obtain the first or second backup copy of an object when the primary copy of the object resides on one of these media:

- On removable media that is marked not readable (possibly damaged or destroyed)
- On removable media that is in a library that is offline or pending offline
- On removable media that is in a library that is not operational
- If a DB2 error is encountered attempting to retrieve the object data (4 KB or 32 KB table rows) and a backup copy of the object exists, OAM attempts to retrieve the backup copy of the object to satisfy the request.

When you activate this function for one or more of the above conditions, and that condition exists when the OSREQ application interface retrieves an object, OAM attempts to obtain the first or second backup copy, if one exists. The backup copy that is selected for retrieval is determined by the BACKUP1 | BACKUP2 keyword that is specified on the MODIFY OAM,START,AB command. If this automatic access to backup objects function is inactive and the primary copy of the object is not available for any of the above reasons, the OSREQ API passes error return and reason codes back to the application. If no backup copy exists and the function is active, the OSREQ API passes error return and reason codes back to the application. Automatic access to backup does not automatically force all retrieves to be initiated from backup. The operator activates and deactivates this function through an operator command.

Related reading: For further information on accessing backup copies, see "Starting Automatic Access to Backup Copies of Objects" on page 298.

Using the Move Volume Utility

OAM provides a utility, the Move Volume utility (MOVEVOL), capable of moving objects from a primary or backup source volume (a tape volume or one side of an optical disk) to one or more target volumes, or deleting scratch tape volumes from the OAM tape inventory and specifying a scratch volume with the delete option specified. The set of eligible target volumes is determined by the drives eligible to write data into the Object or Object Backup storage group containing the source volume. The set of drives eligible to write data into the storage group containing the source volume is defined by the SMS storage group definition and the corresponding SETOAM statement if it exists.

If the source volume is an optical volume belonging to an Object storage group, the target volumes are optical volumes belonging to the same storage group. If no optical drives are available to write to the Object storage group to which the optical source volume belongs, the MOVEVOL request fails.

If the source volume is a tape volume belonging to an Object storage group, the target volumes are tape volumes belonging to the same storage group. If there is not a valid tape unit name associated with the Object storage group to which the tape source volume belongs, the MOVEVOL request fails.

If the source volume is either an optical or a tape volume belonging to the Object Backup storage group, the type of media used for writing the objects is derived from the definition of the Object Backup storage group. For example, if there is a valid SETOAM statement for the Object Backup storage group to which the source volume belongs, the target volumes chosen are tape volumes. If there is no valid

SETOAM statement for the Object Backup storage group belonging to the source volume, the target volumes chosen are optical disk volumes.

The Move Volume utility performs the following functions:

- Writes objects using the optical drives defined in the Object storage group when moving objects off a primary optical source volume.
- Writes objects using the tape drives allocated to the Object storage group (using the tape unit name specified in the SETOAM statement for the Object storage group) when moving objects off a primary tape source volume.
- Writes objects using optical drives defined to, or tape drives allocated to the Object Backup storage group when moving objects off of a backup optical or tape source volume.
- Recycles optical and rewritable tape volumes after all the objects have been successfully moved off of the volumes, if you have specified the optional RECYCLE keyword. For a WORM tape volume, the MOVEVOL with RECYCLE command is rejected.
- Deletes tape and optical volumes from the OAM inventory after all the objects have been moved off of the volumes when you have specified the optional DELETE keyword.

The Move Volume utility enables you to migrate object data in the Object storage group from the following:

- One optical media type to another optical media type
- One tape media type to another tape media type

The Move Volume utility enables you to migrate object data in the Object Backup storage group from the following:

- One optical media type to another optical media type
- One tape media type to another tape media type
- Optical media to tape media
- Tape media to optical media

The intent of the utility is to facilitate migration from "older" technology media to "newer" technology media (for example, from 12-inch media to 5.25-inch media). However, because the set of drives eligible to write data is defined by the definition of the storage group, the following examples of data movement in Table 34 are also valid.

Table 34. Examples of Data Movement with the Move Volume Utility

SCENARIO	MOVE FROM	MOVE TO
Movement from one optical media type to another optical media type	single-density WORM single-density REWR double-density WORM double-density REWR quad-density WORM quad-density REWR 8*x*-density WORM 8*x*-density REWR	single-density WORM single-density REWR double-density WORM double-density REWR quad-density WORM quad-density REWR 8*x*-density WORM 8*x*-density REWR
Movement from one tape media type to another tape media type	Cartridge System Tape Enhanced Capacity High Performance Extended High Performance Enterprise Tape Cartridge	Cartridge System Tape Enhanced Capacity High Performance Extended High Performance Enterprise Tape Cartridge

Table 34. Examples of Data Movement with the Move Volume Utility (continued)

SCENARIO	MOVE FROM	MOVE TO
Movement from any optical media type to a tape volume belonging to the Object Backup storage group	single-density WORM single-density REWR double-density WORM double-density REWR quad-density WORM quad-density REWR 8*x*-density WORM 8*x*-density REWR	Cartridge System Tape Enhanced Capacity High Performance Extended High Performance Enterprise Tape Cartridge
Movement from any tape media type to optical media type belonging to the Object Backup storage group	Cartridge System Tape Enhanced Capacity High Performance Extended High Performance Enterprise Tape Cartridge	single-density WORM single-density REWR double-density WORM double-density REWR quad-density WORM quad-density REWR 8*x*-density WORM 8*x*-density REWR
Notes: 1. WORM = write-once-read-many 2. REWR = rewritable		

Once the data is successfully moved from the source volume, the data is no longer accessible from the original source volume.

Recommendation: If the intent is to migrate from one tape media type to another tape media type (for example, from IBM Cartridge System Tape to IBM Enhanced Capacity Cartridge System Tape), it might be necessary to modify tape volume records in the DB2 TAPEVOL table (see "Updating Fields in the DB2 Volume Table and the Tape Volume Table" on page 377). If you change the TAPEUNITNAME on the SETOAM statement that assigns the storage group, OAM recognizes the change; however, OAM only uses it for new scratch allocations. If there are available usable tape volumes that belong to this storage group (the storage group to which the source volume belongs), OAM continues to use these volumes until they are all full. In order to force writes to go to a new media type (honoring the changed TAPEUNITNAME), any available usable volumes in that storage group must be either marked not writable or marked full with their percent full set to 100. This causes OAM to believe that the storage group is out of space and to request a scratch allocation using the new SETOAM TAPEUNITNAME specified for that group.

Preparation of the Move Volume Utility Environment

Before you invoke the Move Volume utility (also called MOVEVOL), perform the following tasks to prepare the environment in which the utility runs.

Subtask	See Procedure
Preparing Object and Object Backup Storage Groups	228
Updating the SETOPT OPTICALREINITMODE or SETOAM TAPERECYCLEMODE Keyword	228
Updating and Activating an SCDS	228
Minimizing or Quiescing Contending System Activity	230

Subtask	See Procedure
Analyzing Resources and Tuning OAM for MOVEVOL Usage	231

Each of these tasks is explained in further detail below.

Preparing Object and Object Backup Storage Groups

Update storage group definitions in ISMF and the CBROAM*xx* PARMLIB member to ensure the following desired results for the MOVEVOL command:

- A valid SETOAM statement exists for the Object storage group to which the source volume belongs if the source volume is a tape volume.
- An optical library and drives are defined to the Object storage group to which the source volume belongs if the source volume is an optical volume.
- A valid SETOAM statement exists for the Object Backup storage group if you plan to use the Move Volume utility to move objects from the Object Backup storage group to a tape volume.
- An optical library and drives are defined to the Object Backup storage group if you plan to use the Move Volume utility to move objects from the Object Backup storage group to an optical volume.

Updating the SETOPT OPTICALREINITMODE or SETOAM TAPERECYCLEMODE Keyword

If you plan to use the Move Volume utility with the RECYCLE keyword, perform the following steps:

- For optical volumes, update the SETOPT OPTICALREINITMODE keyword in the CBROAM*xx* PARMLIB member.
- For object tape volumes, update the SETOAM TAPERECYCLEMODE keyword in the CBROAM*xx* PARMLIB member.

Updating and Activating an SCDS

The Move Volume utility processes only objects that are associated with Object and Object Backup storage groups that are defined and enabled in the active SCDS. In your preparation for invocation of the Move Volume utility, update the SCDS, if necessary:

1. If the source volume is a backup volume from the Object Backup storage group, the SCDS must include *all* Object storage groups that contain objects that have a backup copy on the backup source volume. The Move Volume utility uses the list of Object storage groups defined in the SCDS to identify the objects to be moved.

   Failure to include all Object storage groups containing objects that have a backup copy on the backup source volume causes non-valid results. For example, although not all of the objects have been moved from the source volume, the utility might issue messages indicating that all objects are moved from the source volume because all of the objects identified in the SCDS have been moved. This situation occurs because the SCDS excludes some of the Object storage groups that contain objects having a backup copy on the backup source volume.

   ---

2. You might need to update the storage group that contains the source volume to define the set of drives eligible to write data into the storage group. Make sure that the storage group containing the source volume includes libraries capable of writing to the target optical media type. Use one of the following methods to update the storage group:

a. Remove libraries from the storage group definition that contains volumes that you do not want to be used as target volumes for MOVEVOL.
b. Add libraries that contain volumes that you do want to be used as target volumes for MOVEVOL.
c. Leave the libraries with the undesired media assigned to the storage group, but for the duration of MOVEVOL, mark them as unwritable or full.
d. If you use multifunction device types in the storage group definition, update the media type attribute in the library definition to direct writes to a specific media type.
e. If you use multifunction device types in the storage group definition, update the library's read-only and write capable function based on the source and target media types.

3. Activate the updated SCDS.

Related reading: For more information on updating and activating the SCDS, see *z/OS DFSMS Storage Administration Reference*.

The following examples (Table 35, Table 36, Table 37 on page 230, and Table 38 on page 230) show how to migrate data from an older media type (OMT) to a newer media type (NMT) using various methods.

Table 35. Migrating from Old Media Type to New Media Type by Removing Libraries from Storage Group Definitions

SCENARIO	You have libraries with drives capable of writing to OMT defined to a storage group.
DESIRED AFFECT	To ensure that the target volumes for the MOVEVOL request are NMT.
TASK	• Remove any libraries with drives capable of writing to OMT from the storage group definition. • Add libraries with drives capable of writing to NMT to the storage group definition, if some libraries are currently not defined.

Table 36. Migrating from Old Media Type to New Media Type without Modifying the SCDS

SCENARIO	VOL1 is OMT and belongs to SG1. Libraries containing drives capable of writing to both OMT and NMT exist in the SCDS.
DESIRED AFFECT	To ensure that the target volumes for the MOVEVOL request for VOL1 are NMT.
TASK	• Mark full or unwritable any scratch volume in libraries associated with SG1 that are capable of writing to OMT. • Mark full or unwritable any volume belonging to SG1 in libraries that are capable of writing to OMT.

Table 37. Migrating from Old Media Type to New Media Type Using Library Default Media Type

SCENARIO	All libraries associated with the source volume's storage group are multifunction 3995 optical libraries that are capable of writing to both OMT and NMT.
DESIRED AFFECT	To ensure that the target volumes for the MOVEVOL request are NMT.
TASK	Modify the library default media type to a media type that includes NMT but not OMT for each library associated with the source volume's storage group. This allows read requests from OMT to still occur inside the libraries, however, any new requests to that storage group are satisfied with NMT.

Table 38. Migrating from Old Media Type to New Media Type Using Multifunction Libraries without Modifying the SCDS

SCENARIO	You are using multifunction 3995 optical libraries that use OMT as read-only.
DESIRED AFFECT	To ensure that the target volumes for the MOVEVOL request are NMT.
TASK	Make certain that no libraries associated with the source volume's storage group can write to OMT. The reads from the source volume are still supported and all writes are directed to NMT without making any modification to the SCDS.

For more information regarding updating, validating, and activating an SCDS, see *z/OS DFSMS Storage Administration Reference*.

Minimizing or Quiescing Contending System Activity

Before and during the execution of the Move Volume utility, you should minimize or quiesce the following types of system activity, which might interfere with the utility:

- Any activity involving *reading* from the source volume. Or, if the source volume is an optical volume any activity involving *reading* from the volume on the opposite side of the optical disk. If read activity on the source volume cannot be quiesced, investigate using the UPD=N option on the CBRINIT statement in the IEFSSN*xx* member of PARMLIB during initial program load (IPL). This will avoid conflicting updates to the objects' directory entries.
- Any activity involving *inserting, selecting, updating, or deleting* operations on the OAM DB2 object directory table for the storage group.

System activity includes, but is not limited to the following:

- Scheduled or operator-initiated OSMC storage group management cycles involving the:
  - Storage group that contains the source volume when moving objects from a primary volume.
  - Storage groups that contain objects that have a backup copy on the source volume when moving objects from a backup optical volume.

- Operator-initiated invocations of the Move Volume utility for other volumes requiring the same OAM DB2 object directory tables.
- Operator-initiated invocations of the Volume Recovery utility for other volumes requiring the same OAM DB2 object directory tables.
- Operator-initiated Tape Recycle commands affecting volumes requiring the same OAM DB2 object directory tables.
- Applications using the OSREQ interface to read data from or write data to the storage groups referenced by the Move Volume utility, or both.

Failure to minimize or quiesce this type of system activity might cause operations in the other system activities to complete unsuccessfully (for example, due to the unavailability of the source volume during the execution of the utility) or might interfere with the operation of the utility (for example, causing contention in the DB2 databases required for the utility to operate).

Analyzing Resources and Tuning OAM for MOVEVOL Usage

At a minimum, plan to use the Move Volume utility when contending system activity is low.

When planning to use the Move Volume utility, the same considerations used for planning the number of OSMC storage group management cycles to run concurrently apply. The Move Volume utility is a long-running process that requires a drive for reading and at least one drive for writing for its duration. You might have to tune your existing implementation of OAM for these considerations using the MAXS and or DRIVE STARTUP threshold, or both controls.

Related reading: For more information on the following topics:
- "MAXS Considerations for MOVEVOL Processing"
- "DRIVE STARTUP Threshold Considerations for MOVEVOL Processing"
- "Tuning OAM" on page 196

MAXS Considerations for MOVEVOL Processing: Review your specification for MAXS. The Move Volume utility is not controlled by the MAXS value; however, it is a consumer of resources. It is not recommended that you run the Move Volume utility at the same time as an OSMC storage management cycle because this causes a conflict for resources. However, if you plan to run the Move Volume utility at the same time as one or more OSMC storage management cycles, you might need to reduce the number of concurrent OSMC storage management cycles to make resources available for the Move Volume utility. Consider and account for the resources that the Move Volume utility requires first and then distribute the remaining resources for the OSMC storage management cycle with MAXS.

Also, because the MAXS value does not control the Move Volume utility, take resource considerations into account when planning for concurrent executions of the utility (for example, multiple Move Volume utilities running concurrently for different volumes).

DRIVE STARTUP Threshold Considerations for MOVEVOL Processing: Always review your specifications for DRIVE STARTUP threshold and TAPEDRIVESTARTUP for your Object storage groups. The Move Volume utility causes objects to be written to the storage group of which the source volume is a member.

For example, if the Move Volume utility is running at the same time as one or more OSMC storage management cycles for the same storage group, the write

activity in the storage group is increased. As a result, you must consider and account for the drives that the Move Volume utility requires in addition to the drives that are required by the OSMC storage management cycle when determining the appropriate value for the threshold. You must perform this action for each Object storage group containing primary source volumes that are processed by the Move Volume utility as well as for any Object Backup storage group for backup source volumes that are processed by the Move Volume utility.

Attention: Running the Move Volume utility concurrently with the OSMC processing for the storage group that the volume belongs to can cause DB2 contention.

DB2 Index Considerations: There are several factors that influence the performance of the Move Volume utility. The following are items to consider when making processing decisions to maximize the performance of the utility:

- Average object size
- Source and target optical device types
- Number of active utilities
- Primary or backup source volume
- Number of rows in the object directory table for the storage group to which the source volume belongs
- Additional DB2 indexes defined (depending on activity currently in progress)
- Level of the system workload and I/O to the source and target devices

The Move Volume utility performs DB2 SELECTs from the object directory tables (OSM_OBJ_DIR) to prepare the list of objects to be moved. Depending on the current status of the table, DB2 might do a table space scan or an index scan. With large DB2 tables, it is recommended that you verify that DB2 is to use index scans to enhance the efficiency and performance of the Move Volume utility.

The object selection is not overlapped with the read from optical or tape, write to optical or tape, or directory update processes. This means that the elapsed time to complete the MOVEVOL processing consists of the time to select the objects and the time to update the object directory tables after the object movement is complete.

The object selection process consists of executing DB2 SELECT statements from the object directory tables. This process is limited by the DB2 indexes available and the chosen access path. Without the additional recommended indexes, the object selection process requires:

- At least one table space scan of the object directory table for a single storage group associated with the primary volume processed
- A table space scan of *all* object directory tables when a backup volume is processed.

Recommendation: Creating these additional DB2 indexes enhances the performance for the Move Volume utility; however, these indexes can negatively affect other OSMC process. After MOVEVOL processing has completed, drop these additional indexes and rebind the modified plans.

To improve performance for the Move Volume utility, perform the following steps:

1. Create an index on ODLSLOC and ODCLID for each storage group that contains a primary volume that is being processed. For first backup volumes,

create an index on ODBKLOC and ODCLID for each storage group that has a significant number of objects (more than 10 000). For second backup volumes, create an index on ODBK2LOC and ODCLID for each storage group that has a significant number of objects (more than 10 000). Use the following SQL statements to define additional DB2 indexes.

```
 CREATE INDEX GROUPhlq.OBJDIRX4
        ON    GROUPhlq.OSM_OBJ_DIR
        (
         ODLSLOC   ASC,
         ODCLID    ASC
        )
        USING      VCAT cat_name
        CLOSE      NO
        SUBPAGES   1
       BUFFERPOOL BP1
       PCTFREE    10;
CREATE INDEX GROUPhlq.OBJDIRX5
       ON    GROUPhlq.OSM_OBJ_DIR
       (
        ODBKLOC   ASC,
        ODCLID    ASC
       )
       USING      VCAT cat_name
       CLOSE      NO
       SUBPAGES   1
       BUFFERPOOL BP1
       PCTFREE    10;
```

Where: *cat_name* is the name of the catalog used under DB2. OAM does not create these indexes using the UNIQUE keyword.

Because moving data from a backup volume requires access to all of the defined storage group directories, creation of the index on ODBKLOC (instead of ODLSLOC as in above example) is important for all storage groups that contain large numbers of objects (whether there are any backup objects on the volume being processed or not).

2. Execute RUNSTATS to collect data on the new indexes. See "Tuning the DB2 Databases" on page 197 for more information.

---

3. Modify and run CBRPBIND to rebind the following DB2 plans to their packages for the affected storage group: CBRHSVOL, CBRHSBKV, CBRHSBCC, CBRHSPCC, CBRHORCL, and CBRHCNTL. See "CBRPBIND" on page 488, "CBRHBIND and CBRHGRNT" on page 489 for information on binding these plans.

---

4. Define data sets for the additional indexes. See "CBRIALC0" on page 431 for more information on defining these data sets.

```
//STEPxx  EXEC PGM=IDCAMS
//SYSPRINT DD SYSOUT=*
//SYSDUMP  DD SYSOUT=*
//SYSIN    DD *
 DELETE
 cat_name.DSNDBC.GROUPhlq.OBJDIRX4.I0001.A001
     CLUSTER
     PURGE
 DELETE
 cat_name.DSNDBC.GROUPhlq.OBJDIRX5.I0001.A001
     CLUSTER
     PURGE
 SET LASTCC=0
 SET MAXCC=0
 DEFINE CLUSTER
 (NAME(cat_name.DSNDBC.GROUPhlq.OBJDIRX4.I0001.A001)
          LINEAR
          SHAREOPTIONS(3 3)
          VOLUMES(vol_ser)
          CYLINDERS(pri_alloc sec_alloc)
          UNIQUE   )
        DATA
 (NAME(cat_name.DSNDBD.GROUPhlq.OBJDIRX4.I0001.A001))
 DEFINE CLUSTER
 (NAME(cat_name.DSNDBC.GROUPhlq.OBJDIRX5.I0001.A001))
         LINEAR
         SHAREOPTIONS(3 3)
         VOLUMES(vol_ser)
         CYLINDERS(pri_alloc sec_alloc)
         UNIQUE    )
       DATA
 (NAME(cat_name.DSNDBD.GROUPhlq.OBJDIRX5.I0001.A001))
/*
```

Where: *vol_ser* is the volume serial the data set should be placed on; *pri_alloc*, *sec_alloc* is the number of primary and secondary allocations for the data set; *cat_name* is the name of the catalog used under DB2. These indexes are not created using the UNIQUE keyword.

5. Run the Move Volume utility.

6. Drop the DB2 indexes used during MOVEVOL processing.

7. Execute RUNSTATS again.

8. Rebind the following DB2 plans: CBRHSVOL, CBRHSBKV, CBRHSBCC, CBRHSPCC, CBRHORCL, and CBRHCNTL.

Migrating objects from one media to another takes a significant amount of time. With this in mind, there are some things that you should consider that could save time and effort in the future.

- Define expiration criteria for all objects. This should reduce the amount of data and time needed to perform migration to another media.
- Adopt higher capacity media into your installation as soon as it is introduced. If you write all objects to the highest capacity media available, you might be able to avoid a media migration.

Related reading: See "CBRISQL0" on page 443 for sample job control language (JCL).

Reusing Recycled Tape and Optical Volumes

You can use the MOVEVOL command with the RECYCLE option to recycle optical and rewritable tape volumes. After all the objects have been moved off of the tape volume or both sides of an optical platter, OAM processes the volumes as specified in the SETOAM TAPERECYCLEMODE and SETOPT OPTICALREINITMODE keywords in the CBROAM*xx* PARMLIB member. When a tape volume is released from DFSMSdfp, DFSMSrmm also releases the volume.

The main reason to recycle a tape or optical volume is to reuse the volume for new data and to save money on buying new media. Many partially full tapes or optical volumes using slot space in a library is considered wasted space. You can use MOVEVOL with the RECYCLE option to consolidate data from many partially full volumes and move that data to one volume, freeing up volumes that you can use for new data. The MOVEVOL command with the RECYCLE option overrides the SETOAM TAPERECYCLEMODE or SETOPT OPTICALREINITMODE options.

For optical volumes, the MOVEVOL command with the RECYCLE option moves objects on both sides of the optical platter (both volumes). In contrast, the MOVEVOL command without any options moves objects on only one side of the optical platter (one volume).

To recycle an optical or rewritable tape volume, issue the following command:

```
MODIFY OAM,START,MOVEVOL,volser,RECYCLE
```

When a volume is released from DFSMSdfp, DFSMSrmm also releases the volume.

Attention: If the MOVEVOL with RECYCLE process is interrupted, all three of the following conditions are true:

- For tape media, the **logical kilobytes deleted** field in the tape volume is not updated, so it would be inaccurate.
- For rewritable optical media, the deleted objects are not inserted in the Deleted Objects table, so orphaned objects remain on the media and the space is not reclaimed until the volume is reformatted. The number of deleted objects and deleted space are not updated, so it would be inaccurate.
- The tape volume or both sides of the optical platter are left in non-writable mode.

Related reading:

- For more information about the RECYCLE option of the MOVEVOL command , see "Moving Objects and Recycling the Source Volume" on page 291 and "Updating the SETOPT OPTICALREINITMODE or SETOAM TAPERECYCLEMODE Keyword" on page 228.
- For more information about enabling and managing the TAPE RECYCLE function , see "SETOAM Keyword Definitions" on page 103.
- For more information about expiring tape and optical volumes, see "Expiring Tape and Optical Volumes" on page 238.
- For more information about using DFSMSrmm to manage tape volumes, see *z/OS DFSMSrmm Guide and Reference*.

Recycling Tape Volumes

When you recycle a rewritable tape volume, you can leave the volume in its current storage group, reassign the volume as an OAM scratch volume, or remove the volume from OAM control. After OAM moves the objects off of the tape volume, it recycles the tape volume using the parameters that are specified in the SETOAM TAPERECYCLEMODE statement in the CBROAM*xx* member of PARMLIB. You can immediately reuse the tape volume.

Recycling Optical Volumes

When you recycle an optical volume, OAM removes the objects from both sides of the optical platter. After OAM removes the objects from the optical platter, it recycles the optical volume using the parameters that are specified in the SETOPT OPTICALREINITMODE statement in the CBROAM*xx* member of PARMLIB. Specify the GROUP parameter to leave the volume in its current storage group, or specify the OAMSCRATCH parameter to reassign the volume as an OAM scratch volume.

You can reuse optical media, as follows:

- OAM reformats the rewritable optical volume to reclaim the used space the next time that it is mounted on a drive. You can reuse the entire rewritable optical volume.
- OAM does not reformat WORM optical volumes because the used space cannot be reclaimed. However, you can recycle WORM media and use the remaining available space on the media.

Example: In this example, SETOPT OPTICALREINITMODE(OAMSCRATCH) is specified in the CBROAM*xx* PARMLIB member. Suppose you have a WORM volume, VOL123, that is 67 percent full. VOL123 belongs to storage group GROUP01. After you recycle VOL123, all the objects are moved off of it and VOL123 is changed to a scratch volume. VOL123 is 100 percent empty, but it still has 33 percent of its original capacity available to write to. This recycled volume is available to any Object or Object Backup storage group that needs it. If this volume had been a rewritable optical volume, you could write to 100 percent of the original capacity.

Deleting Recycled Tape and Optical Volumes from OAM

You can use the MOVEVOL command with the DELETE option to delete tape and optical volumes, and remove them from the OAM inventory. The rows that are associated with these volumes are deleted from the TAPEVOL or VOLUME table in DB2. OAM does not reclaim space on rewritable optical platters that have been deleted. If the deleted volume resides in an optical library, the volume is ejected. Then OAM issues message CBR2153I for deleted optical platters or message CBR2165I for deleted tape volumes.

You can also use the MOVEVOL command with the DELETE option to delete a scratch volume from the OAM inventory. When a MOVEVOL command is specified for a scratch volume and the DELETE option is specified, OAM issues CBR9883I to indicate MOVEVOL is processing a scratch volume. The volume is deleted from the OAM inventory without any data movement taking place.

For optical volumes, the MOVEVOL command with the DELETE option moves objects on both sides of the optical platter (both volumes). In contrast, the MOVEVOL command without any options moves objects on only one side of the optical platter (one volume).

The MOVEVOL command with the DELETE option overrides the SETOAM TAPERECYCLEMODE or SETOPT OPTICALREINITMODE options.

Releasing tape volumes using DFSMSrmm: If you are using DFSMSrmm as your tape management system, as of z/OS V1R7, DFSMSrmm Tape Volume Exit (EDGTVEXT) is invoked after OAM issues the CBR2165I message for a rewritable tape volume, or the CBR2173I message issued for a WORM tape volume. For DFSMSrmm Tape Volume Exit (EDGTVEXT) to return the tape volume to MVS scratch status, the installation must use RACF commands to define the appropriate level of authorization for OAM. Determine the appropriate level of RACF authorization required for OAM to release its own tape volumes. Refer to Authorizing DFSMShsm to DFSMSrmm Resources in *z/OS DFSMSrmm Implementation and Customization Guide* for information about DFSMShsm authorization requirements, which can be used as a base for setting up OAM. Regardless whether the DFSMSrmm exit successfully returns the tape volume to the MVS scratch pool, the tape is deleted from the OAM inventory.

Related reading: For more information about the DELETE option of the MOVEVOL command, see "Moving Objects and Deleting the Source Volume" on page 293. For more information about using DFSMSrmm to manage tape volumes, see *z/OS DFSMSrmm Implementation and Customization Guide*.

Starting Tape Recycle

In z/OS V1R8, you can use the F OAM,START,RECYCLE command to automatically select full tape volumes based on user defined specifications as recycle candidates, and initiate MOVEVOL with RECYCLE option for those volumes.

The command is as follows:

```
F OAM,START,RECYCLE,scope
```

It displays a list of candidate volumes that meet your criteria to the hardcopy log, and in turn, if DISPLAY is not specified, automatically selects recycle candidate volumes and initiates the MOVEVOL with RECYCLE process on those candidates until the limit you specified is reached or no more volumes meeting criteria are available.

You can also issue the F OAM,START,RECYCLE command with the DISPLAY option, which lists in the hardcopy log, the recycle candidate volumes that meet your specified criteria without initiating TAPE RECYCLE processing.

Note:

- You can only use this START,RECYCLE command for the recycle of full tape volumes associated with object or object backup storage groups. Optical volumes and tape volumes that are not full continue to be recycled as usual with one cartridge per MOVEVOL command.
- You can only run one RECYCLE command at a time. Your attempt to issue the RECYCLE command fails if a previous RECYCLE command is processing. You can issue a RECYCLE command with the DISPLAY option at any time. This is because the DISPLAY option indicates that a list of candidate volumes meeting the user-defined criteria is to be displayed and no recycle activity actually occurs.

Related reading:

- For more information about enabling and managing the TAPE RECYCLE function, and specifying the criteria for candidate volume selection , see "SETOAM Keyword Definitions" on page 103.

Expiring Tape and Optical Volumes

This section describes expiring tape and optical volumes in Object and Object Backup storage groups.

Expiring Tape Volumes in Object or Object Backup Storage Groups

OAM expires objects based on the management class criteria that you specify. When an OAM object is expired, all copies of that object are deleted. The OSMC shelf manager expires object tape volumes that are assigned to Object or Object Backup storage groups when the tape volumes have been marked as full, but no longer contain any valid data.

You can define how OAM processes expired tape volumes. Perform the following steps to set up tape volumes for expiration processing:

1. Use the SETOAM TAPERECYCLEMODE GROUP | OAMSCRATCH | MVSSCRATCH statement in the CBROAM*xx* member of PARMLIB to specify how OAM manages expired tape volumes.
   - Specify the GROUP parameter to leave the tape volume in the currently assigned Object or Object Backup storage group.

     When this tape volume is expired, OAM writes message CBR2166I to the hardcopy log only.

     Note: For WORM tape volumes, the GROUP parameter, if specified, is handled like the MVSSCRATCH parameter since WORM tape volumes cannot be reused.
   - Specify the OAMSCRATCH parameter to return the tape volume to OAM scratch status to be available for use by any Object or Object Backup storage group.

     When this tape volume is expired, OAM writes message CBR2164I to the hardcopy log only.

     Note: For WORM tape volumes, the OAMSCRATCH parameter, if specified, is handled like the MVSSCRATCH parameter since WORM tape volumes cannot be reused.
   - Specify the MVSSCRATCH parameter to return the tape volume to the MVS scratch pool and remove it from the OAM inventory.

     When this tape volume is expired and purged from the inventory, OAM writes message CBR2165I for a rewritable tape volume or CBR2173I for a WORM tape volume to the hardcopy log only. In an OAMplex, the OAM member that initially releases the tape volume issues the appropriate CBR21xxI message; then the other OAM members in the OAMplex each issue a CBR7404I message.

     OAM issues the CBR2165I or CBR2173I message to indicate that all knowledge of the specified tape volume is being removed from the OAM tape volume inventory. If your installation uses DFSMSrmm to manage OAM object tapes, determine the appropriate level of RACF authorization

required for OAM to release its own tape volumes. For DFSMSrmm Tape Volume Exit (EDGTVEXT) to return the tape volume to MVS scratch status, the installation must use RACF commands to define the appropriate level of authorization for OAM. Refer to Authorizing DFSMShsm to DFSMSrmm Resources in *z/OS DFSMSrmm Implementation and Customization Guide* for information about DFSMShsm authorization requirements, which can be used as a base for setting up OAM. Installations that use other tape management systems might need to perform similar actions.

---

2. In the management class, specify the following expiration criteria for the objects that reside on tape volumes:
   - Retention Limit
   - Expire After Days Non-Usage
   - Expire After Date/Days
   - RETPD/EXPDT

---

3. The OSMC cycle expires tape volumes that belong to Object or Object Backup storage groups. If the expiration date for a volume is reached and no active objects exist on the volume, OSMC expires the volume.

Result: Eligible tape volumes in the Object or Object Backup storage group, which have expiration dates of less than today, have no more active objects and are full. These volumes are expired during the OSMC cycle. These expired volumes are recycled based on the criteria that is specified in the SETOAM TAPERECYCLEMODE statement.

Related reading:

- For more information about the SETOAM parameters for expiring tape volumes, see "SETOAM Keyword Definitions" on page 103.
- For more information about setting expiration attributes in the management class, see *z/OS DFSMS Storage Administration Reference*.
- For more information about setting the appropriate level of authorization to intercept messages, see *z/OS DFSMSrmm Implementation and Customization Guide*.

Expiring Optical Volumes in Object or Object Backup Storage Groups

The OSMC shelf manager expires rewritable optical platters that are assigned to the Object or Object Backup storage group when valid data no longer exists on either side of the platter. The OSMC shelf manager expires WORM optical platters that are assigned to the Object or Object Backup storage group when both sides of the platter have been marked full, but no valid data exists on either side of the platter.

Rewritable optical volumes: You can specify how OAM processes rewritable optical cartridges that have expired. These volumes are either retained in the current Object or Object Backup storage group, or returned to OAM scratch status.

WORM optical volumes: Because WORM optical media cannot be reclaimed, all knowledge of a WORM cartridge is removed from the OAM inventory when the cartridge expires. If the WORM volume is in an optical library, it is ejected from the library. The volume records are removed from the OAM VOLUME table. OAM

writes message CBR2153I to the hardcopy log that indicates which optical volumes have expired. You can dispose of the WORM optical volume according to your installation's regulations.

Perform the following steps to set up optical volumes for expiration processing:

1. Use the SETOPT OPTICALREINITMODE statement in the CBROAM*xx* member of PARMLIB to specify how OAM manages expired optical volumes.
   - Specify the GROUP parameter to leave expired rewritable optical volumes in the currently assigned Object or Object Backup storage group.
   - Specify the OAMSCRATCH parameter to return expired rewritable optical volumes to the *SCRTCH* storage group to be available for use by any Object or Object Backup storage group.

   ---

2. In the management class, specify the following expiration criteria for the objects that reside on optical volumes:
   - Retention Limit
   - Expire After Days Non-Usage
   - Expire After Date/Days
   - RETPD/EXPDT

   ---

3. The OSMC cycle expires optical volumes that belong to Object or Object Backup storage groups. If the expiration date for a volume is reached and no active objects exist on the volume, OSMC expires the volume.

Result: Eligible rewritable optical platters in the Object or Object Backup storage group, which have expiration dates of less than today and have no more active objects, are expired during the OSMC cycle. These expired rewritable volumes are recycled based on the criteria that is specified in the SETOPT OPTICALREINITMODE statement. Eligible WORM optical platters in the Object or Object Backup storage group, which have expiration dates of less than today, have no more active objects, and have been marked full. These volumes are expired during the OSMC cycle. These expired WORM volumes are removed from the OAM volume inventory.

Related reading:

- For more information on the SETOPT parameters for optical volumes, see "SETOPT Statements for Use in an Optical Environment" on page 121.
- For more information about setting expiration attributes in the management class, see *z/OS DFSMS Storage Administration Reference*.

Using the OAM Object Tape Volume Return to MVS Scratch Exit Routine

The OAM Object Tape Volume Return to MVS Scratch exit routine, CBRUXTVS_EXIT, can be used to notify the installation's tape management system that all knowledge of a given tape volume has been removed from OAM's tape volume inventory. This is a notification only exit; OAM does not change it's tape volume expiration processing regardless of the return code supplied by the user exit. The exit is invoked after OAM issues the CBR2165I message indicating that OAM has removed the tape volume from the OAM inventory and released it for return to the MVS scratch pool.

The exit point uses Dynamic Exit Services, CSVDYNEX, which allows multiple exit routines to be simultaneously associated with a single exit point. No additional steps are required for you to use this dynamic exit with DFSMSrmm. The DFSMSrmm tape exit (EDGTVEXT) is always invoked independently of the dynamic exit routines. If your installation manages tape volumes with any tape management systems other than DFSMSrmm, you can write the exit routine(s), or use the same load module used for the ARCTVEXT exit and add them to this exit using the MVS dynamic exits facility.

This CBRUXTVS_EXIT exit point can provide a tape management system, via user-written or system exit routines that have been defined to the dynamic exits facility, with the information required to maintain an accurate inventory of OAM tapes. However, you do not have to use this exit point to use tapes with OAM.

The exit routine is called when OAM is returns an object tape to MVS scratch after it no longer contains valid files. The tape volume is deleted from the OAM TAPEVOL database before the exit is called. This is a notification only exit. A non-zero return code or an abend in the exit module has no effect on OAM's object tape expiration processing. No error message is issued for a non-zero return code, but an error message is issued for an abend in the exit module.

Dynamic Exits Facility

The dynamic exits facility is a set of services that you can use through any of the following methods:

- The EXIT statement of the PROGxx parmlib member. The EXIT statement allows an installation to add exit routines to an exit, change the state of an exit routine, delete an exit routine for an exit, undefine an implicitly defined exit, and change the attributes of an exit.

  The PROGxx EXIT statement interacts with the PROG=xx parameter of IEASYSxx and the SET PROG=xx command. At IPL, operators can use PROG=xx to specify the particular PROGxx parmlib member the system is to use. During normal processing, operators can use the SET PROG=xx command to set a current PROGxx parmlib member. See *z/OS MVS Initialization and Tuning Reference* for information about the PROGxx parmlib member.
- The SETPROG EXIT operator command. This command performs the same functions as the EXIT statement of the PROGxx parmlib member. See *z/OS MVS System Commands* for information about the SETPROG EXIT command.
- The CSVDYNEX macro. The CSVDYNEX macro can be used to define exits to the dynamic exits facility, control their use within a program, and associate one or more exit routines with those exits. It can also be used to associate exit routines with the existing SMF and allocation exits, which have been defined to the dynamic exits facility. The CSVDYNEX macro provides a superset of the functions available through the SETPROG EXIT operator command and the EXIT statement of the PROGxx parmlib member. See *z/OS MVS Programming: Authorized Assembler Services Reference ALE-DYN* for information about the CSVDYNEX macro.

An installation can use any of these methods to control dynamic exits. For example, an exit routine can be associated with the CBRUXTVS_EXIT exit point using the CSVDYNEX ADD request, the SETPROG EXIT,ADD operator command, or the EXIT statement of PROGxx.

Adding the Installation Exit Routine(s) to CBRUXTVS_EXIT

Users of DFSMSrmm need not provide an exit routine for this exit point because, as of z/OS V1R7, OAM always invokes the DFSMSrmm EDGTVEXT exit routine

directly whenever an OAM tape volume is returned to MVS scratch. However, if you are using a tape management system other than DFSMSrmm, then you need to add the module name of the installation exit routine provided by the tape management system with the OAM dynamic exit point, CBRUXTVS_EXIT. For example, if you are using the DFSMShsm ARCTVEXT module, you could specify the following EXIT statement in the PROGxx PARMLIB member:

```
EXIT ADD  EXITNAME(CBRUXTVS_EXIT)
                     MODNAME(ARCTVEXT)
                     STATE(ACTIVE)
```

You can associate multiple exit routines to the CBRUXTVS_EXIT exit point by specifying multiple EXIT ADD statements. See *z/OS MVS Initialization and Tuning Reference* for information about the PROGxx parmlib member.

Alternatively, you can add the exit routine(s) to this exit point via the SETPROG EXIT command. See Chapter "Adding an Exit routine to an Exit" in the z/OS MVS Programming Authorized Assembler Services Reference for details, or see *z/OS MVS System Commands* for information about the SETPROG EXIT command.

Modifying the Installation Exit Routine

To update exit modules associated with the OAM Object Tape Return to MVS Scratch dynamic exit (CBRUXTVS_EXIT) while OAM is up running; perform the following steps:

1. Change and recompile the exit module
2. Update the library resident copy of the exit module such as SYS1.LINKLIB
3. Perform LLA refresh command for the exit module
4. Modify the current copy of the exit module to be inactive or Delete the current copy of the exit module, by using the MVS operator command:

   ```
   SETPROG EXIT,MODIFY,EXITNAME=CBRUXTVS_EXIT,MODULENAME=m,STATE=INACTIVE
   ```

   or

   ```
   SETPROG EXIT,DELETE,EXITNAME=CBRUXTVS_EXIT,MODULENAME=m
   ```
5. Modify the new copy of the exit module to be active or Add the new copy of the exit module, by using the MVS operator command:

   ```
   SETPROG EXIT,MODIFY,EXITNAME=CBRUXTVS_EXIT,MODULENAME=m,STATE=ACTIVE
   ```

   or

   ```
   SETPROG EXIT,ADD,EXITNAME=CBRUXTVS_EXIT,MODULENAME=m
   ```

Displaying the Installation Exit Routine

The installation can use the DISPLAY PROG,EXIT command to display the exit routines associated with the OAM object tape return to MVS scratch dynamic exit (CBRUXTVS_EXIT). The syntax for the DISPLAY PROG,EXIT command is:

```
DISPLAY PROG,EXIT,
                          {EXITNAME|EX|EN}=CBRUXTVS_EXIT
                          [,L={a|cc|cca|name|name-a}]
```

See *z/OS MVS System Commands* for more information about the DISPLAY PROG,EXIT command. See *z/OS MVS Installation Exits* for more information on dynamic exits.

Processing Requirements for the Installation Exit

The installation exit allows your tape management system to accurately reflect OAM's object tape usage. You must use the tape management system facilities to

notify itself that OAM has deleted the tape from its database. After the exit sends the notification to the tape management system, it returns control to OAM. Tape deletions cannot be canceled.

Writing the Exit Routine

If you are using the DFSMShsm ARCTVEXT exit or an exit supplied with a tape management system, include the coding required for the CBRUXTVS_EXIT exit in your existing exit. The coding considerations for this exit routine are similar to those for the DFSMShsm ARCTVEXT exit or the DFSMSrmm EDGTVEXT exit, including entry and exit linkage. A non-zero return code or an abend in the exit module has no effect on OAM's object tape expiration processing. No error message is issued for a non-zero return code, but an error message is issued for an abend in the exit module.

The exit routine must be reentrant and run in either the 24-bit or 31-bit addressing mode (AMODE). You should always return to the caller in the caller's AMODE.

Registers on Entry to the Exit Routine:

Table 39. Registers on Entry to the Exit Routine

Register	Content
1	Address of the parameter list
13	Address of standard 72-byte save area
14	Return address of the caller
15	Entry point address of the exit routine

Note: The 72-byte save area is provided solely to enable exit routines to save the registers on entry. Its contents are not used by the Dynamic Exit Services nor by the exit.

Registers on Exit: There is no requirement to return any values in registers from the exit routines, so it is not necessary to restore any registers on exit from the exit routines.

Parameter List: The CBRUXTVS_EXIT is modeled to interface directly with the ARCTVEXT exit, and therefore supports the ARCTVEXT parameter list. Refer to the *z/OS MVS Installation Exits* for more information on the ARCTVEXT parameter list. On entry to the exit routines, the Register 1 contains the address of the parameter list which contains the following information:

Table 40. ARCTVEXT Parameter List

Offset	Length or Bit Pattern	Description
0	4	The address of an 8-byte data area, where the first 6 bytes contain the volume serial number of the volume having expired, followed by a 2-byte field
4	4	The address of a full word binary return code described below

Note: The high order bit is set to 1 to indicate the end of the parameters

Data Area: The 8-byte data area is passed to the exit routine, none of them may be modified:

Table 41. ARCTVEXT Parameter List

Offset	Length or Bit Pattern	Description
0	6	The volume serial number of the expired tape volume
6	1	Flag byte one
	1··· ····	Tape volume is being purged
	·1·· ····	Data sets on tape volume are expiration date protected
7	1	Flag byte two

Return Codes: The exit routine may indicate return codes as follows:

Table 42.

Return Code	Meaning
0	The processing was successful
non-zero	The processing failed

Related reading:

- *z/OS DFSMS Installation Exits*
- "Support Use Information" in *z/OS MVS Installation Exits*
- "CSVDYNEX Terminology" in *z/OS MVS Programming: Authorized Assembler Services Guide*

Synchronizing OAM Scratch Tape

With z/OS V1R5, OAM provides the ability for tape volumes to be returned to OAM scratch status. When a tape is returned to OAM scratch status, it is available to be claimed and used by any Object or Object Backup storage group with the same unit name and data class. If OAM is operating at z/OS V1R5 level, tape volumes introduced into this table will have valid values filled in the TAPEVOL table.

When tape volumes that were added to the OAM volume inventory before z/OS V1R5 are returned to OAM scratch status, they have blank unit names and data classes associated with them by default. Therefore, these volumes are never selected for reuse after being returned to OAM scratch status. For object tape volumes that were introduced into the OAM inventory before z/OS V1R5 to be eligible for reuse when they are returned to OAM scratch status, you must either manually update their OUNITNAM and DATACLAS fields in the TAPEVOL table, or enable SETOAM OAMSCRATCHSYNCH mode in the CBROAM*xx* PARMLIB member.

Enabling SETOAM OAMSCRATCHSYNCH Mode

You can use the SETOAM OAMSCRATCHSYNCH statement to specify how OAM is to react to blank DATACLAS and OUNITNAM fields in the DB2 TAPEVOL table that are associated with a tape volume that is being returned to OAM scratch status. In installations where the original unit name of the tape is not changed because the tape is mounted in an IBM automated tape library, you can enable the

SETOAM OAMSCRATCHSYNCH statement to fill in the data class and unit name for the tape volume. Thus, these tape volumes are eligible to be reused.

If the DATACLAS field is blank, OAM sets DATACLAS to the same value as the data class that was associated with the storage group for the volume before it was returned to OAM scratch. IF the OUNITNAM field is blank and the value in UNITNAME is a generic device, OUNITNAM and UNITNAME are both set to the same value as the UNITNAME for the storage group. If OUNITNAM is blank and the value in UNITNAME is an esoteric device name, both OUNITNAM and UNITNAME remain unchanged.

Restriction: This option cannot be used if your object tape volumes reside inside an IBM automated tape library.

Manually updating the OUNITNAM and DATACLAS fields in the TAPEVOL table

If you manually update the OUNITNAM and DATACLAS fields in the TAPEVOL table, follow these steps:

1. If you are using OAM object tape in an IBM automated tape library and opt to return these tape volumes to OAM scratch upon expiration, determine the appropriate esoteric name to insert into the OUNITNAM field.
2. If you are not using OAM object tape in an IBM automated tape library, you can copy the value that is currently in the UNITNAME field to the OUNITNAM field.
3. Set the DATACLAS value based on the Object or Object Backup storage group to which the tape volume belongs.

Related topics: For more information about the SETOAM OAMSCRATCHSYNCH statement, see "SETOAM Keyword Definitions" on page 103 and the CBRSMR15 topic in "Creating the Optical Configuration Database" on page 140.

Processing Object Expiration

Each object stored by OAM is assigned an expiration date. This expiration date is derived using the retention period (RETPD) keyword on the OSREQ STORE macro when the object was stored, the expiration rules in the SMS management class assigned to the object, or both.

When a class transition occurs, the SMS storage class and management class ACS routines are invoked. The SMS storage class ACS routine can assign a new management class to the object. Input to the SMS storage class and management class ACS routine indicates that the reason the routine is invoked is for an OAM object class transition. As a result of a new SMS storage class being assigned to the object, the physical location of the object in the OAM storage hierarchy might change. As a result of a new SMS management class assignment to the object, the expiration date of the object might change as well as its backup requirements.

If an OSREQ CHANGE request is performed and a new retention period is specified with the RETPD keyword on the OSREQ CHANGE macro, then the expiration date of the object is recalculated based on the period specified with the RETPD keyword on the OSREQ CHANGE macro. This is true regardless of the media type of the primary or backup copy.

When the expiration date of an object is reached, OAM invokes the Auto-Delete Installation Exit to approve the deletion of the object. If the exit approves the

deletion of the object, the object is expired. When an object expires, the row for the object in the Object Directory Table is deleted and any reusable resources are reclaimed. For objects residing on tape volumes, the number of logical KB deleted from the tape volume is incremented for each object deleted.

When the OSMC storage management cycle determines that an object should be expired, all copies of the object are deleted.

If at any time an object's management class results in the object's expiration date being set to 9999/12/31 while that object is on removable media, that volume's expiration date is set to 9999/12/31. The volume never expires, even if the object's management class changes at a later date allowing the object to expire. Be aware of the affects of expiration dates that can be set by a management class, even if it is being used as an interim management class for an object.

For primary copies on DASD, OSMC deletes the copy from DASD. For primary copies on optical and tape, OSMC makes a delete request to LCS to delete the copy from optical or tape.

For backup copies on optical or tape, OSMC makes a delete request to delete all the copies from optical or tape.

For both optical and object tape volumes, the number of logical KB of data that is deleted from an OAM optical or tape volume containing objects is calculated and stored in the VOLUME or TAPEVOL table. Each time LCS receives a request to delete an object from an optical or tape volume, LCS updates the number of logical KB deleted for that volume. Because an application could choose to do a DB2 ROLLBACK after requesting a delete, the count of the logical KB deleted in the VOLUME or TAPEVOL table is an approximation.

Destroying and Deleting Expired Data

Deleting an optical-disk-resident object from WORM media removes the directory entry for that object; however, the data itself remains on the disk, because of the write-once characteristic of the media. To ensure that confidentiality is maintained, it might be necessary to physically destroy disks that contain expired sensitive material. Follow the manufacturer's directions to safely dispose of optical media.

When a delete request is issued for an object that resides on rewritable optical media, and the directory table entry for the object is deleted upon approval of the Auto-Delete Installation Exit, a row is added to the Deleted Object table in DB2 to indicate the object is to be deleted (physically erased). If the volume where the object resides is selected for a write request, LCS deletes all objects on the volume indicated within the Deleted Object table. LCS also deletes groups of objects when a drive completes a request and there are no other higher priority requests to perform.

NOT Programming Interface information

When OAM processes physical deletes of objects as background work in periods of inactivity, the order of volume preference is as follows:

- Deletions from the mounted volume
- Deletions from the opposite side of the mounted volume
- Deletions from the volume which has the largest amount of space to be deleted (valid only when considering library resident drives)

End of NOT Programming Interface information

Diagnosing Nondeletion/Expiration of Objects During OSMC Processing

This information provides suggestions for handling the situation of objects not deleting or expiring during the OSMC processing cycle. This information allows you to identify, investigate, and overcome these problems.

If, during OSMC processing, objects that should have expired do not actually get deleted from the database, one of two situations is probably causing the problem:

- The auto-delete installation exit (CBRHADUX) has been invoked and completed with a return code not equal to or greater than 8.
- The object has not been selected for expiration processing by OSMC.

To diagnosis the problem, examine the system console log from the start of the OSMC processing of the storage group containing the object through the completion of the OSMC storage group processing. Look for any CBR*xxxxx* messages that might indicate a problem.

Related reading: The CBR*xxxxx* messages are documented in *z/OS MVS System Messages, Vol 4 (CBD-DMO)*.

Checking CBRHADUX

If you have not successfully deleted objects during OSMC in the past, or you have just moved to a new release of OAM, a good place to start is by examining the Auto-Delete Installation Exit, CBRHADUX. To allow objects to be deleted during OSMC processing, perform the following steps:

1. Modify CBRHADUX to allow deletes.

   CBRHADUX returns with a return code 12 if the exit cannot dynamically allocate the group X.OBJECT.DELETE.NOTIFY data set. Check the syslog for CBR, IGD or IEF messages following the start of OSMC processing for the storage group.

2. Refresh LINKLIB.
3. Stop and start OAM so that the new copy of CBRHADUX is available to OAM.

Related reading: For more information on the CBRHADUX installation exit, see "Auto-Delete Installation Exit (CBRHADUX)" on page 573.

Objects Not Selected for Expiration Processing by OSMC

There might be a number of reasons why an object is not selected for expiration during OSMC processing. The expiration date assigned to an object might not be correct, the object might be in a management class that has different expiration attributes assigned to it than you think it has, a collection entry might not be found within the collection table, or inconsistencies might exist in a collection ID between the catalog and the collection table. The first step in investigating why OSMC does not select the object for expiration processing is to examine the object directory table (HLQ.OSM_OBJ_DIR). The following SQL command retrieves the object's directory table entry:

```
SELECT * FROM HLQ.OSM_OBJ_DIR
WHERE ODNAME = 'object_name';
```

Verify that the pending action date (ODPENDDT) is the current date or earlier and verify that the object has expired.

If the expiration date (ODEXPDT) in the object directory table is less than or equal to the current date, then the object should expire. If the expiration date is the special value 9999-12-31, the object never expires. If the expiration date is 0001-01-01, OAM uses the management class attributes to determine the expiration date.

During OSMC processing, a management cycle called the shelf manager runs after storage management has completed for each Object or Object Backup storage group. Shelf manager examines all the volumes in an Object or Object Backup storage group to determine if there are any volumes on which all of the objects are expired. If all of the objects on a tape volume are expired and the tape volume is full, the tape volume is dispositioned as specified in the SETOAM TAPERECYCLEMODE keyword of the CBROAM*xx* PARMLIB member.

If all objects on both sides of a rewritable optical platter are expired, the platter is reinitialized and dispositioned as specified in the SETOPT OPTICALREINITMODE keyword of the CBROAM*xx* PARMLIB member. If all objects on both sides of a WORM optical platter are expired and both sides of the platter are full, the WORM platter is scheduled for ejection and the operator is prompted to remove it from the input/output station of the optical library. Knowledge of the WORM volume is removed from the OAM inventory.

Management Class and Expiration Attribute Definitions

To determine the management class name of the object, use the following SQL statement:

```
SELECT * FROM OAMADMIN.CBR_MGT_CLASS_TBL M, HLQ.OSM_OBJ_DIR D
WHERE   ODNAME = 'object_name'
AND     D.ODMCNUM = M.ODMCNUM;
```

List the ISMF definition of the management class. Be sure to specify ‘ACTIVE’ as the SCDS name. Examine the expiration attributes. If both EXPIRE AFTER DAYS NON-USAGE and EXPIRE AFTER DATE/DAYS are NOLIMIT, the object never expires. The value of EXPIRE AFTER DAYS NON-USAGE is added to the last referenced date (ODLREFDT) in the object directory table to calculate the expiration date. If the last referenced date is not set, the creation date is used. If the value of EXPIRE AFTER DATE/DAYS is an explicit date, that date is used as the expiration date. If the value is a number of days, the expiration date is calculated based on the number of days added to the creation date (ODCREATS) in the object directory table.

Related reading: For additional information on expiration attribute processing, see *z/OS DFSMS Storage Administration Reference*.

Collection Entry Not Found in the Collection Table

Another common cause of an object not being selected by OSMC is the collection entry not being found in the collection table (OAMADMIN.OBJ_COLLECTION_TBL) for the collection ID (ODCLID) in the object directory table for the storage group being processed.

You can verify that the collection table entry exists for the object with the following SQL statement:

```
SELECT * FROM OAMADMIN.CBR_COLLECTION_TBL C, HLQ.OSM_OBJ_DIR D
WHERE   ODNAME = 'object_name'
AND     D.ODCLID = C.ODCLID;
```

One row should be returned identifying the collection that you expect to be associated with the object.

Inconsistencies between the Catalog and the Collection Table

Another possibility is a mismatch between the collection ID in the catalog and the collection ID in the collection table. OAM checks for this condition when the OAM address space is started. Check your syslog during OAM address space initialization for message CBR9030I, or any other messages that might indicate a problem with the catalog.

The following TSO/E command lists the collection entry in the catalog:

```
LISTCAT ENTRIES('collection_name') ALL
```

Verify that the DIRECTORYTOKEN matches the Object storage group name for qualifier HLQ on the ISMF storage group definition panel. Be sure to use `ACTIVE` as the SCDS name when listing Object storage group information. The Object storage group name must also match storage group name (ODCLSGNM) in the collection table.

Documentation for Your IBM Representative

If you have not identified the reason for objects not being deleted during OSMC, you might wish to contact the IBM support center. Make sure that you have the following documentation available:

- The contents of the following tables:
  - OAMADMIN.CBR_MGT_CLASS_TBL
  - OAMADMIN.CBR_STO_CLASS_TBL
  - OAMADMIN.CBR_COLLECTION_TBL
- The contents of an object directory table entry for one of the objects that you expected would be deleted.
- The collection associated with the object directory table entry printed in step 2. The following command provides this information to you:

  ```
  LISTCAT ENTRIES('collection_name') ALL
  ```

- A screen print of the storage class and management class definitions using `ACTIVE` as the SCDS name.
- The management class and storage class ACS routines.
- The syslog from the time the OSMC message CBR9200I is issued indicating the start of processing for the Object storage group until message CBR9201I is issued indicating processing has completed.

Diagnosing Unexpected Results of Object Movement during OSMC Processing

During OSMC processing, objects might not always transition within the storage hierarchy as expected, in spite of the performance objectives of the assigned storage class and management class for the object. Should an installation

experience differences between its expectations and the actual location of the object within the hierarchy after OSMC processing, the following information might assist in diagnosing why objects are not moved as expected.

Objects Not Moved to a New Storage Level During OSMC Processing

This information allows you to identify, investigate, and overcome the problem when objects do not move to the expected level within the hierarchy as defined by the ISMF storage class and management class definitions.

To determine where an object resides within the storage management hierarchy (on DASD, optical, or tape), query the directory table entry for the object using the following SQL statement:

```
SELECT * FROM HLQ.OSM_OBJ_DIR
WHERE ODNAME = 'object_name';
```

The content of the ODLOCFL field determines the location of the primary copy of the object as follows:

- D—primary copy resides on DASD
- T—primary copy resides on a tape volume
- blank—primary copy resides on an optical disk volume
- R—primary copy has been recalled to DASD

If the object is not found on the expected medium, it might be because an error has occurred during the OSMC cycle or because the SMS environment has not been properly defined to allow objects to make a transition between storage classes.

To determine if there has been an error during the OSMC cycle, examine the system console log from the start and through the completion of OSMC processing of the Object storage group containing the object.

Any CBR*xxxx* messages found in this log might indicate a problem.

Related reading: For more information concerning these messages and how to resolve the problems that prompted these messages, see *z/OS MVS System Messages, Vol 4 (CBD-DMO)*.

Objects Not Selected for Class Transition Processing

If once the system console log is examined no error messages are found, the possibility of OSMC not selecting the object for processing needs to be investigated.

The first step in determining if OSMC did not perform a class transition against the object, and why, is to examine the object's directory table entry. Use the following SQL statement to query the object:

```
SELECT * FROM HLQ.OSM_OBJ_DIR
WHERE   ODNAME = 'object_name';
```

Verify that the pending action date (ODPENDDT) is the current date or earlier. An object with a pending action date that is assigned a date in the future will not be selected for processing. For example, if today's date is 01/05/1999, and the pending action date for the object is 01/05/1999 or earlier, the object should be

chosen for OSMC processing. If the pending action date for the object is 03/05/1999, the object is not chosen for OSMC processing until today's date is the same or earlier than the pending action date for the object.

Check the expiration date (ODEXPDT). If the object's expiration date has been reached, OSMC has no reason to move it to another level in the hierarchy.

Related reading: For more information concerning expiration dates, see "Processing Object Expiration" on page 245.

Collection Entry Not Found in the Collection Table

Another cause for nonselection of an object during OSMC processing might be that the collection entry for the collection ID associated with the storage group being processed cannot be found in the collection table of the object directory.

To verify that the collection table entry exists for the object, use the following SQL statement:

```
SELECT * FROM OAMADMIN.CBR_COLLECTION_TBL C, HLQ.OSM_OBJ_DIR D
WHERE   ODNAME = 'object_name'
AND     D.ODCLID = C.ODCLID;
```

One row should be returned from the collection table identifying the collection that is expected to be associated with the object. If there is no collection table entry, the object is not selected for processing.

Inconsistencies between the Catalog and the Collection Table

Another possibility is a mismatch between the collection ID in the catalog and the collection ID in the collection table. OAM checks for this condition when the OAM address space is started. Check your system log during OAM address space initialization for message CBR9030I or other messages that might indicate a problem with the catalog.

The following TSO/E command lists the collection entry in the catalog:

```
LISTCAT ENTRIES('collection_name') ALL
```

Verify that the DIRECTORYTOKEN matches the storage group name for qualifier GROUP*xx* on the ISMF storage group definition panel.

Indicate "ACTIVE" as the SCDS name when listing Object storage group information. The storage group name in the catalog entry must also match the storage group name (ODCLSGNM) in the collection table entry for the collection associated with the object.

Check Management Class Definitions

To determine the storage class and management class names associated with the object, use the following SQL statement:

```
SELECT * FROM OAMADMIN.CBR_STO_CLASS_TBL S,
         OAMADMIN.CBR_MGT_CLASS_TBL M,
         HLQ.OSM_OBJ_DIR D
WHERE   ODNAME = 'object_name'
AND     D.ODSCNUM = S.ODSCNUM
AND     D.ODMCNUM = M.ODMCNUM;
```

If no rows are produced from the select statement, the object is not processed.

List the ISMF definition of the management class name returned from the select statement. This is the management class currently assigned to the object. Specify `ACTIVE` as the SCDS name.

Calculate the date of the next class transition as follows:

- If TIME SINCE CREATION has been used, add the values for time since creation to the creation date of the object (ODCREATS in the object's directory table entry).
- If TIME SINCE LAST USE has been specified, add the values for time since last use to the last referenced date of the object (ODLREFDT in the object's directory table entry).
- If PERIODIC has been specified, see the period definitions in the *z/OS DFSMS Storage Administration Reference*.

In all cases, if the date calculated is in the future, no class transition occurs.

Check Management Class and Storage Class ACS Routines

If the ISMF management class definition indicates it is time for a class transition, the storage class ACS routine is invoked followed by the management class ACS routine. The ACS input variable &ACSENVIR is set to CTRANS. In order for an object to be moved to a different level of the hierarchy, a new storage class must be assigned when &ACSENVIR is CTRANS.

Use the ISMF ACS test panels to determine what storage class is being assigned. Possible sources of error are as follows:

- CTRANS logic is not executed.
- The current storage class is assigned, or a new storage class is assigned, but the new storage class definition places the object at the same level of the hierarchy.

Check Storage Class Definitions

Display the ISMF storage class definition of the storage class assigned by the ACS routines. If INITIAL ACCESS RESPONSE SECONDS is zero, then the object is stored on DASD. If a nonzero value is specified, and SUSTAINED DATA RATE is greater than or equal to 3, then the object is stored on tape. Otherwise, the object is stored on optical media. If the media assigned by the storage class is unexpected, correct the storage class definition. If the wrong storage class is being assigned, correct the ACS routine. In either case, validate and activate the new configuration.

Documentation for Your IBM Representative

If you have not identified the reason for objects not moving to different levels of the hierarchy during OSMC, you might wish to contact the IBM support center. You should have the following documentation available:

1. Output from the select statements above.
2. The contents of the following tables:
   - OAMADMIN.CBR_MGT_CLASS_TBL
   - OAMADMIN.CBR_STO_CLASS_TBL, and
   - OAMADMIN.CBR_COLLECTION_TBL.
3. The contents of an object directory table entry for one of the objects expected to make a class transition.
4. The collection associated with the object directory table entry printed in step 3. The following command provides this information to you:

```
LISTCAT ENTRIES('collection_name') ALL
```

5. A screen print of the storage group, storage class and management class definitions using "ACTIVE" as the SCDS name.
6. Management class and storage class ACS routines.
7. The syslog from the time OSMC message CBR9200I is issued to indicate the start of processing for the Object storage group until message CBR9201I is issued indicating processing has completed.

Invoking the OSREQ Macro Through the OSREQ TSO/E Command Processor

The OSREQ command is a TSO/E command processor that closely resembles the OSREQ macro, a programming interface, provided by OAM. The OSREQ macro is used for the storage, retrieval, query, deletion of objects, and comparing primary data to backup data. The OSREQ TSO/E command is used to exercise the OSREQ macro interface and OAM without having to explicitly use the OSREQ ACCESS and UNACCESS macros to connect and disconnect the macro to OAM.

Each time the OSREQ command is issued, the OSREQ TSO/E command processor performs the OSREQ ACCESS macro between itself and OAM. If the OSREQ ACCESS macro is successful, the OSREQ command processor continues and performs the requested function. After the function is performed, the OSREQ command processor disconnects itself from OAM through an OSREQ UNACCESS macro command.

The following functions can be performed against objects: store, retrieve, query, delete, compare, and change the management class, storage class, and retention period.

Note: Check with your application provider for any corequisite support that may be required in order to store objects larger than 50MB.

Recommendation: This command processor verifies object support after product installation. You might also use it as a tool to assist in recreating a customer problem in a controlled environment. You cannot use this tool to store actual data, because the STORE function creates "dummy" data.

Related reading: For more information on using the OSREQ macro, see the *z/OS DFSMS OAM Application Programmer's Reference*.

OSREQ TSO/E Command Syntax

The syntax for the OSREQ TSO/E command follows:

The OSREQ TSO/E Command Syntax

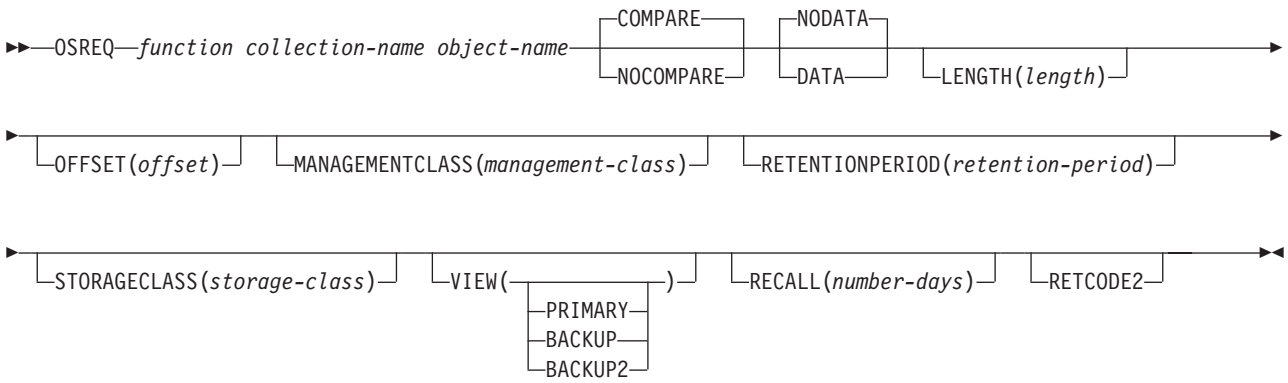

The OSREQ TSO/E command processor requires three positional parameters:

1. The first positional parameter is the *function* to be performed.
2. The second positional parameter is the *collection-name*.
3. The third positional parameter is the *object-name*.

All three positional parameters are required and must be supplied in the order specified. If any of the positional parameters are missing, the system prompts the user for the missing parameter.

The first positional parameter following the OSREQ command name is the OSREQ function to be performed. Valid OSREQ functions are described in Table 43, and each one is discussed in detail further in this section.

Table 43. Functions of the OSREQ macro

FUNCTION	DESCRIPTION
CHANGE	The OSREQ CHANGE macro is invoked to change the management class, or retention period, or storage class, or all three, associated with the specified object.
COMPARE	The OSREQ RETRIEVE macro is invoked to retrieve both the primary object and the backup copy. The primary copy data is then compared with the backup data to insure the data is the same.
DELETE	The OSREQ DELETE macro is invoked to delete the specified object.
QUERY	The OSREQ QUERY macro is invoked for the specified collection name and object name.
RETRIEVE	The OSREQ RETRIEVE macro is invoked to retrieve the specified object.
STORE	The OSREQ STORE macro is invoked to store an object with the specified collection name and object name.

CHANGE

An OSREQ CHANGE command results in an OSREQ CHANGE macro invocation to change the management class, retention period, and or storage

class associated with the specified object. The following optional keywords are valid for an OSREQ CHANGE command:
- MANAGEMENTCLASS
- RETENTIONPERIOD
- STORAGECLASS

Although there are no *required* keywords for an OSREQ CHANGE command, if none of the optional keywords are specified, the OSREQ CHANGE macro that is issued by the OSREQ TSO/E command processor has no affect on any of these keyword attributes currently associated with the object.

New attributes are assigned to the object dependent upon the attributes indicated on the keywords associated with the OSREQ CHANGE command.

COMPARE

An OSREQ COMPARE command results in the issuance of the OSREQ RETRIEVE macro to retrieve the primary and backup copies of the specified object. The data for the primary object then is compared with the data from the backup copy.

There are no required keywords on an OSREQ COMPARE command.

The following optional keywords are valid on an OSREQ COMPARE command:
- DATA or NODATA
- LENGTH
- OFFSET

The DATA keyword causes the DUMP notation display of the actual data comprising the object. Each line of object data consists of a message ID, offset within the object, and 16 bytes of object data in both hexadecimal notation and EBCDIC format.

The LENGTH keyword specifies the length of the object, or portion thereof, for comparison. If the LENGTH keyword is omitted on an OSREQ COMPARE command, the OSREQ command processor issues an OSREQ QUERY macro for the specified object in order to obtain the length of the object. The portion of the object compared is also affected by the OFFSET keyword. If both the LENGTH and the OFFSET keywords are omitted, the entire object is compared using the length returned from the OSREQ QUERY macro. If the LENGTH keyword is supplied and the OFFSET keyword is omitted, the number of bytes specified with the LENGTH keyword starting at offset zero is compared.

The OFFSET keyword specifies the offset of the first byte of the object to be compared by the OSREQ COMPARE command. The first byte of an object has an offset of zero (0). The second byte of an object has an offset of one (1), and so on. If the OFFSET keyword is omitted from an OSREQ COMPARE command, the portion of the object compared is the portion starting with the first byte of the object (OFFSET=0). The number of bytes compared is specified with the LENGTH keyword.

Tip: The compare function of the OSREQ command is different from the compare keyword on the retrieve function.

DELETE

An OSREQ DELETE command results in an OSREQ DELETE macro invocation to delete a specified object. There are no required or optional keywords for this command.

QUERY

An OSREQ QUERY command results in an OSREQ QUERY macro invocation for the specified collection name and object name. There are no required or optional keywords for this command.

You might specify the object name for the OSREQ QUERY command as a generic object name by specifying an asterisk (*) for the low-level qualifier of the object name. In the case where the low-level qualifier of the object name is an asterisk, the OSREQ QUERY macro that is issued is a "generic query" that might result in the directory information of multiple objects being displayed. In the case of a generic query, the query buffer obtained by the OSREQ TSO/E command processor is sufficient to hold the directory information for 10 000 objects. If there are more than 10 000 objects, only the directory information for the first 10 000 objects is listed, and the OSREQ TSO/E command processor ends with a return code 4.

The following OAM directory information is listed for each object through the OSREQ TSO/E command processor:

- Collection name
- Object name
- Creation date
- Creation timestamp
- Last reference date
- Expiration date
- Storage class
- Management class
- Object length

RETRIEVE

An OSREQ RETRIEVE command results in an OSREQ RETRIEVE macro invocation to retrieve specified objects. There are no required keywords on this command.

The following optional keywords are valid on an OSREQ RETRIEVE command:

- DATA or NODATA
- COMPARE or NOCOMPARE
- LENGTH
- OFFSET
- VIEW(PRIMARY | BACKUP | BACKUP2)
- RECALL
- RETCODE2

The DATA keyword displays the actual data comprising the object in a DUMP notation. Each line of object data consists of a message ID, offset within object, 16-bytes of object data is both hexadecimal notation and EBCDIC format. The NODATA keyword suppresses the display of object data on the OSREQ RETRIEVE command. NODATA is the default if no keyword is specified on this command.

The COMPARE keyword checks the portion of the object retrieved for a predefined pattern of data. The predefined pattern is a combination of the collection name, object name and the 4-byte binary counter. If the portion of the object retrieved contains the expected data, a comparison successful message (CBR0420I) is issued. If the portion of the object retrieved does not contain the expected data, a comparison unsuccessful message (CBR0421I) is issued and the OSREQ TSO/E command processor ends with a nonzero return

code. The NOCOMPARE keyword suppresses the checking of the predefined pattern. COMPARE is the default if no keyword is specified with this command.

The LENGTH keyword specifies the length of the object, or portion of the object to be retrieved. If the LENGTH keyword is omitted on the OSREQ RETRIEVE command, the OSREQ TSO/E Command Processor issues and OSREQ QUERY macro for the specified object to obtain the length of the object. The portion of the object retrieved is also affected by the OFFSET keyword. If both the LENGTH and the OFFSET keywords are omitted from the command, the entire object is retrieved using the length provided by the OSREQ QUERY macro. If the LENGTH keyword is supplied and the OFFSET keyword is omitted, the number of bytes specified with the LENGTH keyword, starting at offset zero, is retrieved.

Note: When retrieving an object greater than 50MB (52428800 bytes) and less than or equal to 256MB (268435456 bytes), if the first data buffer supplied is not large enough to contain the requested or partial object, the request fails with OSREQ return code 8, reason code 2403080B.

The OFFSET keyword specified the offset of the first byte of the object retrieved by the OSREQ RETRIEVE command. The first byte of an object has an offset of zero. The second byte of an object has an offset of one and so on. If the OFFSET keyword is omitted from the command, the portion on the object retrieved is the portion starting with the first byte of the object (OFFSET=0). The number of bytes retrieved is specified with the LENGTH keyword.

The VIEW keyword is only valid on an OSREQ RETRIEVE request and is ignored on all other requests. If you specify VIEW(PRIMARY) on the RETRIEVE request, the primary copy of the object is retrieved. If the primary copy of the object is on an unreadable tape or optical volume, and the automatic access to backup facility is activated, OAM then retrieves the backup copy of the object. If you specify VIEW(BACKUP) on the RETRIEVE request, then OAM retrieves the first backup copy of the object. If you specify VIEW(BACKUP2) on the RETRIEVE request, then OAM retrieves the second backup copy of the object. If you omit the VIEW keyword, then OAM uses VIEW(PRIMARY) as the default in the request and the retrieves the primary copy of the object.

The RECALL keyword specifies an explicit request for a temporary copy of this object is to be written to DB2 DASD and retained there for the specified number of days. The value specified as the number of days is a full word ranging from 0–255. An invalid value results in failure of the RETRIEVE request. Regardless whether the RETRIEVE request is for a full or partial object, the RECALL keyword always results in a copy of the full object to DB2 DASD.

The RETCODE2 keyword requests that an additional return code be provided to indicate whether this RETRIEVE request resulted in the scheduling of a RECALL of the object to DB2 DASD. This keyword is an optional parameter. This value provided for this additional return code is not valid when the RETRIEVE is unsuccessful; when the RETRIEVE is successful, it returns the following information:

Table 44. RETCODE2 values for OSREQ RETRIEVE

RETCODE2	Field Definition	Meaning
0	OSM_RECALL_OK_EXP	Either • RECALL not specified with RETRIEVE; no attempt to schedule RECALL or • RECALL specified with RETRIEVE and successfully scheduled
4	OSM_RECALL_OK_IMP	RECALL not specified with RETRIEVE, but RECALL successfully scheduled due to CBROAMxx PARMLIB member specifications
8	OSM_RECALL_NO_OSMC	An attempt to schedule a RECALL was not successful because OSMC=NO was specified on OAM started procedure
10	OSM_RECALL_MRT	An attempt to schedule a RECALL was not successful because MAXRECALLTASKS(0) was specified in CBROAMxx PARMLIB
12	OSM_RECALL_RO	An attempt to schedule a RECALL was not successful because RECALLOFF(ON) was specified in CBROAMxx PARMLIB
14	OSM_RECALL_ERR	An attempt to schedule a RECALL was not successful because of a scheduling error
16	OSM_RECALL_XCF_NS	An attempt to schedule a RECALL was not successful because the RETRIEVE was performed on a downlevel OAMplex member that does not support RECALL processing

STORE

An OSREQ STORE command results in an OSREQ STORE macro invocation to store an object with a specified collection name and object name.

The LENGTH keyword is a required keyword on an OSREQ STORE command. The value specified with the length keyword is the length, in bytes, of the object to store. If the LENGTH keyword or value is omitted, an error message is issued.

The OSREQ command processor creates an object of the specified length and fills the object with a predefined pattern. The predefined pattern is a combination of the collection name, object name and the 4-byte binary counter. The binary counter in the data pattern is incremented by one for each replication of the data pattern within the object.

The following keywords are valid on an OSREQ STORE command:

- LENGTH (required)
- MANAGEMENTCLASS (optional)
- RETENTIONPERIOD (optional)
- STORAGECLASS (optional)
- RETCODE2 (optional)

New attributes are assigned to the object dependent upon the attributes indicated on the keywords associated with the OSREQ STORE command. If these attributes are not specified, the defaults for the collection or the ACS overrides are assigned.

The second positional parameter, following the OSREQ command name is the *collection name*. The collection name must be a fully qualified OAM collection name for each OSREQ function.

The third positional parameter to follow the OSREQ command name is the *object-name*. The object name should be a fully-qualified object name for each OSREQ function with the exception of the QUERY function. For the OSREQ QUERY function, the object name can be either a fully-qualified or a partially-qualified name. A partially-qualified name is an object name that contains one asterisk (*) for the right most portion of the object name. A partially-qualified object name implies a generic-query request for all objects whose object name matches the characters to the left of the asterisk.

Note: When storing an object greater than 50MB (52428800 bytes) and less than or equal to 256MB (268435456 bytes), if multiple data buffers are supplied but they are not in contiguous storage, the request fails with OSREQ return code 8, reason code 2402080A.

RETCODE2 is an optional keyword that indicates whether the STORE request results in scheduling an immediate backup copy for this object. *return_code2_word* is only valid when the STORE is successful, and the system provides the following information:

Table 45. RETCODE2 values for OSREQ STORE

RETCODE2	Field Definition	Meaning
0	OSM_IMBKP_OK	Immediate backup copy request successfully scheduled.
4	OSM_IMBKP_NOT_RQD	Immediate backup copy request not required.
8	OSM_IMBKP_NO_OSMC	An attempt to schedule an immediate backup for this object is not successful because OSMC is not up and running.
14	OSM_IMBKP_ERR	An attempt to schedule an immediate backup for this object is not successful because of unexpected scheduling error.

Note: The remaining keywords and parameters are described in the *z/OS DFSMS OAM Application Programmer's Reference*

OSREQ TSO/E Command Processor Return Codes

The OSREQ TSO/E command processor returns to the TSO/E terminal monitor program (TMP) with a return code in register 15. This return code can be tested using the &LASTCC variable in a TSO/E CLIST. In all cases, except one, the return code in register 15 following the OSREQ command is the return code that was returned by the OSREQ macro in register 15. A return code of 20 indicates that the OSREQ TSO/E command processor encountered an error unrelated to the OSREQ macro which it invokes.

The following return codes are returned from the OSREQ TSO/E command processor:

Return code	Description
0	The requested OSREQ function successfully completed.
4	The requested OSREQ function was completed with a warning condition.
8	The requested OSREQ function was not completed due to an application programming error.
12	The requested OSREQ function was not completed due to an environmental error.
20	The OSREQ TSO/E command processor encountered an error during its processing. The following errors will cause a return code of 20:

Error	Description
1	A nonzero return code was received from the TSO/E parse service routine (IKJPARS) in register 15. Error message CBR0402I is issued.
2	A nonzero return code was received from the STORAGE OBTAIN macro when storage was requested for a data buffer for an OSREQ QUERY operation. Error message CBR0403I is issued.
3	The LENGTH keyword was not specified on an OSREQ STORE request. Error message CBR0406I is issued.
4	A nonzero return code was received from the STORAGE OBTAIN macro when storage was requested for a data buffer for an OSREQ STORE operation. Error message CBR0403I is issued.
5	A nonzero return code was received from the STORAGE OBTAIN macro when storage was requested for a data buffer for an OSREQ RETRIEVE operation. Error message CBR0403I is issued.
6	An invalid length was specified on an OSREQ RETRIEVE or COMPARE command. Error message CBR0407I is issued.
7	An invalid offset was specified on an OSREQ RETRIEVE or COMPARE command. Error message CBR0408I is issued.
8	An OSREQ RETRIEVE command was issued with the COMPARE keyword and the data comparison did not

match. Or an OSREQ COMPARE command was issued and the data comparison did not match. Error message CBR0421I is issued.

3995 Optical Service Information Messages

The 3995 optical library microcode provides a 3995 Service Information Message (SIM) to the host when a component within the 3995 optical library needs service.

If the appropriate bit is on in the SIM, OAM issues an action message (CBR3309E) to the MVS console. Additionally, if the appropriate bit is on in the SIM, OAM logs the SIM message as a type x'A3' Asynchronous Notification Record (ANR) in SYS1.LOGREC.

The following restrictions apply:

- The 3995 optical library dataservers must be defined in the IODF as 3995 devices (not CTC or 3088 devices) in order for the Environmental Recording Editing and Printing program (EREP) to produce formatted reports for any ANRs generated for those libraries.
- AMRF must be active in order to recall CBR3309E messages that have rolled off the screen. To display the message identification numbers and text of all immediate action and eventual action messages, as well as OAM issued messages awaiting replies, use the following command:

```
DISPLAY R,L,KEY=OAM
```

- OAM must be active when SIM attentions from the 3995 are sent to the host or they are lost.
- The optical libraries indicated in the SIM attention messages must be known to OAM, and they must be part of the active SMS configuration or they are lost.

Chapter 5. Operating OAM and OTIS Address Spaces and OSMC Functions

This chapter helps you use operator commands and describes the tasks to operate the OAM and OTIS address spaces (necessary for using the OSREQ functions) and OSMC functions.

Overview of Operator Tasks

You can perform the following operator tasks:

Subtask	Associated procedure (see . . .)
Start: • OTIS • OAM • OSMC storage management cycle • Library management cycle • DASD space management cycle • Automatic access to backup • OAM Volume Recovery utility • Single Object Recovery utility • Move Volume utility • DASD space management • Tape Recycle	See the following topics: • "Starting OTIS" on page 266 • "Starting OAM" on page 267 • "Starting OSMC Functions" on page 269 • "Starting the Library Space Management Cycle" on page 275 • "Starting the DASD Space Management Cycle for an Individual Storage Group" on page 277 • "Starting Automatic Access to Backup Copies of Objects" on page 298 • "Starting the OAM Volume Recovery Utility" on page 278 • "Starting Object Recovery for Single Objects" on page 285 • "Starting the Move Volume Utility" on page 288 • "Starting the DASD Space Management Cycle for an Individual Storage Group" on page 277 • "Starting the Tape Recycle Utility" on page 287
Vary optical drives and optical libraries online and offline.	"Varying Optical Drives and Libraries" on page 301
Enter unlabeled and labeled optical disks into an optical library.	"Entering an Optical Disk into an Optical Library" on page 304
Eject an optical disk from an optical library.	"Ejecting an Optical Disk" on page 309
Mount an optical disk on an operator-accessible optical drive.	"Mounting an Optical Disk on an Operator-Accessible Drive" on page 311
Demount an optical disk on an operator-accessible optical drive.	"Demounting and Removing an Optical Disk Cartridge from an Operator-Accessible Drive" on page 312
Label an optical disk on an operator-accessible optical drive.	• "Labeling an Optical Disk on a 3995 Operator-Accessible Drive" on page 312
Relabel an optical disk volume.	"Relabeling a 3995 Optical Disk Volume" on page 318
Display status of: • OAM • OAMXCF • OSMC storage management cycle • Optical drive • Optical library • Optical and tape volumes • Lost volumes • Storage group • SETOAM, SETOPT, and SETOSMC statements • OAM messages	See the following topics: • "Displaying OAM Status" on page 322 • "Displaying OAM XCF Status" on page 325 • "Displaying OSMC Summary Status" on page 327 • "Displaying Drive Online/Offline Connectivity" on page 333 • "Displaying Library Online/Offline Connectivity" on page 339 • "Displaying Storage Group Status" on page 346 • "Displaying Volume Status" on page 350 • "Displaying Volumes that Have LOSTFLAG Set" on page 356 • "Displaying SETOPT, SETOAM, and SETOSMC Parameters" on page 357 • "Displaying Outstanding OAM Messages" on page 360

© Copyright IBM Corp. 1989, 2006

Subtask	Associated procedure (see . . .)
Query active and pending optical and tape requests.	"Querying Summary and Detail Information for Pending and Active Requests" on page 361
Dump the OAM address space.	"Scheduling an SVC Dump for the OAM Address Space" on page 365
Restart OAM.	"Restarting the OAM Address Space" on page 366
Update SETOAM, SETOPT, SETOSMC, and OAMXCF parameter values.	• "Using the UPDATE Command to Set SETOAM, SETOSMC, and SETOPT Values" on page 368 • "Using the UPDATE Command to Set OAMXCF Values" on page 376
Update fields in the DB2 VOLUME or TAPEVOL table.	"Updating Fields in the DB2 Volume Table and the Tape Volume Table" on page 377
Audit volumes.	"Auditing a Volume" on page 379
Remap a 3995 library.	"Remapping an Optical Library" on page 380
Stop: • OAM • OSMC • Move Volume utility • Access backup • Volume recovery • OTIS • Tape Recycle utility	See the following topics: • "Stopping OAM" on page 381 • "Stopping OSMC" on page 381 • "Stopping the Move Volume Utility" on page 382 • "Stopping Automatic Access to Backup" on page 384 • "Stopping a Volume Recovery that is in Progress" on page 383 • "Stopping OTIS" on page 385 • "Stopping OAM Functions" on page 380

Message Format Conventions

The following conventions are used to show message format:

```
CBRnnnnX Message_text
```

where:

CBR Standard OAM message prefix

nnnn Four-digit message number

X Type code
- **A** Action required
- **D** Decision needed
- **E** Eventual action required
- **I** Information only

Message_text
Text of the message

The following is a sample of an OAM message:

```
CBR2601A Specify shelf location for volume volser.
```

Note: In message text, italicized words indicate a value supplied by the system.

Related reading: For a description of messages, use LookAt or see *MVS System Messages*. For a description of LookAt, see "Using LookAt to look up message explanations" on page xii.

Overview of Operator Commands

Many commands use the MVS operator MODIFY command. Throughout this topic, the command syntax is:

```
F OAM,...
```

The command F is the abbreviation of the MVS MODIFY command.

The OAM address space can be defined in one of the following ways:

- As the name of the cataloged procedure in SYS1.PROCLIB that you use to start the OAM address space:

```
F OAM,START OAM,...
```

- As the task ID assigned in the address space START command:

```
F OAM,START procname.OAM,...
```

Tip: If your system programmer chooses to use a name other than *OAM*, use that name in the place of *OAM*.

Two SMS operator commands are related to the OAM address space:

- **DISPLAY SMS**—for determining the status of OAM, OSMC, storage groups, optical volumes, optical disk drives, and optical libraries. See "Displaying Status" on page 322 for specific information on the DISPLAY command.
- **VARY SMS**—for varying optical disk drives or optical libraries online or offline. See "Varying Optical Drives and Libraries" on page 301 for specific information on the VARY command.

The following operator commands for the OAM address space are based on the MVS MODIFY command:

- **AUDIT**—for auditing library resident volumes. See "Auditing a Volume" on page 379 for specific information on the AUDIT command.
- **DISPLAY**—for displaying the current SETOAM, SETOPT, and SETOSMC settings. See "Displaying SETOPT, SETOAM, and SETOSMC Parameters" on page 357 for specific information on the DISPLAY command.
- **DUMP**—for capturing data used for diagnostic purposes. See "Scheduling an SVC Dump for the OAM Address Space" on page 365 for specific information on the DUMP command.
- **LABEL**—for labeling the two volumes of an optical disk on an operator-accessible optical drive. For specific information on the LABEL command, see the following topic:
  - "Labeling an Optical Disk on a 3995 Operator-Accessible Drive" on page 312
- **QUERY**—for displaying summary, detail, or both types of information regarding active and pending tape and optical requests. See "Querying Summary and Detail Information for Pending and Active Requests" on page 361 for specific information on the QUERY command.

- **RELABEL**—for changing the volume serial number for an existing optical disk volume. See "Relabeling a 3995 Optical Disk Volume" on page 318 for specific information on the RELABEL command.
- **REMAP**—for initiating a REMAP on a 3995 optical library. See "Remapping an Optical Library" on page 380 for specific information on the REMAP command.
- **RESTART**—for restarting the OAM address space without issuing a STOP and START command. See "Restarting the OAM Address Space" on page 366 for specific information on the RESTART command.
- **START**—for starting an OSMC storage management cycle, an OSMC library space management cycle, an OSMC DASD space management cycle, an OSMC Volume Recovery utility, an OSMC Single Object Recovery utility, an OSMC Move Volume utility, an OSMC Tape Recycle command, or the automatic access to backup function. For specific information on the START command, see the following topics:
  - "Starting OAM" on page 267
  - "Starting OSMC Functions" on page 269
  - "Starting Automatic Access to Backup Copies of Objects" on page 298
- **STOP**—for stopping OAM, all OSMC processing, OSMC processing for an individual storage group, an OSMC Move Volume utility, an OSMC Volume Recovery Utility, an OSMC Tape Recycle command process, or the Automatic Access to Backup recovery function. See "Stopping OAM Functions" on page 380 for specific information on the STOP command.
- **UPDATE**—for updating fields in the DB2 Volume Table and the Tape Volume Table with the F OAM command. This command also dynamically updates the SETOAM, SETOPT, SETOSMC, and OAMXCF settings. For specific information on the UPDATE command, see the following topics:
  - "Using the UPDATE Command to Set SETOAM, SETOSMC, and SETOPT Values" on page 368
  - "Using the UPDATE Command to Set OAMXCF Values" on page 376
  - "Updating Fields in the DB2 Volume Table and the Tape Volume Table" on page 377

The following operator commands for the OAM address space are based on the MVS LIBRARY command:

- **EJECT**—for removing an optical disk from an optical library. See "Ejecting an Optical Disk" on page 309 for specific information on the EJECT command.
- **RESET**—for re-enabling the CBRUXSAE user authorization installation exit after it has been disabled or bypassed.

Two MVS operator commands are related to the OTIS address space:

- **START**—for starting or restarting OTIS. See "Starting OTIS" for specific information on this use of the START command.
- **STOP**—for stopping OTIS. You must use the MVS MODIFY command when stopping OTIS. See "Stopping OTIS" on page 385 for specific information on this use of the STOP command.

Starting OTIS

The installation of OAM creates an address space called OAM thread isolation support (OTIS). This required address space starts automatically during system IPL.

Requirement: The OTIS address space must be active when any OAM applications are processing objects.

To start the OTIS address space or restart the address space after it has ended, enter the MVS START command. The following MVS command syntax starts the OSMC functions:

While OTIS is initializing, the system issues the following message:

```
CBR8500I OTIS subsystem is initializing.
```

If your DB2 subsystem is active, the system issues the following message:

```
CBR8571I OTIS subsystem successfully connected to DB2 subsystem.
```

If your DB2 subsystem is *not* active, the system issues the following message:

```
CBR8572I OTIS subsystem unable to connect to DB2 subsystem because DB2
         subsystem is not active.
```

After either of the above messages are issued, the system issues the following message:

```
CBR8501I OTIS subsystem initialization complete.
```

You should not see any messages other than those listed. If any other messages are issued, use LookAt or see *MVS System Messages*.

Related reading:

- For further information on the MVS START command, see the *z/OS MVS System Commands*.
- For a description of LookAt, see "Using LookAt to look up message explanations" on page xii.

Starting OAM

Before starting OAM for object storage, initialize DB2.

Tip: The system programmer can update the SMS entry in the IGDSMS*xx* member of PARMLIB to automatically start OAM during MVS IPL.

To start the OAM address space manually, or to restart the OAM address space after it has terminated, enter the MVS START command. The following syntax of the MVS START command starts OAM:



Where *xx* is the CBROAM*xx* member of PARMLIB that you wish to have OAM use during initialization.

Recommendation: You can include any parameter of the OAM procedure statement in this command to modify the parameter upon activation of the OAM address space. An example of modifying these parameters follows:

Example:

```
START OAM,OAM=XX,OSMC=YES,RESTART=NO,MAXS=10,EJECT=LRM
```

Related reading: For details on these parameters, see the discussion concerning modifying and running the CBRAPROC SAMPLIB member on page 132.

When initializing OAM with OSMC, the system issues the following messages:

```
CBR0001I OAM initialization starting.

CBR0016I Successful processing of the OAMXCF commands in CBR0AMxx member of
         PARMLIB. Initialization continues.

CBR0070I OAM XCF member xcf-member-name is the first member defined to
         OAM XCF group xcf-group-name, group successfully defined to
         XCF and member created.

CBR0016I Successful processing of the SETOAM commands in CBR0AMxx member of
         PARMLIB. Initialization continues.

CBR0016I Successful processing of the SETOPT commands in CBR0AMxx member of
         PARMLIB. Initialization continues.

CBR0016I Successful processing of the SETOSMC commands in CBR0AMxx member of
         PARMLIB. Initialization continues.

CBR9000I OSMC initialization starting.

CBR9001I OSMC initialization completed.

CBR0002I OAM initialization completed.
```

Notes about starting OAM:

1. CBR0016I displays only if OAM=*xx* is indicated.
2. If you use a CBROAM*xx* PARMLIB member to initialize OAM, OAM displays CBR03*xx*I messages that might be normal for your environment.
3. You must restart OAM to recognize any changes that were made to the CBROAM*xx* member of PARMLIB. Additionally, to dynamically change the SETOAM, SETOPT, or SETOSMC parameters, use the UPDATE command. See "Using the UPDATE Command to Set SETOAM, SETOSMC, and SETOPT Values" on page 368 for more information.

When initializing OAM without OSMC, the system issues the same messages as when initializing with OSMC, with the exception of messages CBR9000I and CBR9001I.

For further information on these messages, use LookAt or see *MVS System Messages*.

Related reading:

- For further information on the MVS START command, see the *z/OS MVS System Commands*.
- For explanations and system actions for these messages, see *z/OS MVS System Messages, Vol 4 (CBD-DMO)*.
- For information on starting DB2, see *DB2 Administration Guide*.
- For a description of LookAt, see "Using LookAt to look up message explanations" on page xii.

Starting OSMC Functions

Use the F OAM,START command to start the following OSMC functions:

- Storage management cycle for all or specific Object or Object Backup storage groups
- Library space management cycle for an optical library
- DASD space management cycle for an Object storage group
- Volume Recovery utility
- Single Object Recovery utility
- Move Volume utility
- Tape recycle

The following MVS command syntax starts the OSMC functions:

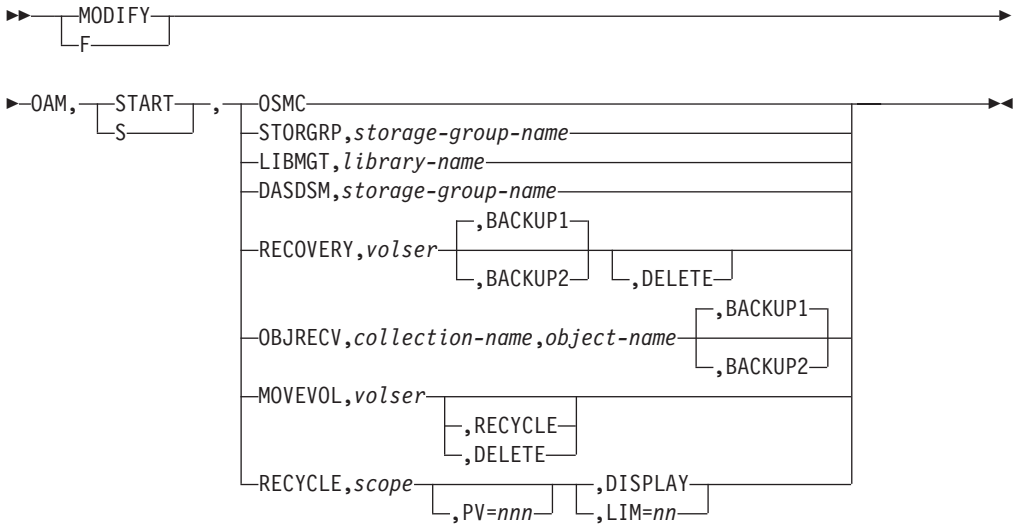

OSMC
Starts an OSMC storage management cycle for each Object storage group in the active configuration. In an OAMplex, OAM initiates OSMC processing for Object storage groups that have a system name of BLANK or a system name that matches the name of the system on which this command was issued.

STORGRP,*storage-group-name*
Starts an OSMC storage management cycle for the specified Object or Object Backup storage group that is named *storage-group-name*. In an OAMplex, if a specific storage group is processed, OAM initiates OSMC processing of the specified storage group on the system where the command was entered.

LIBMGT,*library-name*
Starts an OSMC library management cycle for an optical library that is named *library-name*. OAM must control the library on the system where the command was entered.

DASDSM,*storage-group-name*
Starts an OSMC DASD space management cycle for the specified Object storage group that is named *storage-group-name*.

RECOVERY,*volser***[,BACKUP1 | ,BACKUP2][,DELETE]**
Starts the OSMC Volume Recovery utility for either a tape volume with volume serial number *volser* or an optical platter with volume serial number *volser* and its opposite side.

The RECOVERY command verifies that another instance of OAM in an OAMplex is not controlling the volume that is to be recovered. If another instance of OAM is controlling the volume, OAM displays message CBR1068I and cancels the RECOVERY command.

Volumes that belong to an Object Backup storage group are recovered from the primary copies of the objects. If the volume belongs to an Object Backup storage group, OAM ignores the BACKUP1 and BACKUP2 parameters.

BACKUP1
When you want to recover all objects residing on a volume that belongs to an Object storage group and you have specified BACKUP1 on the START command for Volume Recovery, OAM creates the recovery from the first backup copies of the objects. If the volume or cartridge to be recovered belongs to an Object storage group and you have specified neither BACKUP1 nor BACKUP2, BACKUP1 is the default. Backup volumes are always recovered using the primary copies of the objects.

BACKUP2
When you want to recover all objects residing on a volume that belongs to an Object storage group and you have specified BACKUP2 on the START command for volume recovery, the recovery is made from the second backup copies of the objects. Backup volumes are always recovered using the primary copies of the objects.

DELETE
After the volume recovery is complete and no objects are left on the tape or on either side of the optical platter, the tape volume or optical platter is deleted from the optical configuration database. If the volume resides in an optical library, it is ejected. The DELETE option overrides any parameters that are specified in the SETOAM TAPERECYCLEMODE or the SETOPT OPTICALREINITMODE statement in the CBROAM*xx* member of PARMLIB.

When an optical volume is deleted, OAM displays message CBR2153I. When a tape volume is deleted, OAM displays message CBR2165I. You can automate this message to notify the tape management system to return the tape volume to MVS scratch status.

OBJRECV,*collection-name***,***object-name***,BACKUP1 | BACKUP2**
Starts the OSMC Single Object Recovery utility for the object that is named *object-name*, in the collection that is named *collection-name*. When you want to recover a primary copy of an object, and you have specified BACKUP1 on the START command for object recovery, OAM creates the recovery from the first backup copy of the object. If you have specified BACKUP2, OAM creates the

recovery from the second backup copy of the object. BACKUP1 is the default if you have specified neither BACKUP1 nor BACKUP2.

MOVEVOL,*volser***[,RECYCLE | ,DELETE]**
Starts the OSMC Move Volume utility for the source volume with volume serial number *volser*. Use the MOVEVOL command to migrate objects from a primary or backup source volume to one or more target volumes, or to delete a scratch volume from the OAM inventory. If you omit the RECYCLE or DELETE option, the migrated volume remains in the same Object or Object Backup storage group, and all volume record fields in the OCDB remain the same.

RECYCLE
Recycles the optical platter or rewritable tape volume after moving the objects off the cartridge. When the MOVEVOL command completes, OAM recycles the tape volume or optical platter using the parameters that are specified in the SETOAM TAPERECYCLEMODE or SETOPT OPTICALREINITMODE statement in the CBROAM*xx* member of PARMLIB.

DELETE
Deletes the optical platter or tape volume after the objects are moved off of the cartridge. After the MOVEVOL command completes and no objects remain on the cartridge, the tape volume or optical platter is deleted from the optical configuration database. The DELETE option overrides any parameters that are specified in the SETOAM TAPERECYCLEMODE or the SETOPT OPTICALREINITMODE statement in the CBROAM*xx* member of PARMLIB.

When an optical volume is deleted, OAM displays message CBR2153I. When a tape volume is deleted, OAM displays message CBR2165I for a rewritable tape volume, or message CBR2173I for a WORM tape volume. These messages can be used to signal the tape management system that the tape volume can be returned to MVS scratch status for reuse if the tape volume is rewritable or to handle the WORM tape volume according to the installation procedures for expired WORM media. You can automate this message to notify the tape management system to return the tape volume to MVS scratch status.

RECYCLE,*scope***{,PV=***xxx***}[,LIM=***yy***|,DISPLAY]**
Displays a list of candidate volumes that meet user-defined criteria to the hardcopy log, and in turn, automatically selects recycle candidate volumes and initiates the MOVEVOL with RECYCLE process on those candidates until either the user-specified limit is reached or no more volumes meeting criteria are available.

scope
Indicates one of the following:

- **Specified name of an object or object backup storage group**, indicates that only tape volumes marked full, that belong to the specified object or object backup storage group, are considered candidates for this RECYCLE command.
- **ALLGRP** all full tape volumes that belong to all primary object storage groups defined in the ACTIVE SCDS are considered candidates for this RECYCLE command.
- **ALLBK1** all full tape volumes that belong to all first backup storage groups defined in the ACTIVE SCDS are considered candidates for this RECYCLE command.

- **ALLBK2** all full tape volumes that belong to all second backup storage groups defined in the ACTIVE SCDS are considered candidates for this RECYCLE command.

PV

=*nnn* An optional keyword indicating the valid data threshold to be used in determining whether a volume is a candidate for RECYCLE. Full tape volumes that have a percentage of valid data less than or equal to *nnn* are candidates for RECYCLE. If PV=*nnn* is not specified, the percent valid to be used to determine RECYCLE candidates is derived from the PERCENTVALID default value as defined through the SETOAM command in the CBROAMxx PARMLIB member. Valid values for *nnn* are 0 to 100.

DISPLAY

An optional parameter that produces a list of volumes that meet criteria to be recycle candidates. This list is sorted by the percentage of valid data on each volume and is written to hardcopy system log through the CBR9875I message. This option does not initiate Recycle processing, and can be issued at anytime, whether a RECYCLE command is actively processing or not. The list of candidate volumes might be large as it shows all volumes that meet the user-specified criteria for RECYCLE.

If DISPLAY is not specified then LIM=yy must be specified.

LIM

=*yy* If the DISPLAY parameter is not specified, this keyword is required to indicate the maximum number of volumes to be selected for RECYCLE processing. Valid values for *yy* are 1 to 40.

If LIM=*yy* is not specified, then DISPLAY must be specified

Starting the Storage Management Cycle

You can use the OAM START command to start the storage management cycle for all Object storage groups in the active configuration or for an individual Object or Object Backup storage group.

Starting the Storage Management Cycle for All Storage Groups

To start the OSMC storage management cycle for all Object or Object Backup storage groups:

1. Enter the following command:

```
F OAM,START,OSMC
```

2. The system issues the following message:

```
CBR1000I OAM START command execution scheduled.
```

3. The system issues the following messages on the console that pertain to the storage management cycle:

```
CBR9018I OSMC starting Storage Management Cycle.

CBR9200I Object Processing starting for storage group xxxxx01.

CBR9370I OSMC Detail for taskname:

          READ   READ   READ  WRITE  WRITE
          DASD    OPT   TAPE   DASD    OPT
WORK Q: aaaaaa bbbbbb cccccc dddddd eeeeee
WAIT Q:        jjjjjj kkkkkk        llllll
DONE:   qqqqqq rrrrrr ssssss tttttt uuuuuu

         WRITE   WRITE   WRITE    DIR
          TAPE BACKUP1 BACKUP2  UPDTS
WORK Q: ffffff  gggggg  hhhhhh iiiiii
WAIT Q: mmmmmm  nnnnnn  oooooo pppppp
DONE:   vvvvvv  wwwwww  xxxxxx yyyyyy
End of Display Detail

CBR9201I Object Processing completed for storage group xxxxx01.

CBR9500I Shelf Manager started optical processing for storage group xxxxx01.

CBR9501I Shelf Manager completed optical processing for storage group xxxxx01.
0 cartridges selected. Detailed messages for each volume will be written to
hardcopy log.

CBR9500I Shelf Manager started tape processing for storage group xxxxx01.

CBR9501I Shelf Manager completed tape processing for storage group xxxxx01.
0 cartridges selected. Detailed messages for each volume will be written to
hardcopy log.

CBR9048I Storage Group xxxxx01 has successfully completed processing.

CBR9200I Object Processing starting for storage group xxxxx12.

CBR9370I OSMC Detail for taskname:

          READ   READ   READ  WRITE  WRITE
          DASD    OPT   TAPE   DASD    OPT
WORK Q: aaaaaa bbbbbb cccccc dddddd eeeeee
WAIT Q:        jjjjjj kkkkkk        llllll
DONE:   qqqqqq rrrrrr ssssss tttttt uuuuuu

         WRITE   WRITE   WRITE    DIR
          TAPE BACKUP1 BACKUP2  UPDTS
WORK Q: ffffff  gggggg  hhhhhh iiiiii
WAIT Q: mmmmmm  nnnnnn  oooooo pppppp
DONE:   vvvvvv  wwwwww  xxxxxx yyyyyy
End of Display Detail

CBR9201I Object Processing completed for storage group xxxxx12.

CBR9500I Shelf Manager started optical processing for storage group xxxxx12.

CBR9501I Shelf Manager completed optical processing for storage group xxxxx12.
0 cartridges selected. Detailed messages for each volume will be written to hardcopy log.

CBR9048I Storage Group xxxxx12 has successfully completed processing.

CBR9009I OSMC completed its Storage Management Cycle.  12 tasks started.
         12 tasks completed.
```

If errors occur during the storage management process, additional messages might be issued, such as message CBR9049I to indicate unsuccessful completion.

Starting the Storage Management Cycle for an Individual Storage Group

To start the OSMC storage management cycle for an individual Object or Object Backup storage group:

1. Enter the following command:

```
F OAM,START,STORGRP,storage-group-name
```

2. The system issues the following set of messages for the storage group:

```
CBR1000I OAM START command execution scheduled.
CBR9500I Shelf Manager has started optical processing for storage group
storage-group-name.

CBR9501I Shelf Manager completed optical processing for storage group
storage-group-name. n cartridges selected.
Detailed messages for each volume will be written to hardcopy.

CBR9500I Shelf Manager has started tape processing for storage group
storage-group-name.

CBR9501I Shelf Manager completed tape processing for storage group
storage-group-name. n cartridges selected.
Detailed messages for each volume will be written to hardcopy.

CBR9048I Storage Group storage-group-name has successfully completed processing.
```

3. If the shelf manager selects volumes for expiration, CBR9501I has a value for *n* cartridges. OAM issues more detailed messages for each volume directly to the hardcopy log.

If errors occur during the storage management process for a storage group, additional messages might be issued, such as message CBR9049I to indicate unsuccessful completion.

The following is a sample of the F OAM,START,STORGRP command:

```
CBR1000I OAM START command execution scheduled.
CBR9500I Shelf Manager has started optical processing for storage group IMAFIRST.
CBR9501I Shelf Manager completed optical processing for storage group IMAFIRST.
1 cartridges selected. Detailed messages for each volume will be written to hardcopy.

CBR9500I Shelf Manager has started tape processing for storage group IMAFIRST.
CBR9501I Shelf Manager completed tape processing for storage group IMAFIRST.
0 cartridges selected. Detailed messages for each volume will be written to hardcopy.

CBR9048I Storage Group IMAFIRST has successfully completed processing.
CBR2154I Volumes RG589A and RG589B will be reinitialized on their next mount and will
remain assigned to storage group IMAFIRST.
```

Starting the Library Space Management Cycle

Starting the library space management cycle ejects the least-recently-written or the least-recently-mounted optical disk from the optical library. This command requires that the OAM system, on which the command was entered, control the requested library. If the member name associated with the optical library specified on this command is not the member name for this instance of OAM, the command fails and message CBR1068I is issued.

If you specified the Least-Recently-Mounted (LRM) parameter on the EJECT keyword of the OAM procedure statement, the library space management cycle ejects the least-recently-mounted optical disk from the optical library.

You can start the OSMC library space management cycle:

- Manually, by entering the START command. Use the START command if the library is full or if scratch volumes are needed in the library.
- Automatically, when OAM cannot locate a library-resident optical volume on which to write an object and the following conditions are met:
  - For the storage group:
    - There are no library optical volumes or
    - Those residing in the library are not usable at this time.
  - There are no scratch volumes in the optical library.
  - The library is full.

To start the OSMC library management cycle:

1. Enter the following command:

```
F OAM,START,LIBMGT,library-name
```

2. The system issues the following messages:

```
CBR1000I OAM START command execution scheduled.
CBR9400I Library Space Manager starting for library library-name.
```

3. If a shelf location has not been previously specified for the optical disk being ejected, the system issues the following message and waits for a reply:

```
CBR2600A Specify shelf location for volumes volser1 and volser2.
```

4. Provide 1 to 32 characters of shelf information.

   If the optical volume being ejected does not already have a valid pseudo library associated with it, or the library from which the volume was ejected does not have a default pseudo library in its definition, the system issues message CBR2602A or message CBR2603A, or both:

```
CBR2602A Eject pending for volser in r-library-name. Default pseudo
         library is p-library-name. Reply 'U' to use, or 'R' to respecify.
```

```
CBR2603A Specify pseudo library name for volume volser.
```

If the volume being ejected has an invalid pseudo library associated with its volume record and the library from which the volume is being ejected has a default pseudo library in its SCDS definition, message CBR2602A is issued. This message asks if the default is to be used or if another pseudo library name is requested.

If the library from which the volume is being ejected does not have a default pseudo library in its SCDS definition, or the operator replied with "R" to message CBR2602A, the system issues message CBR2603A. This message requests a pseudo library name to assign the volume to when it becomes shelf resident.

If a pseudo library name specified in response to message CBR2603A is not valid in the current active control data set (ACDS), or the volume record has an invalid pseudo library name associated with it, the system issues messages CBR2604I and CBR2603A:

```
CBR2604I Volume volser cannot be assigned to pseudo library p-library-name, it
         is not a valid pseudo library definition in the active SMS configuration.
CBR2603A Specify pseudo library name for volume volser.
```

The system puts the optical disk cartridge in the input/output station and issues the following messages:

```
CBR3122I Volumes volser1 and volser2 were ejected from library library-name
         shelf location is shelfloc.

CBR3001A Remove cartridge from I/O station on library library-name.  Place in
         shelf location shelfloc.
```

---

5. Remove the optical disk cartridge from the input/output station of the specified optical library and return it to the shelf location indicated.

```
CBR9401I Library Space Manager completed for library library-name. n optical
         disks ejected.
```

If any errors occur during the library space management cycle, additional messages might be issued identifying the error, and message CBR9401I is not issued.

Related reading: Use LookAt or see *MVS System Messages*. For a description of LookAt, see "Using LookAt to look up message explanations" on page xii.

Starting the DASD Space Management Cycle for an Individual Storage Group

Use DASD space management to do the following:

- Select objects that require processing.
- Determine if they have expired by examining the objects' explicit expiration date or examining the objects' management class information.
- Physically delete data for expired objects on DASD and on rewritable optical disks.
- Remove the object directory entry (indicating volume serial number and sector location and other object information) for the expired object.

To start DASD space management:

1. Enter the following command:

```
F OAM,START,DASDSM,storage-group-name
```

2. The system issues the following messages:

```
CBR9300I DASD Space Management starting for storage group storage-group-name.

CBR9301I DASD Space Management completed for storage group storage-group-name.
```

3. The following message appears if OAM is having some major problems and cannot perform DASD space management on a storage group. This message would be preceded by other CBR*xxxx*I messages:

```
CBR9043I DASD Space Manager not started for storage-group-name.
```

If any errors occur during the DASD space management cycle, additional messages might be issued identifying the error, and message CBR9043I is not issued.

Note: If OAM detects that an object storage table or an object directory is unable to extend its storage during normal processing of objects using the OSREQ application interface, DASD space management is automatically started for that storage group. If the table that runs out of extents is the object directory, all object stores to that storage group fail until more space is made available to the object directory for the storage group. DASD space management is started automatically in this instance so that subsequent stores to the storage group might have improved chances of storing successfully.

Related reading: Use LookAt or see *MVS System Messages*. For a description of LookAt, see "Using LookAt to look up message explanations" on page xii.

Starting the OAM Volume Recovery Utility

You can use the Volume Recovery utility to perform the following tasks:

Subtask	Associated procedure (see . . .)
Recover tape volumes or optical disks.	"Starting a Recovery for an Optical or Tape Volume"
Delete a recovered tape or optical volume from the OAM inventory.	"Deleting a Recovered Tape or Optical Volume" on page 284

Use the Volume Recovery utility to recover objects that reside on an unusable optical or tape volume. It does not recover objects to DASD volumes. The utility only retrieves copies of the objects that are stored on DASD to recover them to optical or tape volumes when recovering an Object Backup volume.

Typically, some of the objects are recovered to the Object or Object Backup storage group volume that is currently being written, and the rest of the objects are recovered to the next assigned Object or Object Backup storage group volume. If there are two backup copies of the object, you can indicate which copy of the object (first or second backup copy) is used in the recovery by indicating BACKUP1 or BACKUP2 on the RECOVERY command.

Related reading: For more information on the Volume Recovery utility, see "Recovering an Entire Optical Cartridge or Tape Volume" on page 223.

Starting a Recovery for an Optical or Tape Volume

The following fragment shows the syntax for the RECOVERY command. For the complete syntax for all F OAM,START commands, see page 269.



To recover an optical or tape volume:

1. Enter the following RECOVERY command:

```
F OAM,START,RECOVERY,volser,BACKUP1
```

   where *volser* is the volume serial number of one of the volumes that is being recovered.

   If more than one backup copy of the objects exists, you can select whether to use the first or second backup copy for the recovery by specifying BACKUP1 or BACKUP2 on the F OAM,START,RECOVERY command. If you omit BACKUP1 and BACKUP2, OAM recovers the first backup copy of the object by default.

   To recover a primary volume, all of the backup volumes containing backup copies of the object on the primary volume are needed whether they are optical or tape. Also, to recover a backup volume, *each* Object storage group must be searched for objects which have a backup copy on the backup volume to be recovered. For each of these objects, the primary copy is used to recover the backup volume. The primary copy of these objects could be on DASD,

optical, or tape. The Volume Recovery utility must identify the optical and tape volumes that are needed for the recovery.

Requirement: The RECOVERY command has the following requirements:

- The optical or tape volume that is specified on the command is not controlled by another OAM within the OAMplex.
- Unmounted shelf-resident volumes must be available to the instance of OAM on which the command was entered.

If the member name associated with the optical or tape volume serial number specified on this command is not the member name for this instance of OAM, the command fails. OAM issues message CBR1068I.

---

2. The system issues the following messages:

```
CBR1000I OAM START command execution scheduled.

CBR9800I  OAM Volume Recovery starting for volumes volser1 and volser2.

CBR9827I  OAM Volume Recovery. The following TAPE volumes are needed
          for recovery: volser1 volser2 volser3 volser4 volser5
          volser6 volser7 volser8 volser9

CBR9824I  OAM Volume Recovery. The following OPTICAL volumes are needed
          for recovery: volser1 volser2 volser3 volser4 volser5
          volser6 volser7 volser8 volser9.
```

Message CBR9800I indicates that volume recovery has started for volumes *volser1* and *volser2*. In situations where a tape volume is being recovered, *volser2* is labeled as **N/A**.

Message CBR9824I gives you a list of optical volumes to retrieve that are identified by *volser-n*. This message allows you to get the optical volumes that are needed for recovery processing.

Message CBR9827I gives you a list of tape volumes to retrieve that are identified by *volser-n*. This message allows you to get the tape volumes that are needed for recovery processing.

---

3. For the volumes listed in messages CBR9827I and CBR9824I, the system issues the following message:

```
CBR9810D  Reply 'QUIT' to terminate or 'GO' to proceed with recovery.
```

---

4. If all the volumes are not available, reply QUIT to terminate recovery, and start again when the volumes have been retrieved.

If you reply QUIT to CBR9810D, the system issues the following messages:

```
CBR9862I Volume Recovery status for volumes volser1 and volser2 is not available.
CBR9819I OAM Volume Recovery is ending for volumes volser1 and volser2
```

5. If the volumes are available, reply GO to CBR9810D.

6. The system issues the following message for each optical volume listed in message CBR9824I:

```
CBR4400A Mount volume volser on drive drive-name.  Shelf location is shelfloc.
```

7. The system issues the following message for each tape volume that is listed in the message CBR9827I:

```
IEC501A M drive-Addr,volser,label,,,,data_set_name.
```

Message CBR9824I might identify volumes that are either library-resident or shelf-resident optical volumes. The system automatically mounts the library-resident optical volumes; therefore, a mount message is not issued for them. The mount message CBR4400A requests only shelf-resident optical volumes for recovery.

8. Mount the optical volume that is identified by *volser* in message CBR4400A and any tape volumes identified by *volser* in message IEC501A.

   When recovery is complete, the system issues the following message:

```
CBR9819I OAM Volume Recovery is ending for volumes volser1 and volser2
```

The following is a sample of the F OAM,START,RECOVERY,*volser* command:

```
F OAM,S,RECOVERY,WG360A,BACKUP2

CBR1000I OAM S command execution scheduled.
CBR9800I OAM Volume Recovery starting for volumes WG360A and WG360B.
CBR9827I OAM Volume Recovery.
The following TAPE volumes are needed for recovery:
 TNN005
CBR9824I OAM Volume Recovery.
The following OPTICAL volumes are needed for recovery:
 WG688A
CBR9810D Reply 'QUIT' to terminate or 'GO' to proceed with recovery.

If you reply GO, the system issues the following messages:

CBR9852I Volume Recovery Utility processing objects in storage group GROUP22
         for volume WG360A.
IEC501A M 1D04,TNN005,SL,COMP,OAM,OAM,OAM.BACKUP2.DATA
CBR4401I Volume WG830B mounted on drive P9D3.
CBR9863I Volume Recovery status for volumes WG360A and WG360B.
  Total: 5, Attempted: 5, Successful: 5, Unsuccessful: 0.
CBR9819I OAM Volume Recovery is ending for volumes WG360A and WG360B.

If you reply QUIT, the system issues the following messages:

CBR9862I Volume Recovery status for volumes WG360A and WG360B is not available.
CBR9819I OAM Volume Recovery is ending for volumes WG360A and WG360B.
```

If any errors occur during the volume recovery process, additional messages might be issued identifying the errors.

Message CBR9863I provides statistics for volume recovery status. The statistics include: Total, Attempted, Successful, and Unsuccessful. These statuses have the following meanings:

Total The total number of objects found on *volser1* and *volser2*

Attempted The total number of objects for which processing has begun in this utility for *volser1* and *volser2*

Successful The total number of objects successfully recovered for *volser1* and *volser2* and written to other volumes

Unsuccessful The total number of attempted objects for which processing has begun in this utility, but which were not successfully recovered for *volser1* and *volser2*. This number represents the number of objects that started processing but did not complete successfully.

The text of the message follows:

```
CBR9863I Volume Recovery status for volumes volser1 and volser2.
         Total: total, Attempted: attempted, Successful: successful
         Unsuccessful: unsuccessful
```

If you attempt to recover a primary volume that does not contain backup copies of the objects, OAM issues message CBR9864I and cancels the volume recovery.

```
CBR9864I None of the objects on volume volser have {first | second} backup copies
available for recovery.
```

Related reading: For a description of the messages, use LookAt or see *z/OS MVS System Messages, Vol 4 (CBD-DMO)*. For a description of LookAt, see "Using LookAt to look up message explanations" on page xii.

Statistics Provided by the Volume Recovery Utility

The Volume Recovery utility allows you to recover backup tape volumes.

Normal Completion of Recovery of a Backup Tape Volume: Figure 25 shows recovery of a backup tape volume from the primary objects that reside on both tape and optical volumes. Recovery completion is normal. Twelve first backup copies of objects were identified as residing on the backup volume. All 12 backup objects are successfully recovered from the primary objects.

```
F OAM,S,RECOVERY,CMW008

   CBR1000I OAM S command execution scheduled.
   CBR9800I OAM Volume Recovery starting for volumes CMW008 and N/A.
   CBR9827I OAM Volume Recovery.
            The following TAPE volumes are needed for recovery:
            CMW006
   CBR9824I OAM Volume Recovery.
            The following OPTICAL volumes are needed for recovery:
            WG488A WG488B *38
   CBR9810D Reply 'QUIT' to terminate or 'GO' to proceed with recovery.
            R 38,GO
   IEE600I  REPLY TO 38 IS;GO
   CBR9852I Volume Recovery Utility processing objects in storage group
            GROUP28 for volume CMW008.
   IEC501A  M 1D18,CMW006,SL,COMP,OAM,OAM,OAM.PRIMARY.DATA
   IEC501A  M 1D19,CMW004,SL,COMP,OAM,OAM,OAM.BACKUP.DATA
   CBR4401I Volume WG488A mounted on drive P15D2.
   CBR4401I Volume WG488B mounted on drive P15D2.
   CBR9863I Volume Recovery status for volumes CMW008 and N/A. Total: 12,
            Attempted: 12, Successful: 12, Unsuccessful: 0.
   CBR9819I OAM Volume Recovery is ending for volumes CMW008 and N/A.
```

Figure 25. Example of a Normal Completion of Recovery of a Backup Tape Volume

Normal Completion of Recovery of an Optical Volume without All Backup Copies: Figure 26 on page 283 shows recovery of a primary optical volume using the first backup copies of the objects. There are a total of 14 primary objects on the optical volume and its opposite side, but only 12 of the objects have a backup copy. Therefore, only 12 of the objects are successfully recovered.

Because all 12 objects were successfully recovered from the first backup copies of the primary objects, message CBR9863I indicates that zero objects were unsuccessfully recovered. The "Unsuccessful" field represents only the number of objects that the Volume Recovery utility attempted and failed to recover.

```
F OAM,S,RECOVERY,WG310B,BACKUP1

   CBR1000I OAM S command execution scheduled.
   CBR9800I OAM Volume Recovery starting for volumes WG310B and WG310A.
   CBR9827I OAM Volume Recovery.
            The following TAPE volumes are needed for recovery:
            CMW004 *43
   CBR9810D Reply 'QUIT' to terminate or 'GO' to proceed with recovery.
            R 43,GO
   IEE600I  REPLY TO 43 IS;GO
   CBR9852I Volume Recovery Utility processing objects in storage group
            GROUP28 for volume WG310B.
   CBR9864I A total of 2 objects on volumes WG310B and WG310A do not have a
            first backup copy.
   CBR9103I An error occurred during storage management processing for
            collection GROUP28, object GROUP28.C120.H40. The return code is
            00000008 and the reason code is 00000424.
   IEC501A  M 1D19,CMW004,SL,COMP,OAM,OAM,OAM.BACKUP.DATA
   CBR9863I Volume Recovery status for volumes WG310B and WG310A. Total:
            14, Attempted: 12, Successful: 12, Unsuccessful: 0.
   CBR9819I OAM Volume Recovery is ending for volumes WG310B and WG310A.
```

Figure 26. Example of a Normal Completion of Recovery of an Optical Volume without All Backup Copies

Limited Completion of Recovery of a Backup Volume Due to Error Condition: Figure 27 on page 284 shows the recovery of a backup volume from primary objects that reside on both tape and optical volumes. A total of 24 objects were identified as residing on the backup volume. The Volume Recovery utility attempted to recover the first 17 objects. However, the utility could not process recovery for these 17 objects because a dynamic allocation failure occurred for the tape drive.

Because the Volume Recovery utility cannot determine if any of the objects were successfully recovered before the failure occurred, the system issues message CBR9862I indicating limited recovery for the volume. The “Successful” and “Unsuccessful” fields in message CBR9863I show statistics of zero.

```
F OAM,S,RECOVERY,CMW004

   CBR1000I OAM S command execution scheduled.
   CBR9800I OAM Volume Recovery starting for volumes CMW004 and N/A.
   CBR9827I OAM Volume Recovery.
            The following TAPE volumes are needed for recovery:
            CMW006
   CBR9824I OAM Volume Recovery.
            The following OPTICAL volumes are needed for recovery:
            WG310B WG488A WG488B *42
   CBR9810D Reply 'QUIT' to terminate or 'GO' to proceed with recovery.
            R 42,GO
   IEE600I  REPLY TO 42 IS;GO
   CBR9852I Volume Recovery Utility processing objects in storage group
            GROUP28 for volume CMW004.
   IEC501A  M 1D18,CMW006,SL,COMP,OAM,OAM,OAM.PRIMARY.DATA
   CBR6425I OAM tape drive dynamic allocation failure for object
            GROUP28.C120.H05 in collection GROUP28 in storage group IMAFIRST on
            tape volume CMW008.
   IEF234E  K 1D19,CMW004,PVT,OAM,OAM
   IEF234E  K 1D18,CMW006,PVT,OAM,OAM
   IEC501A  M 1D18,CMW008,SL,COMP,OAM,OAM,OAM.BACKUP.DATA
   CBR9862I Volume Recovery status for volumes CMW004 and N/A is limited.
   CBR9863I Volume Recovery status for volumes CMW004 and N/A. Total: 24,
            Attempted: 17, Successful: 0, Unsuccessful: 0.
   CBR9819I OAM Volume Recovery is ending for volumes CMW004 and N/A.
```

Figure 27. Example of a Limited Completion of Recovery of a Backup Volume Due to Error Condition

Deleting a Recovered Tape or Optical Volume

The DELETE option on the RECOVERY command removes the specified tape volume or optical platter from the OAM inventory after it has been recovered successfully.

1. Enter the following RECOVERY command:

```
F OAM,START,RECOVERY,volser,DELETE
```

   where *volser* is the volume serial number of a tape or optical volume recovery that is in progress.

---

2. The system issues the following messages:

```
CBR1000I OAM START command execution scheduled.
CBR9800I OAM Volume Recovery Delete starting for volumes volser1 and volser2.
CBR9824I OAM Volume Recovery.
The following OPTICAL volumes are needed for recovery:
volser1 volser2 volser3 volser4 volser5
volser6 volser7 volser8 volser9.
CBR9810D Reply 'QUIT' to terminate or 'GO' to
proceed with recovery.
```

---

3. If the volumes are available, reply GO to CBR9810D. Otherwise, reply QUIT to CBR9810D.

---

4. If you have specified the DELETE option on the Volume Recovery command for an optical volume, the hardcopy log displays the following additional message:

```
CBR2153I All objects on volumes volser1 and volser2 have expired,
shelf location shelfloc.
```

If you have specified the DELETE option on the Volume Recovery command for an object tape volume, the hardcopy log displays the following additional message:

```
CBR2165I Tape volume volser has had all objects expired or deleted and
can be returned to the MVS scratch pool.
```

You can use message CBR2165I to notify the tape management system that the volume can be returned to MVS scratch status.

After you delete a recovered volume, it is no longer available to any of the OAM members in the OAMplex. OAM removes the information about the tape or optical volume from the OAM inventory. The rows that are associated with these volumes are deleted from the TAPEVOL or VOLUME table in DB2. Library-resident optical volumes are ejected from the library.

The following is a sample of the F OAM,START,RECOVERY,DELETE command:

```
F OAM,START,RECOVERY,R8009A,DELETE

CBR1000I OAM START command execution scheduled.
CBR9800I OAM Volume Recovery Delete starting for volumes R8009A and R8009B.
CBR9824I OAM Volume Recovery.
The following OPTICAL volumes are needed for recovery:
R8003A R8033A R8042A W8003B
*15 CBR9810D Reply 'QUIT' to terminate or 'GO' to
proceed with recovery.
         15,go
IEE600I REPLY TO 15 IS;GO

CBR9825I Volume Recovery utility processing objects in
storage group GROUP94 for volume R8009A.
CBR4401I Volume R8003A mounted on drive P8XBD1.
CBR2200I Scratch volumes R8028B and R8028A added to
storage group GROUP94.
CBR9863I Volume Recovery status for volumes R8009A and R8009B.
Total: 130, Attempted: 57, Successful: 57, Unsuccessful: 0.
CBR9819I OAM Volume Recovery is ending for volumes R8009A and R8009B.
```

Related reading:

- For more information about these system messages, see *z/OS MVS System Messages, Vol 4 (CBD-DMO)*, or use LookAt.

Starting Object Recovery for Single Objects

OAM contains a Single Object Recovery utility for recovering a single object from an optical or tape volume. The system uses a backup copy of the object (either on optical or tape), if any exist. The backup copy that is used for the recovery can reside either on tape or optical media. If more than one backup copy of the object exists, you can select whether to use the first or second backup copy of the object for the recovery by specifying BACKUP1 or BACKUP2 on the F OAM,START,OBJRECV command. A new primary copy of the object is written

to the same Object storage group and same media type (optical, tape, or DASD) as the original object. The following are examples of how single object recovery works:

- If the primary object resides on optical disk, the backup copy that is selected for the recovery (on either optical disk or tape) creates a new optical primary copy.
- If the primary object resides on tape, the backup copy that is selected for the recovery (on either optical disk or tape) creates a new tape primary copy.
- If the primary object resides on DASD, the backup copy (on either tape or optical disk) creates a new DASD primary copy.

To recover a single object:

1. Enter the following command:

```
F OAM,START,OBJRECV,collection-name,object-name,BACKUP1|BACKUP2
```

2. The system issues the following message:

```
CBR1000I OAM START command execution scheduled.
```

3. If the backup volume is an optical volume and does not reside in an optical library, the system issues the following message:

```
CBR4400A Mount volume volser on drive drive-name. Shelf location is shelfloc.
```

4. If the backup volume is a tape volume, the system issues the following message:

```
IEC501A M drive-Addr,volser,label,,,,data_set_name.
```

5. Mount the optical volume or tape volume that is identified by *volser*.

6. When recovery is complete, the system issues the following message:

```
CBR9830I Single Object Recovery complete for collection collection-name,
         object object-name.
```

The following is a sample of the F OAM,START,OBJRECV command:

```
F OAM,START,OBJRECV,GROUP22,GROUP22.IDVT.H11,BACKUP2

CBR1000I OAM START command execution scheduled.
CBR4401I Volume WG688A mounted on drive P9D1.
CBR4401I Volume WG360A mounted on drive P9D2.
CBR9830I Single Object Recovery complete for
collection GROUP22, object  GROUP22.IDVT.H11.
```

If any errors occur during the single object recovery process, additional messages might be issued identifying the errors.

Related reading: For descriptions of these messages, use LookAt or see *MVS System Messages*. For a description of LookAt, see "Using LookAt to look up message explanations" on page xii.

Starting the Tape Recycle Utility

The following example shows a **F OAM,START,RECYCLE** command with display and *percentvalid* specified, indicating that the result shows volumes that meet criteria of scope and *percentvalid*, but these volumes will not be processed.

```
F OAM,S,RECYCLE,(ALLGRP),PV=20,DISPLAY
CBR9880I OAM START RECYCLE command starting.
CBR9875I Recycle Candidates: 936
The following volumes are candidates for OAM RECYCLE command
processing using pv=20, lim=N/A, scope=(ALLGRP), maxrecycletasks=15.
  VOLSER  %VAL  SGNAME   STAT   VOLSER   %VAL  SGNAME   STAT
  CMW212     0  GROUP07         CMW215      0  GROUP04
  CMW250     5  GROUP17         CMW238     10  GROUP12
  CMW222    15  GROUP00         CMW237     19  GROUP22
  CMW233    20  GROUP02         CMW242     20  GROUP10
  CMW281    20  GROUP81         CMW711     20  GROUP36
CBR9879I OAM Recycle: End of OAM Recycle candidate volumes.
CBR9881I OAM START RECYCLE command ending successfully. Reason is
display specified.
```

The following example shows a **F OAM,START,RECYCLE** using LIM = along with *scope*, indicating that these volumes will be processed:

```
F OAM,S,RECYCLE,(ALLGRP),LIM=16
CBR9880I OAM START RECYCLE command starting.
CBR9875I Recycle Candidates: 943
The following volumes are candidates for OAM RECYCLE command
processing using pv=100, lim=16, scope=(ALLGRP), maxrecycletasks=15.
  VOLSER  %VAL  SGNAME   STAT   VOLSER  %VAL  SGNAME   STAT
  CMW210     0  GROUP07         CMW217     0  GROUP04
  CMW223     0  GROUP00         CMW235     0  GROUP12
  CMW239     0  GROUP09         CMW241     0  GROUP10
  CMW283     0  GROUP01         CMW710     0  GROUP00
  CMW712     0  GROUP02         CMW714     0  GROUP08
  CMW716     0  GROUP05         CMW718     0  GROUP04
  CMW767    20  GROUP06         CMW769    50  GROUP04
  CMW782    67  GROUP03         CMW788    90  GROUP03
CBR9879I OAM Recycle: End of OAM Recycle candidate volumes.
.
...normal MOVEVOL processing messages for each volume processed
.
CBR9881I OAM START RECYCLE command ending successfully. Reason is limit
 reached.
```

Related reading: For descriptions of these messages, use LookAt or see *MVS System Messages*. For a description of LookAt, see "Using LookAt to look up message explanations" on page xii.

Starting the Move Volume Utility

The following fragment shows the syntax for the MOVEVOL command for the Move Volume utility. For the complete syntax for all F OAM,START commands, see page 269.

Use the OAM Move Volume utility to move (migrate) objects from a primary or backup source volume (a tape volume or one side of an optical disk) to one or more target volumes. You can optionally recycle or delete the source volume after moving the objects to the target volumes. Since WORM tape volumes cannot be rewritten from load point and cannot be recycled for reuse, the MOVEVOL command with the RECYCLE option specified is rejected for a WORM tape volume. The MOVEVOL command with no RECYCLE or with the DELETE option is allowed for WORM tape volumes.

Tip: The DELETE or RECYCLE options of the MOVEVOL command moves data on both sides of an optical volumes.

The F OAM,START,MOVEVOL command requires that the optical or tape volume specified on the command is either controlled by the instance of OAM on which the command was entered (not another OAM within the OAMplex), or if the volume is an unmounted shelf-resident volume, it must be available to the instance of OAM on which the command was entered. If the member name associated with the optical or tape volume serial number specified on this command is not blank or is not the member name for this instance of OAM, the command fails. OAM issues message CBR1068I.

Move Volume Scenarios

In this example, there are four Object storage groups, two primary volumes (A and B), and two backup volumes (C and D) as shown in Figure 28.

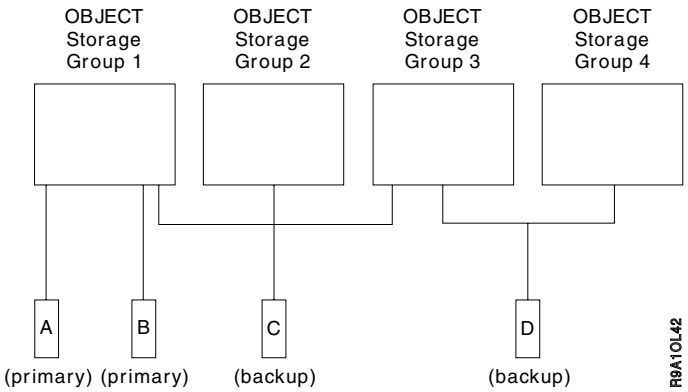

Figure 28. Object Storage Group and Volume Relationship

You *can* concurrently start the Move Volume utility in the following situations:

- A and D or B and D—A primary source volume and a backup source volume where the primary volumes containing the objects are in different Object storage groups. The Move Volume utility for primary source volume A only accesses objects in Object storage group 1, and the Move Volume utility for backup source volume D only accesses objects in Object storage groups 3 and 4.

The Move Volume utility *should not* be started concurrently for the following situations:

- A and B—Two primary source volumes in the same Object storage group. This scenario concurrently accesses objects in Object storage group 1 during the two Move Volume utilities processing primary source volumes A and B.
- A and C or B and C—A primary source volume and a backup source volume where the primary volumes containing the objects are in the same Object storage group. This scenario concurrently accesses objects in Object storage group 1 during the two Move Volume utilities processing primary source volume A and backup source volume C.
- C and D—Two backup source volumes where the primary volumes containing the objects are in the same Object storage group. This scenario concurrently accesses objects in Object storage group 3 during the two Move Volume utilities processing backup source volumes C and D.

Moving Objects from a Source Volume

To move objects from a source volume:

1. Issue the following MOVEVOL command:

```
F OAM,START,MOVEVOL,volser
```

   where *volser* is the volume serial of the source volume from which objects are to be moved.

---

2. The system issues the following messages:

```
CBR1000I OAM START command execution scheduled.

CBR9850I Move Volume Utility starting for volume volser.

CBR9858I Move Volume Utility status for volume volser. Total: total,
         Attempted: attempted, Successful: successful,
         Unsuccessful: unsuccessful.

CBR9859I Move Volume utility ending for volumes volser1 and volser2.
```

3. If any errors occur or contention exists due to concurrent processing, you must take appropriate actions to correct the errors or minimize contention. You can then re-invoke the Move Volume utility to continue moving objects from the source volume. See "Statistics Provided by the Move Volume Utility" on page 295 for examples of various conditions that can exist and the resulting statistics that the utility provides.

When the MOVEVOL command completes, all of the objects are moved to the target volumes and deleted from the source volume.

Attention: If you specified the Move Volume utility with the RECYCLE or DELETE option, the volume is automatically dispositioned (recycled or deleted). However, if you did not specify the RECYCLE or DELETE option, you must update the volume expiration date to ensure that OAM selects the volume for expiration processing. Use the F OAM,UPDATE,VOLUME command to update the EXPDATE field in the DB2 Volume or Tape Volume tables. For more information about this command, see "Updating Fields in the DB2 Volume Table and the Tape Volume Table" on page 377.

Recommendations for using the Move Volume utility:

1. For a given optical disk (consisting of two volumes), only one Move Volume utility (which moves data from one of the two volumes on the disk) or one Volume Recovery utility (which recovers data on both volumes on the disk) can be started for a disk, but not both.
2. For a give tape volume, only one Move Volume utility or one Volume Recovery utility can be started for the volume, but not both.
3. You cannot start the Move Volume utility concurrently for both volumes on an optical disk.
4. You cannot start the Move Volume utility for a volume that is on either side of an optical disk that is being recovered by the Volume Recovery utility.
5. You can start one or more Move Volume utilities only after determining that sufficient resources are available to the utility. Consider the resources required by other OSMC functions, such as the OSMC storage management cycle, which might run concurrently with the Move Volume utility.
6. To avoid contention, it is recommended that you do not start the Move Volume utility for multiple volumes that can cause concurrent references to objects in the same Object storage group. References to objects in the same Object storage group concurrently can occur when there are two primary source volumes in the same Object storage group, two backup source volumes where the primary

volumes containing the objects are in the same Object storage group, or any combination of the above. Figure 28 on page 288 illustrates these relationships.

7. If the member name associated with the optical or tape volser specified on the MOVEVOL command is not the member name for this instance of OAM or not blank, the command fails and the message CBR1068I is issued.

Moving Objects and Recycling the Source Volume

To recycle both sides of an optical platter or rewritable tape volume after moving the objects off of it:

1. Issue the following MOVEVOL command:

```
F OAM,START,MOVEVOL,volser,RECYCLE
```

   where *volser* is the volume serial of the source volume from which objects are to be moved.

---

2. The system issues the following messages:

```
CBR1000I OAM START command execution scheduled.

CBR9850I Move Volume Utility starting for volume volser.
CBR9852I Move Volume Utility processing objects in
storage group sgroup for volume volser.
CBR4401I Volume volser mounted on drive drive.
CBR2200I Scratch volumes volser1 and volser2 added to
storage group sgroup.
CBR9858I Move Volume Utility status for volume volser. Total: total,
         Attempted: attempted, Successful: successful,
         Unsuccessful: unsuccessful.

CBR9859I Move Volume utility ending for volumes volser1 and volser2.
```

When the MOVEVOL command completes, the source tape or optical cartridge is recycled using the parameters that are specified in the SETOAM TAPERECYCLEMODE statement or the SETOPT OPTICALREINITMODE statement in the CBROAM*xx* member of PARMLIB. You can reuse all of the space on rewritable optical media or tape volume. Although you cannot reclaim the previously used space on WORM optical media, you can reuse the remaining free space on the platter.

The following is a sample of the F OAM,START,MOVEVOL,*volser*,RECYCLE command:

```
F OAM,START,MOVEVOL,R8040A,RECYCLE

CBR1000I OAM START command execution scheduled.
CBR9800I OAM Move Volume Recycle starting for volumes R8040A and R8040B.
CBR9850I Move Volume Utility starting for volume R8040A.
CBR9852I Move Volume Utility processing objects in
storage group GROUP58 for volume R8040A.
CBR4401I Volume R8040A mounted on drive P8XAD3.
CBR2200I Scratch volumes R8005A and R8005B added to
storage group GROUP58.
CBR4401I Volume R8005A mounted on drive P8XAD2.
CBR9858I Move Volume Utility status for volume R8040A.
Total: 130, Attempted: 130, Successful: 130, Unsuccessful: 0.
CBR9850I Move Volume Utility starting for volume R8040B.
CBR9858I Move Volume Utility status for volume R8040B.
Total: 0, Attempted: 0, Successful: 0, Unsuccessful: 0.
CBR9859I Move Volume Utility ending for volumes R8040A and R8040B.
```

The following sections describe the completion messages.

Related reading:

- For more information about using the Move Volume utility with the RECYCLE option, see "Reusing Recycled Tape and Optical Volumes" on page 235.
- For more information about these system messages, see *z/OS MVS System Messages, Vol 4 (CBD-DMO)*, or use LookAt.

Recycle Completion Messages for Rewritable Tape Volumes: If you specify the MOVEVOL command with the RECYCLE option for a tape volume and the SETOAM TAPERECYCLEMODE statement specifies GROUP, the system issues the following message to the hardcopy log:

```
CBR2166I Tape volume volser has had all objects expired or deleted and
will remain assigned to storage group storage_group.
```

If you specify the MOVEVOL command with the RECYCLE option for a tape volume and the SETOAM TAPERECYCLEMODE statement specifies OAMSCRATCH, the system issues the following message to the hardcopy log:

```
CBR2164I Tape volume volser has had all objects expired or deleted and
has been returned to OAM scratch status.
```

If you specify the MOVEVOL command with the RECYCLE option for a tape volume and the SETOAM TAPERECYCLEMODE statement specifies MVSSCRATCH, the system issues the following message to the hardcopy log:

```
CBR2165I Tape volume volser has had all objects expired or deleted and
can be returned to the MVS scratch pool.
```

Recycle Completion Messages for Rewritable Optical Volumes: If you specify the MOVEVOL command with the RECYCLE option for a rewritable optical volume and the SETOPT OPTICALREINITMODE statement specifies GROUP, the system issues the following message to the hardcopy log:

```
CBR2154I Volumes volser1 and volser2 will be reinitialized on
their next mount and will remain assigned to storage group storage_group.
```

If you specify the MOVEVOL command with the RECYCLE option for a rewritable optical volume and the SETOPT OPTICALREINITMODE statement specifies OAMSCRATCH, the system issues the following message to the hardcopy log:

```
CBR2151I Volumes volser1 and volser2 will be reinitialized on
their next mount and have been returned to OAM scratch status.
```

Recycle Completion Messages for WORM Optical Volumes: If you specify the MOVEVOL command with the RECYCLE option for a WORM optical volume and the SETOPT OPTICALREINITMODE statement specifies GROUP, the system issues the following message to the hardcopy log:

```
CBR2170I Volumes volser1 and volser2 have completed reinitialization processing
and will remain assigned to storage group storage_group.
```

If you specify the MOVEVOL command with the RECYCLE option for a WORM optical volume and the SETOPT OPTICALREINITMODE statement specifies OAMSCRATCH, the system issues the following message to the hardcopy log:

```
CBR2169I Volumes volser1 and volser2 have completed reinitialization processing
and have been returned to OAM scratch status.
```

Moving Objects and Deleting the Source Volume

To delete both sides of an optical platter or tape volume from the OAM inventory after moving the objects off of it:

1. Issue the following MOVEVOL command:

```
F OAM,START,MOVEVOL,volser,DELETE
```

   where *volser* is the volume serial of the source volume from which objects are to be moved.

2. The system issues several messages, some of which are listed here:

```
CBR1000I OAM START command execution scheduled.

CBR9850I Move Volume Delete starting for volume volser.

CBR9858I Move Volume Utility status for volume volser. Total: total,
         Attempted: attempted, Successful: successful,
         Unsuccessful: unsuccessful.
 CBR9852I Move Volume Utility processing objects in
storage group sgroup for volume volser.
CBR9859I Move Volume utility ending for volumes volser1 and volser2.
```

3. If you have specified the DELETE option on the MOVEVOL command for a rewritable tape volume, the system issues the following message to the hardcopy log. This message displays only if all of the objects have been moved from the source cartridge:

```
CBR2165I Tape volume volser has had all objects expired or deleted and
can be returned to the MVS scratch pool.
```

If you have specified the DELETE option on the MOVEVOL command for a WORM tape volume, the system issues the following message to the hardcopy log. This message displays only if all the objects have been moved from the source cartridge:

```
CBR2173I WORM Tape volume volser has had all objects expired or deleted.
```

If you have specified the DELETE option on the MOVEVOL command for an optical platter, the system issues the following message to the hardcopy log. This message displays only if all of the objects have been moved from the source cartridge:

```
CBR2153I All objects on volumes volser1 and volser2 have expired,
shelf location shelfloc.
```

4. Follow the system prompts to remove the optical cartridge from the I/O station.

After the MOVEVOL command completes successfully, OAM deletes the tape or optical cartridge from the OAM inventory. Library-resident optical volumes are ejected from the library. After a volume has been deleted, it is no longer available to any of the OAM members in the OAMplex.

The following is a sample of the F OAM,START,MOVEVOL,*volser*,DELETE command:

```
F OAM,START,MOVEVOL,R8002A,DELETE

CBR1000I OAM START command execution scheduled.
CBR9800I OAM Move Volume Delete starting for volumes R8002A and R8002B.
CBR9850I Move Volume Utility starting for volume R8002A.
CBR9858I Move Volume Utility status for volume R8002A.
Total: 0, Attempted: 0, Successful: 0, Unsuccessful: 0.
CBR9850I Move Volume Utility starting for volume R8002B.
CBR9852I Move Volume Utility processing objects in
storage group GROUP92 for volume R8002B.
CBR2213I No space left in storage group GROUP92.

CBR2217E Enter an optical disk cartridge that is compatible with
DEFAULT MEDIA TYPE 3995 and write compatible with optical drive device
type 3995-SW4 into library P8XB to relieve the out of space condition
in storage group GROUP92.

CBR2550I Optical disk entry into library P8XA scheduled.
CBR4420I Volume table did not contain information for volume R8000B on drive P8XAD1.
CBR4420I Volume table did not contain information for volume R8000A on drive P8XAD1.
*22 CBR4432D Enter storage group name for volumes R8000B and R8000A,
or reply 'U' to assign to scratch.
         22,u
IEE600I REPLY TO 22 IS;U
CBR4401I Volume R8000B mounted on drive P8XAD1.
CBR2100I Volumes R8000B and R8000A entered into library P8XA.
CBR2200I Scratch volumes R8000B and R8000A added to
storage group GROUP92.
CBR9859I Move Volume Utility ending for volumes R8002A and R8002B.
CBR3001A Remove cartridge from I/O station on library P8XA. Place in shelf location ??????.
CBR3122I Volumes R8002B and R8002A were ejected from library P8XA,
shelf location is ??????.
```

If any errors occur while deleting a volume after MOVEVOL completes, OAM might issue additional messages to identify the errors.

Related reading:

- For more information about using the Move Volume utility with the DELETE option, see "Deleting Recycled Tape and Optical Volumes from OAM" on page 236.
- For more information about these system messages, see *z/OS MVS System Messages, Vol 4 (CBD-DMO)*, or use LookAt.

Statistics Provided by the Move Volume Utility

The following examples illustrate the messages that the Move Volume utility provides for a variety of conditions.

Normal Completion: Figure 29 shows an example of the messages when the Move Volume utility completes normally.

```
F OAM,START,MOVEVOL,WG360A

CBR1000I OAM S command execution scheduled.
CBR9850I Move Volume Utility starting for volume WG360A.
CBR9852I Move Volume Utility processing objects in storage group GROUP22
 for volume WG360A.
CBR4401I Volume WG360B mounted on drive P9D2.
CBR9858I Move Volume Utility status for volume WG360A. Total: 5,
Attempted: 5, Successful: 5, Unsuccessful: 0.
CBR9859I Move Volume Utility ending for volumes WG360A and N/A.
```

Figure 29. Example of Messages Returned after a Normal Completion of MOVEVOL

In this example, five objects were identified on the backup source volume and all five objects were successfully moved.

Notes:

1. 1 to *n* CBR9852I messages are issued (one for each Object storage group processed).
2. "Successful" and "Unsuccessful" counts always add up to the "Attempted" count on a normal completion.

Normal Completion with Contending System Activity: Figure 30 shows an example of the messages provided when the Move Volume utility completes normally, but the utility has detected that other system activity is contending with its processing.

```
F OAM,S,MOVEVOL,BACK01
CBR1000I OAM S command execution scheduled.
CBR9850I Move Volume utility starting for volume
         BACK01.
CBR9852I Move Volume utility processing objects in
         storage group GROUP00 for volume BACK01.
CBR9131I BACK01 CBRHDUPD attempted to update collection
         GROUP00.B, object GROUP00.AAAA.A.STO5.OBJ1 in
         storage group GROUP00. The directory entry
         for the object was already changed.
CBR9131I BACK01 CBRHDUPD attempted to update collection
         GROUP00.B, object GROUP00.AAAA.A.STO5.OBJ2 in
         storage group GROUP00. The directory entry
         for the object was already changed.
CBR9858I Move Volume utility status for volume BACK01.
         Total: 10, Attempted: 10, Successful: 8,
         Unsuccessful: 2.
CBR9859I Move Volume utility ending for volumes BACK01 and N/A.
```

Figure 30. Example of Messages Returned after a Normal Completion with Contention

In this example, 10 objects are identified on the backup source volume and all 10 objects were attempted to be moved; however, only 8 of the 10 attempted objects have been successfully moved. The remaining 2 of the 10 attempted objects have not been successfully moved due to contention with other system activity for those objects.

Limited Completion: Figure 31 on page 297 shows an example of the messages provided for "limited" completion of the Move Volume utility where the utility processing was not complete due to contention, errors, and so on.

```
F OAM,S,MOVEVOL,BACK01

CBR1000I OAM S command execution scheduled.
CBR9850I Move Volume utility starting for volume
         BACK01.
CBR9852I Move Volume utility processing objects in
         storage group GROUP00 for volume BACK01.
CBR9852I Move Volume utility processing objects in
         storage group GROUP01 for volume BACK01.
CBR9855I Move Volume utility processing limited for
         volume BACK01.
         Less objects than expected were found in
         collection GROUP01.A.
CBR9857I Move Volume utility status for volume BACK01
         is limited.
CBR9858I Move Volume utility status for volume BACK01.
         Total: 2, Attempted: 1, Successful: 0,
         Unsuccessful: 0.
CBR9859I Move Volume utility ending for volumes BACK01 and N/A.
```

Figure 31. Example of Messages Returned after a Limited Completion

In this example, two objects are identified on the backup source volume but only one object was moved. Because the utility cannot successfully complete due to a discrepancy in the number of objects in a collection being processed, the system cannot determine whether the one object that was attempted to be moved was successfully moved or not.

"Successful" and "Unsuccessful" counts are always zero when message CBR9857I indicates that the status is "limited".

Not Available Completion: Figure 32 shows an example of the messages provided for "not available" completion of the Move Volume utility where the utility processing is not complete due to contention, errors, and so on, and has not been able to determine the number of objects to be moved.

```
F OAM,S,MOVEVOL,BACK01

CBR1000I OAM S command execution scheduled.
CBR9850I Move Volume utility starting for volume
         BACK01.
CBR9089I No storage groups defined in the active
         configuration.
CBR9856I Move Volume utility stopping for volume
         BACK01.
CBR9857I Move Volume utility status for volume BACK01
         is not available.
CBR9859I Move Volume utility ending for volumes BACK01
and N/A.
```

Figure 32. Example of Messages Returned after a Not Available Completion

In this example, the utility cannot determine how many objects needed to be moved due to an error condition.

Message CBR9858I is *not* issued when message CBR9857I indicates that the status is "not available" since there are no statistics that can be reported.

Status of the Source Volume: The source volume is made ineligible for writing during the execution of the Move Volume utility. Unless you specified the DELETE option on the MOVEVOL command, you can reuse the source volume after the utility completes successfully. If you specified the DELETE option on the MOVEVOL command, the source volume is removed from the OAM inventory. If

you do not specify the RECYCLE or DELETE option on the MOVEVOL command, the source volume remains in its currently assigned Object or Object Backup storage group, and all volume record fields in the OCDB remain the same.

At the completion of the utility, the WRITABLE status of the source volume is restored to its previous state prior to the execution of the utility. In addition, every object that was moved is deleted from the source volume. The objects are logically deleted whereby OAM no longer maintains directory information on the former location of the object, and physically deleted on rewritable media to reclaim the space that was once occupied by the object.

Status of the Objects Following the Completion of the Utility: When the Move Volume utility completes, the OAM DB2 object directory table row for each object that was moved is updated to reflect the new object location. Additionally, each object is scheduled for processing during the next OSMC storage management cycle.

The next OSMC storage management cycle selects each object for processing, calculates the expiration date for the object, and updates the expiration date for the volumes on which the objects are written. As a result, you should expect an increase in the number of objects processed during the OSMC storage management cycle following the movement of objects.

Starting Automatic Access to Backup Copies of Objects

OAM can obtain a backup copy of an object if the primary copy of the object is resident on a removable media volume that is unavailable for any of the following reasons:

UNREAD Is marked unreadable (possibly due to damage or destruction).

OFFLINE Resides in a library that is or pending offline.

NOTOPER Resides in a library that is marked nonoperational.

DB2ERROR Encounters a DB2 error while attempting to retrieve the object data from the 4 KB or 32 KB object storage table.

ALL Is unavailable for any of the above reasons (nonspecific).

With the use of the access backup function, it is unnecessary for the application to specify the VIEW=BACKUP1 or VIEW=BACKUP2 parameter to obtain the backup copy of the object.

Automatic access to backup copies of objects must be active for one or all of the specific reasons before OAM attempts to obtain the backup copy.

Restriction: This access to backup is limited to retrieval requests that are issued by the OSREQ macro. OSMC does not support access to backup for moving objects from removable media to the DB2 tables.

Take the following actions to ensure the retrieval of backup copies of objects. These actions can be performed any time, even when access backup is already active:

- Make a physical inventory of the damaged removable media, noting the volumes residing on the unusable media.
- Repair or replace the hardware as required.
- Obtain all backup removable media volumes containing objects that are related to the objects on the damaged removable media.

- Restore all the OAM DB2 databases from the latest image copy and complete forward recovery through the most recent updates that are available.
- Use ISMF to make any necessary updates to the optical configuration database for any alterations or updates that are needed for your hardware configuration.
- Use the F OAM,UPDATE,VOLUME,*volser* command to alter the VOLUME table or Tape Volume table in the OCDB, changing the READABLE column value to "N" (NO) for each pair of volumes that is identified as residing on damaged (unreadable) media.

Performing one or more of these steps allows normal application processing to occur until object recovery operations restore the primary copies of objects.

Related reading: For more information on this function, see "Accessing Backup Objects Automatically" on page 225.

The following MVS command syntax starts the automatic access to backup copies function:

To start processing for the automatic access to backup copies function:

1. Enter the following command:

```
F OAM,START,AB,reason,BACKUP1 | BACKUP2
```

The following are valid values and descriptions for the *reason* keyword:

UNREAD UNREAD is the default. When a retrieve for an object is attempted and the optical or tape volume on which the object resides is marked not readable, the backup copy of the object is retrieved.

OFFLINE When a retrieve for an object is attempted and the optical or tape volume on which the object resides is in a library that is offline or pending offline, the backup copy of the object is retrieved.

NOTOPER When a retrieve for an object is attempted and the optical or tape volume on which the object resides is in a library that is marked nonoperational, the backup copy of the object is retrieved.

DB2ERROR If a DB2 error occurs while OAM is retrieving object data from the 4 KB or 32 KB object storage table and the first or second backup copy exists, OAM retrieves the object data from the backup copy. This function allows access to backup copies of objects that reside on removable media (optical or tape) when the DB2 resident data is unavailable, such as during the recovery of DB2 tables.

Restriction: The object directory entry is necessary for OAM to proceed with any object request. If a DB2 error occurs while OAM attempts to retrieve the object directory entry, OAM does

not retrieve the backup copy of the object. Without the object directory information, OAM cannot determine the primary or backup location of the object.

ALL When a retrieve for an object is attempted and the optical or tape volume on which the object resides is not available for any of the above reasons, the backup copy of the object is retrieved.

The following are the valid, optional options for the VIEW parameter:

BACKUP1 | BACKUP2
When a primary copy of an object that is read by an application is not available for the specified reason, and BACKUP1 is specified on the START command for automatic access to backup, an attempt is made to retrieve the object from the first backup copy of the object. If BACKUP2 is specified, an attempt is made to retrieve the object from the second backup copy of the object. BACKUP1 is the default if neither BACKUP1 nor BACKUP2 is specified.

---

2. The system issues the following message:

```
CBR1000I OAM START command execution scheduled.
```

---

3. Once the access backup processing starts, the system issues the following message:

```
CBR1090I OAM Access Backup processing started for reason
using the {1st | 2nd} backup copy.
```

Where *reason* can be one of the following values:
- UNREADABLE VOLUMES
- OFFLINE LIBRARIES
- NOT OPERATIONAL LIBRARIES
- DB2 OBJECT TABLE ERRORS

---

4. Access backup processing remains active until a STOP,AB,*reason* command is issued. The system issues the following message:

```
CBR1091I OAM Access Backup processing stopped for reason.
```

---

5. If access backup processing is active and the operator tries to issue another START,AB,*reason* command, the system issues the following message:

```
CBR1092I OAM Access Backup processing already started for reason
using the [first | second] backup copy.
```

The following is a sample of using the F OAM,START,AB command to retrieve the second backup copy of an object:

```
F OAM,START,AB,UNREAD,BACKUP2

CBR1000I OAM START command execution scheduled.
CBR1090I OAM Access Backup processing started for UNREADABLE VOLUMES using the
             2nd backup copy.
```

The following is a sample of using the F OAM,START,AB command to retrieve the first backup copy of an object:

```
F OAM,START,AB,UNREAD,BACKUP1

CBR1000I OAM START command execution scheduled.
CBR1090I OAM Access Backup processing started for UNREADABLE VOLUMES using the
         1st backup copy.
```

Note: Stopping OAM and starting OAM does not affect the status of automatic access to backup. If access to backup has been started and OAM is stopped, access to backup is active when OAM is started again.

Varying Optical Drives and Libraries

You can vary optical drives and optical libraries online or offline, which means that you can control whether the system can access the optical drive or optical library.

If a library or drive is varied online to an instance of OAM, no associated libraries or drives in the same 3995 subsystem can be online to any other instance of OAM in the OAMplex.

The vary offline command requires that the library or drive being taken offline be controlled by the OAM targeted for the vary request.

Tip: Changing the offline status of the optical library does not affect the online/offline status of the library-resident optical drives that are contained within the library. Use the VARY SMS command to vary an optical drive or optical library online or offline.

Varying an Optical Drive Online or Offline

Before OAM can allow a drive to be brought online to an instance of OAM, 3995 drive processing must verify that the drive is not online to another instance of OAM in the OAMplex, or that the OAM that controls the drive has terminated or does not have a valid XCF member defined.

Drive vary processing must check the status of the optical library to which this drive is physically attached. If this drive is brought online, the library where it resides must not be online to another OAM in the OAMplex. It also checks the status of all the other libraries associated with the drive and the drives associated with those libraries.

Drive vary processing must also check the status of other drives in the optical library to which this drive is attached. If this drive is brought online, no other drives in the library where the drive resides can be online to another instance of OAM in the OAMplex.

SMS validates the specified system ID that is targeted for the vary request; it also verifies that the specified drive is defined as connected to the target system ID in the ACDS.

The following SMS command syntax varies optical drives online and offline:

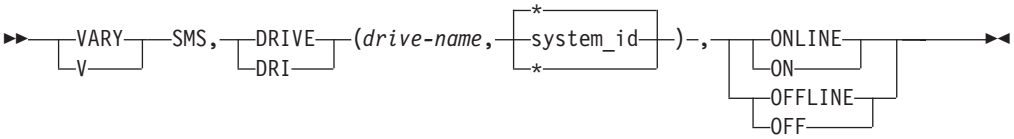

DRIVE(*drive-name***)**
Specifies the name of the optical drive to be varied online or offline. If the name is not specified or the specified drive is not defined in the SMS configuration, an error message is displayed.

* Indicates that the target of the drive vary request is the current OAM.

system-id
Specifies the MVS system that is the target of the vary request.

For optical drives, only one system ID can be specified.

ONLINE
Specifies that the optical drive is varied online.

OFFLINE
Specifies that the optical drive is varied offline.

Here is an example of the command to vary an optical drive online:

```
VARY SMS,DRIVE(drive-name,system-id),ONLINE
```

Here is an example of the command to vary an optical drive offline:

```
VARY SMS,DRIVE(drive-name,system-id),OFFLINE
```

Tip: You can demount an optical disk cartridge on an operator-accessible drive by varying the drive offline.

Varying a Real Optical Library Online or Offline

Before OAM can allow a library to be brought online to an instance of OAM, 3995 library processing verifies that the 3995 optical library is not online to another instance of OAM in the OAMplex, or that the OAM that owns the library is failed (the XCF member name is not defined or is no longer valid for the OAMplex).

Library vary processing must also check drive status of the optical drives that are physically attached to this library and make certain that the drives are not online to another instance of OAM, or that the OAM that controls the drive has

terminated or does not have a valid XCF member defined. It also checks the status of associated libraries and controller and the status of the drives in those libraries.

SMS validates the specified system ID targeted for the vary request, and verifies that the specified drive is defined as connected to the target system ID in the ACDS.

The following SMS command syntax varies optical libraries online and offline:

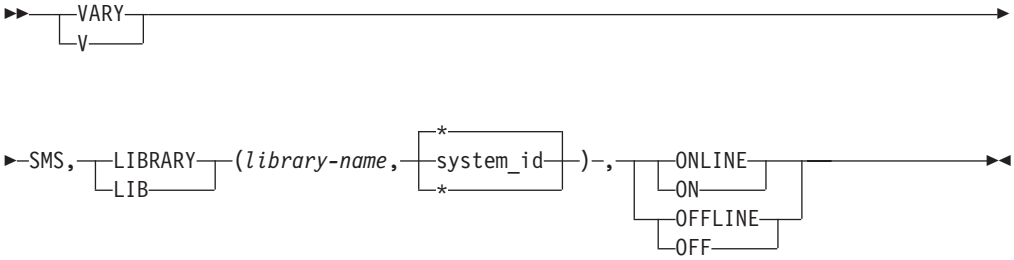

LIBRARY(*library-name***)**
Specifies the name of the real optical library that is varied online or offline. If the name is not specified or the specified library is not defined in the SMS configuration, an error message is displayed.

Restriction: Pseudo libraries cannot be varied online or offline. If a pseudo library name is used to attempt to vary a library online or offline, an error message is displayed.

system-id
Specifies the MVS system that is the target of the vary request.

For optical libraries, only one system ID can be specified.

* Indicates that the target for the library vary request is the current OAM system.

ONLINE
Specifies that the optical library is varied online.

OFFLINE
Specifies that the optical library is varied offline.

Recommendation: To change the system where an optical library is online, the library and drives must be first varied offline to the system where they are currently online. After you successfully bring the 3995 device addresses online to z/OS, you can vary online the optical library and drives to OAM.

Here is an example of the command to vary an optical library online:

```
VARY SMS,LIBRARY(library-name,system-id),ONLINE
```

Here is an example of the command to vary an optical library offline:

```
VARY SMS,LIBRARY(library-name,system-id),OFFLINE
```

Varying an optical library offline does not occur immediately if the drives are active or on the queue to be processed. The vary command activates immediately but does not complete until after the activity on the drives has completed. Once the library is pending offline, all library specific activity to that library fails. Write activity to a storage group that spans multiple libraries including the offline library is scheduled to one of the other libraries.

Entering an Optical Disk into an Optical Library

When OAM needs an additional optical disk volume to satisfy an out-of-space condition for a particular storage group which contains a real library, the following messages are displayed:

For 3995 libraries:

```
CBR2213I No space left in storage group storage-group-name.

CBR2217E Enter an optical disk cartridge that is compatible with the DEFAULT
         MEDIA TYPE library-default-media-type into library library-name
         to relieve the out of space condition in storage group
         storage-group-name.

CBR2550I Optical disk entry into library library-name scheduled.

CBR4401I Volume volser1 mounted on drive drive-name.

CBR2100I Volumes volser1 and volser2 entered into library.
```

You can enter the following in response to message CBR2217E:

- An unlabeled optical disk
- A scratch optical disk
- An optical disk whose volumes are assigned to the requested storage group, writable, not full, and not write-protected

If all slots in the optical library are either occupied by an optical disk cartridge or reserved for an optical disk cartridge mounted on one of the library optical drives, the optical library is full. This condition is detected by displaying the optical library status and checking the CBR1110I message field EMP SLT (empty slot) for a value of zero. The system automatically runs library space management for this library before requesting an additional optical disk cartridge.

Recommendation: When loading an optical disk cartridge into a library with 3995 optical disk drives, the media type of the cartridge must be consistent with the default media type for the library. If the media type of the cartridge is not consistent with the default media type, the cartridge is ejected. If the media is being isolated for specific applications, assign the cartridges to a storage group. The cartridges cannot be used as scratch volumes.

If the media type entered is compatible with the library default media type but is not write compatible with the drives in the library, the out-of-space condition is not relieved. An example of this scenario might be:

- A 3995-C*xx* library containing 3995-SW3 drives
- With a library default media type of 3995
- And the volume entered is a single-density WORM cartridge

In this case, the out-of-space condition still exists because the 3995-SW3 drives cannot write to a single-density WORM cartridge.

In an OAMplex, if a shelf-resident volume is entered into a library that is not known to an OAM in the OAMplex, that OAM removes it from its configuration and issues a message that the volume is no longer known. After that time, any read for that volume on that OAM fails with a volume unknown error. If the volume is ejected and assigned back to a pseudo library that is known to OAM, the volume is added back to the configuration.

Note: Because WORM optical volumes that are full or have very little free space are not useful as scratch volumes, the operator is notified, via a message, if the kilobytes free are less than the SCRENTRYTHRESHOLD parameter. The message contains the number of kilobytes that are free and the percentage of free space that this represents on the volume. The operator can choose to fail the cartridge entry process, causing the cartridge to be ejected from the library.

Related reading: For more information on checking the status of an optical library, see "Displaying Library Detail Status" on page 344.

Entering an Unlabeled Optical Disk into a 3995 Optical Library

To enter an unlabeled optical disk into a 3995 optical library:

1. Put the optical disk cartridge into the optical library input/output station. The system issues the following message:

```
CBR2550I Optical disk entry into library library-name scheduled.
```

2. The optical disk moves from the input/output station when an optical drive becomes available. The system issues the following message for each side of the optical disk cartridge.

```
CBR3381I Volume mounted on drive on drive-name contains an unrecognized format.
```

3. The system issues the following message and waits for a reply:

```
CBR4438D Volume in drive-name has unrecognized media format.
         Reply 'F' to format or 'C' to cancel.
```

   This message is unique to a 3995 library. It is issued when a volume has been entered that is either unlabeled or of a format not known to the library. A reply of 'F' causes the volume to be formatted and any data existing on the volume is destroyed. Replying 'C' at this point causes the formatting processing to stop, leaving only the one side of the optical cartridge formatted.

   Attention: Formatting a rewritable optical disk volume is a time consuming process. Do not interrupt this process by assuming that OAM is inactive during this time frame. OAM issues a completion message when this process is finished.

4. To continue the label process, reply with an 'F'. To cancel the label process, reply with an 'C'. If a reply of 'F' is entered, the system issues the following message and waits for a reply:

```
CBR4412D Enter VOLSER for volume on drive drive-name in library library-name.
```

5. Provide a 1 to 6 character unique volume serial number. The system issues the following message to verify the volume serial number. To accept the volume serial number, reply with a 'U'. A reply of 'R' allows you to enter a different volume serial number.

```
CBR4424D VOLSER for unlabeled volume in drive drive-name is volser. Reply 'U'
         to use this volser, or 'R' to retry.
```

6. The system issues the following message and waits for a reply:

```
CBR4439D Enter VOLSER for opposite side of volume volser in drive drive-name.
```

7. Provide a 1 to 6 character unique volume serial number. The system issues the following message to verify the volume serial number. To accept the volume serial number, reply with a 'U'. A reply of 'R' allows you to enter a different volume serial number.

```
CBR4424D VOLSER for unlabeled volume in drive drive-name is volser. Reply 'U'
         to use this volser, or 'R' to retry.
```

8. Once the system verifies the volume serial number to be used on the cartridge, the system issues the following message and waits for a reply:

```
CBR4406D Enter owner information for volume volser on drive drive-name.
```

9. Provide 1 to 64 characters of owner identification. The system issues the following message:

```
CBR4432D Enter storage-group-name for volumes volser1 and volser2, or reply 'U'
         to assign to scratch.
```

10. If the volumes are to be assigned to scratch status, reply 'U' to this message; otherwise, reply with the name of the object storage group or object backup storage group to which the volumes are to be assigned. The system issues the following message:

```
CBR4401I Volume volser2 mounted on drive drive-name.
```

11. The system issues the following message:

```
CBR2100I Volumes volser1 and volser2 entered into library: library-name.
```

The two volumes on the optical disk are added to a storage group or are assigned to scratch status and are available for use. In the message text, *volser1* and *volser2* are replaced by the volume serial numbers you entered for the optical volumes.

Related reading: For further information about commands from the 3995 dynamic console, see the *3995 Operator Guide for C-Series Models*.

Entering a Labeled Optical Disk into an Optical Library

To put a labeled optical disk into the optical library without prompting from the system:

1. Put the optical disk cartridge into the optical library input/output station. The system issues the following message:

```
CBR2550I Optical disk entry into library library-name scheduled.
```

   Requirement: When loading an optical disk cartridge into a library with 3995 optical disk drives, the media type of the cartridge must be consistent with the default media type for the library and must be compatible with the library resident drives. If the media type of the cartridge is not consistent with the default media type or compatible with the library resident drives, the cartridge is ejected. If the media is being isolated for specific applications, assign the cartridges to a storage group. The cartridges cannot be used as scratch volumes.

2. The optical disk moves from the input/output station when an optical drive becomes available. The system reads and verifies the volume label on each side of the optical disk. The system issues the following messages:

```
CBR4420I Volume table did not contain information for volser1 on drive
         drive-name.

CBR4420I Volume table did not contain information for volser2 on drive
         drive-name.

CBR4432D Enter storage group name for volumes volser1 and volser2,
         or reply 'U' to assign to scratch.

CBR4401I Volume volser1 mounted on drive drive-name.

CBR2100I Volumes volser1 and volser2 entered into library library-name.
```

Ejecting an Optical Disk

Use the MVS LIBRARY EJECT command to eject a specific optical disk from an optical library. This command requires that the optical volume specified be controlled by the instance of OAM on which the command was entered. If the member name associated with the volume serial number is not the member name for this instance of OAM, the command fails and message CBR1068I is issued.

In an OAMplex, if a shelf-resident volume is entered into a library that is not known to an OAM in the OAMplex, that OAM removes it from its configuration and issues a message that the volume is no longer known. After that time, any read for that volume on that OAM fails with a volume unknown error. If the volume is ejected and assigned back to a pseudo library that is known to OAM, the volume is added back to the configuration.

The following command syntax ejects a specific optical disk:



The following describes the values of the options for the EJECT command:

volser Specifies the volume serial number of one of the two optical volumes on the optical disk that is ejected.

LOCATION Prompts the operator to specify the new shelf location information for the ejected optical disk volumes.

LIBRARY Prompts the operator to specify a pseudo library name to which the ejected volume will be assigned.

To eject an optical disk from an optical library, enter the following command:

```
LI EJECT,volser,LOCATION,LIBRARY
```

An optical disk can arrive in the input/output station without an operator request in the following ways:

- The system can eject the optical disk as a result of the Library Space Manager utility running on that library.

  The system ejects an optical disk volume if there are no scratch optical volumes in the optical library, no empty slots in the optical library, and the system is attempting to write to the storage group that has an out-of-space condition.
- The system ejects an optical disk volume if the volume is expired.
- The system ejects an optical disk volume if an unknown volume results in an error during volume entry sequence.
- A storage administrator can specify an EJECT line operator next to an optical volume serial number on an ISMF Mountable Optical Volume List panel.
- The system responds to a REMAP command against the library control inventory.

Tip: You can demount an optical disk on an operator-accessible drive by varying the drive offline.

Specifying the Shelf Location

If a shelf location has not been specified previously for the optical disk being ejected or a new shelf location was requested on EJECT command, the system issues the following messages and waits for the appropriate responses:

```
CBR1000I OAM EJECT command execution scheduled.
```

```
CBR2600A Specify shelf location for volumes volser1 and volser2.
```

Provide 1 to 32 characters of shelf information. The system issues the following messages:

```
CBR2603A Specify pseudo library name for volume volser1.
```

Provide the name of the associated pseudo library for this volume. The system issues the following messages:

```
CBR3001A Remove cartridge from I/O station on library library-name. Place in
         shelf location shelf-location.
```

```
CBR3122I Volumes volser1 and volser2 were ejected from library library-name,
         shelf location is shelf-location.
```

Associating Pseudo Libraries

When an optical volume is ejected from a library, it must be assigned to a pseudo library. In previous releases, shelf resident volumes were associated with a pseudo optical library that represented volumes of that media type. Pseudo libraries do not have a device type association.

If the volume being ejected already has a pseudo library name associated with it in its volume record, that pseudo library continues to be used unless it is overridden with the LIBRARY keyword on the EJECT command. If the volume being ejected does not already have a valid pseudo library associated with it, the default pseudo library associated with the library from which the volume was ejected can be used, if one exists, unless it is overridden with the LIBRARY keyword on the EJECT command. If the optical volume being ejected does not already have a valid pseudo library associated with it, or the library from which the volume was ejected does not have a default pseudo library in its definition, or the LIBRARY keyword was specified on the EJECT command, the system issues message CBR2602A or CBR2603A, or both.

```
CBR2602A Eject pending for volser in r-library-name. Default pseudo library
         is p-library-name. Reply 'U' to use, or 'R' to respecify.
```

```
CBR2603A Specify pseudo library name for volume volser.
```

If the volume being ejected has an invalid pseudo library associated with its volume record and the library from which the volume is being ejected has a default pseudo library in its SCDS definition, message CBR2602A is issued. This message asks if the default is to be used or if another pseudo library name is requested.

If the library from which the volume is being ejected does not have a default pseudo library in its SCDS definition, or "R" was replied to message CBR2602A, message CBR2603A is issued. This message requests a pseudo library name to assign the volume to when it becomes shelf resident.

If a pseudo library name specified in response to message CBR2603A is not valid in the current ACDS, or the volume record has an invalid pseudo library name associated with it, message CBR2604I is issued, followed by message CBR2603A.

```
CBR2604I Volume volser cannot be assigned to pseudo library p-library-name, it is
         not a valid pseudo library definition in the active SMS configuration.
```

```
CBR2603A Specify pseudo library name for volume volser.
```

Related reading: For more information regarding pseudo libraries, see "Pseudo Optical Library Concept" on page 36.

Removing the Optical Disk Cartridge

When you receive the following message, remove the optical disk cartridge from the input/output station of the specified optical library and return it to the shelf location indicated:

```
CBR3001A Remove cartridge from I/O station on library library-name. Place in
         shelf location shelfloc.
```

Attention: Upon ejection of a cartridge, immediately remove it from the input/output station; otherwise, performance is degraded.

Mounting an Optical Disk on an Operator-Accessible Drive

When the system requests a shelf-resident volume, the following message is displayed requesting you to mount an optical disk cartridge on an operator-accessible optical drive:

```
CBR4400A Mount volume volser on drive drive-name. Shelf location is shelfloc.
```

If the *volser* is `??????`, the request is for an unlabeled optical volume. Locate an unlabeled optical disk cartridge and load it on drive *drive-name*.

If a volume serial number is specified in *volser*, the request is for an already labeled optical volume. Locate the optical disk cartridge and load it into the drive *drive-name*. The system issues the following message:

```
CBR4401I Volume volser mounted on drive drive-name.
```

The volume is now ready for the system to use.

Recommendations:

1. You can also mount an optical disk on an operator-accessible optical drive without waiting for a request from the system. To mount the optical disk, vary the operator-accessible optical drive offline, load the optical disk cartridge into the drive, and vary the drive online.
2. The system places a response time limitation of five minutes from the time the operator mount message is received on the console to the time the mount is completed. If the mount is not completed within the allotted time, the operator has the option of canceling or retrying the optical disk mount.

Related reading:

- To label a disk on an operator-accessible drive, see "Labeling an Optical Disk on a 3995 Operator-Accessible Drive."

Demounting and Removing an Optical Disk Cartridge from an Operator-Accessible Drive

To demount an optical disk cartridge from an operator-accessible drive, you must vary the drive offline using the OAM VARY command. The cartridge is demounted so that the operator can remove the cartridge.

Labeling an Optical Disk on a 3995 Operator-Accessible Drive

When there are no scratch optical volumes on the shelf, and a storage group which contains a pseudo library is out of space, the following messages are displayed requesting you to label an unlabeled optical disk on the operator-accessible optical drive:

```
CBR2213I No space left in storage group storage-group-name.

CBR2212E Use the OAM LABEL command to label optical disks for shelf use
         to relieve the out of space condition in the storage group
         storage-group-name.


CBR1000I OAM L command execution scheduled.

CBR4400A Mount volume ?????? on drive drive-name. Shelf location is ??????

CBR4419I Previously labeled volume volser1 was mounted on drive drive-name.

CBR4423D Enter shelf information for volume volser1 on drive drive-name.


CBR4430A Remove and flip cartridge on drive drive-name.

CBR4419I Previously labeled volume volser2 was mounted on drive drive-name.

CBR4432D Enter storage group name for volumes volser1 and volser2,
         or reply 'U' to assign to scratch.

CBR4401I Volume volser2 mounted on drive drive-name.

CBR2102I LABEL function complete for volumes volser1 and volser2.
```

Tip: You can also use a library optical drive to label an optical disk. See "Entering an Optical Disk into an Optical Library" on page 304 to label an optical disk in an optical library.

Use the OAM LABEL command to label optical volumes on operator-accessible optical drives. OAM rejects the LABEL command if there is no operator-accessible optical drive online and operational.

Note: Because WORM optical volumes that are full or have very little free space are not useful as scratch volumes, the operator is notified, via a message, if the kilobytes free are less than the SCRENTRYTHRESHOLD parameter. The message contains the number of kilobytes that are free and the percentage of free space that this represents on the volume. This message gives the operator the opportunity to fail the cartridge entry process, causing the cartridge to be ejected from the library.

In an OAMplex, if a shelf-resident volume is entered into a library that is not known to an OAM in the OAMplex, that OAM removes it from its configuration and issues a message that the volume is no longer known. After that time, any read for that volume on that OAM fails with a volume unknown error. If the volume is ejected and assigned back to a pseudo library that is known to OAM, the volume is added back to the configuration.

The following command syntax labels an optical disk on an operator-accessible optical drive:

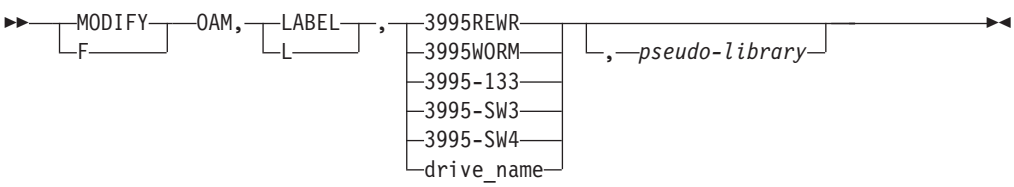

The following describes the values of the options for the LABEL command:

3995REWR
Refers to a request for a single-density, rewritable optical disk media to be labeled on an IBM 3995-131 operator-accessible optical disk drive.

3995WORM
Refers to a request for a single-density, WORM optical disk media to be labeled on an IBM 3995-132 operator-accessible optical disk drive

3995-133
Refers to a request for a single- or double-density, WORM or rewritable, optical disk media to be labeled on an IBM 3995-133 operator-accessible optical disk drive.

3995-SW3
Refers to a request for a double- or quad-density capacity, WORM or rewritable optical disk media to be labeled on an IBM 3995-SW3 operator-accessible optical disk drive.

3995-SW4
Refers to a request for a quad- or 8*x*-density capacity, WORM or rewritable optical disk media to be labeled on an IBM 3995-SW4 operator-accessible optical disk drive.

drive_name
Refers to a IBM 3995 operator-accessible drive on which the label command is processed. The optical media being labeled must be compatible with the drive requested for reading and writing purposes. The name of the optical drive must be defined in the active SCDS configuration.

pseudo-library
Refers to the name of the pseudo library whose drives are to be considered for the label request, and the pseudo library with which the newly labeled volume will be associated. If this keyword is not specified, the default is the pseudo library associated with the operator-accessible drive that is performing the label function. If a pseudo library name specified on the LABEL command is invalid for the current ACDS, message CBR1305I is issued and the command fails.

Attention: Due to a hardware restriction, inserting a double-, quad-, or 8*x*-density, rewritable cartridge into a single-density, WORM (3995-132) or rewritable (3995-131) operator-accessible drive can result in the cartridge being demounted with no error message posted on the library service panel or to the host.

If the label request is directed to a specific drive, OAM verifies that the drive requested is controlled by the OAM on which the command was entered. If this criteria is not satisfied, the request fails and message CBR1068I is issued.

If a pseudo-library name is specified on the LABEL command, a media type must be specified (3995REWR, 3995WORM, 3995-133, 3995-SW3, or 3995-SW4) because pseudo-libraries no longer require a device type affinity, so mixed devices and media types might be associated with a pseudo-library. If the drive name is specified, specification of a pseudo-library is ignored.

If only a media type is specified on the LABEL command, the command is processed on any operator-accessible drive that can use the specified media type

and that is connected to the OAM where the command was entered. Labels are processed on the system where the command is entered. The command must be issued on a system with an online and operational operator-accessible drive that can use the media type.

To write the label on two volumes of an optical disk on an operator-accessible drive:

1. Enter the following command:

```
F OAM,LABEL,{3995REWR|3995WORM|3995-133|3995-SW3|3995-SW4,drive_name},pseudo-lib
```

2. The system issues the following message:

```
CBR1000I OAM LABEL command execution scheduled.
```

3. When an operator-accessible optical drive becomes available, the system issues the following messages and waits for you to mount an optical disk cartridge:

```
CBR4400A Mount volume ?????? on drive drive-name. Shelf location is ??????.
```

4. Put an unlabeled optical disk cartridge into the operator-accessible optical drive. The system issues the following message:

```
CBR3381I Volume mounted on drive drive-name contains an unrecognized format.
```

5. The system issues the following message and waits for a reply:

```
CBR4438D Volume in drive drive-name has unrecognized media
         format.  Reply 'F' to format or 'C' to cancel.
```

   This message is unique to a 3995 library. It is issued when a volume has been entered that is either unlabeled or of a format not known to the library. A reply of 'F' causes the volume to be formatted and any data existing on the volume is destroyed.

6. To continue the label process, reply with an 'F'. To cancel the label process, reply with an 'C'. If a reply of 'F' is entered, the system issues the following message and waits for a reply:

```
CBR4405D Enter VOLSER for volume on drive drive-name.
```

7. Provide a 1 to 6 character unique volume serial number. The system issues the following message to verify the volume serial number. To accept the volume serial number, reply with a 'U'. A reply of 'R' allows you to enter a different volume serial number.

```
CBR4424D Volser for unlabeled volume in drive drive-name is volser.
         Reply 'U' to use this volser, or 'R' to retry.
```

8. Once the system verifies the volume serial number to be used on the cartridge, the system issues the following message and waits for a reply:

```
CBR4406D Enter owner information for volume volser on drive drive-name.
```

9. Provide 1 to 64 characters of owner identification. The system issues the following message and waits for a reply:

```
CBR4423D Enter shelf information for volume volser on drive drive-name.
```

10. Provide 1 to 32 characters of shelf information. The system issues the following message:

```
CBR4430A Remove and flip cartridge on drive drive-name.
```

11. Remove the optical disk cartridge, flip it over, and reinsert it into the operator-accessible optical drive. The system issues the following message:

```
CBR3381I Volume mounted on drive drive-name contains an unrecognized format.
```

12. The system issues the following message and waits for a reply:

```
CBR4438D Volume in drive drive-name has unrecognized media format. Reply 'F'
         to format or 'C' to cancel.
```

This message is unique to a 3995 library. It is issued when a volume has been entered that is either unlabeled or of a format not known to the library. A reply of 'F' causes the volume to be formatted and any data existing on the volume is destroyed.

13. To continue the label process, reply with an 'F'. To cancel the label process, reply with an 'C'. If a reply of 'F' is entered, the system issues the following message and waits for a reply:

```
CBR4439D Enter volser for opposite side of volume volser in drive
         drive-name.
```

14. Provide a 1 to 6 character unique volume serial number. The system issues the following message to verify the volume serial number. To accept the volume serial number, reply with a 'U'. A reply of 'R' allows you to enter a different volume serial number.

```
CBR4424D Volser entered for unlabeled volume in drive drive-name is volser.
         Reply 'U' to use this volser, or 'R' to retry.
```

15. Once the system verifies the volume serial number to be used on the cartridge, the system issues the following message and waits for a reply:

```
CBR4432D Enter storage-group-name for volumes volser1 and volser2, or
         reply 'U' to assign to scratch.
```

16. If the volumes are to be assigned to scratch status, reply 'U' to this message; otherwise, reply with the name of the object storage group or object backup storage group to which the volumes are to be assigned. The system issues the following messages:

```
CBR4401I Volume volser2 mounted on drive drive-name.

CBR2102I LABEL function complete for volumes volser1 and volser2.
```

The two volumes on the optical disk are added to a storage group or are assigned to scratch status and are available for use. In the message text, *volser1* and *volser2* are replaced by the volume serial numbers that you entered for the optical volumes.

Related reading: For further information about commands from the 3995 dynamic console, see the *3995 Operator Guide for C-Series Models*.

Relabeling a 3995 Optical Disk Volume

The relabel command is used to allow the operator to rename a volume serial number on a previously defined 3995 optical disk volume. As a preventive measure to keep from losing all active primary or backup copies of objects on the 3995 disk volume that is being relabeled, the following conditions apply:

- The optical disk volume being relabeled cannot be an Object Backup volume.
- There can be no active primary copy of an object on the volume.
- There can be no write requests scheduled for the volume.
- In an OAMplex, the requested volume must be controlled by the OAM on which the command was entered.

To erase all copies of objects on the 3995 optical disk volume, submit the OAM utility job to reformat the volume. See "Reformatting a 3995 Optical Disk" on page 319 for more information on this utility.

The following command syntax relabels an optical disk volume:



The following describes the values of the options for the RELABEL command:

old_volser
This a required parameter that specifies the current volume serial number of the OAM volume.

new_volser
This is a required parameter that specifies the new volume serial number to be assigned to the optical volume.

drive_name
This is an optional parameter that specifies a write compatible operator-accessible drive for processing this relabel request if the volume resides outside a 3995 optical disk library. If *drive_name* is not supplied or if the volume is library-resident, OAM selects an optical drive in the ACDS that is capable of processing this request.

To relabel a requested optical disk volume and direct the request to a specific operator-accessible drive, enter the following command:

```
F OAM,RELABEL,old_volser,new_volser,drive_name
```

This system issues the following messages:

```
CBR1000I OAM RELABEL command execution scheduled.

CBR4460I Volume old_volser on drive-name has been relabeled to new_volser.

CBR2822I RELABEL function completed for volume old_volser to new_volser.
```

When the command is accepted, if the requested volume is shelf-resident and not mounted on the selected drive, OAM asks the operator to mount the requested

volume on the selected optical drive. If the requested volume is library-resident, OAM mounts the volume on a library drive. Following successful completion of this processing, OAM performs the following functions:

- deletes the row in the DB2 Volume Table row for the old volume serial number
- inserts a new row in the DB2 Volume Table for the new volume serial number
- updates the row of the opposite volume in the DB2 Volume Table with the new volume serial number
- issues message CBR4460 to inform the operator that the relabeling of the 3995 optical disk volume has completed

Reformatting a 3995 Optical Disk

Use the OAM reformat utility (the TSO/E command OAMUTIL) to perform various tasks against a 3995 optical disk cartridge to reclaim usable space on the cartridge. To invoke this utility, run the CBRSAMUT SAMPLIB job or issue a TSO/E command to start the utility. (See "CBRSAMUT" on page 490 for a sample job that can be used within your installation.) This utility allows you to perform the following tasks:

- Reformat one or both sides of a 3995 optical disk cartridge.
- Reformat and rename the volume serial number of one or both sides of an optical disk cartridge.
- Return the volumes back to the SCRATCH storage group (only when there is a request for both sides of the optical disk to be reformatted) to be used for subsequent write requests.

The reformat utility can be run regardless of whether the volume is inside or outside a 3995 optical library, the volume belongs to an Object or an Object Backup storage group, or the media is rewritable or WORM. Reformatting rewritable media reclaims the used space; however, reformatting WORM media cannot reclaim the used space.

For reformatting volumes belonging to an Object storage group, this utility can be run conditionally (using the NOFORCE parameter) or unconditionally (using the FORCE parameter). For reformatting volumes belonging to an Object Backup storage group, this utility can only be run unconditionally (using the FORCE parameter).

When a *conditional* request is submitted for an OAM PRIMARY optical volume, OAM checks to see if any active primary copies of objects on the volume exist before performing the reformat. If any active object is found, the request fails.

When a *conditional* request is submitted for an OAM BACKUP optical volume, the request fails for the reformat.

This utility can only be run *unconditionally* (using the FORCE parameter) for optical volumes that belong to an OAM BACKUP storage group.

When an *unconditional* request is submitted, there is no verification of whether there are any nonexpired objects still on the volume prior to the operation being performed. The volume is reinitialized if the OAM environment permits it at the time of the request. It is therefore recommended, that before submitting an unconditional reformat request, you should select all Object Directory entries for objects that reside on the requested volume (using SPUFI) to verify that the object can be deleted. Or, you can use the Move Volume utility to move all the objects off

the requested volume before performing the reformat. Once an unconditional reformat request is executed successfully, all objects on the requested volume, regardless if the objects are owned by OAM, are all erased or discarded.

Attention: If you use the FORCE parameter or the unconditional form of the format command, be aware that once you request a reformat of the optical disk, there is no reversal. If OAM issues any error messages indicating DB2 or other problems, you are responsible for ensuring that all objects that resided on this volume are no longer referenced in the OAM object directory table.

For a reformat command to execute successfully, the following OAM environment must exist:

- No write, relabel, or reformat requests are scheduled for the requested volume.
- No eject request is scheduled (for the requested volume or its opposite side).
- The volume is not write protected and is not marked not writable.
- In an OAMplex environment, the requested volume is controlled by the instance of OAM on which the reformat request was entered.

The following is the syntax for the OAMUTIL REFORMAT command:

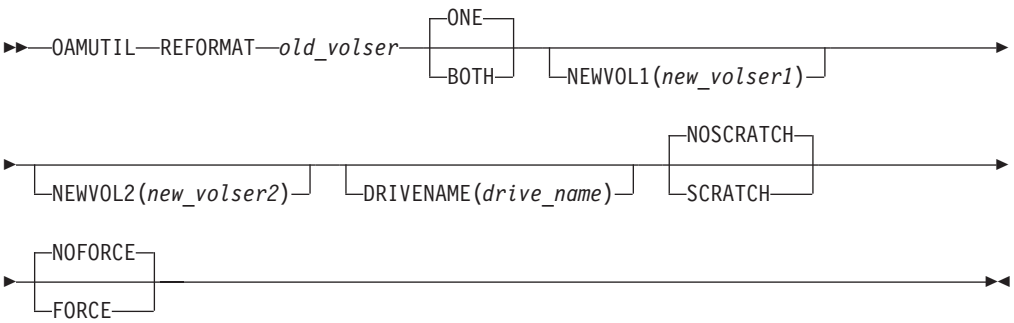

The following is a description of each of the keywords for this command:

old_volser
Indicates the volume serial number of the volume to be reformatted. The FORCE keyword is required if *old_volser* belongs to an Object Backup storage group.

ONE | BOTH
An optional parameter. ONE indicates only one side of optical cartridge should be reformatted. This is the default.

BOTH indicates that both sides of the optical disk cartridge should be reformatted.

NEWVOL1(*new_volser1***)**
An optional parameter that indicates the new volume serial number for side one of the optical disk cartridge. If not specified, there is no change to the volume serial number of side one of the optical disk cartridge.

NEWVOL2(*new_volser2***)**
An optional parameter that indicates the new volume serial number for side two of the optical disk cartridge. If not specified, there is no change to the volume serial number of side two of the optical disk cartridge.

DRIVENAME(*drive_name***)**
An optional parameter that indicates a specified operator-accessible drive that is capable of processing this request. This parameter is only valid if the requested optical disk volume is shelf-resident. If this parameter is not specified, or if the requested optical disk volume is library-resident, OAM selects an optical drive in the SMS ACDS capable of processing this request.

NOSCRATCH | SCRATCH
An optional parameter that indicates which storage group the volume should be placed in after reformatting. NOSCRATCH indicates that the volume should remain in the same storage group to which it was assigned before the successful completion of the reformat execution. *This is the default.*

SCRATCH indicates that both volumes on an optical disk cartridge should be placed in the SCRATCH storage group on successful execution of the reformat request.

NOFORCE | FORCE
An optional parameter that indicates what type of reformat request is being run. NOFORCE indicates that the reformat request is conditional. The utility must verify the existence of any backup copies or active primary copies of objects on the volume before performing the reformat. If these objects exist on the volume, the reformat fails. *This is the default.*

FORCE indicates that the reformat request is unconditional. This parameter allows you to physically erase all copies of objects on a rewritable optical disk cartridge or discard all copies of objects on a WORM optical disk cartridge without first verifying if there are any backup copies or active primary copies of objects on the volume. The volume is reinitialized even if there are nonexpired objects on the volume. The FORCE option is required when reformatting a volume belonging to an Object Backup storage group.

To reformat a requested optical disk volume, enter the following TSO/E command:

```
OAMUTIL REFORMAT old_volser BOTH
```

This system issues the following messages:

```
CBR4401I Volume old_volser1 mounted on drive drive-name.

CBR4465I Volumes old_volser1 and old_volser2 are being reformatted on drive
         drive-name.

CBR4401I Volume old_volser2 mounted on drive drive-nam.

CBR4462I Volume old_volser1 has been reformatted to new_volser1.

CBR4462I Volume old_volser2 has been reformatted to new_volser2.
```

The following conditions exist upon successful completion of this command:

- All object directory entries for the requested volumes are deleted from the 3995 controller, the Object Directory Table, and the Deleted Objects Table.
- All space used by the erased objects are reclaimed for rewritable optical disk volumes.
- If SCRATCH is specified, both volumes on the optical disk cartridge are returned to the SCRATCH storage group.

- If NEWVOL1 is specified, a new row for this new volume serial number for the first side of the optical disk cartridge is added to the Volume Table. The row for the old volume serial number of the requested volume is deleted from the Volume Table. If NEWVOL1 is not specified, the row for the requested volume in the OAM Volume Table is updated.
- If NEWVOL2 is specified and it is a both side reformat, a new row for the new volume serial number for the second side of the optical disk cartridge is added to the Volume Table. The row in the Volume Table for the old volume serial number is deleted. If NEWVOL2 is not specified or the request is for a one side reformat, the row in the Volume Table for the opposite side of the requested volume is updated.

Related reading: For information concerning messages generated from this command, use LookAt or see *MVS System Messages*. For a description of LookAt, see "Using LookAt to look up message explanations" on page xii.

Displaying Status

You can display the status of various items of the OAM system:
- OAM status
- OAM XCF status
- OSMC summary status
- OSMC task status
- Drive online/offline connectivity
- Drive detail status
- Library online/offline connectivity
- Library detail status
- Storage group and volume status
- SETOAM parameters
- SETOPT parameters
- SETOSMC parameters

Requirement: To display information in the Tape Volume table concerning objects stored on tape volumes, you must use the SPUFI SELECT command. Using the DISPLAY command against these tape volumes only provides information from the tape configuration database, not the Tape Volume table.

Displaying OAM Status

The following command syntax displays OAM status:



OAM
Displays OAM status.

L={a | *name* | *name-a*}
Specifies the location where the results of the inquiry are to be displayed, where *name* is the console name, and *a* is the display area on the console screen.

To display OAM status, enter the following command:

```
DISPLAY SMS,OAM
```

The OAM display status shows which backup copy is being used by automatic access to backup processing for each of the possible reasons. If automatic access to backup is not active for a specific reason, the status display shows that no backup copy is being used. The following information is displayed for an optical library.

```
CBR1100I OAM status:
TOT   USE   TOT  USE  AVL  TOT  USE   AVL  TOT  USE  AVL  SCR   REQ
LIB   LIB   DRV  DRV  DRV  LDR  LDR   LDR  SDR  SDR  SDR  VOL    CT
aaa   bbb   ccc  ddd  eee  fff  ggg   hhh  iii  jjj  kkk  lll   mmm
exitname processing {Enabled|Disabled|Bypassed|Operator-Disabled}.
Access Backup status for xxx reasons, using yyy backup copy.
DB2 SSID: ssid
XCF GROUP NAME: group-name
XCF MEMBER NAME: member-name
CBROAM: xx
```

The fields in the data line specify the number of each resource, as follows:

aaa Total number of optical libraries in the configuration.

bbb Number of usable optical libraries (online and operational).

ccc Total number of optical drives in the configuration.

ddd Number of usable optical drives.

eee Number of available optical drives (online, operational, and not in use).

fff Total number of library optical drives in the configuration.

ggg Number of usable library optical drives.

hhh Number of available library optical drives.

iii Total number of operator-accessible optical drives in the configuration.

jjj Number of usable stand-alone or operator-accessible optical drives.

kkk Number of available operator-accessible optical drives.

lll Number of scratch optical volumes in the optical configuration database.

mmm Total number of optical read requests waiting to be scheduled.

exitname The name of the exit for which status is being displayed. This line is repeated for each installation exit. You can use the CBRUXSAE and EDGTVEXT exits for object support. However, you would use the other exits (CBRUXENT, CBRUXEJC, CBRUXCUA, and CBRUXVNL) with tape libraries. The status codes are as follows:

Enabled
The exit is enabled and executed when the requested function is required.

Disabled
The exit has been disabled due to an error or an abend in the installation exit. For EDGTVEXT, OAM continues releasing object tape volumes from the OAM inventory.

Bypassed
The CBRUXSAE exit returned a return code 16 indicating that the request function is to continue without calling the exit for all other exits.

Operator-Disabled
Only the exits for the tape library uses this status code. For information on displaying OAM status for tape libraries, see *z/OS DFSMS OAM Planning, Installation, and Storage Administration Guide for Tape Libraries*.

The following fields are displayed in the status message for the OAM access backup processing:

status The status of Access Backup processing for this reason. The following are valid *status* values:

- **ACTIVE**—Access Backup processing is active for this reason.
- **INACTIVE**—Access Backup processing is inactive for this reason.

xxx The reason for which Access Backup processing can be activated. The following are valid *xxx* values:

- **UNREADABLE VOLUMES**—The backup copy of an object is retrieved when the primary copy resides on a volume with READABLE=N.
- **OFFLINE LIBRARIES**—The backup copy of an object is retrieved when the primary copy resides on a volume that is in an offline library.
- **NOT OPERATIONAL LIBRARIES**—The backup copy of an object is retrieved when the primary copy resides on a volume that is in a library that is nonoperational.
- **DB2 OBJECT TABLE ERRORS**—The backup copy of an object is retrieved when a DB2 object table error occurs while attempting to retrieve the primary copy of the object.

yyy The indicator of which backup copy, if any, is being used for automatic access to backup processing. The following are valid values for *yyy*:

- **1ST**—Access Backup processing accesses the first backup copy of the object when the primary copy is unavailable for the reason shown in *xxx*.
- **2ND**—Access Backup processing accesses the second backup copy of the object when the primary copy is invaluable for the reason shown in *xxx*.
- **NO**—Access Backup processing is inactive for the reason shown in *status*; therefore, no backup copy is being used.

ssid Specifies the name of the DB2 subsystem that OAM uses for object support. The subsystem name is from 1 to 4 characters.

group-name The XCF group name for this OAMplex.

member-name The XCF member name for this instance of OAM in an OAMplex.

cbroam-parmlib-suffix
This field displays the suffix of the CBROAMxx PARMLIB member that was in effect during OAM initialization.

The following is a sample of DISPLAY SMS,OAM status:

```
CBR1100I OAM STATUS: 441
OPT. TOT  USE  TOT  USE  AVL  TOT  USE  AVL  TOT  USE  AVL  SCR  REQ
     LIB  LIB  DRV  DRV  DRV  LDR  LDR  LDR  SDR  SDR  SDR  VOL   CT
       8    0   25    0    0   22    0    0    3    0    0   14    0
TAPE TOT  ONL  TOT  TOT  TOT  TOT   TOT   ONL   AVL   TOTAL
     LIB  LIB   AL   VL  VCL   ML   DRV   DRV   DRV  SCRTCH
       3    1    0    1    0    1    32     2     2      13
There are also 0 VTS distributed libraries defined.
CBRUXCUA processing ENABLED.
CBRUXEJC processing ENABLED.
CBRUXENT processing ENABLED.
CBRUXVNL processing ENABLED.
CBRUXSAE processing ENABLED.
EDGTVEXT processing ENABLED.
Access Backup processing INACTIVE for UNREADABLE VOLUMES, using no
backup copy.
Access Backup processing INACTIVE for OFFLINE LIBRARIES, using no
backup copy.
Access Backup processing INACTIVE for NOT OPERATIONAL LIBRARIES,using
no backup copy.
Access Backup processing INACTIVE for DB2 OBJECT TABLE ERRORS, using
no backup copy.
DB2 SSID:  DB2
XCF GROUP NAME: -N/A-
XCF MEMBER NAME: -N/A-
CBROAM: xx
```

Related reading: If both optical and tape libraries are defined in the active SMS configuration, the optical library information is displayed first, followed by the tape library information. For an example of this display for a tape library, see *z/OS DFSMS OAM Planning, Installation, and Storage Administration Guide for Tape Libraries*.

The CBRUXSAE installation exit performs security authorization checking for users performing OSREQ transactions on object data. For information on the CBRUXSAE exit, see *z/OS DFSMS OAM Application Programmer's Reference*.

Displaying OAM XCF Status

This command displays system status for this instance of OAM in relation to the sysplex and XCF. The following command syntax displays OAM XCF status:

The following is a description of the keyword for this command:

OAMXCF
Displays OAM XCF status.

To display OAM XCF status, enter the following command:

```
DISPLAY SMS,OAMXCF
```

The following information is displayed:

```
CBR1250I OAM XCF STATUS:
XCF MEMBER NAME    USER              SYSTEM    OPT     OPT    TAPE
                   STATE             NAME      READ    WRITE  READ
xcf-member-name    aaaaaaaaaaaaaaaa  bbbbbbbb  cccc    ddddd  eeeee
-------------------------------------------------------------------------------

this-xcf-member   ffffffffffffffff   gggggggg  hhhh    iiiii  jjjjj
XCF GROUP NAME:  xcf-group-name
OAM XCF timeout value for XCFOPTREADA is seconds.
OAM XCF timeout value for XCFOPTREADM is seconds.
OAM XCF timeout value for XCFOPTWRITEA is seconds.
OAM XCF timeout value for XCFOPTWRITEM is seconds.
OAM XCF timeout value for XCFTAPEREADA is seconds.
OAM XCF timeout value for XCFTAPEREADM is seconds.
```

For instances of OAM other than the OAM where the display command was issued, the fields displayed in each data line are as follows:

xcf-member-name
: The member name associated with an instance of OAM in the OAMplex

aaaaaaaaaaaaaaaa
: The user state of *xcf-member-name* on this data line. OAM defined user states are INITIALIZING, TERMINATING, RESTARTING, or ACTIVE.

bbbbbbbb
: The system name associated with *xcf-member-name* on this data line.

cccc
: The number of optical reads sent from the OAM where the command was entered to the OAM on the display line to be processed.

ddddd
: The number of optical writes sent from the OAM where the command was entered to the OAM on the display line to be processed.

eeeee
: The number of tape reads sent from the OAM where the command was entered to the OAM on the display line to be processed.

For instances of OAM on the system where the display command was issued, the following fields are displayed in the last data line of the multiline message:

this-xcf-member
: The member name associated with this instance of OAM in the OAMplex where the display command was issued.

ffffffffffffffff
: User state of *this-xcf-member* where the command was issued. OAM defined user states are INITIALIZING, TERMINATING, RESTARTING, or ACTIVE.

gggggggg
: System name associated with *xcf-member-name* on this data line.

hhhhh
: The total number of optical reads sent from the OAM where the command was entered to other OAMs in the OAMplex.

iiiii
: The total number of optical writes sent from the OAM where the command was entered to other OAMs in the OAMplex.

jjjjj
: The total number of tape reads sent from the OAM where the command was entered to other OAMs in the OAMplex.

xcf-group-name
: The XCF group associated with the OAMplex.

seconds
: The OAM XCF timeout values for each XCFTIMEOUT subparameter (specified in the CBROAM*xx* member of PARMLIB when OAM was initialized or set by operator command) in effect for the OAM where the command was entered.

The following is a sample of DISPLAY SMS,OAMXCF status:

```
CBR1250I OAM XCF status:
XCF MEMBER NAME   USER          SYSTEM    OPT    OPT    TAPE
                  STATE          NAME     READ   WRITE  READ
OAMSYS2           ACTIVE        SYSTEM2     27      65     0
OAMSYS3           ACTIVE        SYSTEM3     36       0    22
-------------------------------------------------------------
OAMSYS1           ACTIVE        SYSTEM1     63      65    22
XCF GROUP NAME:  OAMGRP1
OAM XCF timeout value for XCFOPTREADA is 20.
OAM XCF timeout value for XCFOPTREADM is 50.
OAM XCF timeout value for XCFOPTWRITEA is 150.
OAM XCF timeout value for XCFOPTWRITEM is 150.
OAM XCF timeout value for XCFTAPEREADA is 40.
OAM XCF timeout value for XCFTAPEREADM is 50.
```

If the instance of OAM is not part of an OAMplex, the following message will display:

```
CBR1069I Command rejected. OAM is not a member of an XCF group in a
         sysplex environment.
```

Displaying OSMC Summary Status

The following command syntax displays OSMC status:



OSMC
Displays OSMC status.

L={a | *name* | *name-a*}
Specifies the location where the results of the inquiry are to be displayed, where *name* is the console name, and *a* is the display area on the console screen.

To display OSMC summary status, enter the following command:

```
DISPLAY SMS,OSMC
```

The following information is displayed:

```
CBR9350I OSMC Summary Status:
TASK      TASK      TASK      START      OBJECTS      OBJECTS
NAME      TYPE      STAT      TIME       COMPLETED    ACTIVE
tskname   tsktype   tskstat   starttime  objcomplete  objactive
End of Display Summary
```

The fields displayed in each data line are as follows:

tskname Name of control task

tsktype Type of control task:

- **C** Cycle processing for a storage group
- **D** DASD space management
- **G** Operator requested processing of a single storage group
- **L** Library space management
- **M** Move Volume
- **R** Volume recovery
- **Y** Operator initiated Recycle command process

tskstat Task current status:

- **b** (Blank) OSMC is running
- **P** OSMC is stopping
- **T** OSMC is terminating

starttime Task start time (hh.mm.ss)

objcomplete Number of objects that have completed processing

objactive Number of objects being processed

??

The system displays the following information before it issues the CBR9350I message if a RECYCLE task type is currently active.

```
CBR9356I Recycle Summary Status:

 Explanation:

TASK    TASK TASK  START     START           VOLS      VOLS
NAME    TYPE STAT  DATE      TIME      LIMIT COMPLETE  ACTIVE
RECYCLE Y    tstat startdate starttime limit volcomp   volact
```

Note:

The system issues this message in response to a D SMS,OSMC operator command if there is an active RECYCLE command processing. The system provides the summary status information for the recycle process associated with the MODIFY OAM,START,RECYCLE command.

The summary information includes the name of the task, type of task, a task status (ending or stopped), or blank, the date and time the task was started, the limit of volumes to be recycled as indicated on the MODIFY OAM,START,RECYCLE operator command, the number of volumes completed processing, and the number of volumes still being actively processed.

The following is a sample of DISPLAY OSMC summary status:

```
CBR9350I OSMC Summary Status:
TASK       TASK      TASK       START          OBJECTS        OBJECTS
NAME       TYPE      STAT       TIME           COMPLETED      ACTIVE
GROUP02     G                   19.09.53        32732          3891
GROUP26     C                   19.09.55          480           266
GROUP27     C                   19.10.11         5890           329
VOL001      M                   19.10.14           59             8
End of Display Summary
```

Displaying OSMC Task Status

The following command syntax displays OSMC task status:



To display the status of an OSMC task, enter the following command:

```
DISPLAY SMS,OSMC,TASK(taskname)
```

OSMC
Displays OSMC task status

TASK(*taskname***)**
Specifies the name of the task for which a status display is requested

The value of the task name depends on the type of OSMC process which the task represents. The following list shows the type of OSMC process, and the value used for its name.

Library space management
The library name

Volume recovery
The volume serial of one of the volumes on the disk being recovered

DASD space management
The name of the storage group being processed by DASD space management

OSMC processing of one storage group
The name of the storage group being processed

Storage management cycle processing of a storage group
The name of the storage group being processed

Move volume
The volume serial of the source volume from which objects are being moved

Recycle
The name of the volser being processed as a result of the RECYCLE command.

L={a | *name* | *name-a*}
Specifies the location where the results of the inquiry are to be displayed, where *name* is the console name, and *a* is the display area on the console screen.

NOT Programming Interface information

Detail status information is provided for the OAM storage management component task specified in the DISPLAY command. The number of internal work items queued on the work and wait queues and the number of internal work items completed for each of the OSMC services is displayed. The number of internal work items does not exactly equate to the number of objects processed; there might be multiple internal work items per object or there might be internal work items not associated with any object. This information is better used for problem determination and monitoring the progress of the storage management component than for tracking the number of objects processed.

End of NOT Programming Interface information

The fields displayed in each data line represent the services that OSMC performs during its processing. The following information is displayed:

```
CBR9370I OSMC Detail for taskname:
          READ   READ   READ  WRITE  WRITE
          DASD    OPT   TAPE   DASD    OPT
WORK Q: aaaaaa bbbbbb cccccc dddddd eeeeee
WAIT Q:        jjjjjj kkkkkk        llllll
DONE:   qqqqqq rrrrrr ssssss tttttt uuuuuu
          WRITE  WRITE    WRITE      DIR
          TAPE   BACKUP1  BACKUP2  UPDTS
WORK Q: ffffff   gggggg   hhhhhh   iiiiii
WAIT Q: mmmmmm   nnnnnn   oooooo   pppppp
DONE:   vvvvvv   wwwwww   xxxxxx   yyyyyy
End of Display Detail
```

In the message text, *taskname* is the name associated with the OAM storage management component task and is the same as the task name specified on the DISPLAY SMS,OSMC command. In the case of the OAM storage management cycle, *taskname* is the name of an Object storage group being processed by OSMC. In the case of the OAM MOVEVOL utility, *taskname* is the volume serial number of the volume being operated on by the utility. For the OAM Volume Recovery utility, *taskname* is the volume serial number of the optical or tape cartridge being recovered by the utility.

The fields that are displayed in each row represent the number of internal work items (*n*) that are at that stage of processing for each service:

WORK Q Work items queued for processing by this service

WAIT Q Work items for which processing has started but not completed

DONE Work items that have completed using this service

The values in the display for CBR9370I are defined as follows:

aaaaaa The number of internal work items that are queued on the work queue by the read DASD service.

bbbbbb The number of internal work items that are queued on the work queue by the read optical service.

cccccc The number of internal work items that are queued on the work queue by the read tape service.

dddddd The number of internal work items that are queued on the work queue by the write DASD service.

eeeeee The number of internal work items that are queued on the work queue by the write optical service.

ffffff The number of internal work items that are queued on the work queue by the write tape service.

gggggg The number of internal work items that are queued on the work queue by the write first backup service.

hhhhhh The number of internal work items that are queued on the work queue by the write second backup service.

iiiiii The number of internal work items that are queued on the work queue by the directory update service.

jjjjjj The number of internal work items that are queued on the wait queue by the directory update service.

kkkkkk The number of internal work items that are queued on the wait queue by the read tape service.

llllll The number of internal work items that are queued on the wait queue by the write optical service.

mmmmmm The number of internal work items that are queued on the wait queue by the write tape service.

nnnnnn The number of internal work items that are queued on the wait queue by the write first backup service.

oooooo The number of internal work items that are queued on the wait queue by the write second backup service.

pppppp The number of internal work items that are queued on the wait queue by the directory update service.

qqqqqq The number of internal work items that are completed by the read DASD service.

rrrrrr The number of internal work items that are completed by the read optical service.

ssssss The number of internal work items that are completed by the read tape service.

tttttt The number of internal work items that are completed by the write DASD service.

uuuuuu The number of internal work items that are completed by the write optical service.

vvvvvv The number of internal work items that are completed by the write tape service.

wwwwww The number of internal work items that are completed by the write first backup service.

xxxxxx The number of internal work items that are completed by the write second backup service.

yyyyyy The number of internal work items that are completed by the directory update service.

The following is a sample of DISPLAY SMS,OSMC,TASK(WG360A):

```
CBR9370I OSMC Detail for WG360A:
          READ   READ   READ  WRITE  WRITE
          DASD    OPT   TAPE   DASD    OPT
WORK Q:      0      1      0      0      0
WAIT Q:             3      0             1
DONE:        0      1      1      0      1
          WRITE  WRITE   WRITE   DIR
          TAPE   BACKUP1 BACKUP2 UPDTS
WORK Q:      0      0      0      0
WAIT Q:      0      0      0      0
DONE:        0      0      0      1
End of Display Detail
```

If execution of the D SMS,OSMC,TASK(RECYCLE) command is successful, the system issues the following message to hardcopy log:

```
CBR9875I Recycle Candidates:
The following volumes are candidates for OAM RECYCLE command processing using
pv=percentvalid, lim=limit, scope=scope, maxrecycletasks=maxrecycletasks.
   VOLSER %VAL SGNAME   STAT    VOLSER %VAL SGNAME   STAT
   Volser nnn  grpname  xxxx    volser nnn  grpname  xxxx
   Volser nnn  grpname  xxxx    volser nnn  grpname  xxxx

OAM RECYCLE: END OF OAM RECYCLE CANDIDATE VOLUMES.
```

Related reading: For an example of output for message CBR9370I, see page 332. For descriptions of the column headings for CBR9370I, see *z/OS MVS System Messages, Vol 4 (CBD-DMO)*, or use LookAt.

Displaying Drive Online/Offline Connectivity

The following command syntax displays OAM drive status:



DRIVE(*name* | ALL)
Displays the system connectivity and online/offline status for optical drives. If a drive name is specified, there is one data line describing the specified optical drive. If ALL is specified, all the optical drives in the SMS configuration are displayed. To specify a drive named ALL, surround it with parentheses; for example, DISPLAY SMS,DRIVE((ALL)).

STATUS
Displays the system connectivity and online/offline status.

L={a | *name* | *name-a*}
Specifies the location where the results of the inquiry are to be displayed, where *name* is the console name, and *a* is the display area on the console screen.

To display SMS,DRIVE,STATUS for an individual drive, enter the following command:

```
DISPLAY SMS,DRIVE(drvname),STATUS
```

The following information is displayed:

```
IGD002I hh.mm.ss DISPLAY SMS
                                                1 1 1 1 1 1 1
DRIVE      LIBRARY      SYSTEM=   1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
name       aaaaaaaa               s s s s s s s s s s s s s s s s


                                  1 1 1 2 2 2 2 2 2 2 2 2 3 3 3
DRIVE      LIBRARY      SYSTEM=   7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2
name       aaaaaaaa               s s s s s s s s s s s s s s s s
```

The fields displayed in each data line are as follows:

name	Name of the optical drive for which system connectivity and the online/offline status is displayed
aaaaaaaa	Name of the optical library to which the displayed drive belongs
1–32	Numbers that appear after SYSTEM= indicating the system IDs
s	Indications of drive status: **.** Not defined **+** Online **–** Offline

Recommendation: An online status of "+" does not necessarily mean that either the drive or the library is fully functional. To determine if the drive is both online and operational, you must issue the DISPLAY SMS,DRIVE(*drvname*),DETAIL command. To determine if the library is both online and operational, you must issue the DISPLAY SMS,LIBRARY(*name*),DETAIL command.

Related reading: For more information on these SMS commands, see "Displaying Drive Detail Status" on page 336 and "Displaying Library Detail Status" on page 344.

The following is a sample of DISPLAY SMS,DRIVE(*drvname*),STATUS:

```
D SMS,DRIVE(P13D1),STATUS
IGD002  15:08:16 DISPLAY SMS 397

                                          1 1 1 1 1 1 1
DRIVE       LIBRARY      SYSTEM=1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
P13D1       PEA13               + - . . . . . . . . . . . . . .

                                1 1 1 2 2 2 2 2 2 2 2 2 3 3 3
DRIVE       LIBRARY      SYSTEM=7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2
P13D1       PEA13               . . . . . . . . . . . . . . . .
*********************************LEGEND************************
. THE DRIVE IS NOT DEFINED TO THE SYSTEM
+ THE DRIVE IS ONLINE
- THE DRIVE IS OFFLINE
SYSTEM 1  = SYSTEM1    SYSTEM 2  = SYSTEM2    SYSTEM 3  = SYSTEM3
SYSTEM 4  = SYSTEM4    SYSTEM 5  = SYSTEM5    SYSTEM 6  = SYSTEM6
SYSTEM 7  = SYSTEM7    SYSTEM 8  = SYSTEM8    SYSTEM 9  = SYSTEM9
SYSTEM 10 = SYSTEM10   SYSTEM 11 = SYSTEM11   SYSTEM 12 = SYSTEM12
SYSTEM 13 = SYSTEM13   SYSTEM 14 = SYSTEM14   SYSTEM 15 = SYSTEM15
SYSTEM 16 = SYSTEM16   SYSTEM 17 = SYSTEM17   SYSTEM 18 = SYSTEM18
SYSTEM 19 = SYSTEM19   SYSTEM 20 = SYSTEM20   SYSTEM 21 = SYSTEM21
SYSTEM 22 = SYSTEM22   SYSTEM 23 = SYSTEM23   SYSTEM 24 = SYSTEM24
SYSTEM 25 = SYSTEM25   SYSTEM 26 = SYSTEM26   SYSTEM 27 = SYSTEM27
SYSTEM 28 = SYSTEM28   SYSTEM 29 = SYSTEM29   SYSTEM 30 = SYSTEM30
SYSTEM 31 = SYSTEM31   SYSTEM 32 = SYSTEM32
```

The following is a sample of DISPLAY SMS,DRIVE(ALL),STATUS:

```
D SMS,DRIVE(ALL),STATUS
IGD002I 15:08:33 DISPLAY SMS 400
                                        1 1 1 1 1 1 1
DRIVE    LIBRARY SYSTEM= 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
L1D0     LIB1            - + . . . . . . . . . . . . . .
L2D0     LIB2            - + . . . . . . . . . . . . . .
L3D0     LIB3            + - . . . . . . . . . . . . . .
L4D0     LIB4            + - . . . . . . . . . . . . . .
P13D1    PEA13           + - . . . . . . . . . . . . . .
P13D5    PCTREUSE        + - . . . . . . . . . . . . . .
P15D1    PEA15           + - . . . . . . . . . . . . . .
P15D5    PCTREUSE        + - . . . . . . . . . . . . . .
P17D1    PEA17           + - . . . . . . . . . . . . . .
P19D1    PEA19           + - . . . . . . . . . . . . . .
P21D1    PMA21           - + . . . . . . . . . . . . . .
P21D5    P3995133        - + . . . . . . . . . . . . . .
P7D1     PWA7            + - . . . . . - . . . . . . . .
P8D1     PWB8            + - . . . . . - . . . . . . . .
P9D1     PWA9            + - . . . . . . . . . . . . . .
SOU0     STDALONE        . . . . . . . . . . . . . . . .

                         1 1 1 2 2 2 2 2 2 2 2 2 2 3 3 3
DRIVE    LIBRARY SYSTEM= 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2
L1D0     LIB1            . . . . . . . . . . . . . . . .
L2D0     LIB2            . . . . . . . . . . . . . . . .
L3D0     LIB3            . . . . . . . . . . . . . . . .
L4D0     LIB4            . . . . . . . . . . . . . . . .
P13D1    PEA13           . . . . . . . . . . . . . . . .
P13D5    PCTREUSE        . . . . . . . . . . . . . . . .
P15D1    PEA15           . . . . . . . . . . . . . . . .
P15D5    PCTREUSE        . . . . . . . . . . . . . . . .
P17D1    PEA17           . . . . . . . . . . . . . . . .
P19D1    PEA19           . . . . . . . . . . . . . . . .
P21D1    PMA21           . . . . . . . . . . . . . . . .
P21D5    P3995133        . . . . . . . . . . . . . . . .
P7D1     PWA7            . . . . . . . . . . . . . . . .
P8D1     PWB8            . . . . . . . . . . . . . . . .
P9D1     PWA9            . . . . . . . . . . . . . . . .
SOU0     STDALONE        . . . . . . . . . . . . . . . .
**************************** LEGEND ****************************
. THE DRIVE IS NOT DEFINED TO THE SYSTEM
+ THE DRIVE IS ONLINE
- THE DRIVE IS OFFLINE
SYSTEM 1  = SYSTEM1    SYSTEM 2  = SYSTEM2    SYSTEM 3  = SYSTEM3
SYSTEM 4  = SYSTEM4    SYSTEM 5  = SYSTEM5    SYSTEM 6  = SYSTEM6
SYSTEM 7  = SYSTEM7    SYSTEM 8  = SYSTEM8    SYSTEM 9  = SYSTEM9
SYSTEM 10 = SYSTEM10   SYSTEM 11 = SYSTEM11   SYSTEM 12 = SYSTEM12
SYSTEM 13 = SYSTEM13   SYSTEM 14 = SYSTEM14   SYSTEM 15 = SYSTEM15
SYSTEM 16 = SYSTEM16   SYSTEM 17 = SYSTEM17   SYSTEM 18 = SYSTEM18
SYSTEM 19 = SYSTEM19   SYSTEM 20 = SYSTEM20   SYSTEM 21 = SYSTEM21
SYSTEM 22 = SYSTEM22   SYSTEM 23 = SYSTEM23   SYSTEM 24 = SYSTEM24
SYSTEM 25 = SYSTEM25   SYSTEM 26 = SYSTEM26   SYSTEM 27 = SYSTEM27
SYSTEM 28 = SYSTEM28   SYSTEM 29 = SYSTEM29   SYSTEM 30 = SYSTEM30
SYSTEM 31 = SYSTEM31   SYSTEM 32 = SYSTEM32
```

Displaying Drive Detail Status

The following command syntax displays OAM drive detail status:



DRIVE(*drvname* **|** *libname* **| ALL)**
Displays the details of the current status for optical drives. If a drive name is specified, one data line describes the specified optical drive. If a library name is specified, a data line describes each optical drive associated with the library specified. If ALL is specified, all the optical drives in the SMS configuration are displayed. To specify a drive named ALL, surround it with parentheses, for example, DISPLAY SMS,DRIVE((ALL)).

DETAIL
Displays detail status for optical drives.

L={a | *name* **|** *name-a***}**
Specifies the location where the results of the inquiry are to be displayed, where *name* is the console name, and *a* is the display area on the console screen.

To display detail status for an individual drive, enter the following command:

```
DISPLAY SMS,DRIVE(drvname),DETAIL
```

The following information is displayed:

```
CBR1120I OAM drive status:
DRIVE    DEVICE TY  LIBRARY  ON OP AV WP   DEV  SC  DRV  MOUNT   PEND
NAME     TYPE       NAME                   NUM  SI  NUM  VOLUME  VOLUME
drvname  devtype a  libname   b  c  d  e  ffff   g  hhh  mntvol  pndvol
------------------------------------------------------------
XCF MEMBER NAME: membername
------------------------------------------------------------
```

The fields displayed in each data line are as follows:

drvname Name of the optical drive

devtype Device type of the optical drive:

3995-111	3995 rewritable optical disk drive
3995-112	3995 write-once optical disk drive
3995-113	3995 multifunction optical disk drive
3995-131	3995 rewritable optical disk drive
3995-132	3995 write-once optical disk drive
3995-133	3995 multifunction optical disk drive
3995-SW3	3995 multifunction optical disk drive
3995-SW4	3995 multifunction optical disk drive

a Optical drive type:

L	Library
S	Operator-accessible (stand-alone)

libname Name of the library to which the optical drive is attached. For an operator-accessible optical drive, this field displays the name of the pseudo optical library that this drive is associated within its SCDS definition, or one of the following defaults:
- **PCTWORM** (for 3995-132 write-once drives)
- **PCTREUSE** (for 3995-131 rewritable drives)
- **P3995133** (for 3995-133 multifunction drives)
- **P3995SW3** (for 3995-SW3 drives)
- **P3995SW4** (for 3995-SW4 drives)

b Optical drive online status:
- **Y** Online
- **N** Offline
- **P** Pending offline

c Optical drive operational status:
- **Y** Operational
- **N** Not operational

d Optical drive availability status:
- **Y** Available. The optical drive is online, operational, not pending offline, and not busy.
- **N** Not available.

e Write Protection status:
- **Y** Write protection is on. Writing to this drive is not allowed.
- **N** Write protection is off. Writing to this drive is allowed.

The write protection status reflects the switch setting as of the last volume mount, vary online, or drive error processing.

ffff MVS/ESA™ device number of the CTC that is used to communicate with the optical drive.

g SCSI bus address of the optical drive on the SCSI interface. Not used for 3995 and will be blank.

hhh Drive number of the optical disk drive.

mntvol Volume serial number of the volume that is mounted on the optical drive. If there is no mounted volume, this field is blank.

pndvol Volume serial number of the volume for which a mount is pending on the optical drive. If there is no pending mount, this field is blank. This field is blank when used for library-resident 3995 optical drives.

membername The XCF member name associated with the instance of OAM where this drive is online. If the drive is not online to any OAM system in the OAMplex, this field contains blanks. If this OAM system is not part of the OAMplex, this field contains **N/A**.

The following is a sample of DISPLAY SMS,DRIVE(LID1),DETAIL:

```
CBR1120I OAM drive status:
DRIVE     DEVICE   TY  LIBRARY  ON  OP  AV  WP  DEV  SC  DRV  MOUNT   PEND
NAME      TYPE         NAME                     NUM  SI  NUM  VOLUME  VOLUME
L1D1      3995-133  L  LIB1     Y   Y   N   N   0922       1  OP001

-----------------------------------------------------
XCF MEMBER NAME: OAMXCFMEMBER1
-----------------------------------------------------
```

To display detail status for drives associated with a specific optical library, enter the following command:

```
DISPLAY SMS,DRIVE(libname),DETAIL
```

The following is a sample of DISPLAY SMS,DRIVE(LIB1),DETAIL:

```
CBR1120I OAM drive status:
DRIVE  DEVICE   TY  LIBRARY  ON  OP  AV  WP  DEV  SC  DRV  MOUNT   PEND
NAME   TYPE         NAME                     NUM  SI  NUM  VOLUME  VOLUME
L1D1   3995-133  L  LIB1      Y   Y   N   N 0922        1  OP001
L1D2   3995-133  L  LIB1      Y   Y   N   N 0923        2  OP002
L1D3   3995-133  L  LIB1      Y   Y   Y   N 0924        3  OP003
L1D4   3995-133  L  LIB1      Y   Y   Y   N 0925        4  OP004
```

To display detail status for all the optical disk drives active in the SMS configuration, enter the following command:

```
DISPLAY SMS,DRIVE(ALL),DETAIL
```

The following is a sample of DISPLAY SMS,DRIVE(ALL),DETAIL:

```
CBR1120I OAM drive status:
DRIVE  DEVICE   TY  LIBRARY  ON  OP  AV  WP  DEV  SC  DRV  MOUNT   PEND
NAME   TYPE         NAME                     NUM  SI       VOLUME  VOLUME
L1D1   3995-133  L  LIB1      N   N   N   N 0992        1
L1D2   3995-133  L  LIB1      Y   Y   N   N 0993        2  OP002
L1D3   3995-133  L  LIB1      Y   Y   Y   N 0994        3  OP003
L1D4   3995-133  L  LIB1      Y   Y   Y   N 0995        4  OP004
L1D5   3995-133  S  PSEUDO1   N   N   N   N 0996        5
L2AD1  3995-SW3  L  LIB2      Y   Y   Y   N 19F6        1  OP012
L2AD2  3995-SW3  L  LIB2      N   Y   N   N 19F7        2
L2AD3  3995-SW3  L  LIB2      N   Y   N   N 19F8        3
L2AD4  3995-SW3  L  LIB2      N   Y   N   N 19F9        4
L2AD5  3995-SW3  L  LIB2      N   Y   N   N 19FA        5
L2AD6  3995-SW3  L  LIB2      N   Y   N   N 19FB        6
L3D1   3995-SW3  S  P3995SW3  N   Y   N   N 19F2        1
L3D1   3995-113  L  LIB2      Y   Y   N   N 092A        1  OP006
L3D2   3995-113  L  LIB2      Y   Y   N   N 092B        2  OP007
L3D3   3995-113  L  LIB2      Y   Y   Y   N 092C        3  OP008
L3D4   3995-113  L  LIB2      Y   Y   Y   N 092D        4  OP009
```

Displaying Library Online/Offline Connectivity

The following command syntax display OAM library status:

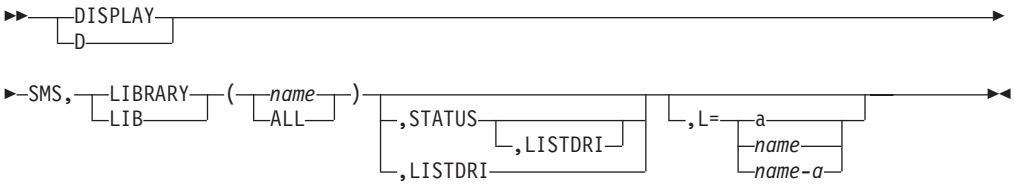

LIBRARY(*name* **|ALL)**
Displays the system connectivity and online/offline status for real libraries. If a library name is specified, there is one data line describing the specified library. If ALL is specified, there is one data line for each optical library in the configuration. To specify a library named ALL, surround it with parentheses; for example, DISPLAY SMS,LIBRARY((ALL)).

This display command applies only to real optical libraries. If the specified library is a pseudo optical library, an error message is displayed.

STATUS
Displays the system connectivity and online/offline status.

LISTDRI
Displays the online/offline status of all drives associated with this library.

L={a | *name* | *name-a***}**
Specifies the location where the results of the inquiry are to be displayed, where *name* is the console name, and *a* is the display area on the console screen.

To display status for an individual library, enter the following command:

```
DISPLAY SMS,LIBRARY(libname),STATUS
```

The following information is displayed:

```
IGD002I 11.19.56    DISPLAY SMS
                                          1 1 1 1 1 1 1
LIBRARY  CLASS       SYSTEM=    1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
name     type                   s s s s s s s s s s s s s s s s

                                1 1 1 2 2 2 2 2 2 2 2 2 2 3 3 3
LIBRARY  CLASS       SYSTEM=    7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2
name     type                   s s s s s s s s s s s s s s s s
```

The fields displayed in each data line are as follows:

name Name of the library for which system connectivity and online/offline status is displayed

type Library type (optical or tape)

1–32 Numbers that appear after SYSTEM= indicating system IDs

s Indications of drive status:

- **.** Not defined
- **+** Online
- **–** Offline

Recommendation: An online status of "+" does not necessarily mean that either the drive or the library is fully functional. To determine if the drive is both online and operational, you must issue the DISPLAY SMS,DRIVE(*drvname*),DETAIL command. To determine if the library is both online and operational, you must issue the DISPLAY SMS,LIBRARY(*name*),DETAIL command.

Related reading: For more information on these SMS commands, see "Displaying Drive Detail Status" on page 336 and "Displaying Library Detail Status" on page 344.

The following is a sample of DISPLAY SMS,LIBRARY(*libname*),STATUS:

```
D SMS,LIBRARY(PEA13),STATUS
IGD002I 15:09:05 DISPLAY SMS 403

                                        1 1 1 1 1 1 1
LIBRARY   CLASS  SYSTEM= 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
PEA13     OPTICAL       + - . . . . . . . . . . . . . .

                        1 1 1 2 2 2 2 2 2 2 2 2 2 3 3 3
LIBRARY   CLASS  SYSTEM= 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2
PEA13     OPTICAL       . . . . . . . . . . . . . . . .
**************************** LEGEND ****************************
. THE LIBRARY IS NOT DEFINED TO THE SYSTEM
+ THE LIBRARY IS ONLINE
- THE LIBRARY IS OFFLINE
P THE LIBRARY IS PENDING OFFLINE
SYSTEM 1  = SYSTEM1    SYSTEM 2  = SYSTEM2    SYSTEM 3  = SYSTEM3
SYSTEM 4  = SYSTEM4    SYSTEM 5  = SYSTEM5    SYSTEM 6  = SYSTEM6
SYSTEM 7  = SYSTEM7    SYSTEM 8  = SYSTEM8    SYSTEM 9  = SYSTEM9
SYSTEM 10 = SYSTEM10   SYSTEM 11 = SYSTEM11   SYSTEM 12 = SYSTEM12
SYSTEM 13 = SYSTEM13   SYSTEM 14 = SYSTEM14   SYSTEM 15 = SYSTEM15
SYSTEM 16 = SYSTEM16   SYSTEM 17 = SYSTEM17   SYSTEM 18 = SYSTEM18
SYSTEM 19 = SYSTEM19   SYSTEM 20 = SYSTEM20   SYSTEM 21 = SYSTEM21
SYSTEM 22 = SYSTEM22   SYSTEM 23 = SYSTEM23   SYSTEM 24 = SYSTEM24
SYSTEM 25 = SYSTEM25   SYSTEM 26 = SYSTEM26   SYSTEM 27 = SYSTEM27
SYSTEM 28 = SYSTEM28   SYSTEM 29 = SYSTEM29   SYSTEM 30 = SYSTEM30
SYSTEM 31 = SYSTEM31   SYSTEM 32 = SYSTEM32
```

The following is a sample of DISPLAY SMS,LIBRARY(ALL),STATUS:

```
D SMS,LIBRARY(ALL),STATUS
IGD002I 15:09:21 DISPLAY SMS 409
                                        1 1 1 1 1 1 1
LIBRARY   CLASS  SYSTEM= 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
ATLF4017  TAPE          + - . . . . . . . . . . . . . .
LIB1      OPTICAL       . . . . . . . . . . . . . . . .
LIB2      OPTICAL       . . . . . . . . . . . . . . . .
LIB3      OPTICAL       . . . . . . . . . . . . . . . .
LIB4      OPTICAL       . . . . . . . . . . . . . . . .
MTLA0001  TAPE          - + . . . . . . . . . . . . . .
MTLA0002  TAPE          + - . . . . . . . . . . . . . .
PCTREUSE  OPTICAL               LIBRARY IS NOT A REAL LIBRARY
PCTWORM   OPTICAL               LIBRARY IS NOT A REAL LIBRARY
PEA13     OPTICAL       + - . . . . . . . . . . . . . .
PEA15     OPTICAL       + - . . . . . . . . . . . . . .
PEA17     OPTICAL       + - . . . . . . . . . . . . . .
PEA19     OPTICAL       + - . . . . . . . . . . . . . .
PMA21     OPTICAL       + - . . . . . . . . . . . . . .
PWA7      OPTICAL       . . . . . . . . . . + . . . . .
PWA9      OPTICAL       + - . . . . . . . . . . . . . .
PWB8      OPTICAL       . . . . . . . . . . - . . . . .
P3995133  OPTICAL               LIBRARY IS NOT A REAL LIBRARY
STDALONE  OPTICAL               LIBRARY IS NOT A REAL LIBRARY

                        1 1 1 2 2 2 2 2 2 2 2 2 2 3 3 3
LIBRARY   CLASS  SYSTEM= 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2
ATLF4017  TAPE          . . . . . . . . . . . . . . . .
LIB1      OPTICAL       . . . . . . . . . . . . . . . .
LIB2      OPTICAL       . . . . . . . . . . . . . . . .
LIB3      OPTICAL       . . . . . . . . . . . . . . . .
LIB4      OPTICAL       . . . . . . . . . . . . . . . .
MTLA0001  TAPE          . . . . . . . . . . . . . . . .
MTLA0002  TAPE          . . . . . . . . . . . . . . . .
PCTREUSE  OPTICAL               LIBRARY IS NOT A REAL LIBRARY
PCTWORM   OPTICAL               LIBRARY IS NOT A REAL LIBRARY
PEA13     OPTICAL       . . . . . . . . . . . . . . . .
PEA15     OPTICAL       . . . . . . . . . . . . . . . .
PEA17     OPTICAL       . . . . . . . . . . . . . . . .
PEA19     OPTICAL       . . . . . . . . . . . . . . . .
PMA21     OPTICAL       . . . . . . . . . . . . . . . .
PWA7      OPTICAL       . . . . . . . . . . . . . . . .
PWA9      OPTICAL       . . . . . . . . . . . . . . . .
PWB8      OPTICAL       . . . . . . . . . . . . . . . .
P3995133  OPTICAL               LIBRARY IS NOT A REAL LIBRARY
STDALONE  OPTICAL               LIBRARY IS NOT A REAL LIBRARY
***************************** LEGEND *****************************
. THE LIBRARY IS NOT DEFINED TO THE SYSTEM
+ THE LIBRARY IS ONLINE
- THE LIBRARY IS OFFLINE
P THE LIBRARY IS PENDING OFFLINE
SYSTEM 1  = SYSTEM1    SYSTEM 2  = SYSTEM2    SYSTEM 3  = SYSTEM3
SYSTEM 4  = SYSTEM4    SYSTEM 5  = SYSTEM5    SYSTEM 6  = SYSTEM6
SYSTEM 7  = SYSTEM7    SYSTEM 8  = SYSTEM8    SYSTEM 9  = SYSTEM9
SYSTEM 10 = SYSTEM10   SYSTEM 11 = SYSTEM11   SYSTEM 12 = SYSTEM12
SYSTEM 13 = SYSTEM13   SYSTEM 14 = SYSTEM14   SYSTEM 15 = SYSTEM15
SYSTEM 16 = SYSTEM16   SYSTEM 17 = SYSTEM17   SYSTEM 18 = SYSTEM18
SYSTEM 19 = SYSTEM19   SYSTEM 20 = SYSTEM20   SYSTEM 21 = SYSTEM21
SYSTEM 22 = SYSTEM22   SYSTEM 23 = SYSTEM23   SYSTEM 24 = SYSTEM24
SYSTEM 25 = SYSTEM25   SYSTEM 26 = SYSTEM26   SYSTEM 27 = SYSTEM27
SYSTEM 28 = SYSTEM28   SYSTEM 29 = SYSTEM29   SYSTEM 30 = SYSTEM30
SYSTEM 31 = SYSTEM31   SYSTEM 32 = SYSTEM32
```

The following is a sample of DISPLAY SMS,LIB(PEA13),LISTDRI:

```
D SMS,LIB(PEA13),LISTDRI
IGD002I 15:09:47 DISPLAY SMS 412
                                          1 1 1 1 1 1 1
LIBRARY   CLASS  SYSTEM= 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
PEA13     OPTICAL       + - . . . . . . . . . . . . . .

                                          1 1 1 1 1 1 1
DRIVE    LIBRARY SYSTEM= 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
P13D1    PEA13          + - . . . . . . . . . . . . . .
P13D2    PEA13          + - . . . . . . . . . . . . . .
P13D3    PEA13          + - . . . . . . . . . . . . . .
P13D4    PEA13          + - . . . . . . . . . . . . . .

                         1 1 1 2 2 2 2 2 2 2 2 2 2 3 3 3
LIBRARY   CLASS  SYSTEM= 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2
PEA13     OPTICAL       . . . . . . . . . . . . . . . .

                         1 1 1 2 2 2 2 2 2 2 2 2 2 3 3 3
DRIVE    LIBRARY SYSTEM= 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2
P13D1    PEA13          . . . . . . . . . . . . . . . .
P13D2    PEA13          . . . . . . . . . . . . . . . .
P13D3    PEA13          . . . . . . . . . . . . . . . .
P13D4    PEA13          . . . . . . . . . . . . . . . .
***************************** LEGEND *****************************
. THE LIBRARY OR DRIVE IS NOT DEFINED TO THE SYSTEM
+ THE LIBRARY OR DRIVE IS ONLINE
- THE LIBRARY OR DRIVE IS OFFLINE
P THE LIBRARY IS PENDING OFFLINE
SYSTEM 1  = SYSTEM1    SYSTEM 2  = SYSTEM2    SYSTEM 3  = SYSTEM3
SYSTEM 4  = SYSTEM4    SYSTEM 5  = SYSTEM5    SYSTEM 6  = SYSTEM6
SYSTEM 7  = SYSTEM7    SYSTEM 8  = SYSTEM8    SYSTEM 9  = SYSTEM9
SYSTEM 10 = SYSTEM10   SYSTEM 11 = SYSTEM11   SYSTEM 12 = SYSTEM12
SYSTEM 13 = SYSTEM13   SYSTEM 14 = SYSTEM14   SYSTEM 15 = SYSTEM15
SYSTEM 16 = SYSTEM16   SYSTEM 17 = SYSTEM17   SYSTEM 18 = SYSTEM18
SYSTEM 19 = SYSTEM19   SYSTEM 20 = SYSTEM20   SYSTEM 21 = SYSTEM21
SYSTEM 22 = SYSTEM22   SYSTEM 23 = SYSTEM23   SYSTEM 24 = SYSTEM24
SYSTEM 25 = SYSTEM25   SYSTEM 26 = SYSTEM26   SYSTEM 27 = SYSTEM27
SYSTEM 28 = SYSTEM28   SYSTEM 29 = SYSTEM29   SYSTEM 30 = SYSTEM30
SYSTEM 31 = SYSTEM31   SYSTEM 32 = SYSTEM32
```

The following is a sample of DISPLAY SMS,LIBRARY(ALL),LISTDRI:

```
D SMS,LIBRARY(ALL),LISTDRI
IGD002I 15:09:21 DISPLAY SMS 409
                                        1 1 1 1 1 1 1
LIBRARY   CLASS  SYSTEM= 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
ATLF4017  TAPE          + - . . . . . . . . . . . . . .
LIB1      OPTICAL       . . . . . . . . . . . . . . . .
LIB2      OPTICAL       . . . . . . . . . . . . . . . .
LIB3      OPTICAL       . . . . . . . . . . . . . . . .
LIB4      OPTICAL       . . . . . . . . . . . . . . . .
MTLA0001  TAPE          - . . . . . . . . . . . . . . .
MTLA0002  TAPE          + - . . . . . . . . . . . . . .
PCTREUSE  OPTICAL               LIBRARY IS NOT A REAL LIBRARY
PCTWORM   OPTICAL               LIBRARY IS NOT A REAL LIBRARY
PEA13     OPTICAL       + - . . . . . . . . . . . . . .
PEA15     OPTICAL       + - . . . . . . . . . . . . . .
PWA9      OPTICAL       + - . . . . . . . . . . . . . .
P156A     OPTICAL       + - . . . . . . . . . . . . . .
3995133   OPTICAL               LIBRARY IS NOT A REAL LIBRARY
STDALONE  OPTICAL               LIBRARY IS NOT A REAL LIBRARY

                       1 1 1 2 2 2 2 2 2 2 2 2 2 3 3 3
DRIVE     LIBRARY SYSTEM= 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2
P13D1     PEA13          + - . . . . . . . . . . . . . .
P13D2     PEA13          + - . . . . . . . . . . . . . .
P13D3     PEA13          + - . . . . . . . . . . . . . .
P13D4     PEA13          + - . . . . . . . . . . . . . .
P15D1     PEA15          + - . . . . . . . . . . . . . .
P15D2     PEA15          + - . . . . . . . . . . . . . .
P15D3     PEA15          + - . . . . . . . . . . . . . .
P15D4     PEA15          + - . . . . . . . . . . . . . .
P9D1      PWA9           + - . . . . . . . . . . . . . .
P9D2      PWA9           + - . . . . . . . . . . . . . .
P9D3      PWA9           + - . . . . . . . . . . . . . .
P9D4      PWA9           P . . . . . . . . . . . . . . .
P156AD1   P156A          + - . . . . . . . . . . . . . .
P156AD2   P156A          + . . . . . . . . . . . . . . .
P156AD3   P156A          - + . . . . . . . . . . . . . .
P156AD4   P156A          - + . . . . . . . . . . . . . .
P156AD5   P156A          - + . . . . . . . . . . . . . .
P156AD6   P156A          - + . . . . . . . . . . . . . .
LISTDRI IS IGNORED FOR PSEUDO AND TAPE LIBRARIES
**************************** LEGEND ****************************
. THE LIBRARY OR DRIVE IS NOT DEFINED TO THE SYSTEM
+ THE LIBRARY OR DRIVE IS ONLINE
- THE LIBRARY OR DRIVE IS OFFLINE
P THE LIBRARY IS PENDING OFFLINE
SYSTEM 1  = SYSTEM1    SYSTEM 2  = SYSTEM2    SYSTEM 3  = SYSTEM3
SYSTEM 4  = SYSTEM4    SYSTEM 5  = SYSTEM5    SYSTEM 6  = SYSTEM6
SYSTEM 7  = SYSTEM7    SYSTEM 8  = SYSTEM8    SYSTEM 9  = SYSTEM9
SYSTEM 10 = SYSTEM10   SYSTEM 11 = SYSTEM11   SYSTEM 12 = SYSTEM12
SYSTEM 13 = SYSTEM13   SYSTEM 14 = SYSTEM14   SYSTEM 15 = SYSTEM15
SYSTEM 16 = SYSTEM16   SYSTEM 17 = SYSTEM17   SYSTEM 18 = SYSTEM18
SYSTEM 19 = SYSTEM19   SYSTEM 20 = SYSTEM20   SYSTEM 21 = SYSTEM21
SYSTEM 22 = SYSTEM22   SYSTEM 23 = SYSTEM23   SYSTEM 24 = SYSTEM24
SYSTEM 25 = SYSTEM25   SYSTEM 26 = SYSTEM26   SYSTEM 27 = SYSTEM27
SYSTEM 28 = SYSTEM28   SYSTEM 29 = SYSTEM29   SYSTEM 30 = SYSTEM30
SYSTEM 31 = SYSTEM31   SYSTEM 32 = SYSTEM32
```

Displaying Library Detail Status

The syntax of the DISPLAY SMS command for detail library status is:



LIBRARY(*name* **| ALL)**
Specifies the name of the optical library to be displayed. If a library name is specified, there is one data line describing the specified library. If ALL is specified, there is one data line for each optical library in the configuration. To specify a library named ALL, surround it with parentheses; for example, DISPLAY SMS,LIBRARY((ALL)).

DETAIL
Displays detail status for optical libraries.

L={a | *name* **|** *name-a***}**
Specifies the location where the results of the inquiry are to be displayed, where *name* is the console name, and *a* is the display area on the console screen.

To display detail status for an individual library, enter the following command:

```
DISPLAY SMS,LIBRARY(name),DETAIL
```

The following information is displayed:

```
CBR1110I OAM library status:
OPTICAL  DEVICE  ATT  USE  AVL  TOT  EMP  SCR  PT  DEV  ON  OP  IO   LIB    READ
LIBRARY  TYPE    DRV  DRV  DRV  SLT  SLT  VOL      NUM          ST   CMD   COUNT
olibname devtype aaa  bbb  ccc  ddd  eee  fff   g  hhhh  i   j   k   lbcmd rdcnt
DEFAULT PSEUDO LIB: def-plib-name
DEFAULT MEDIA TYPE: def-mediatype
XCF MEMBER NAME: membername
3995 MICROCODE LEVEL: EC number
```

The fields displayed in each data line are as follows:

olibname Name of the optical library

devtype Device type of the optical library:

3995-111	3995 rewritable library, extension to a 3995-131
3995-112	3995 WORM library, extension to a 3995-132
3995-113	3995 multifunction library, extension to a 3995-133
3995-132	3995 WORM library and controller
3995-133	3995 multifunction library and controller
3995-C3A	3995 multifunction library controller
3995-C12	3995 multifunction library, extension to a 3995-C32
3995-C16	3995 multifunction library, extension to a 3995-C36
3995-C18	3995 multifunction library, extension to a 3995-C38
3995-C32	3995 multifunction library, attaches to a 3995-C3A
3995-C34	3995 multifunction library, attaches to a 3995-C3A
3995-C36	3995 multifunction library, attaches to a 3995-C3A
3995-C38	3995 multifunction library, attaches to a 3995-C3A

aaa Number of optical drives attached to the optical library

bbb Number of usable optical drives (online, operational, and not pending offline)

ccc Number of available optical drives (online, operational, and not in use)

ddd Total number of storage slots in the optical library

eee Number of empty storage slots in the optical library

fff Number of scratch volumes in the optical library

g Active path to the optical library:

P	Primary
A	Alternate
BLANK	Pseudo library or 3995 library

hhhh MVS/ESA device number of the active CTC, or blank for pseudo libraries

i Optical library online status:

Y	Online
N	Offline
P	Pending offline

j Optical library operational status:

Y	Operational
N	Not operational

k Optical library input/output station operational status, as follows:

Y	Operational
N	Not operational
*	An error occurred while trying to get status
BLANK	Library not attached or library has no I/O station

lbcmd For the 3995: (except for 3995-C3A) REMAP indicates that a REMAP of the library is in progress, RMPND indicates that a full library audit is being processed, and AUDIT indicates that a full library audit of the library is in progress. If not REMAP, RMPND, or AUDIT, this field contains the library command most recently sent to the optical library.

rdcnt The number of read requests waiting or in progress for optical volumes that are resident in this optical library.

def-plib-name The name of the pseudo library that will be assigned to any volume that is ejected from this library if that volume does not already have a pseudo library associated with it.

def-mediatype The media types that can be entered into the optical library and which media types can be written to if they already reside in the library. This value is specified on the 3995 Library Define panel in ISMF.

membername The XCF member name associated with the instance of OAM where this library is online.

microcode-level This field displays the 3995 microcode level.

The following is a sample of DISPLAY SMS,LIBRARY(LIB1),DETAIL:

```
CBR1110I OAM library status:
OPTICAL  DEVICE   ATT  USE  AVL  TOT  EMP  SCR  PT  DEV   ON  OP  IO  LIB   READ
LIBRARY  TYPE     DRV  DRV  DRV  SLT  SLT  VOL      NUM          ST  CMD   COUNT
LIB1     3995-C36   6    1    1  156  153    4     19F4    Y   Y   Y  LM        0
-----------------------------------------------------------
DEFAULT PSEUDO LIB: PLIB4
DEFAULT MEDIA TYPE: 3995REWR
XCF MEMBER NAME: OAMSYS1
3995  MICROCODE LEVEL: 14028Q
-----------------------------------------------------------
```

The following is a sample of DISPLAY SMS,LIBRARY(ALL),DETAIL:

```
CBR1110I OAM library status:
OPTICAL  DEVICE   ATT  USE  AVL  TOT  EMP  SCR  PT  DEV   ON  OP  IO  LIB   READ
LIBRARY  TYPE     DRV  DRV  DRV  SLT  SLT  VOL      NUM          ST  CMD   COUNT
LIB1     3995-131   4    4    4  144   43   12   P 0900    Y   Y   Y  LM        0
LIB2     3995-111   4    4    3  144   48    8   P 0908    Y   Y   Y  LACT      0
LIB3     3995-132   4    4    3  144   45    6   P 0910    Y   Y   Y  LM        0
LIB4     3995-112   4    4    4  144   38    6   P 0918    Y   Y   Y  LM        4
LIB5     3995-133   4    4    0  144   11   26   P 0920    Y   Y   Y  LD       12
LIB6     3995-113   4    4    1  144   10   36   P 0928    Y   Y   Y  LM        0
LIB7     3995-C36   6    1    1  156  153    4     19F4    Y   Y   Y  LM        0
STDALONE 9246       0    0    0    0    0    0        0    N   Y                 0
P3995SW3 3995-SW3   0    0    0    0    0    0        0    Y   Y                 0
PCTREUS  3995-131   0    0    0    0    0    0        0    Y   Y                 0
PCTWORM  3995-132   0    0    0    0    0    0        0    Y   Y                 0
P3995133 3995-133   0    0    0    0    0    0        0    Y   Y                 0
P3995SW4 3995-SW4   0    0    0    0    0    0        0    Y   Y                 0
PSEUDO1             0    0    0    0    0    0        0    Y   Y                 0
```

Displaying Storage Group Status

The following command syntax displays storage group status:



DISPLAY
Specifies the OAM display command.

STORGRP(*group-name* **| ALL)**
Displays the status of an Object or Object Backup storage group. If *group-name* is specified, one data line displays the status of the requested storage group. If *group-name* is omitted or if ALL is selected, there is one data line for each Object and Object Backup storage group in the active configuration. If *group-name* is ALL, you must enclose the ALL parameter in two sets of parentheses, as follows:

```
D SMS,STORGRP((ALL))
```

DETAIL
Displays the detail status for the storage group specified by *object-group*.

L={a | *name* | *name-a***}**
Specifies the location where the results of the inquiry are to be displayed, where *name* is the console name, and *a* is the display area on the console screen.

To display Object or Object Backup storage group status, enter the following command:

```
DISPLAY SMS,STORGRP(object-group),DETAIL
```

Specifying *object-group* on the D SMS,STORGRP command displays the status of the requested storage group:

```
CBR1130I OAM storage group status:
OBJECT   TY  REQ   OSMC     BACKUP    BACKUP    TAPE     DATA
STORGRP     COUNT  SYSTEM   STORGRP1  STORGRP2  UNIT     CLASS
sgname   a bbbbb   sysname  objbusg1  objbusg2  unitname dataclass
-------------------------------------------------------------
Library Names:  libname1 libname2 libname3 libname4
                libname5 libname6 libname7 libname8
                          OPTICAL      TAPE
All Volumes Full:         c            d
Writable Volumes:         eeeeee       ffffff
Drive Start Threshold:    ggggg        hhhhh
Volume Full Threshold:    iiiii        jjjjj
Reinit / Recycle Mode:    kkkkkkkk     pppppppp
# of Active Drives:       llll         mmm
Recall Status:            qqqqqqqq     rrrrrrrr
```

The fields displayed in each data line are as follows:

sgname Name of the Object storage group or Object Backup storage group being displayed.

a Optical storage group type:
- **B** Object Backup storage group
- **G** Object storage group
- **N** Nongroup. Not used.
- **S** Scratch

bbbbb Number of write requests for the storage groups that are pending in OAM.

sysname Name of the system where OSMC processing is run for the Object or Object Backup storage group. This system name is defined in the storage group definition in the active SMS configuration. OSMC processes storage groups automatically when the cycle start window occurs, or manually when a user requests a full OSMC cycle on that system. This field is blank if you do not define a specific OSMC system name. If this field is blank, OSMC processes storage groups when the cycle window starts, or manually when a user requests a full OSMC cycle on any system where OAM and OSMC are active.

objbusg1 Name of the Object Backup storage group that is specified in the CBROAM*xx* member of PARMLIB, where the first backup copies of objects in this object storage group are stored. This field is *--N/A--* if the displayed storage group is an Object Backup storage group. This field contains hyphens if the displayed Object storage group does not have a defined first backup storage group.

objbusg2 Name of the Object Backup storage group that is specified in the CBROAM*xx* member of PARMLIB, where the second backup copies of objects in this object storage group are stored. This field

is --*N/A*-- if the displayed storage group is an Object Backup storage group. This field contains hyphens if the displayed Object storage group does not have a defined second backup storage group.

unitname MVS esoteric or generic assigned to this storage group that OAM uses when allocating a tape drive for a scratch volume during a write request to this storage group. This field is defined using the SETOAM statements in the CBROAM*xx* member of PARMLIB. This field contains hyphens if the displayed storage group does not have a tape unit name that is associated with it.

libname1–libname8
Names of one-to-eight real optical libraries or a single pseudo library that is associated with the storage group.

dataclass The data class that is associated with this object tape volume. The data class is defined using the SETOAM statements in the CBROAM*xx* member of PARMLIB. This field contains hyphens if this storage group does not have a data class (DATACLASS) associated with it.

c Indicates whether all optical volumes associated with this storage group are full. Valid values are:
Y All optical volumes are full.
N At least one optical volume has available space.
- There are no optical volumes in this storage group.

d Indicates whether all tape volumes associated with this storage group are full. Valid values are:
Y All tape volumes are full.
N At least one tape volume has available space.
- There are no tape volumes in this storage group.

eeeeee Number of optical volumes in this storage group that are writable and not full.

ffffff Number of tape volumes in this storage group that are writable and not full.

ggggg Optical drive startup threshold for this storage group. When the number of requests per active optical drive exceeds the threshold, a new optical drive can be started for this storage group.

hhhhh Tape drive startup threshold for this storage group. When the number of requests for this storage group exceeds this threshold, a new tape drive task can be started for this storage group.

iiiii Optical volume full threshold. When the number of kilobytes that are free on an optical volume belonging to this storage group drops below this threshold value, the volume is marked full.

jjjjj Tape volume full threshold. When the number of kilobytes that are free on a tape volume belonging to this storage group drops below this threshold value, the volume is marked full.

kkkkkkkk The optical reinitialization mode for this storage group. When a reusable optical cartridge expires or is recycled using the RECYCLE option on a MOVEVOL command, both volumes on that cartridge are reinitialized. The volumes can be returned to scratch, or remain assigned to their current storage group. Valid values are:

GROUP Remain in the currently assigned storage group.
SCRATCH Return to scratch.

pppppppp Tape recycle mode. When the tape cartridge in this storage group no longer contains active objects because the volume is expired, or is recycled using the START RECYCLE command or the RECYCLE option on a MOVEVOL command. The tape volumes can be returned to MVS scratch, OAM scratch, or remain assigned to their current storage group. Valid values are:
GROUP Remain in the currently assigned storage group.
OAMSCR Return to OAM scratch.
MVSSCR Return to MVS scratch.

llll The number of optical drives actively processing requests for this storage group.

mmm The number of tape tasks actively processing requests for this storage group.

qqqqqqqq Optical Immediate Recall to DB2 (IRD) Status. Indicates the current IRD setting for objects residing on optical media. These values are based on SETOSMC statements in the CBROAMxx Parmlib member. Valid values are:
nnn Implicit recalls are enabled as a result of RECALLOPTICAL or RECALLALL keywords specified in a SETOSMC statement. When an object from this storage group is retrieved from optical, it will be recalled to DB2 DASD. *nnn* represents the number of days an implicitly recalled object will reside on DB2.
EXPLICIT Implicit recalls disabled due to RECALLNONE or RECALLOPTICAL or both specified, or RECALLALL keywords NOT specified in a SETOSMC statement. Recalls will occur only through OSREQ invocation.
DISABLED Implicit and explicit recalls disabled as a result of RECALLOFF(ON) or MAXRECALLTASKS(0) specified in a SETOSMC Statement.

If the storage group displayed is an object backup storage group, this field will contain "--N/A--".

rrrrrrrr Tape Immediate Recall to DB2 (IRD) Status. Indicates the current IRD setting for objects residing on tape media. These values are based on SETOSMC statements in the CBROAMxx Parmlib member. Valid values are:
nnn Implicit recalls are enabled as a result of RECALLTAPE or RECALLALL keywords specified in a SETOSMC statement. When an object from this storage group is retrieved from optical, it will be recalled to DB2 DASD. *nnn* represents the number of days an implicitly recalled object will reside on DB2.
EXPLICIT Implicit recalls disabled due to RECALLNONE or RECALLTAPE or both specified, or RECALLALL keywords NOT specified in a SETOSMC statement. Recalls will occur only through OSREQ invocation.
DISABLED Implicit and explicit recalls disabled as a result of

RECALLOFF(ON) or MAXRECALLTASKS(0) specified in a SETOSMC Statement.

If the storage group displayed is an object backup storage group, this field will contain "--N/A--".

The following is a sample of DISPLAY SMS,STORGRP(GROUP22),DETAIL:

```
CBR1130I OAM storage group status:
OBJECT   TY  REQ   OSMC     BACKUP    BACKUP    TAPE     DATA
STORGRP     COUNT  SYSTEM   STORGRP1  STORGRP2  UNIT     CLASS
GROUP01  G     0   SYSTEM1  IMAFIRST  IMSECOND  -------- --------
Library Names:
                          OPTICAL        TAPE
ALL VOLUMES FULL:               -           -
WRITABLE VOLUMES:               0           0
DRIVE START THRESHOLD:         17           0
VOLUME FULL THRESHOLD:        124           0
REINIT / RECYCLE MODE:     SCRATCH      OAMSCR
# OF ACTIVE DRIVES:             0           0
```

The following is a sample of DISPLAY SMS,STORGRP(ALL),DETAIL:

```
CBR1130I OAM storage group status:
OBJECT   TY  REQ   OSMC     BACKUP    BACKUP    TAPE     DATA
STORGRP     COUNT  SYSTEM   STORGRP1  STORGRP2  UNIT     CLASS
BACKUP1   B     0           --N/A--   --N/A--   -------- --------
Library Names:  P156A    PWA9
BACKUP2   B     0           --N/A--   --N/A--   -------- --------
Library Names:  PWA9     P156A
BKUP1     B     0           --N/A--   --N/A--   3490
Library Names:  PWA9     P156A
BKUP2     B     0           --N/A--   --N/A--   3490
Library Names:  PWA9     P156A
GROUP00   G     0 SYSTEM1   BACKUP1   BACKUP2   -------- --------
Library Names:  P156A    PWA9
GROUP01   G     0 SYSTEM1   BACKUP1   BACKUP2   -------- --------
Library Names:  P156A    PWA9
GROUP02   G     0 SYSTEM1   BACKUP1   BACKUP2   -------- --------
Library Names:  P156A    PWA9
GROUP03   G     0 SYSTEM1   BACKUP1   BACKUP2   -------- --------
Library Names:  P156A    PWA9
GROUP94   G     0           BKUP1     BKUP2     -------- --------
Library Names:  PWA9     P156A
SBACKUP   B     0           --N/A--   --N/A--   -------- --------
Library Names:  PCTREUSE PCTWORM  P3995133
   TAPE     LIBRARY
   STORGRP  NAMES
   SGATL    ATL10001
   SGATLOBJ ATL10001
```

Displaying Volume Status

The OAM display volume command shows if a volume belongs to an Object Backup storage group, and whether that volume is used to write first or second backup copies of objects. The first or second backup copy indicator is the backup volume type.

The following command syntax displays volume status:



DISPLAY
Specifies the OAM display command.

VOLUME,*volser*
Displays the status of the requested optical volume and the optical volume on the other side of the optical disk. There is no option to display all optical disk volumes known to the system; however, you can use ISMF to display the optical volume list.

L={*a* | *name* | *name-a*}
Specifies the location where the results of the inquiry are to be displayed, where *name* is the console name, and *a* is the display area on the console screen.

Requirement: To display information in the Tape Volume table concerning objects stored on tape volumes, you must use the SPUFI SELECT command. Using the DISPLAY command against these tape volumes only provides information from the tape configuration database, not the Tape Volume table.

To display optical or object tape volume status, enter the following command:

```
DISPLAY SMS,VOLUME(volser)
```

Specifying *volser* displays the status of the requested optical volume and its opposite-side volume.

Optical Volume Status

For an optical volume, the following information is displayed in message CBR1140I:

```
CBR1140I OAM volume status

VOLUME  STORAGE RD  WR  WP LOST  FREE SPACE     MOUNTED  PENDING  REQ
        GROUP               FLAG  (KB)      (%)  DRIVE    MOUNT     CT
volser  sgname  a   b   c  d     freespac fff%  mdrvname pdrvname ggg
oppvol  sgname  a   b   c  d     freespac fff%  mdrvname pdrvname ggg
MEDIA TYPE: mediatyp
media descript {WORM|rewritable|unknown} optical disk media.
LIBRARY: libname
SHELF LOC: shelfloc
PSEUDO LIBRARY: plibname
OWNER: owner-information
XCF MEMBER NAME: member-name
BACKUP TYPE: {BACKUP1 | BACKUP2}
CREATION DATE: createdate     ENTER-EJECT DATE: eedate
VOLSER:            volser     oppvol

LAST WRITTEN DATE: lwdate     lwdate
LAST MOUNTED DATE: lmdate     lmdate
EXPIRATION DATE:   expdate    expdate
status
```

The fields displayed in each data line are as follows:

volser Volume serial number of the requested optical volume.

oppvol Volume serial number of the opposite side of the requested optical volume.

sgname Name of the storage group to which the optical volume belongs.

a Optical volume label readability status:
- **Y** Readable
- **N** Unreadable

b Optical volume writability status:
- **Y** Writable
- **N** Not writable

c Optical volume write protection status:
- **Y** Write protected
- **N** Not write protected

d Volume lost indicator:
- **Y** Volume is marked lost
- **N** Volume is not marked lost

freespac Remaining volume space of the requested optical volume in kilobytes (KB).

fff% Percentage of free space on the optical volume. For a full optical volume, this field contains "FULL".

mdrvname Name of the drive where this optical volume is mounted. If the optical volume is not mounted, this field contains blanks.

pdrvname For a 3995 drive, this field displays "YES" if a mount is pending for this optical volume.

ggg Number of read requests for this optical volume that are pending in OAM.

mediatyp 8-character media type of the requested optical volume. Valid values are as follows:

3995-1RW	3995 5.25-inch, single-density (650 MB), rewritable optical disk media
3995-1WO	3995 5.25-inch, single-density (650 MB), WORM optical disk media
3995-2RW	3995 5.25-inch, double-density (1300 MB), rewritable optical disk media
3995-2WO	3995 5.25-inch, double-density (1300 MB), WORM optical disk media
3995-4RW	3995 5.25-inch, quad-density (2600 MB) rewritable optical disk media
3995-4WO	3995 5.25-inch, quad-density (2600 MB) WORM optical disk media
3995-8RW	3995 5.25-inch, 8*x*-density (5.2 GB) rewritable optical disk media
3995-8WO	3995 5.25-inch, 8*x*-density (5.2 GB) WORM optical disk media

media_descript 72-character description for the requested optical volume.

libname Name of the library in which the optical volume resides. This field appears only for a library-resident optical volume.

shelfloc Shelf location where the optical volume is found. This field appears only for a shelf-resident optical volume.

plib-name The pseudo library name that this volume is assigned to when it is shelf resident.

owner-information
Owner information from the optical volume label.

member-name The XCF member name of the OAM that is controlling the optical volume, blank, or -N/A-.

BACKUP1 | *BACKUP2*
The backup volume type for this volume. This line is displayed only if the volume type is "B" (a backup volume). This volume contains first (BACKUP1) or second (BACKUP2) backup copies written to the Object Backup storage group to which this volume belongs.

volser The volume serial number of the requested optical volume.

oppvol The volume serial number of the opposite side of the requested optical volume.

createdate Date the optical volume was created in the format YYYY-MM-DD.

lwdate Date the optical volume was last written to in the format YYYY-MM-DD.

lmdate Date the optical volume was last mounted in the format YYYY-MM-DD.

eedate Date the optical volume was last entered or ejected from the library in the format YYYY-MM-DD.

expdate Expiration date of the optical volume in the format YYYY-MM-DD.

status Additional optical volume status:
- Optical volumes are not in their assigned optical library slot.
- The optical library slot assigned to these optical volumes is empty or contains different optical volumes.

For an optical volume belonging to an Object storage group, the command `D SMS,VOLUME(WG830B)` displays the following information:

```
CBR1140I OAM volume status:
VOLUME STORAGE  RD WR WP LOST  FREE SPACE   MOUNTED  PENDING   REQ
       GROUP            FLAG   (KB)   (%)  DRIVE    MOUNT     CT
WG830B GROUP22  Y  Y  N  N     194044  65%  P9D3     --------    0
WG830A GROUP22  Y  Y  N  N     194656  65%           --------    0
MEDIA TYPE: 3995-1WO
3995 (650 MB) WORM optical disk media.
LIBRARY: PWA9
PSEUDO LIBRARY:
OWNER: K. G. SMITH
XCF MEMBER NAME: -N/A-
CREATION DATE: 2000-12-19  ENTER-EJECT DATE:  2000-12-19
VOLSER:            - WG830B -  - WG830A -
LAST WRITTEN DATE: 2001-03-08  2000-12-19
LAST MOUNTED DATE: 2001-03-08  2000-12-19
EXPIRATION DATE:   0001-01-01  0001-01-01
```

For an optical volume belonging to an Object Backup storage group, the command `D SMS,VOLUME(WG920A)` displays the following information:

```
CBR1140I OAM volume status:
VOLUME STORAGE  RD WR WP LOST  FREE SPACE    MOUNTED  PENDING   REQ
       GROUP            FLAG    (KB)   (%)  DRIVE    MOUNT     CT
WG920A BACKUP1  Y  Y  N  N     60838    20%           --------    0
WG920B BACKUP1  Y  Y  N  N    166181    55%           --------    0
MEDIA TYPE: 3995-1WO
3995 (650 MB) WORM optical disk media.
LIBRARY: PWA9
PSEUDO LIBRARY:
OWNER: K. G. SMITH
XCF MEMBER NAME: -N/A-
BACKUP TYPE: BACKUP1
CREATION DATE: 2000-12-07  ENTER-EJECT DATE:  2000-12-07
VOLSER:            - WG920A -  - WG920B -
LAST WRITTEN DATE: 2001-01-08  2000-12-07
LAST MOUNTED DATE: 2001-02-14  2000-12-07
EXPIRATION DATE:   9999-12-31  0001-01-01
```

Object Tape Volume Status

For an object tape volume, the following information is displayed:

```
CBR1240I  OAM object tape volume status
VOLUME  STORAGE RD  WR  CM  IN   MED  FREE-SPACE  %    FULL LOST  REQ
        GROUP              USE  TYPE             FULL      FLAG  CT
volser  sgname   a   b   c   d   ee   fffffffff   gg   h   i     JJJ
Volume is WORM tape
XCF MEMBER NAME: member-name
BACKUP TYPE: {BACKUP1 | BACKUP2} :
CAPACITY:          capacity     UNITNAME: unitname
ERDS PHYSICAL ID:  epi
CREATION DATE:     createdate   EXPIRATION DATE:   expdate
LAST MOUNTED DATE: lmdate       LAST WRITTEN DATE: lwdate
DATACLASS:  dataclass
```

The fields displayed in each data line are as follows:

volser Volume serial number of the requested tape volume.

sgname Name of the Object storage group to which the tape volume belongs.

unitname MVS unit name used when the tape volume is allocated. If the tape volume is in an IBM tape library, this value is ignored.

a Tape volume readability status:
- **Y** Readable
- **N** Unreadable

b Tape volume writability status:
- **Y** Writable
- **N** Unwritable

c Compaction indicator for this tape volume:
- **Y** Tape volume written in compacted format.
- **N** Tape volume written in noncompacted format.

d Tape volume in use indicator for this tape volume:
- **Y** Tape volume currently in use by an OAM drive task.
- **N** Tape volume not currently in use by an OAM drive task.

ee Media type of the requested tape volume:
- **02** IBM Cartridge System Tape
- **04** IBM Enhanced Capacity Cartridge System Tape
- **05** IBM High Performance Cartridge System Tape
- **06** IBM Extended High Performance Cartridge System Tape
- **07** IBM Enterprise Tape Cartridge
- **08** IBM Enterprise WORM Tape Cartridge
- **09** IBM Enterprise Economy Tape Cartridge
- **10** IBM Enterprise Economy WORM Tape Cartridge
- **12** IBM Enterprise Extended Tape Cartridge
- **14** IBM Enterprise Extended WORM Tape Cartridge

fffffffffff Remaining space on the requested tape volume in kilobytes (KB).

gg Percentage that the requested tape volume is full (percentage of the tape that has been used).

h Volume full indicator:
- **Y** Volume is marked full.
- **N** Volume is not marked full.

i Volume lost indicator:
- **Y** Volume is marked lost.
- **N** Volume is not marked lost.

jjj Number of read requests for this tape volume that are pending in OAM.

Volume is WORM tape
This text is displayed if the volume is WORM tape.

member-name The XCF member name of the OAM which is controlling this tape volume, or -N/A-.

BACKUP1 | BACKUP2
The backup volume type for this volume. This volume contains first (BACKUP1) or second (BACKUP2) backup copies written to the Object Backup storage group to which this volume belongs.

capacity Approximate number of millimeters of tape or approximate number of kilobytes of data which can be written to the volume, allowing variance for different manufacturers.

epi The ERDS Physical Identifier which indicates the real underlying device type that is used to write OAM objects to this volume. You can use this value to diagnose problems in a mixed device environment where native and emulated devices coexist.

createdate Date the tape volume was created, in the format YYYY-MM-DD.

expdate Expiration date of the tape volume, in the format YYYY-MM-DD.

lmdate Date the tape volume was last mounted, in the format YYYY-MM-DD.

lwdate Date the tape volume was last written to, in the format YYYY-MM-DD.

dataclass This field represents the data class associated with this object tape volume. If no DATACLASS is specified, this field contains hyphens.

For an object tape volume belonging to an Object storage group, the command D SMS,VOLUME(TNN000) displays the following information:

```
CBR1240I Object tape vol status:
VOLUME STORAGE  RD WR CM IN  MED  FREE-SPACE  %   LOST REQ
        GROUP           USE TYPE           FULL FLAG CT
TNN000 GROUP24   Y  Y  Y  N   04      874212   0   N     0
XCF MEMBER NAME: -N/A-
CAPACITY:             874218  UNITNAME: 3490
ERDS PHYSICAL ID:       0002
CREATION DATE: 2000-12-18    EXPIRATION DATE: 9999-12-31
LAST MOUNTED DATE: 2001-02-23    LAST WRITTEN DATE:  2000-12-18
DATACLASS: --------
```

For an object tape volume belonging to an Object Backup storage group, the command D SMS,VOLUME(TNN005) displays the following information:

```
CBR1240I Object tape vol status:
VOLUME STORAGE  RD WR CM IN  MED  FREE-SPACE  %   LOST REQ
        GROUP           USE TYPE           FULL FLAG CT
TNN005 BACKUP2   Y  Y  Y  N   04     874210   0   N     0
XCF MEMBER NAME: -N/A-
BACKUP TYPE: BACKUP2   :
CAPACITY:             874218   UNITNAME: 3490
ERDS PHYSICAL ID:       0002
CREATION DATE: 2000-12-18    EXPIRATION DATE: 9999-12-31
LAST MOUNTED DATE: 2001-03-08    LAST WRITTEN DATE:  2000-12-18
DATACLASS: --------
```

If the object tape volume resides in an IBM automated tape library, you receive both the CBR1240I display for object tape volumes and the CBR1180I display for tape library volumes. The command D SMS,VOLUME(XCF011) displays the following information for an OAM scratch tape volume that resides in an automated tape library:

```
CBR1180I OAM tape volume status:
VOLUME  MEDIA  STORAGE  LIBRARY  USE  W  C  SOFTWARE  LIBRARY
        TYPE   GROUP    NAME     ATR  P  P  ERR STAT  CATEGORY
XCF011  MEDIA2 *SCRTCH* ATLBA999 S    N  N  MEDIAMNT  NOTAVAIL
------------------------------------------------------------
RECORDING TECH:    36 TRACK     COMPACTION:       UNKNOWN
SPECIAL ATTRIBUTE: NONE         ENTER/EJECT DATE: 2001-02-14
CREATION DATE: 2001-02-14       EXPIRATION DATE:
LAST MOUNTED DATE:              LAST WRITTEN DATE:
SHELF LOCATION:
OWNER:
```

Related reading: For more examples of CBR1180I, see the *z/OS DFSMS OAM Planning, Installation, and Storage Administration Guide for Tape Libraries*.

Displaying Volumes that Have LOSTFLAG Set

The OAM display lost volumes command displays the volume serial numbers of the optical and tape volumes that have LOSTFLAG set. OAM requests might fail if this flag is set. This command allows you to determine which volumes are "lost" and to perform the necessary troubleshooting on those volumes.

The following command syntax displays the optical and tape volumes that have LOSTFLAG set:

The following is a description of the keyword for this command:

LOSTVOL
Displays the optical and tape volumes that have LOSTFLAG set.

To display the optical and tape volumes that have LOSTFLAG set, enter the following command:

```
F OAM,DISPLAY,LOSTVOL
```

The output of the F OAM,DISPLAY,LOSTVOL command shows optical volumes that are lost, but no tape volumes that are lost:

```
F OAM,DISPLAY,LOSTVOL
CBR1154I OPTICAL volume OPTVOL1 is a lost volume.
CBR1154I OPTICAL volume OPTVOL2 is a lost volume.
CBR1155I Total number of OPTICAL volumes marked lost is 2.
CBR1155I Total number of TAPE volumes marked lost is 0.
```

The output of the F OAM,DISPLAY,LOSTVOL command shows both optical and object tape volumes that are lost:

```
F OAM,DISPLAY,LOSTVOL
CBR1154I OPTICAL volume OPTVOL1 is a lost volume.
CBR1154I OPTICAL volume OPTVOL2 is a lost volume.
CBR1155I Total number of OPTICAL volumes marked lost is 2.
CBR1154I TAPE volume TAPEVOL1 is a lost volume.
CBR1155I Total number of TAPE volumes marked lost is 1.
```

To clear the status of a lost volume, use either of the following commands:
F OAM,UPDATE,VOLUME,VOLSER,LOSTFLAG,OFF

or the
F OAM,RESTART

Displaying SETOPT, SETOAM, and SETOSMC Parameters

Use the F OAM,DISPLAY,SETOAM, SETOPT, or SETOSMC command to display the current settings of the SETOAM, SETOPT, or SETOSMC statement for the OAM address space.

The following is the command syntax:



The following are the descriptions of the keywords used in this command:

SETOPT | SETOAM | SETOSMC
Specifies the command parameter being displayed. Use SETOAM to display values of settings in an object tape environment. SETOPT is used to display values of settings in an optical environment. Use SETOSMC to display the values of settings for OSMC processing.

ALL | GLOBAL | *storgrp*
Specifies the kind of information that the system is to display. For the SETOAM, SETOSMC, and SETOPT parameters, the valid values are as follows:

ALL Displays the settings for each valid storage group as well as the global default settings. If ALL is specified, the global default, if applicable, is displayed as well as the settings for each valid storage group in the active SMS configuration.

GLOBAL
Displays only the OAM global keywords.

storgrp

- Displays only the settings for the specified storage group name. There can be up to fourteen storage group names indicated on a single DISPLAY command.
- Displays the settings for the FIRSTBACKUPGROUP and SECONDBACKUPGROUP for the specified storage group name.

The following is a sample of F OAM,DISPLAY,SETOAM,*storgrp* command:

```
F OAM,DISPLAY,SETOAM,GROUP22

CBR1075I GROUP22 value for SGMAXTPS is  55
CBR1075I GROUP22 value for SGMAXTPR is 22
CBR1075I GROUP22 value for EXPDATE is 2019/031
CBR1075I GROUP22 value for TFULLTHR is 240
CBR1075I GROUP22 value for TFULLPER is 100
CBR1075I GROUP22 value for TAPEUNIT is 3490
CBR1075I GROUP22 value for DMWT is 120
CBR1075I GROUP22 value for DATACL is ATLM2CU
CBR1075I GROUP22 value for TCOMP is N
CBR1075I GROUP22 value for TDRVSTRT is 9999
CBR1075I group-name value for SGMAXREC is nn
```

The following is a sample of F OAM ,DISPLAY,SETOAM,ALL command:

```
F OAMPLEX,DISPLAY,SETOAM,ALL

CBR1075I GLOBAL value for MAXTAPESTORETASKS is 68
CBR1075I GLOBAL value for MAXTAPERETRIEVETASKS is 42
CBR1075I GLOBAL value for DSNSGNAM is Y
CBR1075I GLOBAL value for EXPDATE is 2010/115
CBR1075I GLOBAL value for TFULLTHR is 240
CBR1075I GLOBAL value for MWT is 5
CBR1075I GLOBAL value for DATACL is ATLM2CU
CBR1075I GLOBAL value for TRECYC is GROUP
CBR1075I GLOBAL value for OSCRSYNC is DISABLED
CBR1075I GLOBAL value for TAPEDISP is 3
CBR1075I GLOBAL value for MAXRECYC is nn
CBR1075I GLOBAL value for PERCENTV is nnn
CBR1075I BACKUP1 value for EXPDATE is /
CBR1075I BACKUP1 value for TFULLTHR is 0
CBR1075I BACKUP1 value for TFULLPER is 0
CBR1075I BACKUP1 value for TAPEUNIT is 3490
CBR1075I BACKUP1 value for DMWT is 300
CBR1075I BACKUP1 value for DATACL is
CBR1075I BACKUP1 value for TCOMP is N
CBR1075I BACKUP1 value for TDRVSTRT is 0
CBR1075I BACKUP2 value for EXPDATE is /
CBR1075I BACKUP2 value for TAPEUNIT is
CBR1075I BACKUP2 value for TFULLTHR is 0
CBR1075I BACKUP2 value for TFULLPER is 0
```

The following is a sample F OAM,D,SETOAM,GLOBAL command:

```
F OAM,D,SETOAM,GLOBAL
CBR1075I GLOBAL VALUE FOR MAXTAPES IS 3
CBR1075I GLOBAL value for MAXTAPER is 3
CBR1075I GLOBAL value for DSNSGNAM is Y
CBR1075I GLOBAL value for EXPDATE is 2006/364
CBR1075I GLOBAL value for TFULLTHR is 9999
CBR1075I GLOBAL value for MWT is 3
CBR1075I GLOBAL value for DATACL is VTSM2CU
CBR1075I GLOBAL value for TRECYC is GROUP
CBR1075I GLOBAL value for OSCRSYNC is DISABLED
CBR1075I GLOBAL value for TAPEDISP is 3
CBR1075I GLOBAL value for MAXRECYC is 0
CBR1075I GLOBAL value for PERCENTV is 100
```

The following is a sample of F OAM,D,SETOPT,*storgrp* command:

```
F OAM,DISPLAY,SETOPT,GROUP22

CBR1075I GROUP22 value for OPREINIT is GROUP
CBR1075I GROUP22 value for OPDISDLY is 0
```

The following is a sample of F OAM,DISPLAY,SETOPT,ALL command:

```
F OAM,DISPLAY,SETOPT,ALL

CBR1075I GLOBAL value for OPREINIT is GROUP
CBR1075I GLOBAL value for OPDISDLY is 0
CBR1075I GLOBAL value for MWT is 3
CBR1075I GROUP00 value for OPREINIT is GROUP
CBR1075I GROUP22 value for OPREINIT is GROUP
CBR1075I GROUP26 value for OPREINIT is GROUP
CBR1075I GROUP28 value for OPREINIT is GROUP
```

The following is a sample F OAM,D,SETOPT,GLOBAL command:

```
F OAM,D,SETOPT,GLOBAL
CBR1075I GLOBAL value for OPREINIT is GROUP
CBR1075I GLOBAL value for OPDISDLY is 0
CBR1075I GLOBAL value for MWT is 5
CBR1075I GLOBAL value for UNLOADD is 1
CBR1075I GLOBAL value for UNLOADT is 9999
```

The following is a sample F OAM,DISPLAY,SETOSMC,*storgrp* command:

```
F OAM,DISPLAY,SETOSMC,GROUP22
CBR1075I GROUP22 value for BACKUP1 is IMAFIRST
CBR1075I GROUP22 value for BACKUP2 is IMSECOND
CBR1075I GROUP22 value for RECALLO is 30,ON
CBR1075I GROUP22 value for RECALLT is 30,ON
CBR1075I GROUP22 value for RECALLF is OFF
CBR1075I GROUP22 value for CLEAROLD is OPT
```

The following is a sample F OAM,DISPLAY,SETOSMC,ALL command:

```
F OAM,DISPLAY,SETOSMC,ALL
CBR1075I GLOBAL value for BACKUP1 is IMAFIRST
CBR1075I GLOBAL value for BACKUP2 is IMSECOND
CBR1075I GLOBAL value for CYCLEW is STRTSTOP
CBR1075I GLOBAL value for MAXRECAL is 10
CBR1075I GLOBAL value for CLEAROLD is OPT
CBR1075I GLOBAL value for RECALLO is 15,ON
CBR1075I GLOBAL value for RECALLT is 15,ON
CBR1075I GROUP00 value for BACKUP1 is IMAFIRST
CBR1075I GROUP00 value for BACKUP2 is IMSECOND
CBR1075I GROUP01 value for BACKUP1 is IMAFIRST
CBR1075I GROUP01 value for BACKUP2 is IMSECOND
CBR1075I GROUP02 value for BACKUP1 is IMAFIRST
CBR1075I GROUP02 value for BACKUP2 is IMSECOND
CBR1075I GROUP03 value for BACKUP1 is IMAFIRST
CBR1075I GROUP03 value for BACKUP2 is IMSECOND
CBR1075I GROUP04 value for BACKUP1 is IMAFIRST
CBR1075I GROUP04 value for BACKUP2 is IMSECOND
CBR1075I GROUP05 value for BACKUP1 is IMAFIRST
CBR1075I GROUP05 value for BACKUP2 is IMSECOND
CBR1075I GROUP06 value for BACKUP1 is IMAFIRST
CBR1075I GROUP06 value for BACKUP2 is IMSECOND
CBR1075I GROUP07 value for BACKUP1 is IMAFIRST
```

The following is a sample F OAM,D,SETOSMC,GLOBAL command:

```
F OAM,D,SETOSMC,GLOBAL
CBR1075I GLOBAL value for BACKUP1 is IMAFIRST1
CBR1075I GLOBAL value for BACKUP2 is SECOND1
CBR1075I GLOBAL value for CYCLEW is STRTONLY
CBR1075I GLOBAL value for MAXRECAL is 0
CBR1075I GLOBAL value for RECALLO is 1, ON
CBR1075I GLOBAL value for RECALLT is 1, ON
CBR1075I GLOBAL value for CLEAROLD is BOTH
```

Displaying Outstanding OAM Messages

To display outstanding OAM messages, enter the following command:

```
DISPLAY R,L,KEY=OAM
```

Use this command to display the message identification numbers and texts of all immediate action, eventual action messages, and messages waiting for replies that OAM issued.

Querying Summary and Detail Information for Pending and Active Requests

Use the F OAM,QUERY,*options* command to display:
- A summary of active optical requests
- A summary of active tape requests
- A summary of waiting optical requests
- A summary of waiting tape requests
- Detailed information concerning active optical requests
- Detailed information concerning active tape requests
- Detailed information concerning waiting optical requests
- Detailed information concerning waiting object tape requests

The following command syntax shows the QUERY command:

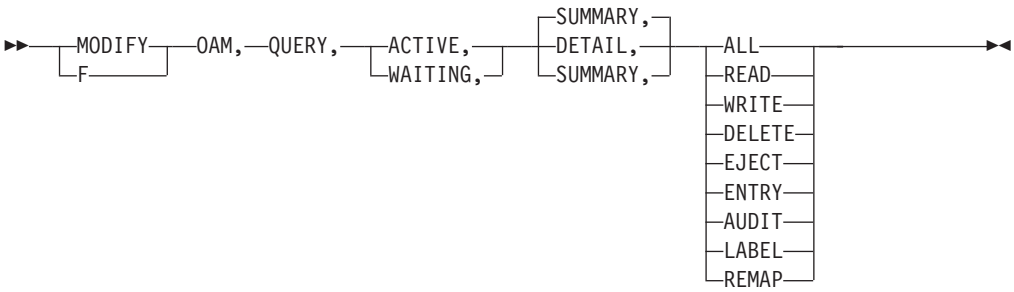

Recommendation: OAM is the default name of the cataloged procedure in your SYS1.PROCLIB. If a name other than OAM is used for the cataloged procedure, use that name in the QUERY statement. For example, MODIFY *procname_name*,QUERY,ACTIVE,SUMMARY.

The following are the keyword descriptions of the QUERY command:

QUERY Specifies a request to display information about active and waiting tape and optical requests. The abbreviation for this command, Q, can also be used.

ACTIVE Indicates that only information about active requests, those currently being processed, is displayed. The abbreviation for this command, A, can also be used. Either the ACTIVE or WAITING keyword must be specified on the QUERY statement.

WAITING Indicates that only information about requests waiting to be processed are to be displayed. The abbreviation for this command, W, can also be used. Either the WAITING or ACTIVE keyword must be specified on the QUERY command. This information includes any waiting requests that have been sent to other instances of OAM in the OAMplex for processing.

SUMMARY Indicates that only summary information about the requested

category is displayed. If neither the SUMMARY nor the DETAIL keyword is specified on the QUERY command, only summary information is displayed for the requested category. The abbreviation for this command, S, can also be used. This summary information also includes any waiting requests that have been sent to other instances of OAM in the OAMplex for processing. SUMMARY is the default.

DETAIL Indicates that only detailed information about the requested category (ACTIVE or WAITING) is displayed. If neither the DETAIL nor the SUMMARY keyword is specified on the QUERY command, only summary information is displayed for the requested category. The abbreviation for this command, D, can also be used. Query detail messages are written to the hard copy log so that the WTO buffers are not overrun, which causes a system degradation. One of the following keywords is required when the DETAIL keyword is specified:

ALL Indicates that detail information for either all active or all waiting (depending on the prior specification in the command) requests are to be displayed.

READ Indicates that detail information for all READS (active or waiting) is displayed.

WRITE
Indicates that detail information for either all WRITES (active or waiting) is displayed.

DELETE
Indicates that detail information for all DELETES (active or waiting) is displayed.

EJECT Indicates that detail information for all EJECTS (active or waiting) is displayed.

ENTRY
Indicates that detail information for all ENTRIES (active or waiting) is displayed.

AUDIT
Indicates that detail information for all AUDITS (active or waiting) is displayed.

LABEL
Indicates that detail information for all LABELS (active or waiting) is displayed.

REMAP
Indicates that detail information for all REMAPS (active or waiting) is displayed.

Note: The OAM QUERY command is passed to the OAM address space through the MVS MODIFY system command. All messages that are sent as a result of the OAM QUERY command are sent to the system console from which the command originated, except for the QUERY DETAIL messages. They are sent to the system log only, not the console. The system operator must be aware that entering a F OAM,QUERY,ACTIVE,DETAIL or a F OAM,QUERY,WAITING,DETAIL command can result in a significant number of messages if there is a significant backlog of OAM requests processing or waiting for execution.

Related reading: For further information about messages that are associated with the OAM QUERY command, see *z/OS MVS System Messages, Vol 4 (CBD-DMO)*.

To query OAM to provide information about active optical and tape requests, enter the following command:

```
F OAM,QUERY,ACTIVE

      OR

F OAM,QUERY,ACTIVE,SUMMARY
```

The following information is displayed only if optical libraries are defined in the active configuration:

```
CBR1720I OPTICAL ACTIVE SUMMARY
----------- OPTICAL REQUESTS CURRENTLY BEING PROCESSED--------------
 READS  WRITES  DELETES  ENTERS  EJECTS  AUDITS  LABELS
aaaaaa   bbbbbb  cccccc  dddddd  eeeeee  ffffff  gggggg
```

aaaaaa Total number of object read requests from an optical volume currently being processed. This includes read requests being processed on this system that originated from another instance of OAM in an OAMplex.

bbbbbb Total number of object write requests to an optical volume currently being processed. This includes write requests being processed on this system that originated from another instance of OAM in an OAMplex.

cccccc Total number of object delete requests from an optical volume currently being processed.

dddddd Total number of optical volume enter requests currently being processed.

eeeeee Total number of optical volume eject requests currently being processed. This number also includes system initiated ejects.

ffffff Total number of optical volume audit requests currently being processed.

gggggg Total number of optical cartridge label requests currently being processed.

The following information is displayed for object tape requests only if there are SETOAM statements in the current OAM invocation:

```
CBR1730I TAPE OBJECT ACTIVE SUM:
---- OBJECT TAPE REQUESTS CURRENTLY BEING PROCESSED--------------
 READS  WRITES
aaaaaa   bbbbbb
```

The following fields in the data line specify the number of each resource currently being processed:

aaaaaa Total number of object read requests from a tape volume currently

being processed. This includes read requests being processed on this system that originated from another instance of OAM in an OAMplex.

bbbbbb Total number of object write requests to a tape volume currently being processed.

To query OAM to provide information about waiting optical and tape requests, enter the following command:

```
F OAM,QUERY,WAITING

      OR

F OAM,QUERY,WAITING,SUMMARY
```

The following information is displayed only if optical libraries are defined in the active configuration:

```
CBR1700I OPTICAL WAITING SUMMARY:

------------ OPTICAL REQUESTS WAITING FOR PROCESSING----------------------
READS    WRITES    DELETES   ENTERS    EJECTS    AUDITS    LABELS
aaaaaa   bbbbbb    cccccc    dddddd    eeeeee    ffffff    gggggg
```

The following fields in the data line specify the number of each resource waiting for execution:

aaaaaa Total number of object read requests from an optical volume waiting to be processed. This includes read requests waiting to be processed on this system that originated from another instance of OAM in the OAMplex or read requests originated by this system, waiting to be processed by another instance of OAM in the OAMplex.

bbbbbb Total number of object write requests to an optical volume waiting to be processed. This includes write requests waiting to be processed on this system that originated from another instance of OAM in the OAMplex or write requests originated by this system, waiting to be processed by another instance of OAM in the OAMplex.

cccccc Total number of object delete requests from an optical volume waiting to be processed.

dddddd Total number of optical volume enter requests waiting to be processed.

eeeeee Total number of optical volume eject requests waiting to be processed. This number also includes system initiated ejected.

ffffff Total number of optical volume audit requests waiting to be processed.

gggggg Total number of optical cartridge label requests waiting to be processed.

The following information is also displayed for object tape requests only if there are SETOAM statements in the current OAM invocation:

```
CBR1710I TAPE OBJECT WAITING SUM:

----- OBJECT TAPE REQUESTS WAITING FOR PROCESSING----------
 READS  WRITES
aaaaaa   bbbbbb
```

The following fields in the data line specify the number of each resource waiting for execution:

aaaaaa Total number of object read requests from a tape volume waiting to be processed. This includes read requests waiting to be processed on this system that originated from another instance of OAM in the OAMplex or read requests originated by this system, waiting to be processed by another instance of OAM in the OAMplex.

bbbbbb Total number of object write requests to a tape volume waiting to be processed.

Scheduling an SVC Dump for the OAM Address Space

OAM uses SVC dumps as a diagnostic tool for system hangs or performance problems. In order to capture this data, the operator must issue the DUMP command after the completion of a recreate to obtain all the required data needed for diagnostics. OAM provides a streamlined version of the DUMP command. The F OAM,DUMP,(*operands*) command automatically collects all the pertinent data needed for diagnostic purposes without the operator having to key in all the correct parameters.

The following command syntax shows the DUMP command:



OAM Specifies an SVC dump is scheduled for the OAM address space. If the first operand after the DUMP verb is either OAM or blank, OAM schedules a SVC dump for the OAM address space.

ALL An SVC dump is scheduled for the OAM address space and any address spaces which have work queued to the OAM address space, up to 14 address spaces in addition to OAM.

If the first operand after the DUMP verb is ALL, OAM scans all queues to identify address spaces that are not the OAM address space. OAM scans until all queues are searched or 14 address are found. OAM schedules an SVC dump for the OAM address space and up to 14 other address spaces that have work queued in the OAM address space.

ASID,*asid1, asid2, asid3...*
An SVC dump is scheduled for the OAM address space and any address spaces separated by commas specified after the ASID operand. A valid

ASID is a 1 to 4 hexadecimal (0–9, A–F) value. From one to 14 ASIDs can be specified with the ASID operand. If more than 14 ASIDs are specified, the first 14 will be used.

If the first operand after the DUMP verb is ASID, OAM validates that any ASIDs specified following the ASID operand are valid hexadecimal characters (0–9, A–F). If they are valid, OAM, schedules an SVC dump for the OAM address space and any additional address spaces specified (up to 14 address spaces in addition to OAM).

JOBN,*jobname1,jobname2,jobname3...*
An SVC dump is scheduled for the OAM address space and any job spaces specified after the JOBN operand separated by commas. A valid job name is a 1 to 8 character value of the following character set:
- Alphanumeric characters (A–Z, 0–9)
- National characters (&, $, @)
- Wildcard characters (*, ?) where '*' can stand for 0 or more characters, up to the maximum length of the job name string (8) and '?' can stand for one character.

From 1 to 14 job names can be specified with the JOBN operand. If more than 14 job names are specified, the first 14 will be used.

If the first operand after the DUMP verb is JOBN, OAM validates that any job names specified following the JOBN operand contain the valid character set. If they are valid, OAM schedules an SVC dump for the OAM address space and any job names specified (up to 14 jobs in addition to OAM).

OAM issues messages for any errors found in the DUMP command at SVC scheduling time and at SVC DUMP data capture completion.

Related reading: For more information concerning these messages, see *z/OS MVS System Messages, Vol 4 (CBD-DMO)*.

Restarting the OAM Address Space

Use the OAM RESTART command to restart the OAM address space. During restart processing, OAM matches the constructs and definitions that are used to those that are found in the active SMS configuration.

This command provides the ability to avoid having to do a STOP and START of the OAM address space and allows the OAM address space to retain its current ASID.

To restart the OAM address space without first stopping OAM, enter the following RESTART command:

```
F OAM,RESTART,parm=value,parm=value,...
```

You can issue this command when the parameter RESTART=NO is specified on the OAM procedure statement, which prevents OAM from automatically restarting the address space after a change is made to the SMS configuration. The time that OAM is notified of the SCDS activation depends on the time interval specified with the INTERVAL keyword in the IGDSMS*xx* PARMLIB member. If the change to the

SMS configuration affects OAM and a restart of the OAM address space is required, you can issue this command in place of issuing a STOP and START command.

The following command syntax shows the RESTART command. Use the OAM parameter to specify which CBROAM*xx* PARMLIB member is used during initialization.

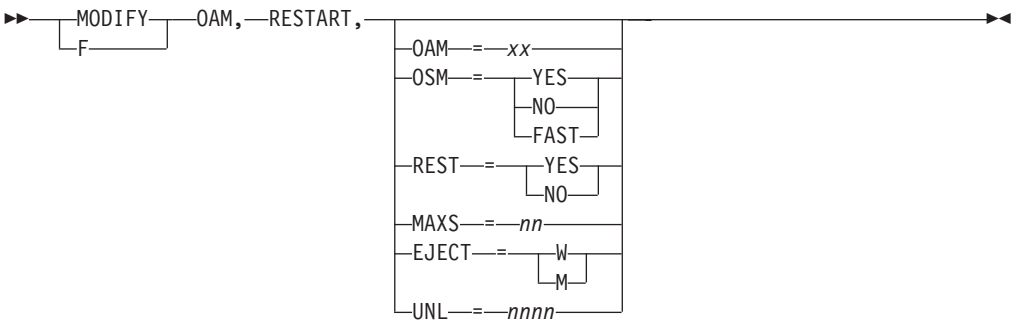

OAM OAM=*xx* specifies the suffix of the CBROAM*xx* PARMLIB member that OAM should process during OAM address space initialization. The two alphanumeric characters (*xx*) must immediately follow the OAM=*keyword* in the PARM field. If the two characters immediately following the OAM=*keyword* are invalid or not specified, error message CBR0025I is issued. OAM only reads PARMLIB member CBROAM*xx* if the OAM=*keyword* is specified on the PARM field of the JCL EXEC statement in the OAM cataloged procedure. If no OAM=*keyword* is specified on the PARM field of the JCL EXEC statement, no PARMLIB member is read by OAM and object tape storage is not active. If the object tape storage is not active, OAM cannot read any objects back or write any new objects to tape until OAM is initialized with a valid OAM=*xx* specification, and a valid corresponding CBROAM*xx* PARMLIB member. OAM processes PARMLIB member CBROAM*xx* during OAM address space initialization.

OSM Indicates whether or not OSMC is initialized at the same time as OAM after the RESTART command has been issued. The valid values for this parameter are as follows:

YES OAM initializes with OSMC.

NO OAM initializes without OSMC

FAST OAM initializes with OSMC. However, OAM bypasses the collection audit, delaying it until OSMC storage group processing is done.

REST Determines whether OAM should automatically restart when it receives notification that a new SCDS is activated. The valid values for this parameter are as follows:

YES OAM automatically restarts when a new SCDS is activated.

NO OAM does not automatically restart when a new SCDS is activated.

MAXS

MAXS=*nn* specifies the maximum number of OSMC storage management tasks that can be active at one time, where *nn* is a number value 1–99. The value given for MAXS must not exceed the number of optical and tape

drives that is available for storage management processing. If the MAXS parameter is not specified, a default of 2 is assigned.

If concurrent processing includes Object storage groups writing to tape volumes, the correct corresponding (global level) MAXTAPERETRIEVETASKS and MAXTAPESTORETASKS values on the SETOAM statement must be specified.

EJECT Used to determine which volumes are ejected from an optical library when the library is full and there is a request to add additional volumes to the library. The valid values for this parameter are as follows:

W This value indicates that Library Space Management is to use the *least recently written* algorithm when selecting a volume to be ejected from an optical library.

M This value indicates that Library Space Management is to use the *least recently mounted* algorithm when selecting a volume to be ejected from an optical library.

UNL UNL=*nnnn* specifies the number of seconds of inactivity that OAM waits before unloading an optical drive in a library in order to keep at least one drive empty. This unload only occurs if there are no available optical drives within this library. That is, there are no empty online and operational drives. Thus, during periods of inactivity, you can cause at least one drive to be ready to accept the next mount request without first having to do a demount.

Related reading: For more information about the MAXS parameter and related SETOAM keywords, see "OAM Cataloged Procedure Parameter (MAXS)" on page 158.

Using the UPDATE Command to Set SETOAM, SETOSMC, and SETOPT Values

You can change most of the current values of the SETOAM, SETOSMC, and SETOPT statements using the F OAM,UPDATE command without having to restart OAM. This command can also define settings of most of the SETOAM, SETOSMC, and SETOPT values if a CBROAM*xx* PARMLIB member was not used at OAM startup. This command provides dynamic processing that provides another method (other than using the CBROAM*xx* PARMLIB member) for customizing your object tape and optical storage.

If you used a CBROAM*xx* PARMLIB member at OAM initialization, you can use the OAM UPDATE command to change the current settings for SETOAM, SETOSMC, and SETOPT for the duration of the OAM session. If OAM is restarted, in most cases, the settings from the CBROAM*xx* PARMLIB member override any SETOAM, SETOSMC, or SETOPT values modified by an update command.

Exception: If you restart OAM and no specific statements exist in the CBROAM*xx* PARMLIB member for a given storage group and a previous UPDATE SETOPT, SETOSMC, or SETOAM command was issued to update a field for that storage group, the value assigned by the update might be retained.

The following is the syntax for the F OAM,UPDATE,SETOAM | SETOPT | SETOSMC command:



Note: There is a maximum of seven pairs of field and value updates allowed on one UPDATE command.

The following are the descriptions of the keywords used in this command:

SETOPT | SETOAM | SETOSMC
Specifies the command parameter being updated. Use SETOAM to update settings values in an object tape environment. Use SETOPT to update settings values in an optical environment. Use SETOSMC to update settings for OSMC processing in tape and optical environments.

scope Specifies which storage groups will be affected by the update. Valid values are ALL or the name of a storage group defined in the active SMS configuration. If ALL is specified, the global default, if applicable, is updated for each object storage group in the active SMS configuration. If the name of a storage group is specified, only that storage group is updated with the setting value changes. Only one storage group can be specified with a single UPDATE command.

field Specifies specific keyword in the SETOAM or SETOPT statement that is being updated.

value Specifies the new value for the specified field. This value must conform to the same conditions and restrictions that apply to the CBROAM*xx* PARMLIB member in SYS1.PARMLIB, with the following exceptions:

- The OPREINIT (OPTICALREINITMODE) keyword values are GROUP and OAMSCR when this keyword is issued with the UPDATE command. This is due to an 8-character restriction on the input values.
- The TCOMP (TAPECOMPACTION / NOTAPECOMPACTION) keyword values are Y (indicating TAPECOMPACTION) or N (indicating NOTAPECOMPACTION) when this keyword is issued with the UPDATE command.
- The TRECYC (TAPERECYCLEMODE) keyword values are GROUP, OAMSCR, and MVSSCR when this keyword is issued with the update command. OAMSCR represents the OAMSCRATCH value. MVSSCR represents the MVSSCRATCH value.

Updating SETOAM Values

Table 46 lists the valid UPDATE command keywords and their associated SETOAM keywords. If a SETOAM keyword is not on the list, it is not modifiable on the F OAM,UPDATE command.

Table 46. Valid SETOAM Keywords on the UPDATE Command

UPDATE Keyword	Associated SETOAM Keyword	Associated Value	Value Range
EXPDATE	TAPEEXPIRATION	YYYY/DDD	
TFULLTHR	TAPEFULLTHRESHOLD	Kilobytes	0 - 999999
TFULLPER	TAPEPERCENTFULL	Percent	1 - 100
TAPEUNIT	TAPEUNITNAME	Unit name	
DMWT	DEMOUNTWAITTIME	Seconds	1 - 9999

Table 46. Valid SETOAM Keywords on the UPDATE Command (continued)

UPDATE Keyword	Associated SETOAM Keyword	Associated Value	Value Range
MWT	MOUNTWAITTIME	Minutes	1 - 120
DATACL	DATACLASS	Name	
TCOMP	TAPECOMPACTION / NOTAPECOMPACTION	Y/N	
TDRVSTRT	TAPEDRIVESTARTUP	Megabytes	1 - 9999
TRECYC	TAPERECYCLEMODE	GROUP | OAMSCR | MVSSCR	
TAPEDISP	TAPEDISPATCHERDELAY	Seconds	0 - 60
MAXRECYC	MAXRECYCLETASKS	Number	0 - 15
SGMAXREC	SGMAXRECYCLETASKS	Number	0 - 15
PERCENTV	PERCENTVALID	Percent	0 - 100

The following is an example of the syntax to update or set the number of recycle tasks that can be run concurrently:

F OAM,UPDATE,SETOAM,[ALL],MAXRECYC,*max_recyc_tasks*

- MAXRECYC represents the MAXRECYCLETASKS keyword of the SETOAM statement in the CBROAMxx PARMLIB member.
- *max_recyc_tasks* represents the maximum number of MOVEVOL tasks that can run concurrently as a result of a RECYCLE command. Valid values are 0 to 15.
- If a value of 0 is specified while there is an active START RECYCLE command processing, the update command fails.

If the execution of this command is successful, the system issues the following message:

```
CBR1074I Update successful for SETOAM parameter MAXRECYC, new
value max_recyc_tasks, scope (ALL). The previous value was old_value.
```

The following is the syntax to update or set the number of recycle tasks that can be run concurrently for a specific storage group, or to set the number of recycle tasks that can be run concurrently for all storage groups:

F OAM,UPDATE,SETOAM,[ALL|*group-name*],SGMAXREC,*sgmax_recyc_tasks*

- SGMAXREC represents the SGMAXRECYCLETASKS keyword of the SETOAM statement in the CBROAMxx PARMLIB member.
- *sgmax_recyc_tasks* represents the maximum number of MOVEVOL tasks for a specific storage group that can run concurrently as a result of a RECYCLE command. Valid values are 0 to 15. If the SGMAXRECYCLETASKS associated with a given storage group exceeds the MAXRECYCLETASKS specified at the global level, OAM *only* processes concurrent MOVEVOL tasks for the storage group up to the MAXRECYCLETASKS value.
- If a value of 0 is specified while there is an active START RECYCLE command processing, the update command fails.

If the execution of this command is successful, the system issues the following message:

```
CBR1074I Update successful for SETOAM parameter SGMAXREC, new value sgmax_recyc_tasks,
scope (ALL | group-name). The previous value was old_value..
```

The following is the syntax to update or set the default percent valid threshold for RECYCLE:

```
F OAM,UPDATE,SETOAM,ALL,PERCENTV,percent_valid
```

- PERCENTV represents the PERCENTVALID keyword of the SETOAM statement in the CBROAMxx PARMLIB member
- *percent_valid* represents the threshold of valid data on a full tape volser to be considered a candidate for recycle selection. Valid values are 0 to 100.

If the execution of this command is successful, the system issues the following message:

```
CBR1074I Update successful for SETOAM parameter PERCENTV, new value
percent_valid, scope ALL. The previous value was previous_percent_valid.
```

The following are some examples of F OAM,UPDATE,SETOAM commands:

```
F OAM,UPDATE,SETOAM,GROUP22,TAPEUNIT,TAPEESO
```

Assuming TAPEESO is a valid tape esoteric name defined to the system, this command sets the TAPEUNITNAME setting for only GROUP22 to the tape esoteric, TAPEESO.

TAPEUNITNAME is the MVS unit name that OAM uses to initially allocate a scratch tape when an object is stored to this Object or Object Backup storage group and stored on a tape volume. If tape volumes already belong to the object or object backup storage group, they are used first before allocating a scratch volume. Even though a tape unit name is specified for the group, the ACS routines (for environment ALLOC) can override the TAPEUNITNAME specification by assigning the allocation to a Tape storage group, thereby, steering the allocation into an ATLDS or an MTL.

```
F OAM,UPDATE,SETOAM,ALL,TFULLPER,90,TFULLTHR,100
```

This command updates all global values and every storage group name in the active SMS configuration to a TAPEPERCENTFULL value of 90 and a TAPEFULLTHRESHOLD value of 100.

```
F OAM,UPDATE,SETOAM,GROUP22,MWT,2,DMWT,4,TFULLPER,95
```

This command updates the values for MOUNTWAITTIME, DEMOUNTWAITTIME, and TAPEFULLPERCENT for only the GROUP22 storage group.

```
F OAM,UPDATE,SETOAM,ALL,TRECYC,GROUP
```

This command updates the value for TAPERECYCLEMODE for expired object tape volumes in all Object and Object Backup storage groups. The expired tape volumes

remain in their current storage group. When this command executes successfully, OAM issues the following message:

```
CBR1074I Update successful for SETOAM parameter TRECYC, new value GROUP,
scope ALL. The previous value was MVSSCR.
```

```
F OAM,UPDATE,SETOAM,ALL,TRECYC,MVSSCR
```

This command updates the value for TAPERECYCLEMODE for expired object tape volumes in all Object and Object Backup storage groups. The expired tape volumes are returned to the MVS scratch pool. When this command executes successfully, OAM issues the following message:

```
CBR1074I Update successful for SETOAM parameter TRECYC, new value MVSSCR,
scope ALL. The previous value was GROUP.
```

This command updates the value for TAPEDISPATCHERDELAY to 3 seconds for object tape volumes in all Object and Object Backup storage groups.

```
F OAM,UPDATE,SETOAM,ALL,TAPEDISP,3
```

This instructs OAM to wait 3 seconds before demounting a tape volume even if other work is available for this drive. When this command executes successfully, OAM issues the following message:

```
CBR1074I Update successful for SETOAM parameter TAPEDISP, new value 3,
scope ALL. The previous value was 0.
```

Updating SETOPT Values

Table 47 lists the valid UPDATE command keywords and their associated SETOPT keywords. If a SETOPT keyword is not on the list, it is not modifiable on the F OAM,UPDATE command.

Table 47. Valid SETOPT Keywords on the UPDATE Command

UPDATE Keyword	Associated SETOPT Keyword	Associated Value	Value Range
OPREINIT	OPTICALREINITMODE	GROUP | OAMSCR	
OPDISDLY	OPTICALDISPATCHERDELAY	Seconds	1 - 60
MWT	MOUNTWAITTIME	Minutes	1 - 9999
UNLOADD	UNLOADDRIVES	Number	1 - 6
UNLOADT	UNLOADTIMER	Seconds	1 - 9999

The following are some examples of F OAM,UPDATE,SETOPT commands:

```
F OAM,UPDATE,SETOPT,ALL,OPREINIT,MWT,3,OAMSCR,OPDISDLY,50
```

This command updates the values for OPTICALREINITMODE, MOUNTWAITTIME, and OPTICALDISPATCHERDELAY for all global values and for each storage group in the active SMS configuration.

```
F OAM,UPDATE,SETOPT,GROUP22,OPREINIT,GROUP,OPDISDLY,45
```

This command updates the values for OPTICALREINITMODE and OPTICALDISPATCHERDELAY only for storage group GROUP22.

```
F OAM,UPDATE,SETOPT,GROUP22,OPREINIT,GROUP,OPREINIT,OAMSCR
```

This updates the values for OPTICALREINITMODE twice for storage group GROUP22. The first update takes place followed by the second. The final result is OAMSCR.

```
F OAM,UPDATE,SETOPT,ALL,UNLOADD,4,UNLOADT,600
```

This updates the values of UNLOADDRIVES and UNLOADTIMER such that inactive optical drives are unloaded for all storage groups after 10 minutes idle time.

Updating SETOSMC Values

Table 48 lists the valid UPDATE command keywords and their associated SETOSMC keywords. If a SETOSMC keyword is not on the list, it is not modifiable on the F OAM,UPDATE command.

Table 48. Valid SETOSMC Keywords on the UPDATE Command

UPDATE Keyword	Associated SETOSMC Keyword	Associated Value	Value Range
CYCLEW	CYCLEWINDOW	STRTONLY | STRTSTOP	
CLEAROLD	CLEAROLDLOC	OPT | TAPE | BOTH | NONE	
RECALLA	RECALLALL	Days	0 - 255
RECALLO	RECALLOPTICAL	Days	0 - 255
RECALLT	RECALLTAPE	Days	0 - 255
RECALLN	RECALLNONE	ON	
RECALLF	RECALLOFF	ON|OFF	
MAXRECAL	MAXRECALLTASKS	Number	0 - 255

The following is an example of the F OAM,UPDATE,SETOSMC command:

```
F OAM,UPDATE,SETOSMC,ALL,CYCLEW,STRTONLY
```

This command updates the value for the SETOSMC CYCLEWINDOW keyword for all Object and Object Backup storage groups. STRTONLY represents the STARTONLY value, where the start and end cycle times represent a window in which to start the OSMC cycle. STRTSTOP represents the STARTSTOP value, where the start and end cycle times represent a window in which to begin and end the OSMC cycle.

When this command executes successfully, OAM issues the following message:

```
F OAMPLEX,UPDATE,SETOSMC,ALL,CYCLEW,STRTSTOP
CBR1074I Update successful for SETOSMC parameter CYCLEW, new value STRTSTOP,
scope ALL. The previous value was STRTONLY.
```

This command updates the value for CLEAROLDLOC specifications for all storage groups when objects transition to DB2 DASD..

```
F OAM,UPDATE,SETOSMC,ALL,CLEAROLD,BOTH
```

This instructs OAM not to retain the original volume location information for objects on tape or optical media for ALL storage groups, when the objects have been transitioned to DB2 DASD.

When this command executes successfully, OAM issues the following message:

```
F OAMPLEX,UPDATE,SETOSMC,ALL,CLEAROLD,BOTH
CBR1074I Update successful for SETOSMC parameter CLEAROLD, new value BOTH,
scope ALL. The previous value was NONE.
```

This command updates the value for RECALLALL to 124 days for all storage groups.

```
F OAM,UPDATE,SETOSMC,ALL,RECALLA,124
```

This implicit recall parameter instructs OAM to copy to DB2 DASD any object retrieved from an optical device or a tape device and keep it there for 124 days after the day of retrieval.

When this command executes successfully, OAM issues the following message:

```
F OAMPLEX,UPDATE,SETOSMC,ALL,RECALLA,124
CBR1074I Update successful for SETOSMC parameter RECALLA, new value RECALLO=124,ON
scope ALL. The previous value was RECALLO=0,OFF, RECALLT=0,OFF.
```

This command updates the value for RECALLOPTICAL for all storage groups.

```
F OAM,UPDATE,SETOSMC,ALL,RECALLO,10
```

This instructs OAM to copy to DB2 DASD, and keep there for 10 days, any object retrieved from an optical device in any storage group.

When this command executes successfully, OAM issues the following message:

```
F OAMPLEX,UPDATE,SETOSMC,ALL,RECALLO,10
CBR1074I Update successful for SETOSMC parameter RECALLO, new value RECALLO=10,ON,
scope ALL. The previous value was RECALLO=233,ON.
```

This command updates the value for RECALLTAPE for storage group GROUP22.

```
F OAM,UPDATE,SETOSMC,GROUP22,RECALLT,10
```

This instructs OAM to copy to DB2 DASD, and keep there for 10 days, any object retrieved from a tape device in storage group GROUP22.

When this command executes successfully, OAM issues the following message:

```
F OAMPLEX,UPDATE,SETOSMC,GROUP22,RECALLT,10
CBR1074I Update successful for SETOSMC parameter RECALLT, new value RECALLT=10,ON,
scope GROUP22. The previous value was RECALLT=0,OFF.
```

This command updates the value for RECALLNONE and activates it for storage group GROUP14.

```
F OAM,UPDATE,SETOSMC,GROUP14,RECALLN,ON
```

This implicit recall parameter instructs OAM not to copy to DB2 DASD any GROUP14 object retrieved from an optical device or a tape device.

When this command executes successfully, OAM issues the following message:

```
F OAMPLEX,UPDATE,SETOSMC,GROUP14,RECALLN
CBR1074I Update successful for SETOSMC parameter RECALLN, new value RECALLO=3,OFF,
RECALLT=3,OFF, scope GROUP14. The previous value was RECALLO=3,ON, RECALLT=3,ON.
```

This command updates the value for RECALLOFF to ON for storage group GROUP24.

```
F OAM,UPDATE,SETOSMC,GROUP24,RECALLF,ON
```

This instructs OAM not to copy to DB2 DASD any GROUP24 object retrieved from an optical device or a tape device, even if recall is specified on an OSREQ RETRIEVE request.

When this command executes successfully, OAM issues the following message:

```
F OAMPLEX,UPDATE,SETOSMC,GROUP24,RECALLF,ON
CBR1074I Update successful for SETOSMC parameter RECALLF, new value ON,
scope GROUP24. The previous value was RECALLF=OFF.
```

This command updates the value for MAXRECALLTASKS to 8.

```
F OAM,UPDATE,SETOSMC,ALL,MAXRECAL,8
```

This instructs OAM process a maximum of 8 recalls of DB2 DASD of tape or optical objects being retrieved from any storage group. This can only be issued at the global level.

When this command executes successfully, OAM issues the following message:

```
F OAMPLEX,UPDATE,SETOSMC,ALL,MAXRECAL,8
CBR1074I Update successful for SETOSMC parameter MAXRECAL,8
scope ALL. The previous value was MAXRECAL=27.
```

Using the UPDATE Command to Set OAMXCF Values

Use the F OAM,UPDATE command to allow users to update the OAMXCF timeout value settings without having to restart OAM. This command can also define settings of the OAMXCF timeout values if a CBROAM*xx* PARMLIB member was not used at OAM startup. This command provides dynamic processing that provides another method (other than using the CBROAM*xx* PARMLIB member) for customizing your object tape and optical storage.

The OAM UPDATE command can be used to change the current settings for OAMXCF timeout parameters for the duration of the OAM session. If OAM is restarted, the settings from the CBROAM*xx* PARMLIB member will not override any OAMXCF values changed by an update command.

The following is the syntax for the F OAM,UPDATE,OAMXCF command:



The following are the descriptions of the keywords used in this command:

OAMXCF
Specifies the command parameter being updated. OAMXCF is used to update settings values in a Parallel Sysplex environment.

parm Specifies the timeout parameter setting that is being updated.

The following are valid timeout parameters:

OPTREADA
Indicates the number of seconds that an OAM originating an optical read request, which is shipped to another OAM within the OAMplex that owns the library where the object resides for processing, should wait for completion of the read request. This parameter equates to the XCFOPTREADA parameter of the OAMXCF statement in the CBROAM*xx* member of PARMLIB.

OPTREADM
Indicates the number of seconds that an OAM originating an optical read request for a shelf-resident volume, which is shipped to another OAM within the OAMplex that owns the library where the object resides for processing, should wait for completion of the read request.

This parameter equates to the XCFOPTREADM parameter of the OAMXCF statement in the CBROAM*xx* member of PARMLIB.

OPTWRITA
Indicates the number of seconds that an OAM originating an optical write request targeted for an object storage group that contains real (automated) optical libraries, which is shipped to another OAM within the OAMplex that owns the optical library defined to the object storage group for processing, should wait for completion of the write request. This parameter equates to the XCFOPTWRITEA parameter of the OAMXCF statement in the CBROAM*xx* member of PARMLIB.

OPTWRITM
Indicates the number of seconds that an OAM originating an optical write request targeted for an object storage group that contains pseudo libraries, which is shipped to another OAM within the OAMplex that owns the pseudo library defined to the object storage group for processing, should wait for completion of the write request. This parameter equates to the XCFOPTWRITEM parameter of the OAMXCF statement in the CBROAM*xx* member of PARMLIB.

TAPREADA
Indicates the number of seconds that an OAM originating a tape read request targeted for an automated tape library dataserver, which is shipped to another OAM within the OAMplex that owns the library in which the object resides for processing, should wait for completion of the read request. This parameter equates to the XCFTAPEREADA parameter of the OAMXCF statement in the CBROAM*xx* member of PARMLIB.

TAPREADM
Indicates the number of seconds that an OAM originating a tape read request targeted for a manual tape library, which is shipped to another OAM within the OAMplex that owns the library in which the object resides for processing, should wait for completion of the read request. This parameter equates to the XCFTAPEREADM parameter of the OAMXCF statement in the CBROAM*xx* member of PARMLIB.

value Specifies the numeric value, in seconds, that is used for the specified timeout parameter.

Valid input values for the OAMXCF timeout parameters are numeric values in the range of 0–999999. A timeout value of zero causes the originating OAM to wait until a request is completed and a response is returned from the target OAM without ever timing out the request.

Updating Fields in the DB2 Volume Table and the Tape Volume Table

Use the F OAM,UPDATE,VOLUME command to allow users to update specific fields in a volume record that are related to an optical or tape volume that is used for OAM object storage. You can use this command in place of the SPUFI option to make the changes. Stop and start the OAM address space for the changes to take effect.

Requirement: The volume requested for the update request must reside in a library that is either controlled by the OAM on which the command was entered or not controlled by any OAM at this time.

The following MVS command syntax updates valid fields in the DB2 Volume Table or the Tape Volume Table:



The following are the descriptions of the keywords used in this command:

UPDATE Specifies that an update is requested to a volume record related to an optical or tape volume used for object storage.

VOLUME Indicates whether this update command is for an optical or tape volume.

volser Indicates the specific volume serial number targeted for the update.

field Specifies the specific field in the DB2 Volume Table or the Tape Volume Table that is targeted for the update.

value Specifies the value to be assigned to the field as a result of the update.

Table 49 shows the valid fields, field values, and value descriptions for updating optical volumes:

Table 49. Field Values for Optical Volumes

FIELD	VALID VALUES	DEFINITION OF VALUE
LOSTFLAG	OFF	The volume lost flag will be reset. This is the only valid value for the LOSTFLAG operand.
EXPDATE	*yyyymmdd*	A valid date that specifies the scheduled expiration date for the volume. If all objects on this volume are not yet expired or deleted, OSMC automatically recalculates this date when the volume is selected for expiration, unless this volume belongs to the Object Backup storage group. This value might be recalculated if an object is stored to this volume prior to the expiration of the volume.
FULL	Y	Indicates that this volume is full.
	N	Indicates that this volume is not full, or that it is not writable. (See 119 for a discussion of the TAPEPERCENTFULL parameter.)
READABLE	Y N	Indicates that this volume is readable. Indicates that this volume is not readable.
WRITABLE	Y N	Indicates that this volume can be written to. Indicates that this volume cannot be written to.
WRITPROT	Y N	Indicates that this volume is write protected. Indicates that this volume is not write protected.

Table 50 on page 379 shows the valid fields, field values, and value descriptions for updating object tape volumes:

Table 50. Field Values for Object Tape Volumes

FIELD	VALID VALUES	DEFINITION OF VALUE
LOSTFLAG	OFF	The volume lost flag will be reset. This is the only valid value for the LOSTFLAG operand.
EXPDATE	*yyyymmdd*	A valid date that specifies the scheduled expiration date for the volume. If all objects on this volume are not yet expired or deleted, OSMC automatically recalculates this date when the volume is selected for expiration, unless this volume belongs to the Object Backup storage group. This value might be recalculated if an object is stored to this volume prior to the expiration of the volume.
FULL	Y	Indicates that this volume is full.
	N	Indicates that this volume is not full, or that it is not writable. (See page 119 for a discussion of the TAPEPERCENTFULL parameter.) **Note:** OAM recalculates the PERCENTFULL and FULL status for volumes during initialization.
PFULL	0–100	Decimal value in the range of 0 to 100 that specifies the current percentage full for this object tape volume. This value might be recalculated by OAM initialization or after a write request to this volume.
READABLE	Y N	Indicates that this volume is readable. Indicates that this volume is not readable.
WRITABLE	Y N	Indicates that this volume is writable. Indicates that this volume is not writable.

Auditing a Volume

OAM provides an AUDIT command that enables the system operator to audit a library resident tape or optical volume.

The syntax of the command for the AUDIT function is:



The following are the descriptions of the keywords used in this command:

VOLUME | VOLLIST | LIBRARY
Specifies the scope (single volume, volume list, or all volumes in a library) of the audit to be performed.

volser Specifies the single tape or optical volume to be audited when the scope is VOLUME.

volser1, volser2...
Specifies up to 15 tape or optical volumes to be audited when the scope is VOLLIST.

library-name Specifies the name of the tape or optical library to be audited when the scope is LIBRARY.

Remapping an Optical Library

OAM provides a REMAP command that enables the system operator to remap an optical library.

The syntax of the command for the REMAP function is:



library-name
Specifies the name of the optical library that is remapped.

Stopping OAM Functions

Use the OAM STOP command to stop the following processes:
- OAM
- OSMC
- OSMC processing for a particular storage group
- Move volume processing for a particular volume
- Access backup processing
- Volume recovery processing for a particular volume
- RECYCLE command processing.

The following command syntax stops OAM:

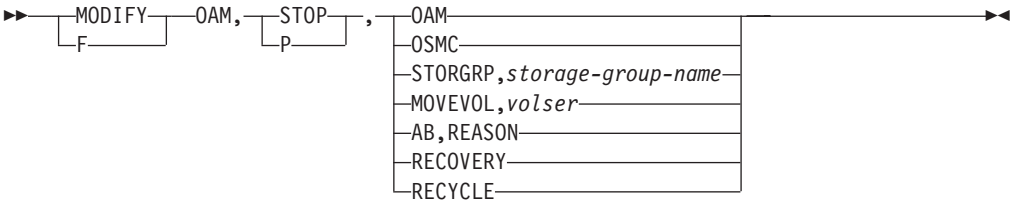

The syntax diagram illustrates the next six commands.

Attention: To stop OAM, DB2 must be active. If you plan to stop DB2, stop OAM first.

OAM
Stops OAM and stops OSMC if it is running. OSMC does not complete work in process before stopping.

OSMC
OSMC completes all work currently in process before stopping. OSMC continues processing DISPLAY commands.

STORGRP,*storage-group-name*
OSMC completes all work currently in process for this Object or Object Backup storage group before stopping.

MOVEVOL,*volser*
OSMC completes movement of objects that are currently in the process of being moved before stopping.

AB,REASON
Automatic access to backup copies of objects on removable media is discontinued for the specified reason.

RECOVERY
OSMC completes the recovery of all objects currently in process before stopping the recovery.

RECYCLE
Stop the RECYCLE process.

Note: To stop a MOVEVOL of a specific volume that is currently being processed on behalf of a F OAM,START,RECYCLE command, you can issue the following command to terminate the MOVEVOL processing of the volume:

```
F OAM,STOP,MOVEVOL,volser
```

The processing of the F OAM,START,RECYCLE command continues.

Stopping OAM

To stop OAM, enter one of the following commands:

```
F OAM,STOP,OAM
or
STOP OAM
```

The system displays messages that indicates OAM termination status. If you stop OAM and the OSMC cycle is running, you receive the following messages:

```
CBR1000I OAM STOP command execution scheduled.

CBR0098I OAM termination starting.

CBR9011I OAM requested OSMC to terminate.

CBR9012I OSMC completed termination.

CBR0074I OAM XCF member xcf-member-name successfully left OAM XCF group
        xcf-group-name

CBR0099I OAM termination completed.
```

Note: If OSMC is running and OSMC processing is still completing, you also receive other OSMC messages. OSMC does not complete work in process before stopping.

Stopping OSMC

To stop OSMC, enter the following command:

```
F OAM,STOP,OSMC
```

The system displays messages that indicates OSMC completion status. When OSMC is running, you also see OSMC messages as processing completes, in addition to the following messages:

```
CBR9047I Operator requested OSMC to stop processing.

CBR1000I OAM STOP command execution scheduled.

CBR9010I OSMC has stopped.
```

Note: OSMC waits for outstanding requests sent to LCS to process completely before stopping. This is not a CANCEL type of stop.

Stopping OSMC Processing for a Storage Group

To stop OSMC for a storage group, enter the following command:

```
F OAM,STOP,STORGRP,storgrp
```

where *storgrp* is the name of the Object or Object Backup storage group.

The system displays messages that indicates OSMC completion status. When OSMC is running, you also see OSMC messages as processing completes, in addition to the following messages:

```
CBR1000I OAM STOP command execution scheduled.
 CBR9201I Object processing completed for storage group.
CBR9048I Storage group has successfully completed processing.
```

OSMC completes all work currently in process for this Object or Object Backup storage group before stopping.

Stopping the Move Volume Utility

To stop the Move Volume utility for a volume, enter the following command:

```
F OAM,STOP,MOVEVOL,volser
```

where *volser* is the volume serial of the source volume from which objects are being moved.

The system issues the following messages:

```
CBR9856I Move Volume Utility stopping for volume volser.

CBR9858I Move Volume Utility status for volume volser. Total: total
         Attempted: attempted, Successful: successful,
         Unsuccessful:  unsuccessful.

CBR9859I Move Volume Utility ending for volume  volser.
```

The Move Volume utility completes any work it is currently processing, but does not move more objects than those already completed or those the utility is currently processing. If OAM is unable to process the STOP MOVEVOL command, it issues one of the following messages: CBR9093I, CBR9094I, or CBR9095I.

Stopping a Volume Recovery that is in Progress

The system operator can stop a volume recovery that is in progress without also stopping OAM or OSMC processing. OAM allows any work (reads, writes, and updates) that is already scheduled to complete before ending the volume recovery.

Example: A volume recovery can run for hours for full volumes with small objects. This type of volume recovery can impact users trying to retrieve OAM data from the DB2 database. If a volume recovery is impacting users, you can stop the recovery in the morning and resume the recovery where it left off in the evening.

To stop a recovery that is already in progress, enter the following command:

1. Enter the following RECOVERY command:

```
F OAM,STOP,RECOVERY,volser
```

where *volser* is the volume serial number of the volume that is being recovered.

---

2. The system issues the following messages:

```
CBR10001 OAM STOP command execution scheduled.
CBR9862I Volume Recovery status for volumes volser1 and volser2 is not available.
CBR9865I Volumes volser1 and volser2 will not be scheduled to be deleted
because one or more objects could not be recovered.
CBR9819I OAM Volume Recovery is ending for volumes volser1 and volser2.
```

Result: The volume recovery stops.

If a volume recovery requests mounts of volumes that an operator cannot find or an operator is unavailable to mount the volume, you can cancel the volume recovery until the volume or operator is available. You can resume a stopped volume recovery where it left off by issuing the `MODIFY OAM,START,RECOVERY,volser` command. Wait for the volume recovery to stop before starting the Volume Recovery utility again for the same volume.

If OAM is unable to stop the volume recovery, it issues one of the following messages: CBR9093I or CBR9095I. If the Volume Recovery utility is not active, OAM issues message CBR9094I.

In the following example, a volume recovery with the DELETE option was started. The operator replies with `GO` to proceed with the recovery, and then stops the volume recovery. Because the volume recovery is stopped before all the objects can be recovered, the optical volumes are not deleted.

```
F OAM,START,RECOVERY,PW801A,DELETE

CBR1000I OAM START command execution scheduled.
CBR9800I OAM Volume Recovery Delete starting for volumes PW801A and PW801B.
CBR9824I OAM Volume Recovery.
The following OPTICAL volumes are needed for recovery:
R8003A R8003B R8033A
*06 CBR9810D Reply 'QUIT' to terminate or 'GO' to
proceed with recovery.
6,go
IEE600I REPLY TO 06 IS;GO

F OAM,STOP,RECOVERY,PW801A

CBR10001 OAM STOP command execution scheduled.
CBR9862I Volume Recovery status for volumes PW801A and PW801B is not available.
CBR9865I Volumes PW801A and PW801B will not be scheduled to be deleted
because one or more objects could not be recovered.
CBR9819I OAM Volume Recovery is ending for volumes PW801A and PW801B.
```

Related reading: For more information about these system messages, see *z/OS MVS System Messages, Vol 4 (CBD-DMO)* or use LookAt.

Stopping Automatic Access to Backup

To stop processing for automatic access to backup, enter the following command:

```
F OAM,STOP,AB,reason
```

The following are valid values and descriptions for the *reason* keywords:

UNREAD Automatic access to backup processing is stopped for object retrieves from unreadable media. When a retrieve for an object is attempted and the volume (optical or tape media) on which the object resides is marked not readable, the retrieve request fails.

OFFLINE Automatic access to backup processing is stopped for object retrieves from resident volumes (optical or tape media) in libraries that are not online. When a retrieve for an object is attempted and the volume on which the object resides is in a library that is offline or pending offline, the retrieve request fails.

NOTOPER Automatic access to backup processing is stopped for object retrieves from resident volumes (optical or tape media) in libraries that are not operation. When a retrieve for an object is attempted and the media on which the object resides is in a library that is marked nonoperational, the retrieve request fails.

DB2ERROR If a DB2 error occurs while OAM is retrieving object data from the 4 KB or 32 KB object storage table and the first or second backup copy exists, OAM retrieves the object data from the backup copy. This function allows access to backup copies of objects that reside on removable media (optical or tape) when the DB2 resident data is unavailable, such as during the recovery of the DB2 tables.

ALL ALL is the default. Automatic access to backup processing is stopped for all object retrieves. When a retrieve for an object is attempted and the volume (optical or tape media) on which the object resides is not available for any of the above reasons the retrieve request fails.

The system displays the following messages that indicates access backup processing is stopped:

```
CBR1000I OAM STOP command execution scheduled.

CBR1091I OAM Access Backup processing stopped for reason.
```

If access to backup is already stopped, the following message displays:

```
CBR1093I OAM Access Backup processing already stopped for reason.
```

Where reason is one of the following values:
- UNREADABLE VOLUMES
- OFFLINE LIBRARIES
- NOT OPERATIONAL LIBRARIES
- DB2 OBJECT TABLE ERRORS

Stopping OTIS

To stop OTIS, enter one of the following commands:

Note: Remember that if any OAM applications are processing the OTIS address space must be active.

```
F OTIS,STOP
    or
STOP OTIS
```

When the OTIS address space has ended, the system issues the following message:

```
CBR8511I OTIS subsystem has terminated.
```

Appendix A. Sample Optical Hardware Configurations

This appendix provides information on the following topics:

Topic and Page Reference
"MVS/ESA 3995 Optical Library Dataserver"
"Sample ISMF Session for an IBM 3995 Optical Library Dataserver" on page 402
"Defining Optical Drives" on page 413
"Maintaining and Modifying Optical Libraries and Optical Drives" on page 418

These topics discuss the 9246/9247 Optical Storage Subsystem and the IBM 3995 Optical Library Dataserver. This appendix provides the following information for each device:

- The major hardware components
- An overview of the physical connections between the various components
- Information important to the system software

MVS/ESA 3995 Optical Library Dataserver

There are various models of the IBM 3995 Optical Library Dataserver. In a nonsysplex environment where OAM is **not** running in an OAMplex with DB2 data sharing, each model can be connected to a single host processor operating in basic mode or to one logical partition of a processor complex operating in LPAR mode.

Attention: Multihost attachment is not supported and causes unpredictable results.

The 3995 models with two parallel channel adapters (PCA) are attachable to the host through parallel channels, while 3995 models with one or two ESCON® channel adapters (ECA) are attachable to the host through ESCON channels.

Up to two ESCON directors can be connected between the 3995 Optical Library Dataserver and the host, but only one ESCON director can use dynamic link connection. The 3995 ESCON models can connect to the host in one of the following ways.

When using dynamic link, the host side port number of the dynamic link is required by the 3995 configuration program.

When using static link, or when not using an ESCON director, the host side port number is not required by the 3995 configuration program.

In an OAMplex with DB2 data sharing, it is recommended that you use ESCON and the System Automation for z/OS for connectivity as opposed to using parallel channels.

In a Parallel Sysplex, it is possible to establish a multisystem connection (logical not physical) that is controlled so that there is only one physical library-host connection at a time. Multiple instances of OAM within an OAMplex can be

© Copyright IBM Corp. 1989, 2006

connected to a single library-host connection. The logical connection to these instances of OAM can be changed by specifying which library on a specific OAM system should be connected to the host system. This logical connection allows data to be accessed from and shared between various libraries associated with multiple instances of OAM within an OAMplex.

Related reading: See *IBM 3995 Optical Library Dataserver: Maintenance Information* for more information regarding supplying the port numbers to the 3995 configuration file.

Configurations for the 3995-1xx Models

Figure 33 on page 389 shows a sample hardware configuration for the IBM 3995 Optical Library Dataserver with two parallel channel adapters.

Note: Although Figure 33 on page 389 shows a configuration with two parallel channel adapters, most 3995-133 and 3995-113 Optical Library Dataservers are ESCON attached.

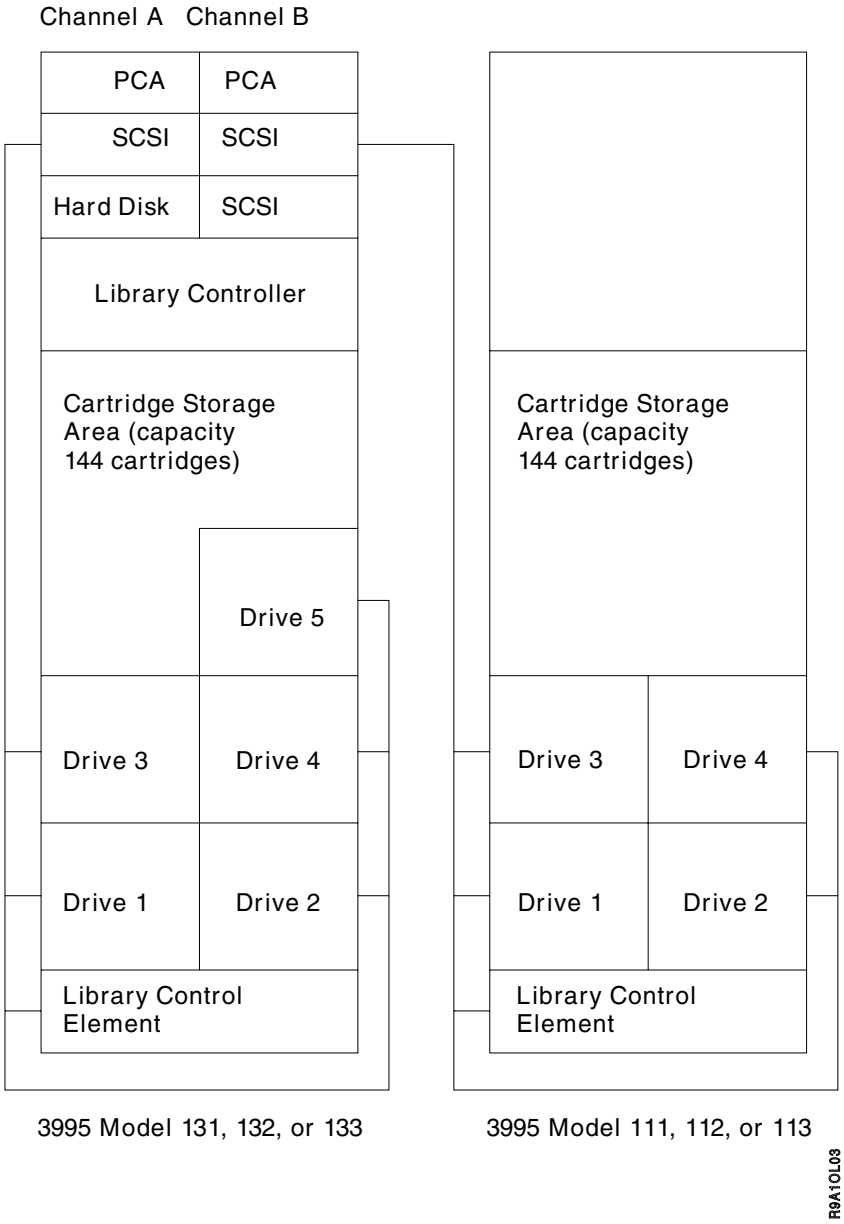

Figure 33. Sample Hardware Configuration—IBM 3995 Models 131, 132, 133, 111, 112, 113

Each channel adapter can be configured to run in one of the following modes, as shown in Table 51 via the IBM 3995 Optical Dataserver's RAS package.

Table 51. PCA Card Speed Setting to Match CPU Channel Speeds.

CPU rated channel speed	**Optical Library Controller PCA speed setting**
High speed DC interlock	1.5 MB/second
2.0 MB/second data streaming	1.9 MB/second
3.0 MB/second data streaming	2.7 MB/second
3.5 MB/second data streaming	3.4 MB/second
4.5 MB/second data streaming	4.5 MB/second
ESCON channel speed	17.5 MB/second

Configurations for the 3995-Cxx Models

Figure 34 on page 391, Figure 35 on page 392, Figure 36 on page 393, and Figure 37 on page 394 show sample hardware configurations for the 3995 C-Series Models. The C32, C34, C36, and C38 are attached to a single host processor through two ESCON channels or two parallel channels. While neither attachment supports multiple hosts, ESCON attachment does support remote connection of the 3995 up to 3 kilometers to the first director or host. For a configuration example for the 3995-11*x* and 3995-13*x* models see "Configurations for the 3995-1xx Models" on page 388.

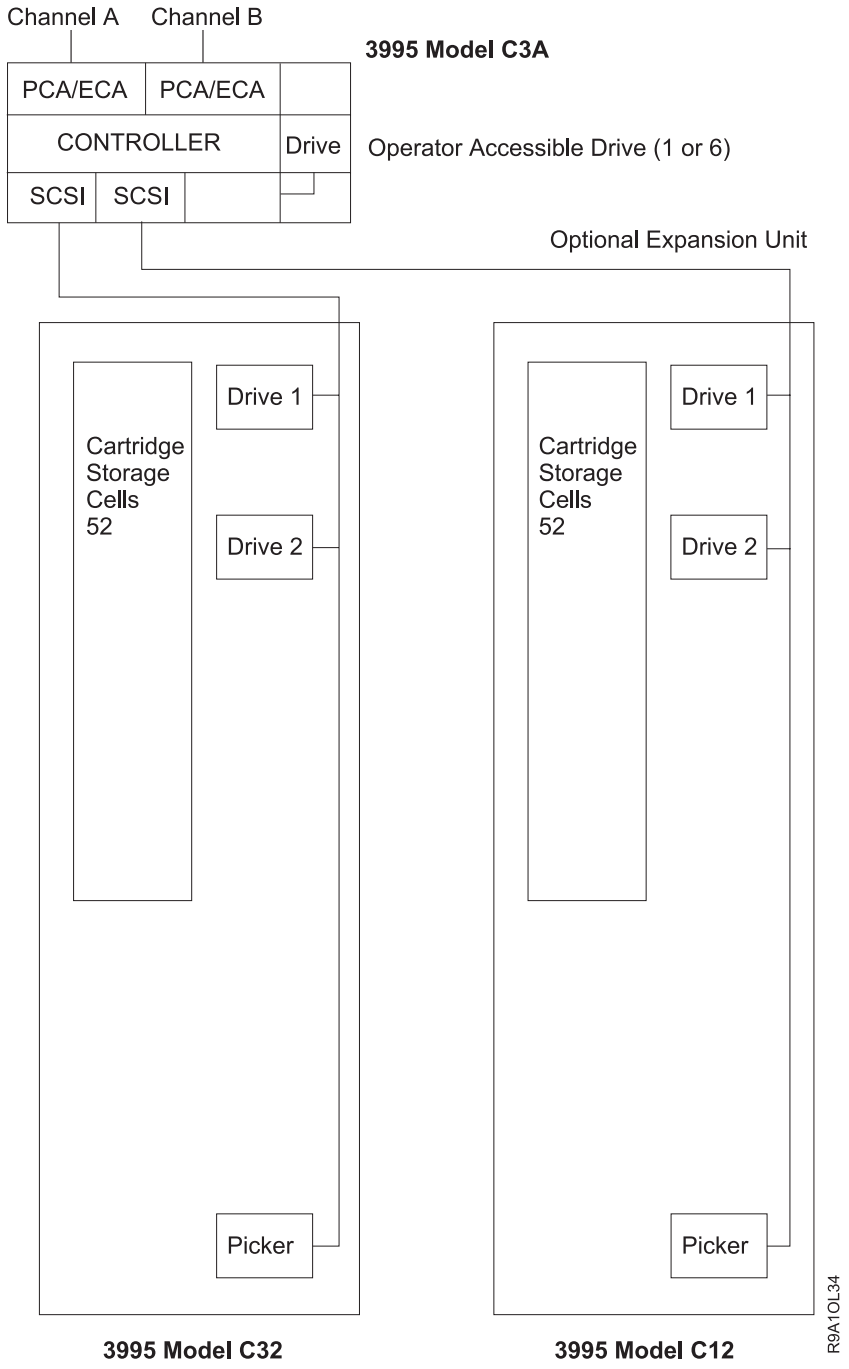

Figure 34. Sample Hardware Configuration—IBM 3995 Models C3A, C32, and C12. This configuration requires twelve addresses.

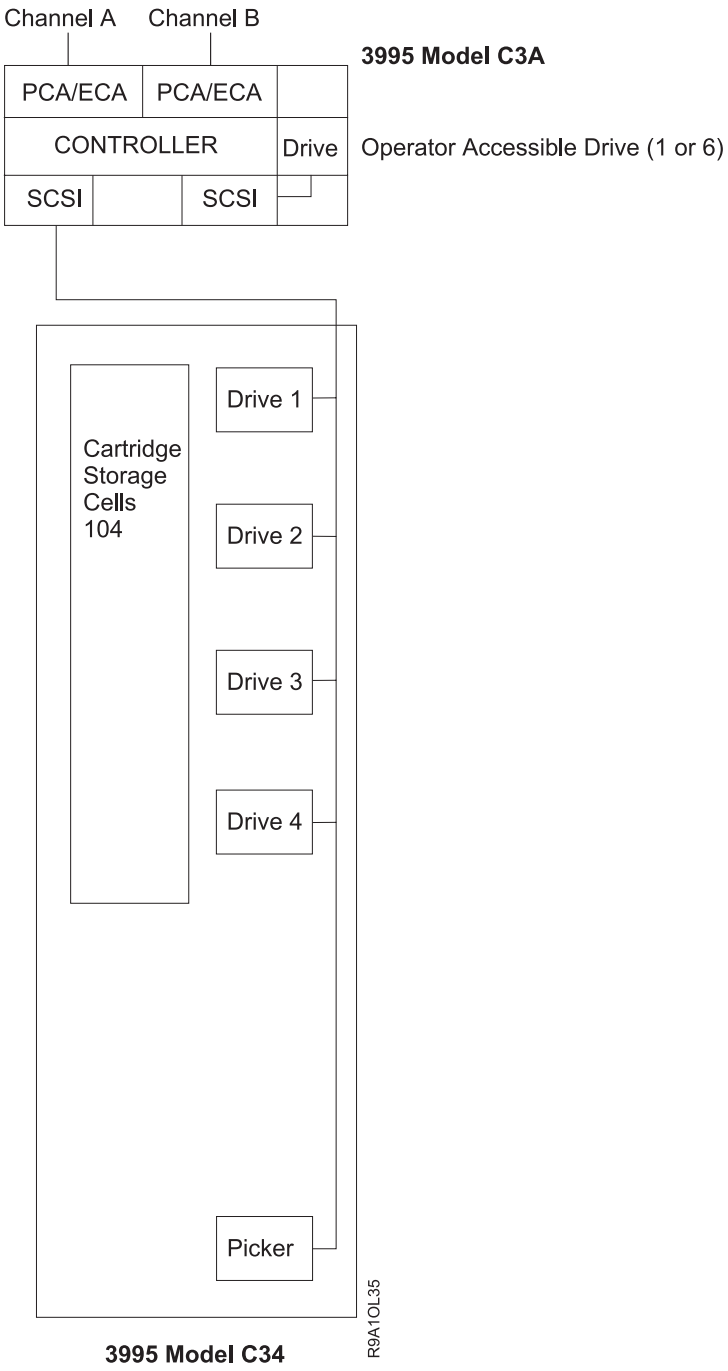

Figure 35. Sample Hardware Configuration—IBM 3995 Models C3A and C34. This configuration requires ten addresses.

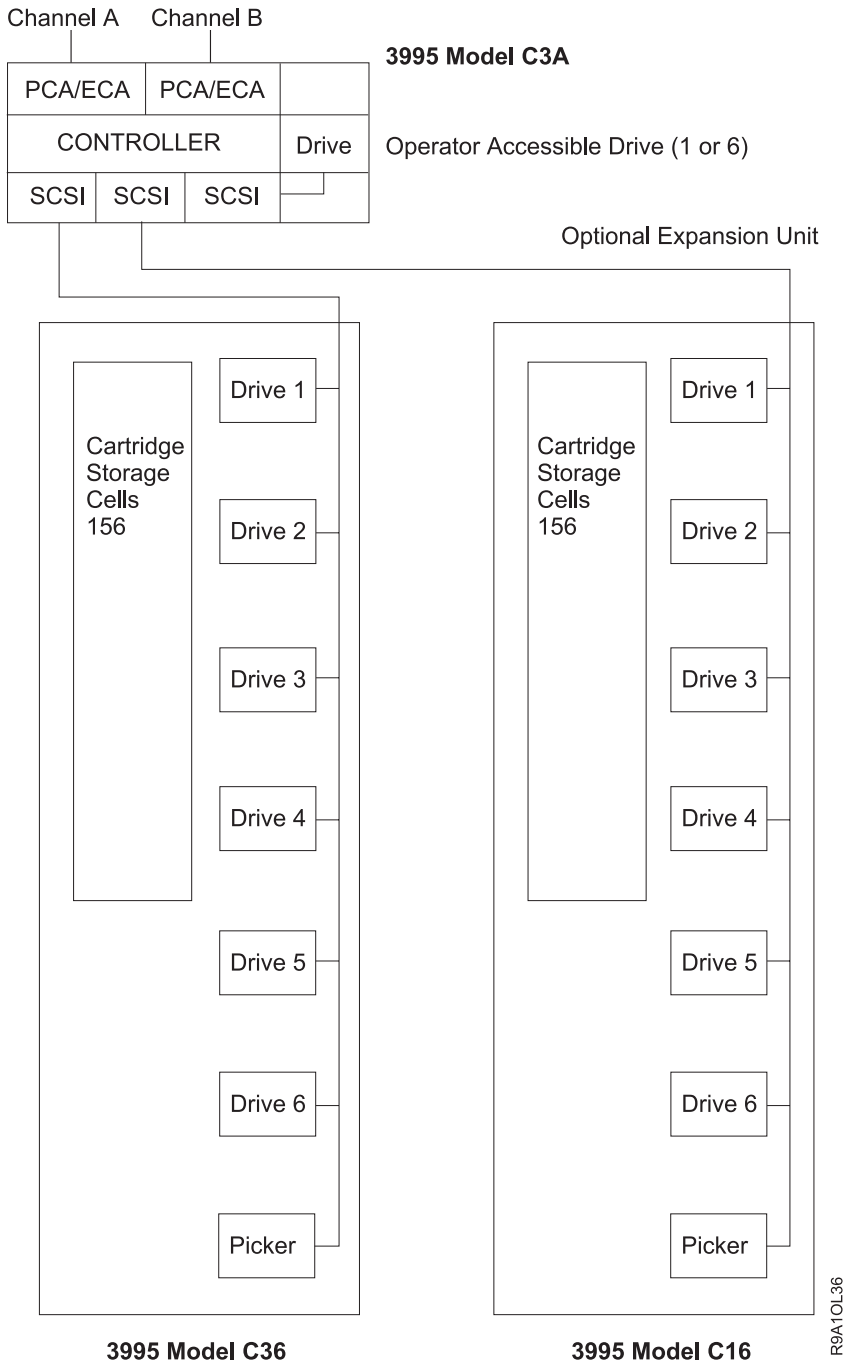

Figure 36. Sample Hardware Configuration—IBM 3995 Model C3A, C36, and C16. This configuration requires twenty addresses.

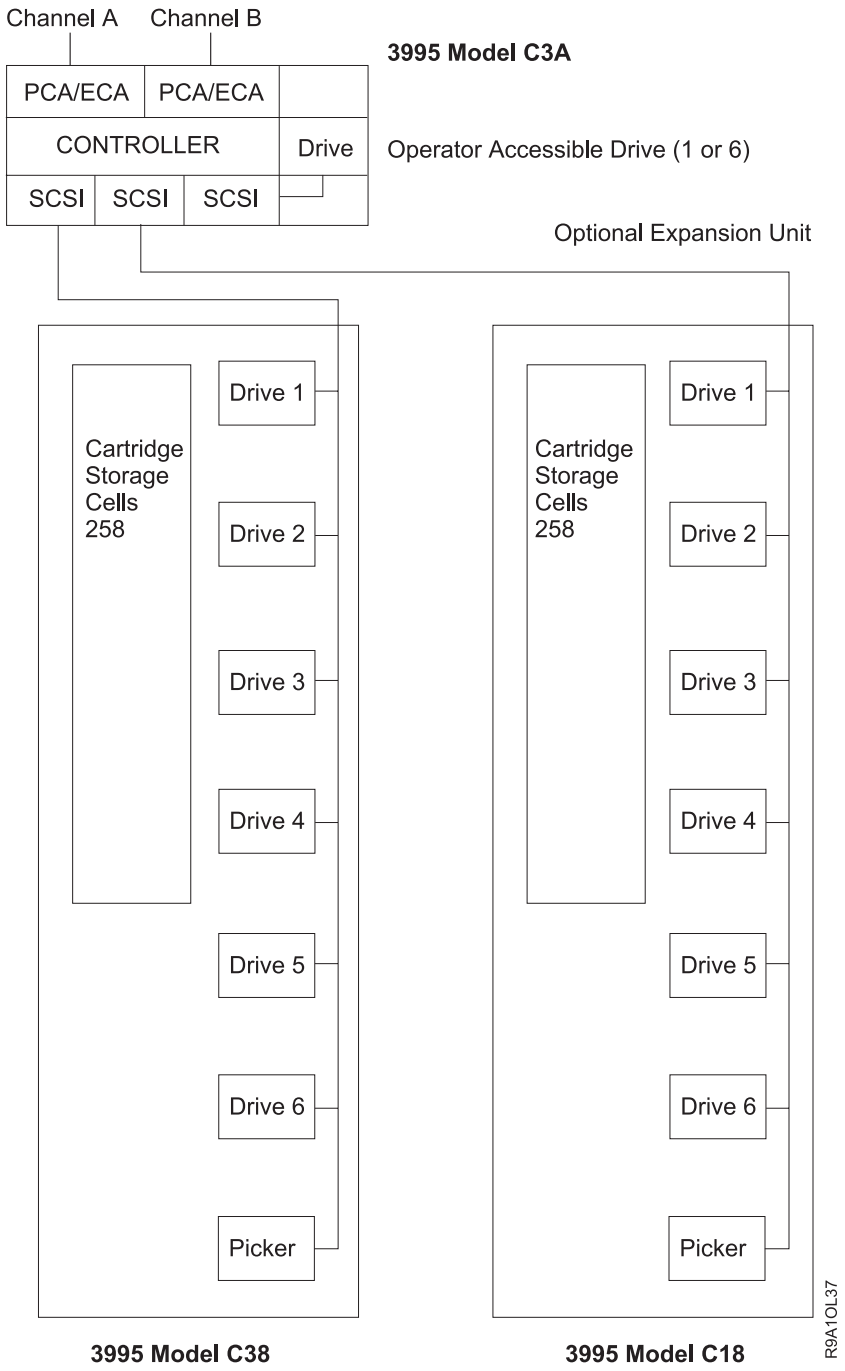

Figure 37. Sample Hardware Configuration—IBM 3995 Model C3A, C38 and C18. This configuration requires twenty addresses.

Defining 3995 Device Numbers

OAM uses specific MVS/ESA base device numbers for communicating the following with the optical disk library and the optical disk drives within the library:

- Sending library related commands to the 3995 library
- Receiving unsolicited attention interrupts from the input output station
- Performing input and or output to specific optical disk drives

Each IBM 3995 library configuration is required to have device numbers defined to the MVS operating system and channel subsystem. A library configuration can consist of a controller, a single library, or a single library with an expansion unit. *The number of device numbers depends on the hardware configuration.*

Attention: Multihost attachment from two separate processors or two separate partitions of the same processor is not supported in a nonOAMplex environment. The multihost logical connection environment of an OAMplex uses only one active host-library connection.

The base device number for the IBM 3995-13*x* or 3995-C3A controlling library models must be a multiple of 16, meaning the low order digit of the base device number must be zero, for example, 0940.

The base device number for the IBM 3995-11*x* expansion unit models must be equal to the base device number of the controlling library (the IBM 3995-13*x* models) + 8, for example, 0948. The base device number for the expansion units (3995-11*x* models) is automatically calculated and does not need to be specified when defining these libraries.

The base device number for the IBM 3995-C*xx* models must match the base device number assigned to the device when it was installed. For further information on defining the 3995-C*xx* libraries, see Figure 45 on page 409.

Use the HCD panels to define the new 3995 device numbers. Defining 3995 device numbers with HCD provides the following capabilities:
- Dynamic I/O capability
- Specially designed 3995 Error Recovery Processing
- 3995 optical service information messages
- Ability to have MVS Unit Control Blocks for 3995 devices reside above the 16 MB line in 31-bit addressable storage
- Assigning the device type of 3995 for all 3995 device numbers

Using 3995-SDA Definition in HCD

3995-SDA stands for a 3995 with self-description architecture. Self-description architecture allows the 3995 hardware to provide information concerning the optical library and optical drives to the OAM. This allows OAM to depend on information provided by the hardware without having to perform validity checking on its own. Although the 3995-13*x* models are not self-descriptive devices, the preferred method for defining all 3995 libraries is to use the 3995-SDA definition method.

To define the device numbers for a channel attached 3995 library, perform the following steps:
1. Use the Add Control Unit panel to define 3995-SDA type control units. Specify the base device number of each 3995 controller (3995-13*x* or 3995-C3A model) as a control unit. The base device number for 3995 library controller must be a multiple of 16, meaning the low order digit of this device number must end in zero, for example, 0940 or 0AC0. This is the control unit number that must be used when attaching the channel paths to the 3995. The unit addresses for the 3995 control unit must begin with 00 when attached to ESCON CHPIDs.
2. Use the Add Device panel to define the 3995. You must supply the starting device number; the low order digit of this device number must end in zero, for example 0940 or 0AC0. The device type must be a 3995-SDA. You can reserve device numbers for future drive expansions of the library. This allows you to best utilize channel address resources while allowing for the planning of future

upgrades of the drives. The number of devices must be greater than zero and less than or equal to 256. The default is 16. The control unit number is the same as the base device number. Using the default number of devices as an example, devices 0AC0–0ACF are generated.

Note: The 3995 does not belong to any esoteric device group and is not reserved through device allocation.

Using 3995 Definition in HCD

This section describes defining device numbers for 3995-1*xx* models.

Note: The 3995-SDA definition method is the preferred method for defining *any* 3995 library. For information concerning this definition method, see "Using 3995-SDA Definition in HCD" on page 395.

To define the device numbers for IBM 3995-1*xx* models, perform the following steps:

1. Use the Add Control Unit panel to define 3995 type control units. Specify the base device number of each 3995-13*x* model as a control unit. The base device number for the 3995-13*x* library must be a multiple of 16, meaning the low order digit of this device number must end in zero, for example, 0940 or 0AC0. This is the control unit number that must be used when attaching the channel paths to the 3995 Optical Dataserver. The unit addresses for the 3995 control unit must begin with 00 when attached to ESCON CHPIDs.
2. Use the Add Device panel to define the 3995-13*x* model. You must supply the base device number; the low order digit of this device number must end in zero, for example 0940 or 0AC0. The number of devices must be 1 and the device type must be a 3995. The control unit number is the same as the base device number. Using 0AC0 as an example, devices 0AC0–0AC7 are generated.
3. Use the Add Device Panel to define the 3995-11*x* model. You must supply the base device number; the low order digit of this device number must be 8 (the base device number for the controlling library, IBM 3995-13*x* models + 8), for example, 0948 or 0AC8. The number of devices must be 1 and the device type must be 3995. The control unit number is the same as the base number of the 3995-13*x* model to which this 3995-11*x* model is attached. Using 0AC8 as an example, devices 0AC8–0ACF are generated, with 0AC0 as the control unit device number.

   Note: The 3995 does not belong to any esoteric device group and is not reserved through device allocation.

Migrating the Configuration from IOCDS into IODF

The OAM optical device statements in the IOCP/MVSCP input data set must be upgraded for a migration to HCD/IODF for the following reasons:

- In contrast to IOCP, HCD validates device and control unit types, and associated parameters such as the protocols for a given control unit type and the connection of a device to a control unit.
- HCD introduced the specification of the SDA model for the 3995.
- HCD uses the true 3995 device type that had to be defined as a "look-like" device for MVSCP (3995 was defined as a "look-like" CTC, CTCS, or 3088 in MVSCP).

There are really two options that can be used to assist you in migrating to the HCD/IODF structure. The first method, and the preferred option, is to redefine your optical devices using HCD control unit and device definition panels. An

alternate method is to change your MVSCP/IOCP statements and migrate them to IODF. Both methods are discussed in this section.

The *preferred* method of migrating your configuration from IOCDS to IODF is to perform the following steps:

1. Delete the CNTLUNIT and IODEVICE statements for the OAM 3995 optical devices from the old IOCP/MVSCP input data set.
2. Use the HCD migration panels or run a batch job to create a migrated IODF work file using the updated IOCP/MVSCP input from the previous step. This will create an IODF work file that does not include OAM 3995 optical devices.
3. Add the OAM 3995 optical devices to the IODF work file generated from the previous step by using the appropriate HCD panels. Use the HCD Control Unit Panel to add the OAM 3995 optical library controllers. Use the HCD I/O Device Panel to add the OAM 3995 optical devices.

An alternate method of migrating from MVSCP/IOCP to IODF is to change the device statements within the IOCP input data set. The HCD panels or a batch job can then be used to perform the migration.

Note: It is recommended that the *preferred* method be used instead of this alternate method. The changes made to the device and control unit statements in the alternate method are device specific and therefore might cause errors if not modified correctly.

The following examples are provided to assist you in changing your MVSCP/IOCP statements for 3995 optical devices for migration purposes only. These examples can be used when migrating an old MVSCP/IOCP input data set into an IODF file using the HCD migration panel or batch job. These statements should not be used as an input example for MVSCP or IOCP programs.

Figure 38 shows examples of changing the device and control unit statements for 3995-C*xx* optical devices:

```
* ========================================================== *
* A. 3995 Cxx Series                                         *
**************************************************************
**************************************************************
*                                                            *
* A1. ESCON 3995-C3x/C1x optical devices                     *
*     using ESCON (serial attached to Host)                  *
*                                                            *
*           (such as:  3995-C32/C12, 3995-C34/C16,           *
*                      3995-C38/C18)                         *
```

Figure 38. Changing the Device and Control Unit Statements for 3995-Cxx Optical Devices (Part 1 of 3)

```
************************************************************
*                                                          *
*  >>> ESCON 3995-SDA CHPID    statement               <<<   *
*        --->Note:                                         *
*              SWITCH=ss (ss: ESCON Director Number)       *
*              TYPE=CNC                                    *
*                                                          *
*              Also define the PARTITION                   *
*              Reconfigurable (REC) if running in LPAR mode *
*                                                          *
************************************************************
 CHPID PATH=((7B)),SWITCH=0A,TYPE=CNC,PARTITION=(PC6,REC)
 CHPID PATH=((7F)),SWITCH=0B,TYPE=CNC,PARTITION=(PC6,REC)
************************************************************
*  >>> ESCON 3995-SDA CNTLUNIT statement               <<<   *
*        --->Note:                                         *
*              UNITADD=((00,nnn))  (nnn: # of devices      *
*                                        1 < nnn =< 256 )  *
*              UNIT=3995-SDA                               *
*              LINK=(l1,l2)        (l1: ESCON Link Address) *
*                                  (l2: ESCON Link Address) *
************************************************************
 CNTLUNIT CUNUMBR=0005,PATH=(7B,7F),UNITADD=((00,032)),        +
       UNIT=3995-SDA,LINK=(C4,C5)
************************************************************
*  >>> ESCON 3995-SDA I/O device (IODEVICE) statement  <<<   *
*        --->Note:                                         *
*              ADDRESS=((xxx0,nnn))  (nnn: # of devices    *
*                                        1 < nnn =< 256 )  *
*              UNITADD=00                                  *
*              TIMEOUT=N                                   *
*              UNIT=3995                                   *
*              MODEL=SDA                                   *
*              DYNAMIC=YES                                 *
*              LOCANY=YES                                  *
************************************************************
 IODEVICE ADDRESS=(19D0,032),UNITADD=00,CUNUMBR=(0005),        +
       UNIT=3995,MODEL=SDA,DYNAMIC=YES,LOCANY=YES
************************************************************
************************************************************
*                                                          *
* A2. OEMI 3995-C3x/C1x optical devices                    *
*     using OEMI (parallel attached to Host)               *
************************************************************
*                                                          *
*  >>> OEMI  3995-SDA CHPID    statement               <<<   *
*        --->Note:                                         *
*              TYPE=BL                                     *
*                                                          *
************************************************************
 CHPID PATH=((9D)),TYPE=BL
 CHPID PATH=((9E)),TYPE=BL
```

Figure 38. Changing the Device and Control Unit Statements for 3995-Cxx Optical Devices (Part 2 of 3)

```
************************************************************
*  >>> OEMI 3995-SDA control unit (CNTLUNIT) statement <<<   *
*        --->Note:                                           *
*              UNITADD=((00,nnn))  (nnn: # of devices        *
*                                        1 < nnn =< 256 )    *
*              SHARED=N                                      *
*              PROTOCL=S4                                    *
*              UNIT=3995-SDA                                 *
************************************************************
 CNTLUNIT CUNUMBR=0004,PATH=(9D,9E),UNITADD=((C0,016)),        +
       SHARED=N,PROTOCL=S4,UNIT=3995-SDA
************************************************************
*  >>> OEMI 3995-SDA IO device (IODEVICE) statement    <<<   *
*        --->Note:                                           *
*              ADDRESS=((xxx0,nnn))  (nnn: # of devices      *
*                                        1 < nnn =< 256 )    *
*              TIMEOUT=N                                     *
*              UNIT=3995                                     *
*              MODEL=SDA                                     *
*              DYNAMIC=YES                                   *
*              LOCANY=YES                                    *
************************************************************
 IODEVICE ADDRESS=(19C0,016),CUNUMBR=(0004),                   +
       TIMEOUT=N,UNIT=3995,MODEL=SDA,DYNAMIC=YES,LOCANY=YES
* ========================================================== *
```

Figure 38. Changing the Device and Control Unit Statements for 3995-Cxx Optical Devices (Part 3 of 3)

Figure 39 on page 400 shows examples of changing the device and control unit statements for 3995-1*xx* optical devices:

```
* ============================================================ *
*                                                              *
* B. 3995 1xx Series                                           *
. . .
****************************************************************
*                                                              *
* B1. ESCON 3995-13x/11x optical devices                       *
*     using ESCON (serial attached to Host)                    *
*                                                              *
*     (such as:  3995-133/113, 3995-132/112,                   *
*                3995-131/111.)                                *
*                                                              *
****************************************************************
*                                                              *
*  >>> ESCON 3995 channel path(CHPID) statement         <<<  *
*        --->Note:                                             *
*              SWITCH=ss  (ss: ESCON Director Number)          *
*              TYPE=CNC                                        *
*                                                              *
*              Also must define the PARTITION as               *
*              reconfigurable (REC) if running in LPAR mode  *
****************************************************************
 CHPID    PATH=((A6)),TYPE=CNC,PART=(PC6,REC),SWITCH=07
 CHPID    PATH=((A7)),TYPE=CNC,PART=(PC6,REC),SWITCH=08
****************************************************************
*                                                              *
*  >>> ESCON 3995 control unit(CNTLUNIT) statement      <<<  *
*        --->Note:                                             *
*              UNITADD=((00,016))                              *
*              UNIT=3995                                       *
*              LINK=(l1,l2)           (ESCON Link Addresses) *
*                                                              *
****************************************************************
 CNTLUNIT CUNUMBR=0164,PATH=(A6,A7),UNITADD=((00,016)),        +
       UNIT=3995,LINK=(ED,EF)
```

Figure 39. Changing the Device and Control Unit Statements for 3995-1xx Optical Devices (Part 1 of 3)

```
************************************************************
*  >>> ESCON 3995-13x (A BOX) IODEVICE  statement:      <<<  *
*       (When the HCD migration completed successfully,      *
*        the following example statement will generate       *
*        8 device numbers for 3995 from 0E40 to 0E47)        *
*        --->Note:                                           *
*             ADDRESS=(xxx0,001)                             *
*             UNITADD=00                                     *
*             TIMEOUT=N                                      *
*             UNIT=3995                                      *
*             DYNAMIC=YES                                    *
*             LOCANY=YES                                     *
************************************************************
 IODEVICE ADDRESS=(0E40,001),UNITADD=00,CUNUMBR=(0164),        +
       TIMEOUT=N,UNIT=3995,DYNAMIC=YES,LOCANY=YES
************************************************************
*  >>> ESCON 3995-11x (B BOX) IODEVICE  statement:      <<<  *
*         (When the HCD migration completed successfully,    *
*          the following example statement will generate     *
*          8 device numbers for 3995 from 0E48 to 0E4f)      *
*          --->Note:                                         *
*              ADDRESS=(xxx8,001)                            *
*              UNITADD=08                                    *
*              TIMEOUT=N                                     *
*              UNIT=3995                                     *
*              DYNAMIC=YES                                   *
*              LOCANY=YES                                    *
*                                                            *
*              Also the controller unit number (CUNUMBR)     *
*              of A and B boxes must be the same.            *
************************************************************
 IODEVICE ADDRESS=(0E48,001),UNITADD=08,CUNUMBR=(0164),        +
       TIMEOUT=N,UNIT=3995,DYNAMIC=YES,LOCANY=YES
************************************************************
************************************************************
* B2. OEMI 3995-13x/11x optical devices                      *
*     using OEMI (parallel attached to Host):                *
*     (such as:  3995-133/113, 3995-132/112,                 *
*                3995-131/111.)                              *
************************************************************
*                                                            *
************************************************************
*  >>> OEMI 3995 channel path (CHPID) statement        <<<   *
************************************************************
 CHPID PATH=((1A)),TYPE=BL
 CHPID PATH=((9C)),TYPE=BL
************************************************************
*  >>> OEMI 3995     control unit (CNTLUNIT) statement <<<   *
*        --->Note:                                           *
*             UNITADD=((x0,016)),                            *
*             SHARED=N                                       *
*             PROTOCL=S4                                     *
*             UNIT=3995                                      *
```

Figure 39. Changing the Device and Control Unit Statements for 3995-1xx Optical Devices (Part 2 of 3)

```
************************************************************
 CNTLUNIT CUNUMBR=00C5,PATH=(9C,1A),UNITADD=((50,016)),        +
       SHARED=N,PROTOCL=S4,UNIT=3995
************************************************************
*  >>> OEMI 3995-13x (A BOX) IODEVICE  statement:       <<<  *
*                                                           *
*       (When the HCD migration completed successfully,     *
*        the following example statement will generate      *
*        8 device numbers for 3995 from 0950 to 0957)       *
*        --->Note:                                          *
*              ADDRESS=(xxx0,001)                           *
*              UNITADD=x0                                   *
*              TIMEOUT=N                                    *
*              UNIT=3995                                    *
*              DYNAMIC=YES                                  *
*              LOCANY=YES                                   *
************************************************************
 IODEVICE ADDRESS=(0950,001),CUNUMBR=(00C5),                   +
       TIMEOUT=N,UNIT=3995,DYNAMIC=YES,LOCANY=YES
************************************************************
*                                                           *
*  >>> OEMI 3995-11x (B BOX) IODEVICE  statement:       <<<  *
*                                                           *
*         (When the HCD migration completed successfully,   *
*          the following example statement will generate    *
*          8 device numbers for 3995 from 0958 to 095f)     *
*          --->Note:                                        *
*              ADDRESS=(xxx8,001)                           *
*              UNITADD=x8                                   *
*              TIMEOUT=N                                    *
*              UNIT=3995                                    *
*              DYNAMIC=YES                                  *
*              LOCANY=YES                                   *
*                                                           *
*              Also the controller unit number (CUNUMBR)    *
*              of A and B boxes must be the same.           *
************************************************************
 IODEVICE ADDRESS=(0958,001),CUNUMBR=(00C5),                   +
       TIMEOUT=N,UNIT=3995,DYNAMIC=YES,LOCANY=YES
* ========================================================= *
```

Figure 39. Changing the Device and Control Unit Statements for 3995-1xx Optical Devices (Part 3 of 3)

Sample ISMF Session for an IBM 3995 Optical Library Dataserver

The following series of panels illustrates an ISMF session defining a sample 3995 library and drive configuration. These panels will illustrate how to define libraries and drives for 3995-1*xx*, 3995-C*xx*, and pseudo libraries. From the ISMF Primary Option menu for storage administrators (as shown in Figure 40 on page 403), select option **10** to start the library management dialog.

```
  Panel  Help
------------------------------------------------------------------------------
                          ISMF PRIMARY OPTION MENU - z/OS DFSMS V1R5
Enter Selection or Command ===>

Select one of the following options and press Enter:

 0  ISMF Profile              - Specify ISMF user profile
 1  Data Set                  - Perform Functions Against Data Sets
 2  Volume                    - Perform Functions Against Volumes
 3  Management Class          - Specify Data Set Backup and Migration Criteria
 4  Data Class                - Specify Data Set Allocation Parameters
 5  Storage Class             - Specify Data Set Performance and Availability
 6  Storage Group             - Specify Volume Names and Free Space Thresholds
 7  Automatic Class Selection - Specify ACS Routines and Test Criteria
 8  Control Data Set          - Specify System Names and Default Criteria
 9  Aggregate Group           - Specify Data Set Recovery Parameters
 10 Library Management        - Specify Library and Drive Configurations
 11 Enhanced ACS Management   - Perform Enhanced Test/Configuration Management
 C  Data Collection           - Process Data Collection Function
 L  List                      - Perform Functions Against Saved ISMF Lists
 P  Copy Pool                 - Specify Pool Storage Groups for Copies
 R  Removable Media Manager   - Perform Functions Against Removable Media
 X  Exit                      - Terminate ISMF

Use HELP Command for Help; Use END Command or X to Exit.
```

Figure 40. ISMF Primary Option Menu

When you select Library Management, the Library Management Selection menu is displayed, as shown in Figure 41. At this point, you select either an optical library configuration or an optical drive configuration. Because a library must be defined before any drives associated with that library can be defined, you must first define libraries and then define drives. Select option **1** to display the Optical Library Application Selection panel, as shown in Figure 42 on page 404.

```
  Panel  Help
------------------------------------------------------------------------------
                       LIBRARY MANAGEMENT SELECTION MENU
Enter Selection or Command ===>_

 1  Optical Library          - Optical Library Configuration
 2  Optical Drive            - Optical Drive Configuration
 3  Tape Library             - Tape Library Configuration









Use HELP Command for Help; Use END Command to Exit.
```

Figure 41. Library Management Selection Menu

The ISMF screens that follow provide examples for defining 3995-11*x*, 3995-13*x*, 3995-C*xx*, and pseudo libraries. These examples define the pseudo libraries based on the media type and device type association; however, you can define pseudo libraries to best suit the requirements of your environment (based, for example, on location, or all backup objects with primary active objects, or data categories, and

so forth). Where applicable, the ISMF screens are duplicated with examples for the different library definitions. The following libraries are defined in our sample configuration:

- **LIBRARY1**—3995-133
- **LIB1C**—3995-C3A
- **LIBRARY2**—3995-113
- **LIBRARYA**—3995-C38
- **LIBRARYB**—3995-C18
- **PSEUDO1**—operator-accessible drives.

The name of the source control data set (SCDS) that contains the library and drive definitions in these examples is SCDS.PRIMARY. The default CDS NAME is the single-quoted word 'ACTIVE', which represents the currently active configuration. Whenever you define a new optical library within an SCDS, the library definition added to the SCDS is identified by the system to which the storage administrator is logged on. You can use the Optical Library Configuration application to add an optical library to an SCDS. The Optical Library Configuration application must be running on the system on which the optical configuration database resides. The OAM optical configuration database cannot be shared among systems.

The OPTICAL LIBRARY APPLICATION SELECTION panel, Figure 42, provides an example of selecting the define option to define a 3995-133 optical library (LIBRARY1). The following information must be provided on this screen:

- CDS Name—**'SCDS.PRIMARY'**
- Library Name—**LIBRARY1**
- Library Device Number—**3995-133**
- Library Type—**REAL**
- Select Option **3** (Define) to continue the definition

```
  Panel  Utilities  Help
 ------------------------------------------------------------------------------
                     OPTICAL LIBRARY APPLICATION SELECTION
Command ===>_

To Perform Library Operations, Specify:
  CDS Name  . . . . . . . . 'SCDS.PRIMARY'
                              (1 to 44 character data set name or 'ACTIVE')
  Library Name  . . . . . LIBRARY1  (For Optical Library List, fully or
                                     Partially Specified or * for All)
  Library Device Type . . 3995-133  (For Optical Library List, fully or
                                     Partially Specified or * for All)
  Library Type . . . . .  REAL  (REAL, PSEUDO, or * for ALL)

Select one of the following Options:
  3  1. List    - Generate a list of Libraries
     2. Display - Display a Library
     3. Define  - Define a Library
     4. Alter   - Alter a Library
If List Option is Chosen,
   Enter "/" to select option    _ Respecify View Criteria
                                 _ Respecify Sort Criteria
 Use ENTER to Perform Selection;
 Use HELP Command for Help; Use END Command to Exit.
```

Figure 42. Optical Library Application Selection Panel

The following are output fields specified in the Optical Library Application Selection panel:

SCDS NAME
The name of the source control data set that this library is defined in.

LIBRARY NAME
The name of the library being defined.

Rules:

1. To avoid confusion, do not assign the same name to both libraries and Object storage groups when defining them to the optical configuration database.
2. You must include library names in the Object and Object Backup storage group definition so that optical writes are performed for the Object or Object Backup storage group.

LIBRARY TYPE
The type of library you are addressing. This can be either REAL or PSEUDO. A REAL optical library is a physical library containing optical disk drives and optical volumes that reside physically inside the library. A PSEUDO optical library is a set of shelf-resident optical disk volumes associated with operator-accessible optical disk drives, or both.

In order to process read and write requests from optical shelf-resident volumes, you need to define compatible optical operator-accessible drives to the pseudo optical library when defining it to the optical configuration database. If you do not define any optical operator-accessible drives to the pseudo optical library, OAM cannot process read and write requests for optical shelf-resident volumes.

OAM stills uses pseudo optical libraries for each optical drive device type. If no pseudo optical library is defined in the active SMS configuration for a valid optical drive device type, OAM defines a default using the following names that can be used for assigning shelf-resident optical volumes:

- **PCTREUSE**—3995-131 device types
- **PCTWORM**—3995-132 device types
- **P3995133**—3995-133 device types
- **P3995SW3**—3995-SW3 device types
- **P3994SW4**—3995-SW4 device types

Note: After the first library definition, ISMF primes CDS NAME, LIBRARY NAME, LIBRARY DEVICE TYPE, and LIBRARY TYPE with the last used reference values on the Optical Library Application Selection panel.

Related reading: For more information on pseudo libraries, see "Pseudo Optical Library Concept" on page 36.

Defining Real 3995 Libraries

Choose option **3** from the Optical Library Application Selection panel to display the 3995 Library Define panel with all the input fields blanked out. You can then enter a sample definition, as shown in Figure 43 on page 406 and Figure 44 on page 408 (for LIBRARY1), and as shown in Figure 45 on page 409 and Figure 46 on page 409 (for LIB1C). When the panel is complete, press the END key.

```
  Panel  Utilities  Help
------------------------------------------------------------------------------
                            3995 LIBRARY DEFINE              Page 1 of 2
Command ===>_

SCDS Name  . :SCDS.PRIMARY
Library Name :LIBRARY1
Library Type :REAL

To DEFINE Library, Specify:

  Description ==>
              ==>

  Model Number . . . . .  133
  Base Device Number  . . 0940      (Valid base device number)
  Controlling Library . .           (Library Name)        (if expansion unit)
  Default Media Type  . . 3995
  Default Pseudo Library. PSEUDO1   (Pseudo Library name)

Use ENTER to Perform Verification; Use DOWN Command to View next Panel;
Use HELP Command for Help; Use END Command to Save and Exit; CANCEL to Exit.
```

Figure 43. 3995 Library Define Panel for LIBRARY1 (Page 1 of 2)

The following are field descriptions for the 3995 Library Define panel (1 of 2). The information provided on this panel is stored in the optical configuration database and an entry is made in the current source control data set:

DESCRIPTION
A 120-byte field that allows you to enter a description of the library definition for use by the installation. There are no restrictions on its content.

BASE DEVICE NUMBER
Specify the base device number of a IBM 3995 controlling library model. This field is required for all *controlling* library models. The low order digit of this base device number must be 0 (for example, 1AC0).

The base device number for the IBM 3995-11*x* expansion unit models must be equal to the base device number of the controlling library (the IBM 3995-13*x* models) + 8, for example, 0948. The base device number for the expansion units (3995-11*x* models) is automatically calculated and does not need to be specified when defining these libraries.

The base device number for the IBM 3995-C*xx* models must match the base device number assigned to the device when it was installed. See "Defining 3995 Device Numbers" on page 394 for more information on the device numbers.

CONTROLLING LIBRARY
Specify the name of the 3995 control unit (**3995-13x** or **3995-C3A**) to which the 3995 library expansion unit is connected. This field is required for all connected 3995 library expansion unit models. The following lists the controlling library and the associated expansion unit:

3995-131 3995-111

3995-132 3995-112

3995-133 3995-113

3995-C3A 3995-C32, 3995-C34, 3995-C36, 3995-C38, 3995-C12, 3995-C16, 3995-C18

Note: The 3995-C12, 3995-C16, and 3995-C18 must be attached to its corresponding 3995-C32, -C36, and -C38 before being attached to the 3995-C3A controlling library. See Table 3 on page 29 for more details concerning these devices.

The system connectivity defined for the controlling library is inherited by the libraries attached to it.

DEFAULT MEDIA TYPE

Specifying a default media type limits the type of media that can be entered into the specified optical library dataserver. It is also used as a criteria for the output volume selection for a grouped write request when using a multifunction library that is referenced by the Object or the Object Backup storage group to which the grouped write request is being written. The valid values for the default media type are:

3995 Any 3995 5.25-inch single-, double-, quad-, or 8*x*-density, WORM, or rewritable optical disk media. This is the default.

3995REWR 3995 5.25-inch, single-, double-, quad-, or 8*x*-density rewritable optical disk media.

3995WORM 3995 5.25-inch, single-, double-, quad-, or 8*x*-density WORM optical disk media.

3995-1 Only 3995 5.25-inch, single-density, WORM or rewritable optical disk media.

3995-1RW Only 3995 5.25-inch, single-density, rewritable optical disk media.

3995-1WO Only 3995 5.25-inch, single-density, WORM optical disk media.

3995-2 Only 3995 5.25-inch, double-density, WORM or rewritable optical disk media.

3995-2RW Only 3995 5.25-inch, double-density, rewritable optical disk media.

3995-2WO Only 3995 5.25-inch, double-density, WORM optical disk media.

3995-4 Only 3995 5.25-inch, quad-density, rewritable or WORM optical disk media.

3995-4RW Only 3995 5.25-inch, quad-density, rewritable optical disk media.

3995-4WO Only 3995 5.25-inch, quad-density, WORM optical disk media.

3995-8 Only 3995 5.25-inch, 8*x*-density, rewritable or WORM optical disk media.

3995-8RW Only 3995 5.25-inch, 8*x*-density, rewritable optical disk media.

3995-8WO Only 3995 5.25-inch, 8*x*-density, WORM optical disk media.

Notes:

1. Double-density, quad-, and 8*x*-density, WORM includes CCW media.
2. CCW is continuous composite WORM media. WORM is write-once-read-many media.
3. The 3995-SW3 drives (used within the C3A, C1*x*, and C3*x* libraries) are capable of only reading single-density WORM or rewritable media. A 3995-SW3 cannot handle write requests to this media. It is capable of reading from and writing to all other 3995 optical media types. The 3995-SW4 drives used within these libraries are capable of only reading from single- or double-density WORM or rewritable media. However,

these drives are capable of reading from and writing to quad- or 8*x*-density WORM or rewritable media. Keep this in mind when deciding the appropriate default media type for an optical library.

DEFAULT PSEUDO LIBRARY
The name of the pseudo library to which the volume is assigned after it is ejected from this real library.

```
  Panel  Utilities  Scroll  Help
------------------------------------------------------------------------------
                              3995 LIBRARY DEFINE               Page 2 of 2
Command ===>_

SCDS Name  . :SCDS.PRIMARY
Library Name :LIBRARY1
Library Type :REAL

  Initial Online Status (Yes, No, or Blank):
    SYSTEM1  ===> YES  SYSTEM2  ===> NO   SYSTEM3  ===> NO   SYSTEM4  ===>
    SYSTEM5  ===>      SYSTEM6  ===>      SYSTEM7  ===>      SYSTEM8  ===>
             ===>               ===>               ===>               ===>
             ===>               ===>               ===>               ===>
             ===>               ===>               ===>               ===>
             ===>               ===>               ===>               ===>
             ===>               ===>               ===>               ===>
             ===>               ===>               ===>               ===>


Use ENTER to Perform Verification; Use UP Command to View previous Panel;
Use HELP Command for Help; Use END Command to Save and Exit; CANCEL to Exit.
```

Figure 44. 3995 Library Define Panel for LIBRARY1 (Page 2 of 2)

The following is a description of the information required for the 3995 Library Define panel (2 of 2). The information provided on this panel is stored in the optical configuration database and an entry is made in the current source control data set:

INITIAL ONLINE STATUS
Indicates the library connectivity to specified systems when this SCDS is activated. The library status is set to this value each time this SCDS is activated. The library must be connected to at least one system. The library only can be online to one system at a time. The default is blank.
- **Y** (YES) for online.
- **N** (NO) for offline.
- **Blank** for not connected.

Figure 45 on page 409 shows how to define a 3995-C3A controlling library (LIB1C). The following information must be provided:
- CDS Name—**'SCDS.PRIMARY'**
- Library Name—**LIB1C**
- Library Device Number—**3995-C3A**
- Select Option **3** (Define) to continue the definition

```
  Panel  Utilities  Scroll  Help
------------------------------------------------------------------------------
                            3995 LIBRARY DEFINE              Page 1 of 2
Command ===>_

SCDS Name  . :SCDS.PRIMARY
Library Name :LIB1C
Library Type :REAL

To Define Library, Specify:
  Description ==>
              ==>

  Model Number . . . . .  C3A
  Base Device Number  . . 0900      (Valid base device number)
  Controlling Library . .           (Library Name)        (if expansion unit)
  Default Media Type  . . 3995
  Default Pseudo Library.           (Pseudo Library name)

Use ENTER to Perform Verification; Use DOWN Command to View next Panel;
Use HELP Command for Help; Use END Command to Save and Exit; CANCEL to Exit.
```

Figure 45. 3995 Library Define Panel for LIB1C (Page 1 of 2)

```
  Panel  Utilities  Scroll  Help
------------------------------------------------------------------------------
                            3995 LIBRARY DEFINE              Page 2 of 2
Command ===>_

SCDS Name  . :SCDS.PRIMARY
Library Name :LIB1C
Library Type :REAL

  Initial Online Status (Yes, No, or Blank):
    SYSTEM1  ===> YES  SYSTEM2  ===> NO   SYSTEM3  ===> NO   SYSTEM4  ===>
    SYSTEM5  ===>      SYSTEM6  ===>      SYSTEM7  ===>      SYSTEM8  ===>
             ===>               ===>               ===>               ===>
             ===>               ===>               ===>               ===>
             ===>               ===>               ===>               ===>
             ===>               ===>               ===>               ===>
             ===>               ===>               ===>               ===>
             ===>               ===>               ===>               ===>


Use ENTER to Perform Verification; Use UP Command to View previous Panel;
Use HELP Command for Help; Use END Command to Save and Exit; CANCEL to Exit.
```

Figure 46. 3995 Library Define Panel for LIB1C (Page 2 of 2)

After you complete the library definitions (for LIBRARY1, LIB1C, or both) the Optical Library Application Selection menu (Figure 42 on page 404) is displayed again, and you can define your next library. Enter the name of the library into the library name field, the model number into the model number field, and select option **3**. The 3995 Library Define panel is again displayed. Figure 47 on page 410 and Figure 48 on page 410, Figure 49 on page 411 and Figure 50 on page 411, and Figure 51 on page 412 and Figure 52 on page 412 provide sample definitions for LIBRARY2 (3995-113), LIBRARYA (3995-C38), and LIBRARYB (3995-C18).

```
  Panel  Utilities  Scroll  Help
------------------------------------------------------------------------------
                            3995 LIBRARY DEFINE              Page 1 of 2
Command ===>_

SCDS Name  . :SCDS.PRIMARY
Library Name :LIBRARY2
Library Type :REAL

To Define Library, Specify:
  Description ==>
              ==>

  Model Number . . . . .  113
  Base Device Number  . . 0948     (Valid device number)
  Controlling Library . . LIBRARY1 (Library Name)        (if expansion unit)
  Default Media Type  . . 3995WORM
  Default Pseudo Library. PSEUDO1  (Pseudo Library name)

Use ENTER to Perform Verification; Use DOWN Command to View next Panel;
Use HELP Command for Help; Use END Command to Save and Exit; CANCEL to Exit.
```

Figure 47. 3995 Library Define Panel for LIBRARY2 (Page 1 of 2)

```
  Panel  Utilities  Help
------------------------------------------------------------------------------
                            3995 LIBRARY DEFINE              Page 2 of 2
Command ===>_

SCDS Name  . :SCDS.PRIMARY
Library Name :LIBRARY2
Library Type :REAL

  Initial Online Status (Yes, No, or Blank):
    SYSTEM1  ===> YES  SYSTEM2  ===> NO   SYSTEM3  ===> NO   SYSTEM4  ===>
    SYSTEM5  ===>      SYSTEM6  ===>      SYSTEM7  ===>      SYSTEM8  ===>
             ===>               ===>               ===>               ===>
             ===>               ===>               ===>               ===>
             ===>               ===>               ===>               ===>
             ===>               ===>               ===>               ===>
             ===>               ===>               ===>               ===>
             ===>               ===>               ===>               ===>


Use ENTER to Perform Verification; Use UP Command to View previous Panel;
Use HELP Command for Help; Use END Command to Save and Exit; CANCEL to Exit.
```

Figure 48. 3995 Library Define Panel for LIBRARY2 (Page 2 of 2)

```
  Panel  Utilities  Scroll  Help
------------------------------------------------------------------------------
                            3995 LIBRARY DEFINE              Page 1 of 2
Command ===>_

SCDS Name  . :SCDS.PRIMARY
Library Name :LIBRARYA
Library Type :REAL

To Define Library, Specify:
  Description ==>
              ==>

  Model Number . . . . .  C38
  Base Device Number  . . 0904     (Valid base device number)
  Controlling Library . . LIB1C    (Library Name)        (if expansion unit)
  Default Media Type  . . 3995
  Default Pseudo Library. PSEUDO1  (Pseudo Library name)

Use ENTER to Perform Verification; Use DOWN Command to View next Panel;
Use HELP Command for Help; Use END Command to Save and Exit; CANCEL to Exit.
```

Figure 49. 3995 Library Define Panel for LIBRARYA (Page 1 of 2)

```
  Panel  Utilities  Help
------------------------------------------------------------------------------
                            3995 LIBRARY DEFINE              Page 2 of 2
Command ===>_

SCDS Name  . :SCDS.PRIMARY
Library Name :LIBRARYA
Library Type :REAL

  Initial Online Status (Yes, No, or Blank):
    SYSTEM1  ===> YES  SYSTEM2  ===> NO   SYSTEM3  ===> NO   SYSTEM4  ===>
    SYSTEM5  ===>      SYSTEM6  ===>      SYSTEM7  ===>      SYSTEM8  ===>
             ===>               ===>               ===>               ===>
             ===>               ===>               ===>               ===>
             ===>               ===>               ===>               ===>
             ===>               ===>               ===>               ===>
             ===>               ===>               ===>               ===>
             ===>               ===>               ===>               ===>


Use ENTER to Perform Verification; Use UP Command to View previous Panel;
Use HELP Command for Help; Use END Command to Save and Exit; CANCEL to Exit.
```

Figure 50. 3995 Library Define Panel for LIBRARYA (Page 2 of 2)

```
  Panel  Utilities  Scroll  Help
------------------------------------------------------------------------------
                            3995 LIBRARY DEFINE              Page 1 of 2
Command ===>_

SCDS Name  . :SCDS.PRIMARY
Library Name :LIBRARYB
Library Type :REAL

To Define Library, Specify:
  Description ==>
              ==>

  Model Number . . . . .  C18
  Base Device Number  . . 090C     (Valid base device number)
  Controlling Library . . LIB1C    (Library Name)        (if expansion unit)
  Default Media Type  . . 3995
  Default Pseudo Library. PSEUDO1  (Pseudo Library name)

Use ENTER to Perform Verification; Use DOWN Command to View next Panel;
Use HELP Command for Help; Use END Command to Save and Exit; CANCEL to Exit.
```

Figure 51. 3995 Library Define Panel for LIBRARYB (Page 1 of 2)

```
  Panel  Utilities  Help
------------------------------------------------------------------------------
                            3995 LIBRARY DEFINE              Page 2 of 2
Command ===>_

SCDS Name  . :SCDS.PRIMARY
Library Name :LIBRARYB
Library Type :REAL

  Initial Online Status (Yes, No, or Blank):
    SYSTEM1  ===> YES  SYSTEM2  ===> NO   SYSTEM3  ===> NO   SYSTEM4  ===>
    SYSTEM5  ===>      SYSTEM6  ===>      SYSTEM7  ===>      SYSTEM8  ===>
             ===>               ===>               ===>               ===>
             ===>               ===>               ===>               ===>
             ===>               ===>               ===>               ===>
             ===>               ===>               ===>               ===>
             ===>               ===>               ===>               ===>
             ===>               ===>               ===>               ===>


Use ENTER to Perform Verification; Use UP Command to View previous Panel;
Use HELP Command for Help; Use END Command to Save and Exit; CANCEL to Exit.
```

Figure 52. 3995 Library Define Panel for LIBRARYB (Page 2 of 2)

Defining Pseudo Libraries

After you complete the definition of the last real library, display the Optical Library Application Selection menu (Figure 42 on page 404) again, and you can then define your pseudo library. Enter the SCDS name, the Library Name, the Library Device Type (if it is an old default pseudo library), and the pseudo library type into the Library Type field, and then select option **3** (Define). Figure 53 on page 413 is displayed.

```
  Panel  Utilities  Help
------------------------------------------------------------------------------
                              PSEUDO LIBRARY DEFINE
Command ===>_

SCDS Name  . :SCDS.PRIMARY
Library Name :PSEUDO1
Library Type :PSEUDO

To Define Library, Specify:
  Description ==> Department HRA functional testing data
              ==>









Use ENTER to Perform Verification;
Use HELP Command for Help; Use END Command to Save and Exit; CANCEL to Exit.
```

Figure 53. Pseudo Library Define Panel for PSEUDO1

Hit ENTER to perform the pseudo library definition. This definition is added to the SCDS.

Defining Additional Optical Libraries

You can copy existing optical library definitions and modify them to create new ones by using the COPY line operator from the Optical Library List panel.

Related reading: For more information on how to copy these existing optical library definitions, see "Copying Optical Library and Drive Definitions" on page 425.

Defining Optical Drives

After completing the previous library definitions, you have defined real libraries (LIBRARY1, LIBRARY2, LIBRARYA, LIBRARYB, and LIB1C) and a pseudo library (PSEUDO1). Define drives for each of these libraries. For this sample configuration, define one drive for each library (library LIB1C is not illustrated). Define two operator-accessible drives for the pseudo library. Define all of these libraries within the same SCDS named SCDS.PRIMARY.

The ISMF screens that follow provide examples for defining 3995-11*x*, 3995-13*x*, and 3995-SW3 (the drive used with all the 3995-C*xx* models) drives. Where applicable, the ISMF screens are duplicated with examples for the different drive definitions.

Table 52 shows the names of the libraries and their associated drive names and drive device types as defined in the sample configuration:

Table 52. Optical Libraries and their Associated Drive Names and Drive Device Types

Library	Drive Name	Drive Device Type
LIBRARY1	LIB1D1	3995-133
LIBRARY2	LIB2D1	3995-113
LIBRARYA	LIBAD1	3995-SW3
LIBRARYB	LIBBD1	3995-SW3

Table 52. Optical Libraries and their Associated Drive Names and Drive Device Types (continued)

PSEUDO1	OPA1	3995-133
PSEUDO1	OPDRV1	3995-SW3

From the Library Management Selection menu, (Figure 41 on page 403), select option **2** (Optical Drive Configuration), to display the Optical Drive Application Selection menu, as shown in Figure 54. For each of the drives to be defined, enter the drive name into the drive name field, the drive device type into the drive device type field, and choose option **3** to continue with the definition.

Note: The optical drives inherit their online and system connectivity for the configuration from the library to which they belong, or in the case of operator-accessible drives, from their controlling library.

```
  Panel  Utilities  Help
------------------------------------------------------------------------------
                    OPTICAL DRIVE APPLICATION SELECTION
 Command ===>_

 To Perform Drive operations, Specify:
   CDS Name  . . . . . . 'SCDS.PRIMARY'
                              (1 to 44 Character Data Set Name or 'ACTIVE')
   Drive Name  . . . . . LIB1D1     (For Optical Drive List, fully or
                                     Partially Specified or * for all)
   Drive Device Type . . 3995-133   (For Optical Drive List, fully or
                                     Partially Specified or * for all)

Select One of the following options:
  3  1. List    - Generate a list of Drives
     2. Display - Display a Drive
     3. Define  - Define a Drive
     4. Alter   - Alter a Drive

If List Option is Chosen,
   Enter "/" to select option    _ Respecify View Criteria
                                 _ Respecify Sort Criteria
 Use ENTER to Perform Selection;
 Use HELP Command for Help; Use END Command to Exit.
```

Figure 54. Optical Drive Application Selection Panel

Note: After the first drive definition, ISMF primes CDS NAME, DRIVE NAME, and DRIVE DEVICE TYPE with the last used reference values on the Optical Drive Application Selection panel. To define a drive, you must specify the name of an SCDS in CDS NAME, provide a name in the DRIVE NAME field, and a device type in the DRIVE DEVICE TYPE field. (The default CDS NAME is the single-quoted word 'ACTIVE', which represents the currently active configuration.) The 'ACTIVE' SCDS cannot be modified.

Choose option **3** to display the 3995 Drive Define panel with all input fields blanked out.

Note: You can leave the Drive Define panel at any time without saving optical disk drive attributes by issuing the CANCEL command.

Figure 55 on page 415 shows the drive being defined for LIBRARY1.

```
  Panel  Utilities  Help
--------------------------------------------------------------------------------
                            3995 DRIVE DEFINE
Command ===>_

SCDS Name . . :SCDS.PRIMARY
Drive Name  . :LIB1D1
Model Number  :133

To Define Drive, Specify:

  Description ===>
              ===>

  Library Name  . . . . LIBRARY1             (1 to 8 characters)
  Drive Number  . . . . 1
  Operator Accessible Drive . . Y            (Y or N)

The Following Field is for Operator Accessible Drive Type Only:
  Controlling Library Name . .               (1 to 8 characters)

Use ENTER to Perform Verification;
Use HELP Command for Help; Use END Command to Save and Exit; CANCEL to Exit.
```

Figure 55. 3995 Drive Define Panel for LIB1D1

SCDS NAME, DRIVE NAME, and MODEL NUMBER are output fields that contain the SCDS name, drive name, and model number of the drive device type you specified in the Optical Drive Application Selection panel.

Specify the following information in the optical configuration database and make an entry in the current SCDS:

DESCRIPTION
A 120-byte field that allows you to enter a description of the drive definition. There are no restrictions on its content.

LIBRARY NAME
A 1- to 8-character library name to which the drive is assigned. For operator-accessible drives, this field is the name of a pseudo optical library.

DRIVE NUMBER
A 3-character field representing the position the drive occupies in the library. This is a required field for 3995 models and should have the following values:
- 1 to 4 for library-resident drives; 5 for operator accessible 3995-1*xx* models
- 1 to 999 for all other 3995 models

OPERATOR ACCESSIBLE DRIVE
Specify if this drive is an operator-accessible drive that should be connected to a controlling library.

CONTROLLING LIBRARY NAME
Specify the name of the 3995-13*x* or -C3A model optical library to which the operator-accessible disk drive is connected.

Figure 56 on page 416 shows the drive definition for library LIBRARY2.

```
  Panel  Utilities  Help
------------------------------------------------------------------------------
                            3995 DRIVE DEFINE
Command ===>_

SCDS Name . . :SCDS.PRIMARY
Drive Name  . :LIB2D1
Model Number  :113

To Define Drive, Specify:

  Description ===>
              ===>

  Library Name  . . . . LIBRARY2             (1 to 8 characters)
  Drive Number  . . . . 1
  Operator Accessible Drive . . N            (Y or N)

The Following Field is for Operator Accessible Drive Type Only:
  Controlling Library Name . .               (1 to 8 characters)

Use ENTER to Perform Verification;
Use HELP command for Help; Use END Command to Save and Exit; CANCEL to Exit.
```

Figure 56. 3995 Drive Define Panel for LIB2D1

Figure 57 shows the drive definition for library LIBRARYA.

```
  Panel  Utilities  Help
------------------------------------------------------------------------------
                            3995 DRIVE DEFINE
Command ===>_

SCDS Name . . :SCDS.PRIMARY
Drive Name  . :LIBAD1
Model Number  :SW3

To Define Drive, Specify:

  Description ===>
              ===>

  Library Name  . . . . LIBRARYA             (1 to 8 characters)
  Drive Number  . . . . 1
  Operator Accessible Drive . . N            (Y or N)

The Following Field is for Operator Accessible Drive Type Only:
  Controlling Library Name . .               (1 to 8 characters)

Use ENTER to Perform Verification;
Use HELP Command for Help; Use END Command to Save and Exit; CANCEL to Exit.
```

Figure 57. 3995 Drive Define Panel for LIBAD1

Figure 58 on page 417 shows the drive definition for library LIBRARYB.

```
  Panel  Utilities  Help
------------------------------------------------------------------------------
                            3995 DRIVE DEFINE
Command ===>_

SCDS Name . . :SCDS.PRIMARY
Drive Name  . :LIBBD1
Model Number  :SW3

To Define Drive, Specify:

  Description ===>
              ===>

  Library Name  . . . . LIBRARYB             (1 to 8 characters)
  Drive Number  . . . . 1
  Operator Accessible Drive . . N            (Y or N)

The Following Field is for Operator Accessible Drive Type Only:
  Controlling Library Name . .               (1 to 8 characters)

Use ENTER to Perform Verification;
Use HELP Command for Help; Use END Command to Save and Exit; CANCEL to Exit.
```

Figure 58. 3995 Drive Define Panel for LIBBD1

Figure 59 shows the drive definition for the pseudo library, PSEUDO1.

```
  Panel  Utilities  Help
------------------------------------------------------------------------------
                            3995 DRIVE DEFINE
Command ===>_

SCDS Name . . :SCDS.PRIMARY
Drive Name  . :OPA1
Model Number  :133

To Define Drive, Specify:

  Description ===>
              ===>

  Library Name  . . . . PSEUDO1              (1 to 8 characters)
  Drive Number  . . . . 5
  Operator Accessible Drive . . Y            (Y or N)

The Following Field is for Operator Accessible Drive Type Only:
  Controlling Library Name . . LIBRARY1      (1 to 8 characters)

Use ENTER to Perform Verification;
Use HELP Command for Help; Use END Command to Save and Exit; CANCEL to Exit.
```

Figure 59. 3995 Drive Define Panel for OPA1

Figure 60 on page 418 shows the drive definition for the pseudo library, PSEUDO1.

```
  Panel  Utilities  Help
------------------------------------------------------------------------------
                            3995 DRIVE DEFINE
Command ===>_

SCDS Name . . :SCDS.PRIMARY
Drive Name  . :OPDRV1
Model Number  :SW3

To Define Drive, Specify:

  Description ===>
              ===>

  Library Name  . . . . PSEUDO1             (1 to 8 characters)
  Drive Number  . . . . 1
  Operator Accessible Drive . .Y            (Y or N)

 The Following Field is for Operator Accessible Drive Type Only:
  Controlling Library Name . . LIB1C        (1 to 8 characters)

Use ENTER to Perform Verification;
Use HELP Command for Help; Use END Command to Save and Exit; CANCEL to Exit.
```

Figure 60. 3995 Drive Define Panel for OPDRV1

Defining Additional Optical Disk Drives

You can copy existing optical disk drive definitions and modify them to create new ones by using the COPY line operator from the Optical Drive List panel.

Related reading: For more information on how to copy these existing optical disk drive definitions, see "Copying Optical Library and Drive Definitions" on page 425.

Maintaining and Modifying Optical Libraries and Optical Drives

After defining your optical libraries and optical disk drives to the SCDS and the optical configuration database, you might find that you need to change some of the definitions originally assigned to them. The following information provides options on how you can alter, copy, change, and delete definitions for optical libraries and optical disk drives.

Altering a 3995 Optical Library

You can use the optical library alter option to alter the attributes of an existing optical library. Altering a library results in updating the library definition within the specified SCDS and the attributes stored in the optical configuration database. The alter option is available only when the OAM address space is NOT active.

You can modify an optical library to change its definition in the optical configuration database by using the 3995 LIBRARY ALTER panel, Figure 61 on page 419 and Figure 62 on page 421. To modify an optical library, start from the Library Application Selection panel, shown in Figure 42 on page 404, and specify the name of the SCDS containing the optical library you want to change. Specify the optical library name and select option **4**, ALTER. ISMF displays the appropriate library alter panel.

```
  Panel  Utilities  Scroll  Help
------------------------------------------------------------------------------
                            3995 LIBRARY ALTER               Page 1 of 2
Command ===>_

SCDS Name  . :SCDS.PRIMARY
Library Name :LIBRARY1
Library Type :REAL

To ALTER Library, Specify:
  Description ==>
              ==>

  Model Number  . . . . .  133
  Base Device Number  . . 0940     (Valid base device number)
  Controlling Library . .          (Library Name)        (if expansion unit)
  Default Media Type  . . 3995
  Default Pseudo Library.          (Pseudo Library name)

Use ENTER to Perform Verification; Use DOWN Command to View next Panel;
Use HELP Command for Help; Use END Command to Save and Exit; CANCEL to Exit.
```

Figure 61. 3995 Library Alter Panel (Page 1 of 2)

The following fields can be modified on the 3995 Library Alter panel (Page 1 of 2) to alter the 3995 library definition in the specified SCDS and in the optical configuration database for LIBRARY1.

MODEL NUMBER

Indicates the model number of the optical library. You can only change this field for 3995-1*xx* models. You cannot change the model number if the following conditions exist:

- The requested library is a PSEUDO library.
- The original library is one of the following model numbers: C3A, C1*x*, or C3*x*.

  Note: For simplicity, this publication refers to the following 3995 library models as C1*x* and C3*x* respectively: C12, C16, C18, C32, C34, C36, C38.
- The new model number specified is one of the following model numbers: C3A, SW3, SW4, C3*x*.

If you change the model number of a 3995-13*x* to that of another -13*x* model (for example, changing a model number from 131 to 133), you must perform the following steps:

1. Delete any existing operator-accessible drive from the SCDS **before** you change the model number if one had been previously defined as part of the 3995-13*x* optical library model.
2. Change the model number.
3. Redefine the operator-accessible drive by specifying the pseudo optical library name.
4. Repeat the above steps for other SCDSs that have the operator-accessible drive defined in them. These other SCDSs must have the same new model number so that they can be validated.

   Note: If the model 3995-13*x* optical library has a model 3995-11*x* optical library expansion unit connected to it before the MODEL NUMBER field is changed, it continues to be connected after the MODEL NUMBER field is changed. The model number of the connected optical library expansion unit is also changed

accordingly. For example, changing the model number from 131 to 132 also changes the model number of all attached drives in the library and expansion units.

If you change the MODEL NUMBER field from a -1*xx* to any other -1*xx* model (for example, changing the model number from a 111 to a 112), you must perform the following steps:

1. Change the optical library name in the CONTROLLING LIBRARY field to the appropriate corresponding -13*x* controlling library name.

   The system recalculates the base device number of the optical library and all the attached optical disk drives based on the base device number of the new controlling library specified.
2. Change the model number.

If you change the MODEL NUMBER field from a -13*x* model number to a -11*x* model number (for example, changing the model number from a 131 to a 111), you must perform the following steps:

1. Delete any existing operator-accessible drive from the SCDS that was previously defined as part of the 3995-13*x* optical library model.
2. Use the DELETE line operator to delete any connected -11*x* optical library **before** you change the model number.
3. Fill in the CONTROLLING LIBRARY field with the new controlling library name (3995-13*x*) to validate the controlling library.

   The system recalculates the base device number of the optical libraries and all of the attached optical disk drives based on the base device number of the new controlling library.

If you change the MODEL NUMBER field from a -11*x* model number to a -13*x* model number (for example, changing from a model number 113 to a 133), you must perform the following steps:

1. Fill in the BASE DEVICE NUMBER field with a valid 3995 device number.
2. Blank out the CONTROLLING LIBRARY NAME field.

Note: If you are changing the model number to 131 or 132 from model 113, then the DEFAULT MEDIA TYPE field is blanked out. If you are changing the model number to 133 from model 111 or 112, then the DEFAULT MEDIA TYPE field is displayed as “3995”.

BASE DEVICE NUMBER

Changes to the base device number for a 3995 optical controlling library has the following results:

- All the base device numbers for all connected optical disk drives are recalculated based on the new base device number specified.
- All the base device numbers for any connected 3995 optical library expansion units are recalculated based on the new base device number specified.
- All the base device numbers for all the optical disk drives connected to the attached optical library expansion units are recalculated based on the new base device number specified.

Note: You cannot manually change the base device number for a 3995 optical library expansion unit model because this number is derived by the system based on the controlling library to which it is attached.

CONTROLLING LIBRARY

Changes to the CONTROLLING LIBRARY field for a connected 3995 library expansion unit model, has the following result:

- The new controlling library is verified. The library base device number of the connected 3995 optical library expansion unit and all of the attached optical disk drives are recalculated based on the base device number of the new 3995 controlling library model whose name is specified in the CONTROLLING LIBRARY field.

DEFAULT MEDIA TYPE

Changes to the DEFAULT MEDIA TYPE field restrict the type of optical media that can be used for the 3995 optical libraries with multifunction optical disk drives.

DEFAULT PSEUDO LIBRARY

Changes to the DEFAULT PSEUDO LIBRARY field might result in the volume being associated with a different pseudo library when it is ejected from this real library.

```
  Panel  Utilities  Scroll   Help
------------------------------------------------------------------------------
                              3995 LIBRARY ALTER                Page 2 of 2
Command ===>_

SCDS Name  . :SCDS.PRIMARY
Library Name :LIBRARY1
Library Type :REAL

  Initial Online Status (Yes, No, or Blank):
    SYSTEM1  ===> YES  SYSTEM2  ===> NO   SYSTEM3  ===> NO   SYSTEM4  ===>
    SYSTEM5  ===>      SYSTEM6  ===>      SYSTEM7  ===>      SYSTEM8  ===>
             ===>               ===>               ===>               ===>
             ===>               ===>               ===>               ===>
             ===>               ===>               ===>               ===>
             ===>               ===>               ===>               ===>
             ===>               ===>               ===>               ===>
             ===>               ===>               ===>               ===>


Use ENTER to Perform Verification; Use UP Command to View previous Panel;
Use HELP Command for Help; Use END Command to Save and Exit; CANCEL to Exit.
```

Figure 62. 3995 Library Alter Panel (Page 2 of 2)

The following field can be modified on the 3995 Library Alter panel (Page 2 of 2) to alter the 3995 library system connection definition in the specified SCDS and in the optical configuration database for LIBRARY1.

INITIAL ONLINE STATUS

To change the system connectivity, or the online or offline status for the library, or both, alter the values on page 2 of 2 of the 3995 Library Alter panel (see Figure 62). A library can be defined as connected to any system that is defined in the SCDS, whether it was originally defined to that system or not. The library status is set to this value each time this SCDS is activated. The library must be connected to at least one system. Only one

library can be online and connected (YES) to any system at a time. The default is blank. The following values can be used to specify initial online status:

- **YES** — online and connected to the system
- **NO** — offline and connected to the system
- **blank** — offline and not connected to the system.

Changing the 3995 Library Connectivity

The 3995 LIBRARY ALTER panels also allow the storage administrator to alter the library system connectivity, online or offline status, or both. This allows the library to be connected to a different system (different from the currently logged on system or different from the system on which the library was originally defined).

This change in system connectivity for the library allows customers to test OAM software and 3995 hardware on a test system without interrupting the production system; however, once a 3995 library is connected to a test system, it is not available to the production system until it is reconnected and the SCDS is reactivated. If the system connectivity of a 3995 optical library is changed, all the storage groups associated with that library must also have their system enablement status changed so they are enabled to the same system as the library. The test system then can use the same SMS configuration as the production system.

Note: DB2 databases belonging to OAM must be defined to the DB2 subsystem on the test system, because these databases cannot be shared between systems, and the optical configuration database used on the test system must be a copy of the one used on the production system.

To change the library's system connectivity and online status, assume a scenario where systems PRODSYS1-3 are part of an OAMplex on a production sysplex. Also assume that systems TESTSYS5-8 are being used as test systems and are not part of a separate test OAMplex on the same sysplex or a different sysplex.

Changing connectivity is done by changing the INITIAL ONLINE STATUS for system name PRODSYS1 to blank and the INITIAL ONLINE STATUS for system name TESTSYS5 to YES (see Figure 64 on page 423). LIBRARY1 is now online and connected to the TESTSYS5 system and can be used for testing. LIBRARY1 is now offline and not connected to any of the production systems (PRODSYS1-3) and is connected but offline to all the other test systems (TESTSYS6-8).

Changing the INITIAL ONLINE STATUS of a 3995 optical library dataserver controlling library model also updates the library definition in the specified SCDS to indicate the library is connected to the new system. This also changes the system connectivity for any optical library expansion unit connected to these controlling libraries. In addition, all of the optical drive definitions in the specified SCDS for all the optical disk drives associated with this library are updated to indicate the optical drives are connected to the new system.

Note: Changing the system connectivity of an optical library *does not* automatically change the system enablement status for the storage groups associated with that library. Therefore, the storage group definitions might need to be updated to provide the correct storage group enablement status. This allows the system connectivity of the optical library's associated storage groups' also to be changed from the OAMplex systems to the test system.

Attention: To reconnect the library to the original system (PRODSYS1), simply change the INITIAL ONLINE STATUS for system name PRODSYS1 back to **Y** (YES) and the system name TESTSYS1 back to **N** (NO) or **BLANK**. Also change the system enablement status of the storage groups which were changed from TESTSYS1 to PRODSYS1.

Indicate the library (LIBRARY1) for which the system connectivity and initial online status will change on the 3995 LIBRARY ALTER (Page 1 of 2) panel (Figure 63).

```
  Panel  Utilities  Scroll  Help
------------------------------------------------------------------------------
                            3995 LIBRARY ALTER                Page 1 of 2
Command ===>_

SCDS Name  . :SCDS.PRIMARY
Library Name :LIBRARY1
Library Type :REAL

To ALTER Library, Specify:
  Description ==>
              ==>

  Model Number . . . . .  133
  Base Device Number  . . 0940     (Valid base device number)
  Controlling Library . .          (Library Name)        (if expansion unit)
  Default Media Type  . . 3995
  Default Pseudo Library.          (Pseudo Library name)

Use ENTER to Perform Verification; Use DOWN Command to View next Panel;
Use HELP Command for Help; Use END Command to Save and Exit; CANCEL to Exit.
```

Figure 63. 3995 Library Alter Panel (Page 1 of 2)

The 3995 LIBRARY ALTER (Page 2 of 2) panel (Figure 64) is displayed next. This panel is used to indicate the initial online status and system connectivity of the library to various systems in the installation.

```
  Panel  Utilities  Scroll  Help
------------------------------------------------------------------------------
                            3995 LIBRARY ALTER                Page 2 of 2
Command ===>_

SCDS Name  . :SCDS.PRIMARY
Library Name :LIBRARY1
Library Type :REAL

  Initial Online Status (Yes, No, or Blank):
    PRODSYS1  ===>     PRODSYS2  ===>     PRODSYS3  ===>     PRODSYS4  ===>
    TESTSYS5  ===> YES TESTSYS6  ===> NO  TESTSYS7  ===> NO  TESTSYS8  ===> NO
              ===>               ===>               ===>               ===>
              ===>               ===>               ===>               ===>
              ===>               ===>               ===>               ===>
              ===>               ===>               ===>               ===>
              ===>               ===>               ===>               ===>
              ===>               ===>               ===>               ===>


Use ENTER to Perform Verification; Use UP Command to View previous Panel;
Use HELP Command for Help; Use END Command to Save and Exit; CANCEL to Exit.
```

Figure 64. 3995 Library Alter Panel (Page 2 of 2)

Confirming a System Mode Conversion

The Conversion Confirmation panel (see Figure 65 on page 424) is displayed when there is an attempt to change the system mode of an SCDS from SYSTEMS(8) to

SYSTEMS(32), or if the SCDS is in conflict with the current system mode for the active configuration. This panel occurs when the CDS being altered is in 8 system mode, and the SMS complex is in 32-system mode.

Related reading: For more information regarding system modes, see *z/OS DFSMS Storage Administration Reference*.

```
  Panel  Utilities  Help
------------------------------------------------------------------------------
                          CONVERSION CONFIRMATION PANEL
Command ===>

  To Confirm Conversion on the following CDS:

     CDS Name . . :SCDS.EIGHT.SYSTEM.MODE


  Specify the following:

      Perform Conversion:. . Y         (Y or N)



  This CDS is in 8-Name Mode, and the SMS complex is in 32-Name Mode.
  You must convert the CDS to 32-Name Mode prior to being able to
  access the CDS for update.  The conversion is PERMANENT.  A 32-Name
  Mode CDS cannot be converted to 8-Name Mode, be used by pre-DFSMS 1.3.0
  systems or be used by DFSMS 1.3.0 and above systems running in 8-Name Mode.

Use ENTER to Perform Operation;
Use Help Command for Help; Use END Command to Exit.
```

Figure 65. Conversion Confirmation Panel

The following is a description of the fields on the Conversion Confirmation Panel:

CDS NAME
Specifies the name of the CDS identified on the ISMF Optical Library Application Selection panel. This CDS system mode is in conflict with the system mode of the active configuration.

PERFORM CONVERSION
Specifies a conversion should be done for the CDS to convert it to 32-system mode.

Note: A CDS in 32-system mode cannot be converted to 8-system mode. Only the reverse is possible.

Altering an Optical Disk Drive

You can use the drive alter option to alter the attributes of an existing drive. Altering a drive definition results in updating the database drive row for that drive. The alter option is available only when OAM is **not** running.

To alter a drive definition in the optical configuration database and the SCDS, start from the Drive Application Selection panel, shown in Figure 42 on page 404, and specify the name of the SCDS containing the drive you want to change. Specify the drive name and select option **4**, ALTER. For the 3995 optical drive, ISMF displays the 3995 Drive Alter panel shown in Figure 66 on page 425.

```
  Panel  Utilities  Help
------------------------------------------------------------------------------
                              3995 DRIVE ALTER
Command ===>

SCDS Name   . . . . . :'SCDS.TEMP.PRIMARY'
Drive Name  . . . . . :P1D0
Drive Type  . . . . . :LIBRARY
Model Number  . . . . :132
Controlling Lib Name  :LIBRARY1

To ALTER Drive, Specify:

  Description ===> Line 1
              ===> Line 2
  Drive Number . . . 1


The Following Field may be Changed by Operator Accessible Drives Only:
  Library Name . . .                      (1 to 8 characters)

Use ENTER to Perform Verification;
Use HELP Command for Help; Use END Command to Save and Exit; CANCEL to Exit.
```

Figure 66. 3995 Drive Alter Panel

Notes:

1. You cannot change the drive number (always 5) for an operator-accessible drive (model 111, 112, or 113, the 3995 C-series models are exceptions).
2. For 3995 models 111, 112, 113, 131, 132, or 133, the drive number must be within the range of 1 to 4.
3. For all other 3995 models, the drive number must be within the range of 1 to 999.
4. You cannot change the library name for a drive unless it is an operator-accessible drive.

Copying Optical Library and Drive Definitions

You can copy existing optical drive and optical library definitions and modify them to create new ones using two methods. One method uses the attributes from the last optical disk drive or library definition. These values from the last definition are primed on the 3995 LIBRARY DEFINE or the 3995 DRIVE DEFINE panels, saving you from having to re-input similar data. It is simple to modify the attributes to define a new optical disk drive or optical library. After the attributes have been modified and you hit enter to finish the definition, the new optical disk drive or optical library is added to the SCDS and the optical configuration database. A second method of copying existing optical disk drives or optical library definitions to create new optical disk drives or optical libraries uses the COPY line operator from the OPTICAL LIBRARY LIST panel (for optical libraries) or the OPTICAL DRIVE LIST panel (for optical disk drives). To do so, enter the COPY line operator in the LINE OPERATOR column next to the optical disk drive or optical library you wish to copy. Press ENTER to copy the existing optical disk drive or optical library, and the COPY ENTRY panel is displayed (see Figure 67 on page 426).

Note: The copy function requires that an controlling library be specified if you are copying an optical library expansion unit definition into a SCDS. The corresponding optical controlling library the SCDS is attached to must already be defined.

```
  Panel  Utilities  Help
------------------------------------------------------------------------------
                           COPY ENTRY PANEL
Command ===>

  Definition will be copied from:

    Data Set Name . :'SCDS.TEMP.PRIMARY'
    Definition Name :LIB1
    Definition Type :OPTICAL LIBRARY

  Specify "Copy To" Definition:

    Data Set Name . .   'SCDS.TEMP.PRIMARY'
                                       (1 to 46 characters)

    Definition Name . .                (1 to 8 characters, fully specified)

    Enter "/" to select option       _  Perform Alter



 Use ENTER to Perform COPY;
 Use HELP Command for HELP; Use END command to Exit.
```

Figure 67. Copy Entry Panel

The *from* DATA SET NAME field identifies the source for the copy. It is primed with the value you specified on the Optical Drive (or Library) Application Selection panel. The *from* DEFINITION NAME field identifies the name of the optical disk drive or optical library to be copied. This field is primed with the value from the DRIVE NAME or LIBRARY NAME field of the Optical Drive (or Library) List panel.

The *to* DATA SET NAME field identifies the target SCDS of the copy. It must be a name of an SCDS. It is primed with the value of the *from* DATA SET NAME if the *from* DATA SET NAME contains an SCDS name. It is primed with blanks if the *from* DATA SET NAME is 'ACTIVE'. The *to* DEFINITION NAME field identifies the name of the optical disk drive or optical library. It is primed with blanks.

In the PERFORM ALTER field, indicate if you want to change some of the attributes of the source copy. If you specify **Y** (YES), the appropriate Alter panel is displayed. If you specify **N** (NO), you remain on the Copy Entry panel, where you can perform another copy or return to the original List panel.

When copying an optical disk drive or optical library definition from one SCDS into another SCDS, you do not need to select the PERFORM ALTER option. In the case where an optical disk drive or optical library definition is copied within the same SCDS, you must choose the PERFORM ALTER option because optical disk drives and optical libraries must differ from one definition to another. (In particular, those fields that are used in addressing an optical disk drive or optical library, such as CTC device number and SCSI address, must be unique.)

When you have specified the values, press ENTER to perform the copy.

Deleting an Optical Library

You can delete an optical library definition within the specified SCDS. Before the optical library definition is deleted, all optical disk drives defined for that optical library are deleted and all storage groups constructs that reference the optical library are updated to not reference that optical library. This is done automatically as part of the optical library deletion process.

From the Optical Library List panel, enter DELETE in the LINE OPERATOR column next to the optical library you wish to delete. When you press ENTER, the Confirm Delete Request panel, shown in Figure 68, is displayed.

```
 Panel  Utilities  Help
------------------------------------------------------------------------------
                           CONFIRM DELETE REQUEST
Command ===>

  To Confirm Deletion on the following Optical Library:

     Optical Library Name :LIB1
     Residing in SCDS . . :'SCDS.TEMP.PRIMARY'

  Specify the following:
      Enter "/" to select option   _ Perform deletion

  Note:If Deletion is Performed, All Drive Definitions associated with the
       Library will be Deleted and all Storage Group Constructs that
       reference the Library will be Updated.  In addition, if the Library is
       a 3995 Model 131, 132, 133 or C3A, then any Library connected to it
       (such as a 3995 Model 111, 112, 113, C12, C16, C18, C32, C34, C36
       or C38) will also be deleted in the same manner.  Definitions
       will not be removed from the Optical Configuration Database
       DB2 tables.  DB2 (SPUFI) can be used for this purpose.

Use ENTER to Perform Operation;
Use HELP Command for Help; Use END Command to Exit.
```

Figure 68. Deleting an Optical Library

Confirm that the displayed library is the one that you want to delete. If it is, enter **Y** for YES and press ENTER. The Optical Library List should appear with '*DELETE' in the LINE OPERATOR column next to the deleted library.

Note: If an optical controlling library is deleted, any attached optical library expansion unit and optical disk drives are also deleted. To delete an optical library from the optical configuration database, use the DB2I or SPUFI tools.

Deleting an Optical Disk Drive

You can delete an optical disk drive definition within the specified SCDS. From the Optical Drive List panel, enter **DELETE** in the LINE OPERATOR column next to the optical disk drive you wish to delete. When you press ENTER, the Confirm Delete Request panel, shown in Figure 69 on page 428, is displayed. To delete an optical disk drive from the optical configuration database, use the DB2I or SPUFI tools.

```
  Panel  Utilities  Help
------------------------------------------------------------------------------
                            CONFIRM DELETE REQUEST
Command ===>

  To Confirm Deletion on the Following Optical Drive:

    Optical Drive Name :LIB0
    Residing in SCDS . :'SCDS.TEMP.PRIMARY'



  Specify the Following:
      Enter "/" to select option   _ Perform Deletion



  Note: If deletion is performed, the drive definition will not be removed
        from the Optical Configuration Database DB2 tables.



Use ENTER to Perform Operation;
Use HELP Command for Help; Use END Command to Exit.
```

Figure 69. Deleting an Optical Disk Drive

Confirm that the displayed drive is the one that you want to delete. If it is, enter **Y** for YES and press ENTER. The Optical Drive List appears with ***DELETE** in the LINE OPERATOR column next to the deleted drive.

Deleting a drive has no effect on the optical configuration database. When you delete a drive, the definition for that drive is removed from the specified SCDS. When the SCDS is reactivated, the deleted drive is unavailable to the system. To delete a drive from the optical configuration database, use the DB2I or SPUFI tools. Ensure that the other SCDSs that reference the deleted drive are updated; otherwise, OAM initialization will fail.

Using DELETE FORCE to Delete an Optical Library or Optical Drive

Under certain circumstances, the ISMF Library Management **DELETE** line operator will not work. To get around this problem the **FORCE** parameter is used. To cause deletion of an optical library or optical disk drive when the standard **DELETE** line operator does not work, enter **DELETE FORCE**.

Remember, deleting an optical library or optical drive has no effect on the optical configuration database. Instead, when you delete an optical library or an optical disk drive, the definition for that deleted device is unavailable to the system when the SCDS is reactivated. Therefore, once the record in the SCDS is removed, you can redefine the record using the values found in the optical configuration database. Make sure you save the names of the optical libraries, optical disk drives, or both so they can be redefined.

Attention: **DELETE FORCE** will *not* delete any other entries in the SCDS. For example, if a library is deleted using the normal **DELETE** line operator, any optical disk drives associated with the optical library will also be deleted. However, if the optical library is deleted using **DELETE FORCE**, the optical disk drives associated with the optical library will not be deleted.

Appendix B. Sample Library Members

This appendix provides examples of some of the SAMPLIB members that enable you to install and use OAM. The SAMPLIB members provided include the following examples:

SAMPLIB Member and Page Reference
"Changing System Libraries" on page 430 • "CBRAPROC" on page 430 • "CBRIPROC" on page 430
"Creating Object Databases" on page 431 • "CBRIALC0" on page 431 • "CBRIALCX" on page 434 • "CBRIALCY" on page 437 • "CBRILOB" on page 438 • "CBRISQL0" on page 443 • "CBRISQLX" on page 447 • "CBRISQLY" on page 450
"OAM Optical Configuration Database" on page 452 • "CBRSAMPL" on page 452
Sample Migration Jobs • "CBRSMB2" on page 459 • "CBRSM150" on page 463 • "CBRSMR13" on page 465 • "CBRSMR15" on page 469 • "CBRSMERG" on page 471 • "CBRSG100" on page 478 • "CBRSMR18" on page 441
"Application Plans" on page 488 (Only text descriptions are provided; no examples are available.)
"OAM Installation Verification Program and OAMUTIL" on page 489 • "CBRSAMIV" on page 489 • "CBRSAMUT" on page 490
"Automatic Class Selection" on page 492 • "CBRHSC" on page 493 • "CBRHMC" on page 497 • "CBRHSG" on page 506

OAM processing depends on the DB2 tables that are created by the sample jobs. It is crucial that the tables are created, and migrated where applicable, exactly as specified in the sample jobs without change. Changes to columns or other characteristics of these tables might cause errors initializing or using OAM. These tables are not intended as an interface. Though accessible through system administration authority, access should be restricted from end users.

© Copyright IBM Corp. 1989, 2006

Changing System Libraries

SAMPLIB members CBRAPROC and CBRIPROC are supplied to create the OAM and OTIS procedures in PROCLIB.

CBRAPROC

SAMPLIB member CBRAPROC, as shown in Figure 70, creates member OAM in PROCLIB.

```
//CBRAPROC JOB MSGLEVEL=(1,1),MSGCLASS=A
//*********************************************************************
//*
//*  $SEG(CBRAPROC) COMP(OSMC) PROD(OAM):
//*
//*  OAM Update PROCLIB Job (for OAM procedure).
//*
//*  This job will create a procedure in PROCLIB that can be used
//*  to start OAM.
//*
//*  NOTE:If the DB2 load module library containing DSNALI is
//*         not in the LNKLST concatenation, either include
//*         the DB2 load module library in the SYS1.LINKLIB
//*         concatenation (LNKLSTxx) or add a STEPLIB DD to
//*         this PROCEDURE.
//*
//*         If a STEPLIB is used, then that concatenation must be
//*         APF-authorized.
//*
//*********************************************************************
//         EXEC PGM=IEBUPDTE,PARM=NEW
//SYSPRINT DD   SYSOUT=A
//SYSUT2   DD   DSNAME=SYS1.PROCLIB,DISP=SHR
//SYSIN    DD   DATA
./         ADD   NAME=OAM,LEVEL=01,SOURCE=0,LIST=ALL
./      NUMBER   NEW1=10,INCR=10
//OAM PROC OSMC=YES,MAXS=2,UNLOAD=9999,EJECT=LRW,RESTART=YES
//IEFPROC EXEC PGM=CBROAM,REGION=0M,
// PARM=('OSMC=&OSMC,APLAN=CBROAM,MAXS=&MAXS,UNLOAD=&UNLOAD,EJECT=&EJECT,RESTART=&RESTART')
//SYSABEND DD SYSOUT=A
./      ENDUP
```

Figure 70. CBRAPROC SAMPLIB Member

CBRIPROC

SAMPLIB member CBRIPROC, as shown in Figure 71 on page 431, creates member OTIS in PROCLIB.

```
//CBRIPROC JOB  MSGLEVEL=(1,1),MSGCLASS=A
//*******************************************************************
//*
//*  $SEG(CBRIPROC) COMP(OSR) PROD(OAM):
//*
//*  OAM Update PROCLIB Job (for OTIS procedure).
//*
//*  This job will create a procedure in PROCLIB that can be used
//*  to start OTIS.
//*
//*  NOTE:If the DB2 load module library containing DSNALI is
//*       not in the LNKLST concatenation, either include
//*       the DB2 load module library in the SYS1.LINKLIB
//*       concatenation (LNKLSTxx) or add a STEPLIB DD to
//*       this PROCEDURE.
//*
//*       If a STEPLIB is used, then that concatenation must be
//*       APF-authorized.
//*
//*******************************************************************
//STEP1    EXEC PGM=IEBUPDTE,PARM=NEW
//SYSPRINT DD   SYSOUT=A
//SYSUT2   DD   DSNAME=SYS1.PROCLIB,DISP=SHR
//SYSIN    DD   DATA
./         ADD   NAME=OTIS,LEVEL=01,SOURCE=0,LIST=ALL
./      NUMBER   NEW1=10,INCR=10
//OTIS    PROC
//IEFPROC EXEC PGM=CBRIIAS,REGION=0M
//SYSABEND DD SYSOUT=A
./      ENDUP
```

Figure 71. CBRIPROC SAMPLIB Member

Creating Object Databases

To create the object databases for OAM, several jobs are supplied as members in SAMPLIB. Three members contain the data set allocation jobs and three members contain the DB2 database definition jobs. The CBRIALC0 job allocates the VSAM data sets for the DB2 object storage databases, and the CBRIALCX and CBRIALCY jobs allocate the VSAM data sets for the DB2 object administration database. Similarly, the CBRISQL0 database definition job defines the object storage databases, and the CBRISQLX and CBRISQLY jobs define the object administration database.

For each database used, the corresponding allocation and database definition job steps must be run successfully. You must modify the jobs for your installation before you run the jobs. See the job prologs for the required modifications and related information.

CBRIALC0

SAMPLIB member CBRIALC0, as shown in Figure 72 on page 432, provides data set allocation for the OAM object tables and directories. You must modify and run the job successfully before you use OAM.

```
//CBRIALC0 JOB  MSGLEVEL=(1,1),MSGCLASS=A
//*************************************************************
//*
//*  $SEG(CBRIALC0) COMP(OSR) PROD(OAM):
//*
//*  OAM DB2 Data Set Allocation Job (for Object Tables
//*  and Directories).
//*
//*  Run CBRIALC0 to define a VSAM ESDS that will be
//*  used by DB2 for an OSR object database.
//*
//*  Prior to executing this job you need to make the
//*  following modifications:
//*
//*  1. Change "vol_ser" to the volume serials that your
//*     target database should reside on.
//*  2. Change "pri_alloc" and "sec_alloc" to the desired
//*     number of cylinders for each particular VSAM ESDS
//*     being defined. For example, CYLINDER(pri_alloc
//*     sec_alloc) may be CYLINDER(200 10).
//*  3. Change "cat_name" to the name of the catalog you
//*     will be using under DB2.
//*  4. If you intend on using the DSN1COPY utility to copy
//*     these data bases, then you must include the REUSE keyword
//*     in the DEFINE CLUSTER command for each data base.
//*  5. Change "osg_hlq" to the high level qualifier to be used
//*     for the object storage group definition and tables.
//*     This is the qualifier used on the object storage group
//*     define through ISMF and used by OAM and OSR for all access
//*     to the object storage group's directories and data tables.
//*  6. Add additional job steps, repeating all statements in the
//*     first STEP01, for each object storage group defined in your
//*     configuration.  In each repeated step, change the qualifier
//*     to match the qualifier for each object storage group.
//*
//*  Following data set allocations, run CBRISQL0 (provided
//*  in SAMPLIB for your modification) to define
//*  DB2 databases, table spaces, indexes, views, etc.
//*  using the data sets allocated by this job.
//*
//*  If you have run this job and want to start over
//*  again, just issue a DROP for each database that was
//*  previously defined in DB2.
//*
//*************************************************************
//STEP01  EXEC PGM=IDCAMS
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *
 DELETE                                                 -
 cat_name.DSNDBC.osg_hlq.OSMDTS.I0001.A001              -
     CLUSTER                                            -
     PURGE
 DELETE                                                 -
 cat_name.DSNDBC.osg_hlq.OSMOTS04.I0001.A001            -
     CLUSTER                                            -
     PURGE
 DELETE                                                 -
 cat_name.DSNDBC.osg_hlq.OSMOTS32.I0001.A001            -
     CLUSTER                                            -
     PURGE
 SET LASTCC=0
 SET MAXCC=0
```

Figure 72. CBRIALC0 SAMPLIB Member (Part 1 of 3)

```
DEFINE CLUSTER                                      -
(NAME(cat_name.DSNDBC.osg_hlq.OSMDTS.I0001.A001)    -
        LINEAR                                      -
        SHAREOPTIONS(3 3)                           -
        VOLUMES(vol_ser)                            -
        CYLINDERS(pri_alloc sec_alloc)              -
        UNIQUE   )                                  -
      DATA                                          -
(NAME(cat_name.DSNDBD.osg_hlq.OSMDTS.I0001.A001))
DEFINE CLUSTER                                      -
(NAME(cat_name.DSNDBC.osg_hlq.OSMOTS04.I0001.A001)  -
        LINEAR                                      -
        SHAREOPTIONS(3 3)                           -
        VOLUMES(vol_ser)                            -
        CYLINDERS(pri_alloc sec_alloc)              -
        UNIQUE   )                                  -
      DATA                                          -
(NAME(cat_name.DSNDBD.osg_hlq.OSMOTS04.I0001.A001))
DEFINE CLUSTER                                      -
(NAME(cat_name.DSNDBC.osg_hlq.OSMOTS32.I0001.A001)  -
        LINEAR                                      -
        SHAREOPTIONS(3 3)                           -
        VOLUMES(vol_ser)                            -
        CYLINDERS(pri_alloc sec_alloc)              -
        UNIQUE   )                                  -
      DATA                                          -
(NAME(cat_name.DSNDBD.osg_hlq.OSMOTS32.I0001.A001))
DELETE                                              -
cat_name.DSNDBC.osg_hlq.OBJDIRX1.I0001.A001         -
    CLUSTER                                         -
    PURGE
DELETE                                              -
cat_name.DSNDBC.osg_hlq.OBJDIRX2.I0001.A001         -
    CLUSTER                                         -
    PURGE
DELETE                                              -
cat_name.DSNDBC.osg_hlq.OBJDIRX3.I0001.A001         -
    CLUSTER                                         -
    PURGE
DELETE                                              -
cat_name.DSNDBC.osg_hlq.OBJT04X1.I0001.A001         -
    CLUSTER                                         -
    PURGE
DELETE                                              -
cat_name.DSNDBC.osg_hlq.OBJT32X1.I0001.A001         -
    CLUSTER                                         -
    PURGE
SET LASTCC=0
SET MAXCC=0
DEFINE CLUSTER                                      -
(NAME(cat_name.DSNDBC.osg_hlq.OBJDIRX1.I0001.A001)  -
        LINEAR                                      -
        SHAREOPTIONS(3 3)                           -
        VOLUMES(vol_ser)                            -
        CYLINDERS(pri_alloc sec_alloc)              -
        UNIQUE   )                                  -
      DATA                                          -
(NAME(cat_name.DSNDBD.osg_hlq.OBJDIRX1.I0001.A001))
```

Figure 72. CBRIALC0 SAMPLIB Member (Part 2 of 3)

```
 DEFINE CLUSTER                                    -
 (NAME(cat_name.DSNDBC.osg_hlq.OBJDIRX2.I0001.A001)   -
        LINEAR                                     -
        SHAREOPTIONS(3 3)                          -
        VOLUMES(vol_ser)                           -
        CYLINDERS(pri_alloc sec_alloc)             -
        UNIQUE   )                                 -
      DATA                                         -
 (NAME(cat_name.DSNDBD.osg_hlq.OBJDIRX2.I0001.A001))
 DEFINE CLUSTER                                    -
 (NAME(cat_name.DSNDBC.osg_hlq.OBJDIRX3.I0001.A001)   -
        LINEAR                                     -
        SHAREOPTIONS(3 3)                          -
        VOLUMES(vol_ser)                           -
        CYLINDERS(pri_alloc sec_alloc)             -
        UNIQUE   )                                 -
      DATA                                         -
 (NAME(cat_name.DSNDBD.osg_hlq.OBJDIRX3.I0001.A001))
 DEFINE CLUSTER                                    -
 (NAME(cat_name.DSNDBC.osg_hlq.OBJT04X1.I0001.A001)   -
        LINEAR                                     -
        SHAREOPTIONS(3 3)                          -
        VOLUMES(vol_ser)                           -
        CYLINDERS(pri_alloc sec_alloc)             -
        UNIQUE   )                                 -
      DATA                                         -
 (NAME(cat_name.DSNDBD.osg_hlq.OBJT04X1.I0001.A001))
 DEFINE CLUSTER                                    -
 (NAME(cat_name.DSNDBC.osg_hlq.OBJT32X1.I0001.A001)   -
        LINEAR                                     -
        SHAREOPTIONS(3 3)                          -
        VOLUMES(vol_ser)                           -
        CYLINDERS(pri_alloc sec_alloc)             -
        UNIQUE   )                                 -
      DATA                                         -
 (NAME(cat_name.DSNDBD.osg_hlq.OBJT32X1.I0001.A001))
/*
```

Figure 72. CBRIALC0 SAMPLIB Member (Part 3 of 3)

CBRIALCX

SAMPLIB member CBRIALCX, as shown in Figure 73 on page 435, provides data set allocation for part of the OAM administration tables. You must modify and run the job successfully before you use OAM.

```
//CBRIALCX JOB  MSGLEVEL=(1,1),MSGCLASS=A
//*************************************************************
//*
//*  $SEG(CBRIALCX) COMP(OSR) PROD(OAM):
//*
//*  OAM DB2 Data Set Allocation Job (for Administration
//*  Databases).
//*
//*  Run CBRIALCX to define the VSAM ESDSs that
//*  will be used by DB2 for the OAMADMIN databases
//*  required by OAM.
//*
//*  Prior to executing this job you need to make the
//*  following modifications:
//*
//*  1. Change "vol_ser" to the volume serials that your
//*     target database should reside on.
//*  2. Change "pri_alloc" and "sec_alloc" to the desired
//*     number of cylinders for each particular VSAM ESDS
//*     being defined. For example, CYLINDER(pri_alloc
//*     sec_alloc) may be CYLINDER(200 10).
//*  3. Change "cat_name" to the name of the catalog you
//*     will be using under DB2.
//*
//*  Following data set allocations, run CBRISQLX (provided
//*  in SAMPLIB for your modification) to define the
//*  OAM Administration databases using the data sets
//*  allocated by this job.
//*
//*  If you have run this job and want to start over
//*  again, just issue a DROP for each OSR database
//*  in DB2 that was previously defined by this job.
//*
//*************************************************************
//STEP0X  EXEC PGM=IDCAMS
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *
 DELETE                                              -
 cat_name.DSNDBC.OAMADMIN.MCIND.I0001.A001           -
     CLUSTER                                         -
     PURGE
 DELETE                                              -
 cat_name.DSNDBC.OAMADMIN.SCIND.I0001.A001           -
     CLUSTER                                         -
     PURGE
 DELETE                                              -
 cat_name.DSNDBC.OAMADMIN.COLIND.I0001.A001          -
     CLUSTER                                         -
     PURGE
 SET LASTCC=0
 SET MAXCC=0
 DEFINE CLUSTER                                      -
 (NAME(cat_name.DSNDBC.OAMADMIN.MCIND.I0001.A001)    -
         LINEAR                                      -
         SHAREOPTIONS(3 3)                           -
         VOLUMES(vol_ser)                            -
         CYLINDERS(pri_alloc sec_alloc)              -
         UNIQUE   )                                  -
       DATA                                          -
 (NAME(cat_name.DSNDBD.OAMADMIN.MCIND.I0001.A001))
```

Figure 73. CBRIALCX SAMPLIB Member (Part 1 of 3)

```
DEFINE CLUSTER                                      -
(NAME(cat_name.DSNDBC.OAMADMIN.SCIND.I0001.A001)    -
        LINEAR                                      -
        SHAREOPTIONS(3 3)                           -
        VOLUMES(vol_ser)                            -
        CYLINDERS(pri_alloc sec_alloc)              -
        UNIQUE   )                                  -
      DATA                                          -
(NAME(cat_name.DSNDBD.OAMADMIN.SCIND.I0001.A001))
DEFINE CLUSTER                                      -
(NAME(cat_name.DSNDBC.OAMADMIN.COLIND.I0001.A001)   -
        LINEAR                                      -
        SHAREOPTIONS(3 3)                           -
        VOLUMES(vol_ser)                            -
        CYLINDERS(pri_alloc sec_alloc)              -
        UNIQUE   )                                  -
      DATA                                          -
(NAME(cat_name.DSNDBD.OAMADMIN.COLIND.I0001.A001))
DELETE                                              -
cat_name.DSNDBC.OAMADMIN.CBRMGTX.I0001.A001         -
    CLUSTER                                         -
    PURGE
DELETE                                              -
cat_name.DSNDBC.OAMADMIN.CBRSTOX.I0001.A001         -
    CLUSTER                                         -
    PURGE
DELETE                                              -
cat_name.DSNDBC.OAMADMIN.CBRCLTX1.I0001.A001        -
    CLUSTER                                         -
    PURGE
DELETE                                              -
cat_name.DSNDBC.OAMADMIN.CBRCLTX2.I0001.A001        -
    CLUSTER                                         -
    PURGE
DELETE                                              -
cat_name.DSNDBC.OAMADMIN.CBRCLTX3.I0001.A001        -
    CLUSTER                                         -
    PURGE
SET LASTCC=0
SET MAXCC=0
DEFINE CLUSTER                                      -
(NAME(cat_name.DSNDBC.OAMADMIN.CBRMGTX.I0001.A001)  -
        LINEAR                                      -
        SHAREOPTIONS(3 3)                           -
        VOLUMES(vol_ser)                            -
        CYLINDERS(pri_alloc sec_alloc)              -
        UNIQUE   )                                  -
      DATA                                          -
(NAME(cat_name.DSNDBD.OAMADMIN.CBRMGTX.I0001.A001))
DEFINE CLUSTER                                      -
(NAME(cat_name.DSNDBC.OAMADMIN.CBRSTOX.I0001.A001)  -
        LINEAR                                      -
        SHAREOPTIONS(3 3)                           -
        VOLUMES(vol_ser)                            -
        CYLINDERS(pri_alloc sec_alloc)              -
        UNIQUE   )                                  -
      DATA                                          -
(NAME(cat_name.DSNDBD.OAMADMIN.CBRSTOX.I0001.A001))
DEFINE CLUSTER                                      -
(NAME(cat_name.DSNDBC.OAMADMIN.CBRCLTX1.I0001.A001) -
        LINEAR                                      -
        SHAREOPTIONS(3 3)                           -
        VOLUMES(vol_ser)                            -
        CYLINDERS(pri_alloc sec_alloc)              -
        UNIQUE   )                                  -
      DATA                                          -
(NAME(cat_name.DSNDBD.OAMADMIN.CBRCLTX1.I0001.A001))
```

Figure 73. CBRIALCX SAMPLIB Member (Part 2 of 3)

```
DEFINE CLUSTER                                    -
(NAME(cat_name.DSNDBC.OAMADMIN.CBRCLTX2.I0001.A001)  -
        LINEAR                                    -
        SHAREOPTIONS(3 3)                         -
        VOLUMES(vol_ser)                          -
        CYLINDERS(pri_alloc sec_alloc)            -
        UNIQUE   )                                -
      DATA                                        -
(NAME(cat_name.DSNDBD.OAMADMIN.CBRCLTX2.I0001.A001))
DEFINE CLUSTER                                    -
(NAME(cat_name.DSNDBC.OAMADMIN.CBRCLTX3.I0001.A001)  -
        LINEAR                                    -
        SHAREOPTIONS(3 3)                         -
        VOLUMES(vol_ser)                          -
        CYLINDERS(pri_alloc sec_alloc)            -
        UNIQUE   )                                -
      DATA                                        -
(NAME(cat_name.DSNDBD.OAMADMIN.CBRCLTX3.I0001.A001))
```

Figure 73. CBRIALCX SAMPLIB Member (Part 3 of 3)

CBRIALCY

SAMPLIB member CBRIALCY, as shown in Figure 74, provides data set allocation for part of the OAM object tables and directories. You must modify and run the job successfully before you use OAM.

```
//CBRIALCY JOB  MSGLEVEL=(1,1),MSGCLASS=A
//*************************************************************
//*
//*  $SEG(CBRIALCY) COMP(OSR) PROD(OAM):
//*
//*  OAM DB2 Data Set Allocation Job (for Administration
//*  Databases).
//*
//*  Run CBRIALCY to define the VSAM ESDSs that
//*  will be used by DB2 for the OAMADMIN databases
//*  required by OAM.
//*
//*  Prior to executing this job you need to make the
//*  following modifications:
//*
//*  1. Change "vol_ser" to the volume serials that your
//*     target database should reside on.
//*  2. Change "pri_alloc" and "sec_alloc" to the desired
//*     number of cylinders for each particular VSAM ESDS
//*     being defined. For example, CYLINDER(pri_alloc
//*     sec_alloc) may be CYLINDER(200 10).
//*  3. Change "cat_name" to the name of the catalog you
//*     will be using under DB2.
//*
//*  Following data set allocations, run CBRISQLY (provided
//*  in SAMPLIB for your modification) to define the
//*  OAM Administration databases using the data sets
//*  allocated by this job.
//*
```

Figure 74. CBRIALCY SAMPLIB Member (Part 1 of 2)

```
//*************************************************************
//STEP0X  EXEC PGM=IDCAMS
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *
 DELETE                                          -
 cat_name.DSNDBC.OAMADMIN.CBRMGTY.I0001.A001     -
     CLUSTER                                     -
     PURGE
 DELETE                                          -
 cat_name.DSNDBC.OAMADMIN.CBRSTOY.I0001.A001     -
     CLUSTER                                     -
     PURGE
 DEFINE CLUSTER                                  -
 (NAME(cat_name.DSNDBC.OAMADMIN.CBRMGTY.I0001.A001)   -
         LINEAR                                  -
         SHAREOPTIONS(3 3)                       -
         VOLUMES(vol_ser)                        -
         CYLINDERS(pri_alloc sec_alloc)          -
         UNIQUE   )                              -
       DATA                                      -
 (NAME(cat_name.DSNDBD.OAMADMIN.CBRMGTY.I0001.A001))
 DEFINE CLUSTER                                  -
 (NAME(cat_name.DSNDBC.OAMADMIN.CBRSTOY.I0001.A001)   -
         LINEAR                                  -
         SHAREOPTIONS(3 3)                       -
         VOLUMES(vol_ser)                        -
         CYLINDERS(pri_alloc sec_alloc)          -
         UNIQUE   )                              -
       DATA                                      -
 (NAME(cat_name.DSNDBD.OAMADMIN.CBRSTOY.I0001.A001))
```

Figure 74. CBRIALCY SAMPLIB Member (Part 2 of 2)

CBRILOB

SAMPLIB member CBRILOB, as shown in Figure 75, creates the LOB storage structure for LOB support. You must modify and run the job successfully before you use OAM.

```
//CBRILOB JOB MSGLEVEL=(1,1),CLASS=A,MSGCLASS=A
//*********************************************************************
//*
//*  $SEG(CBRILOB) COMP(DBM) PROD(OAM):
//*
//*  OAM DB2 Data Set Allocation and Database Definition job for
//*  LOB Storage Structures (LOB tablespaces, Base tables, Base
//*  table views, Auxiliary tables and Auxiliary index.
//*  ------------------------------------------------------------
//*  ------------------------------------------------------------
//*
//*  CBRILOB
//*
//*  This job will
//*  1. DEFINE VSAM ESDS THAT WILL BE USED BY DB2 to create
//*     the LOB Storage Structure.
//*  2. Create the LOB base table, base table view, auxiliary table,
//*     and index that comprise the LOB Storage Structure within the
//*     Object Storage Table Hierarchy.
//*
```

Figure 75. CBRILOB SAMPLIB Member (Part 1 of 4)

```
//*  Prior to executing this job you need to make the
//*  following modifications:
//*
//*  1. Change "vol_ser" to the volume serials that your
//*     target database should reside on.
//*  2. Change "pri_alloc" and "sec_alloc" to the desired
//*     number of cylinders for each particular VSAM ESDS
//*     being defined. For example, CYLINDER(pri_alloc
//*     sec_alloc) may be CYLINDER(200 10).
//*  3. Change "cat_name" to the name of the catalog you
//*     will be using under DB2.
//*  4. If you intend on using the DSN1COPY utility to copy
//*     these data bases, then you must include the REUSE keyword
//*     in the DEFINE CLUSTER command for each data base.
//*  5. Change "osg_hlq" to the high level qualifier to be used
//*     for the object storage group definition and tables.
//*     This is the qualifier used on the object storage group
//*     define through ISMF and used by OAM and OSR for all access
//*     to the object storage group's directories and data tables.
//*  6. Change "ds_size" to the maximum size allowed for each data
//*     set.  Please refer to the DB2 for z/OS SQL reference
//*     manual for limitations.
//*  7. Change "auth_id" to the identifier(s)
//*     authorized for the respective group.
//*  8. Change the name in the DSN SYSTEM(DB2) statement to
//*     the name of the DB2 Subsystem in your installation.
//*  9. Change the data set name in the RUN statement
//*     LIB('DB2.RUNLIB.LOAD') phrase to the data set name used
//*     in your installation for the DB2 RUNLIB.LOAD data set.
//* 10. Change the PLAN name (DSNTIA71) in the RUN statement to
//*     match your current DB2 version and release level.
//* 11. Add additional job steps, repeating all statements in the
//*     STEP00 and STEP01, for each object storage group defined in
//*     your configuration.  In each repeated step, change the
//*     qualifier to match the qualifier for each object storage
//*     group.
//*
//*
//*  If you have run this job and want to start over
//*  again, just issue a DROP for each LOB base table and for each
//*  base tablespace and auxiliary tablespace that was previously
//*  defined in DB2 by this job.
//*
//*********************************************************************
//*
//*  CHANGE ACTIVITY:
//*    $L0=HDZ1180  R18 050531 TUCGPW: INITIAL RELEASE
//*    $P0=K180710  R18 051214 TUCGPW: Change ROW_ID to OTROWID
//*
//*********************************************************************
//STEP00  EXEC PGM=IDCAMS
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *
 DELETE                                                 -
 cat_name.DSNDBC.osg_hlq.OSMLBTS.I0001.A001             -
     CLUSTER                                            -
     PURGE
 DELETE                                                 -
 cat_name.DSNDBC.osg_hlq.OTLOBX1.I0001.A001             -
     CLUSTER                                            -
     PURGE
```

Figure 75. CBRILOB SAMPLIB Member (Part 2 of 4)

```
 DELETE                                                 -
 cat_name.DSNDBC.osg_hlq.OSMLATS.I0001.A001             -
     CLUSTER                                            -
     PURGE
 DELETE                                                 -
 cat_name.DSNDBC.osg_hlq.OTLOBAX1.I0001.A001            -
     CLUSTER                                            -
     PURGE
 SET LASTCC=0
 SET MAXCC=0
/*
//STEP01  EXEC PGM=IDCAMS
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *
 DEFINE CLUSTER                                         -
 (NAME(cat_name.DSNDBC.osg_hlq.OSMLBTS.I0001.A001)      -
         LINEAR                                         -
         SHAREOPTIONS(3 4)                              -
         VOLUMES(vol_ser)                               -
         CYLINDERS(pri_alloc sec_alloc)                 -
         UNIQUE   )                                     -
       DATA                                             -
 (NAME(cat_name.DSNDBD.osg_hlq.OSMLBTS.I0001.A001))
 DEFINE CLUSTER                                         -
 (NAME(cat_name.DSNDBC.osg_hlq.OTLOBX1.I0001.A001)      -
         LINEAR                                         -
         SHAREOPTIONS(3 4)                              -
         VOLUMES(vol_ser)                               -
         CYLINDERS(pri_alloc sec_alloc)                 -
         UNIQUE   )                                     -
       DATA                                             -
 (NAME(cat_name.DSNDBD.osg_hlq.OTLOBX1.I0001.A001))
 DEFINE CLUSTER                                         -
 (NAME(cat_name.DSNDBC.osg_hlq.OSMLATS.I0001.A001)      -
         LINEAR                                         -
         SHAREOPTIONS(3 4)                              -
         VOLUMES(vol_ser)                               -
         CYLINDERS(pri_alloc sec_alloc)                 -
         UNIQUE   )                                     -
       DATA                                             -
 (NAME(cat_name.DSNDBD.osg_hlq.OSMLATS.I0001.A001))
 DEFINE CLUSTER                                         -
 (NAME(cat_name.DSNDBC.osg_hlq.OTLOBAX1.I0001.A001)     -
         LINEAR                                         -
         SHAREOPTIONS(3 4)                              -
         VOLUMES(vol_ser)                               -
         CYLINDERS(pri_alloc sec_alloc)                 -
         UNIQUE   )                                     -
       DATA                                             -
 (NAME(cat_name.DSNDBD.osg_hlq.OTLOBAX1.I0001.A001))
/*
//STEP02  EXEC PGM=IKJEFT01,DYNAMNBR=20,COND=(4,LT)
//SYSTSPRT DD SYSOUT=*
//SYSTSIN  DD *
 DSN SYSTEM(DB2)
 RUN  PROGRAM(DSNTIAD) PLAN(DSNTIA71) -
      LIB('DB2.RUNLIB.LOAD')
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *
```

Figure 75. CBRILOB SAMPLIB Member (Part 3 of 4)

```
CREATE TABLESPACE OSMLBTS
       IN         osg_hlq
       USING      VCAT cat_name
       LOCKSIZE   ANY
       CLOSE      NO
       SEGSIZE    64
       BUFFERPOOL BP32K;
CREATE TABLE osg_hlq.OSM_LOB_BASE_TBL
       (
        OTVER    CHAR(1)      NOT NULL,
        OTSEG    SMALLINT     NOT NULL,
        OTCLID   INTEGER      NOT NULL,
        OTNAME   VARCHAR(44)  NOT NULL,
        OTROWID  ROWID        NOT NULL GENERATED ALWAYS,
        OTOBJ    BLOB(2G)   NOT NULL
       )
       IN osg_hlq.OSMLBTS;
CREATE UNIQUE INDEX osg_hlq.OTLOBX1
       ON osg_hlq.OSM_LOB_BASE_TBL
       (
        OTCLID   ASC,
        OTNAME   ASC
       )
       CLUSTER
       USING      VCAT cat_name
       CLOSE      NO
       BUFFERPOOL BP1
       PCTFREE    10;
COMMIT;
CREATE VIEW
       osg_hlq.V_OSM_LOB_BASE_TBL
     AS SELECT ALL * FROM
       osg_hlq.OSM_LOB_BASE_TBL;
GRANT ALL ON
       osg_hlq.V_OSM_LOB_BASE_TBL
     TO auth_id;
COMMIT;
CREATE LOB TABLESPACE OSMLATS
       IN         osg_hlq
       USING      VCAT cat_name
       LOG        NO
       LOCKSIZE   LOB
       BUFFERPOOL BP32K
       DSSIZE     ds_size
       GBPCACHE   SYSTEM;
CREATE AUXILIARY TABLE osg_hlq.OSM_LOB_AUX_TBL
       IN         osg_hlq.OSMLATS
       STORES     osg_hlq.OSM_LOB_BASE_TBL
       COLUMN     OTOBJ;
CREATE UNIQUE INDEX osg_hlq.OTLOBAX1
       ON osg_hlq.OSM_LOB_AUX_TBL
       USING      VCAT cat_name;
COMMIT;
/*
//
```

Figure 75. CBRILOB SAMPLIB Member (Part 4 of 4)

CBRSMR18

SAMPLIB member CBRSMR18, as shown in Figure 76 on page 442, adds a new LOB location indicator column to the object directory table. Even if you do not have LOB support, this is required.

```
//CBRSMR18    JOB MSGLEVEL=(1,1),MSGCLASS=A
//*****************************************************************
//*
//*  $SEG(SMR18) COMP(DBM) PROD(OAM):
//*
//*  OAM DB2 Database Migration Job (for the Object Storage
//*  Databases).
//*
//*  ---------------------------------------------------------------
//*  ---------------------------------------------------------------
//*
//*  SMR18
//*
//*  This job will perform the migration from the z/OS V1 R7
//*  version of the Object Storage Database to the z/OS V1 R8   @POC
//*  version which supports DB2 large objects.                  @POC
//*
//*  This job will:
//*   1. add a new column ODLOBFL to the existing object directory
//*      table.
//*
//*  It is recommended that you create a DB2 image copy of the
//*  existing hlq.OSM_OBJ_DIR table prior to executing this
//*  migration job for recovery purposes.
//*
//*  Before running this job, you must change the following:
//*
//*    1.Change the name in the DSN SYSTEM(DB2) statement to
//*      the name of the DB2 Subsystem in your installation.
//*
//*    2.Change the PLAN name (DSNTIA71) in the RUN statement to
//*      match your current DB2 version and release level.
//*
//*    3.Change the data set name in the RUN statement
//*      LIB('DB2MINI.V7R1M0.RUNLIB.LOAD') phrase to the data set name
//*      used in your installation for the DB2 RUNLIB.LOAD data set.
//*
//*    4.Change the high level qualifier (hlq) in the ALTER and LABEL
//*      statement of the table 'hlq.OSM_OBJ_DIR' to match the database
//*      name the table lives in.
//*
//*    5. Add a new ALTER and LABEL statement for every object storage
//*       database.
//*
//*  After running this job, you must:
//*    1. Drop and then re-create the view for every object storage
//*       database updated.
//*
//*  CHANGE ACTIVITY:
//*    $L0=HDZ1180  R18 050309 TUCGPW: Initial Release
//*    $P0=K180710  R18 051214 TUCGPW: Reword: Optical Configuration
//*                                    Database --> Object Storage DB
//*
//*****************************************************************
//*****************************************************************
//*  Alter the hlq.OSM_OBJ_DIR table to add the ODLOBFL column
//*  definitions.
//*****************************************************************
//ALTERTAB EXEC PGM=IKJEFT01,DYNAMNBR=20,COND=(4,LT)
//SYSTSPRT DD SYSOUT=*
//SYSTSIN  DD *
 DSN SYSTEM(DB2)
 RUN  PROGRAM(DSNTIAD) PLAN(DSNTIA71) -
      LIB('DB2MINI.V7R1M0.RUNLIB.LOAD')
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *
```

Figure 76. CBRSMR18 SAMPLIB Member (Part 1 of 2)

```
 ALTER TABLE hlq.OSM_OBJ_DIR ADD ODLOBFL CHAR(1) NOT NULL WITH DEFAULT;

 COMMIT;
/*
//*********************************************************************
//*  Place label in table for new column
//*********************************************************************
//LABELTAB EXEC PGM=IKJEFT01,DYNAMNBR=20,COND=(4,LT)
//SYSTSPRT DD SYSOUT=*
//SYSTSIN  DD *
 DSN SYSTEM(DB2)
 RUN  PROGRAM(DSNTIAD) PLAN(DSNTIA71) -
      LIB('DB2MINI.V7R1M0.RUNLIB.LOAD')
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *

 LABEL ON hlq.OSM_OBJ_DIR
   (ODLOBFL IS 'OBJECT_LOB_FLAG');
 COMMIT;
/*
```

Figure 76. CBRSMR18 SAMPLIB Member (Part 2 of 2)

CBRISQL0

SAMPLIB member CBRISQL0, as shown in Figure 77, provides the DB2 definitions for the OAM object tables and directories. You must modify and run the job successfully before you use OAM.

Note: Before z/OS V1R7, the CBRISQL0 sample job created UNIQUE indexes OBJDIRX1 and OBJDIRX2. In z/OS V1R7, CBRISQL0 was modified to create these indexes without the UNIQUE attribute to alleviate a potential OAM OSREQ error due to duplicate time stamp (RC8 RSN30020100). If your OAM Database was defined before z/OS V1R7, it is recommended that you drop UNIQUE indexes OBJDIRX1 and OBJDIRX2, and create them as non-UNIQUE per the CBRISQL0 sample job below. See APAR II13964 for more information.

```
//CBRISQL0 JOB  MSGLEVEL=(1,1),MSGCLASS=A
//*****************************************************************
//*
//*  $SEG(CBRISQL0) COMP(OSR) PROD(OAM):
//*
//*  OAM DB2 Database Definition Job (for Object Tables
//*  and Directories).
//*
//*  This job will create an OSR database, table, and
//*  index in DB2 for an object storage group.
//*
```

Figure 77. CBRISQL0 SAMPLIB Member (Part 1 of 4)

```
//*  Before running this job, you must change the following:
//*
//*  1. Change "cat_name" to the DB2 VCAT name used
//*     for defining the VSAM data sets in CBRIALC0.
//*
//*  2. Change "auth_id" to the identifier(s)
//*     authorized for the respective group.
//*
//*  3. Change the name in the DSN SYSTEM(DB2) statement to
//*     the name of the DB2 Subsystem in your installation.
//*
//*  4. Change the data set name in the RUN statement
//*     LIB('DB2.RUNLIB.LOAD') phrase to the data set name used
//*     in your installation for the DB2 RUNLIB.LOAD data set.
//*
//*  5. Change the PLAN name (DSNTIA51) in the RUN statement to
//*     match your current DB2 version and release level.
//*
//*  6. If you plan to use just one collection, reverse the
//*     order of ODCLID and ODPENDDT in index OBJDIRX2.
//*
//*  7. Change "osg_hlq" to the high level qualifier to be used
//*     for the object storage group definition and tables.
//*     This is the qualifier used on the object storage group
//*     define through ISMF and used by OAM and OSR for all access
//*     to the object storage group's directories and data tables.
//*
//*  8. Add additional job steps, repeating all statements in
//*     STEP01, for each object storage group defined in your
//*     configuration.  In each repeated step, change the qualifier
//*     to match the qualifier for each object storage group.
//*
//*  CHANGE ACTIVITY:
//*    $L0=JDP3227 320 890601 TUCJRL: Initial Release
//*    $01=OY26530 320 891113 TUCTNN: Removed OTSEG from OBJT04X1
//*    $02=OY33596 320 901019 TUCHTT: Changed index OBJDIRX1 to
//*                                   ODCREATS. Changed index
//*                                   OBJDIRX2 to ODPENDDT, ODCLID,
//*                                   ODCREATS. Changed index
//*                                   OBJDIRX3 to ODNAME, ODCLID.
//*    $L1=JDP3331 331 910614 TUCKSG: Reverse order of ODCLID
//*                                   and ODPENDDT for index
//*                                   OBJDIRX2.
//*    $L2=HDZ11D0 140 970331 TUCSPP: Specify TYPE 1 INDEX for
//*                                   DB2 4.1 or above level
//*    $L3=HDZ11E0 150 970812 TUCLJT: GROUP00-GROUP99 qualifier
//*                                   restriction removed.  Single
//*                                   set of JCL provided and user
//*                                   to customize to installation.
//*    $L4=HDZ11G0 R13 001012 TUCLJT: Add ODBK2LOC and ODBK2SEC for
//*                                   Multiple Object Backup Support
//*                                   Also:
//*                                   - Removed reference to type 1
//*                                     indexes, which are no longer
//*                                     supported by DB2
//*                                   - Removed SUBPAGES from CREATE
//*                                     statements, since they are
//*                                     only for type 1 indexes
//*    $P1=K170872 R13 010913 TUCLJT: Correct misplaced commas
//*    $P2=K1K0640 R17 041130 TUCVRE: INDEX OBJDIRX1 and OBJDIRX2
//*                                   do not need to be UNIQUE.
//*
```

Figure 77. CBRISQL0 SAMPLIB Member (Part 2 of 4)

```
//STEP00  EXEC PGM=IKJEFT01,DYNAMNBR=20,COND=(4,LT)
//SYSTSPRT DD SYSOUT=*
//SYSTSIN  DD *
 DSN SYSTEM(DB2)
 RUN  PROGRAM(DSNTIAD) PLAN(DSNTIA51) -
      LIB('DB2.RUNLIB.LOAD')
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *
          CREATE DATABASE   osg_hlq;
          COMMIT;
          CREATE TABLESPACE OSMDTS
                 IN         osg_hlq
                 USING      VCAT cat_name
                 LOCKSIZE   ANY
                 CLOSE      NO
                 SEGSIZE    64
                 BUFFERPOOL BP0;
          CREATE TABLESPACE OSMOTS04
                 IN         osg_hlq
                 USING      VCAT cat_name
                 LOCKSIZE   ANY
                 CLOSE      NO
                 SEGSIZE    64
                 BUFFERPOOL BP2;
          CREATE TABLESPACE OSMOTS32
                 IN         osg_hlq
                 USING      VCAT cat_name
                 LOCKSIZE   ANY
                 CLOSE      NO
                 SEGSIZE    64
                 BUFFERPOOL BP32K;
          COMMIT;
          CREATE TABLE osg_hlq.OSM_OBJ_DIR
                 (
                  ODVER    CHAR(1)      NOT NULL,
                  ODSIZE   INTEGER      NOT NULL,
                  ODCREATS TIMESTAMP    NOT NULL,
                  ODEXPDT  DATE         NOT NULL,
                  ODLREFDT DATE         NOT NULL,
                  ODPENDDT DATE         NOT NULL,
                  ODMCASDT DATE         NOT NULL,
                  ODSCNUM  SMALLINT     NOT NULL,
                  ODMCNUM  SMALLINT     NOT NULL,
                  ODLOCFL  CHAR(1)      NOT NULL,
                  ODLSLOC  CHAR(6)      NOT NULL,
                  ODSECLOC INTEGER      NOT NULL,
                  ODBKLOC  CHAR(6)      NOT NULL,
                  ODBKSEC  INTEGER      NOT NULL,
                  ODCLID   INTEGER      NOT NULL,
                  ODNAME   VARCHAR(44)  NOT NULL,
                  ODBK2LOC  CHAR(6)     NOT NULL WITH DEFAULT,
                  ODBK2SEC  INTEGER     NOT NULL WITH DEFAULT
                 )
                 IN osg_hlq.OSMDTS;
          CREATE INDEX osg_hlq.OBJDIRX1
                 ON osg_hlq.OSM_OBJ_DIR
                 (
                  ODCREATS ASC
                 )
                 CLUSTER
                 USING      VCAT cat_name
                 CLOSE      NO
                 BUFFERPOOL BP1
                 PCTFREE    10;
```

Figure 77. CBRISQL0 SAMPLIB Member (Part 3 of 4)

```
CREATE INDEX osg_hlq.OBJDIRX2
       ON osg_hlq.OSM_OBJ_DIR
       (
        ODCLID   ASC,
        ODPENDDT ASC,
        ODCREATS ASC
       )
       USING      VCAT cat_name
       CLOSE      NO
       BUFFERPOOL BP1
       PCTFREE    10;
CREATE UNIQUE INDEX osg_hlq.OBJDIRX3
       ON osg_hlq.OSM_OBJ_DIR
       (
        ODNAME   ASC,
        ODCLID   ASC
       )
       USING      VCAT cat_name
       CLOSE      NO
       BUFFERPOOL BP1
       PCTFREE    10;
COMMIT;
CREATE TABLE osg_hlq.OSM_04K_OBJ_TBL
       (
        OTVER    CHAR(1)      NOT NULL,
        OTSEG    SMALLINT     NOT NULL,
        OTCLID   INTEGER      NOT NULL,
        OTNAME   VARCHAR(44)  NOT NULL,
        OTOBJ    LONG VARCHAR NOT NULL
       )
       IN osg_hlq.OSMOTS04;
CREATE UNIQUE INDEX osg_hlq.OBJT04X1
       ON osg_hlq.OSM_04K_OBJ_TBL
       (
        OTCLID   ASC,
        OTNAME   ASC
       )
       CLUSTER
       USING      VCAT cat_name
       CLOSE      NO
       BUFFERPOOL BP1
       PCTFREE    10;
CREATE TABLE osg_hlq.OSM_32K_OBJ_TBL
       (
        OTVER    CHAR(1)      NOT NULL,
        OTSEG    SMALLINT     NOT NULL,
        OTCLID   INTEGER      NOT NULL,
        OTNAME   VARCHAR(44)  NOT NULL,
        OTOBJ    LONG VARCHAR NOT NULL
       )
       IN osg_hlq.OSMOTS32;
CREATE UNIQUE INDEX osg_hlq.OBJT32X1
       ON osg_hlq.OSM_32K_OBJ_TBL
       (
        OTCLID   ASC,
        OTNAME   ASC,
        OTSEG    ASC
       )
       CLUSTER
       USING      VCAT cat_name
       CLOSE      NO
       BUFFERPOOL BP1
       PCTFREE    10;
COMMIT;
CREATE VIEW
       osg_hlq.V_OSM_OBJ_DIR
     AS SELECT ALL * FROM
       osg_hlq.OSM_OBJ_DIR;
CREATE VIEW
       osg_hlq.V_OSM_04K_OBJ_TBL
     AS SELECT ALL * FROM
       osg_hlq.OSM_04K_OBJ_TBL;
CREATE VIEW
       osg_hlq.V_OSM_32K_OBJ_TBL
     AS SELECT ALL * FROM
       osg_hlq.OSM_32K_OBJ_TBL;
GRANT ALL ON
       osg_hlq.V_OSM_OBJ_DIR
     TO auth_id;
GRANT ALL ON
```

CBRISQLX

SAMPLIB member CBRISQLX, as shown in Figure 78 on page 448, provides DB2 definitions for part of the OAM administration database. You must modify and run the job successfully before you use OAM.

```
//CBRISQLX JOB  MSGLEVEL=(1,1),MSGCLASS=A
//*************************************************************
//*
//*  $SEG(CBRISQLX) COMP(OSR) PROD(OAM):
//*
//*  OAM DB2 Database Definition Job (for Administration
//*  Databases).
//*
//*  This job will create the OAM Administration databases,
//*  tables, and indexes in DB2.
//*
//*  Before running this job, you must change the following:
//*
//*  1. Change "cat_name" to the DB2 VCAT name used
//*     for defining the VSAM data sets in CBRIALCX.
//*
//*  2. Change "auth_id" to the identifier(s)
//*     authorized for the respective group.
//*
//*  3. Change the name in the DSN SYSTEM(DB2) statement to
//*     the name of the DB2 Subsystem in your installation.
//*
//*  4. Change the data set name in the RUN statement
//*     LIB('DB2.RUNLIB.LOAD') phrase to the data set name used
//*     in your installation for the DB2 RUNLIB.LOAD data set.
//*
//*  5. Change the PLAN name (DSNTIA21) in the RUN statement to
//*     match your current DB2 version and release level.
//*
//*  6. If you plan to run OAM under DB2 4.1 or above level
//*     and you have specified the Default Index Type = 2 when
//*     you installed the DB2, change "CREATE UNIQUE INDEX" to
//*     "CREATE TYPE 1 UNIQUE INDEX" and change "CREATE INDEX"
//*     to "CREATE TYPE 1 INDEX."
//*
//*************************************************************
//CREATE EXEC PGM=IKJEFT01,DYNAMNBR=20,COND=(4,LT)
//SYSTSPRT DD SYSOUT=*
//SYSTSIN  DD *
 DSN SYSTEM(DB2)
 RUN  PROGRAM(DSNTIAD) PLAN(DSNTIA21) -
      LIB('DB2.RUNLIB.LOAD')
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *
          CREATE DATABASE   OAMADMIN;
          COMMIT;
          CREATE TABLESPACE MCIND
                 IN         OAMADMIN
                 USING      VCAT cat_name
                 LOCKSIZE   ANY
                 CLOSE      NO
                 BUFFERPOOL BP0;
          CREATE TABLESPACE SCIND
                 IN         OAMADMIN
                 USING      VCAT cat_name
                 LOCKSIZE   ANY
                 CLOSE      NO
                 BUFFERPOOL BP0;
          CREATE TABLESPACE COLIND
                 IN         OAMADMIN
                 USING      VCAT cat_name
                 LOCKSIZE   ANY
                 CLOSE      NO
                 BUFFERPOOL BP0;
```

Figure 78. CBRISQLX SAMPLIB Member (Part 1 of 3)

```
COMMIT;
CREATE TABLE OAMADMIN.CBR_MGT_CLASS_TBL
       (
        ODMCNUM  SMALLINT    NOT NULL,
        ODMCNAME VARCHAR(30) NOT NULL
       )
       IN OAMADMIN.MCIND;
CREATE UNIQUE INDEX OAMADMIN.CBRMGTX
       ON OAMADMIN.CBR_MGT_CLASS_TBL
       (
        ODMCNUM  ASC
       )
       USING      VCAT cat_name
       CLOSE      NO
       SUBPAGES   1
       BUFFERPOOL BP1
       PCTFREE    10;
COMMIT;
CREATE TABLE OAMADMIN.CBR_STO_CLASS_TBL
       (
        ODSCNUM  SMALLINT    NOT NULL,
        ODSCNAME VARCHAR(30) NOT NULL
       )
       IN OAMADMIN.SCIND;
CREATE UNIQUE INDEX OAMADMIN.CBRSTOX
       ON OAMADMIN.CBR_STO_CLASS_TBL
       (
        ODSCNUM  ASC
       )
       USING      VCAT cat_name
       CLOSE      NO
       SUBPAGES   1
       BUFFERPOOL BP1
       PCTFREE    10;
COMMIT;
CREATE TABLE OAMADMIN.CBR_COLLECTION_TBL
       (
        ODCLSCNM VARCHAR(30) NOT NULL,
        ODCLMCNM VARCHAR(30) NOT NULL,
        ODCLSGNM VARCHAR(30) NOT NULL,
        ODCLID   INTEGER     NOT NULL,
        ODCLNAME VARCHAR(44) NOT NULL
       )
       IN OAMADMIN.COLIND;
CREATE UNIQUE INDEX OAMADMIN.CBRCLTX1
       ON OAMADMIN.CBR_COLLECTION_TBL
       (
        ODCLID   ASC
       )
       USING      VCAT cat_name
       CLOSE      NO
       SUBPAGES   1
       BUFFERPOOL BP1
       PCTFREE    10;
CREATE UNIQUE INDEX OAMADMIN.CBRCLTX2
       ON OAMADMIN.CBR_COLLECTION_TBL
       (
        ODCLNAME ASC
       )
       USING      VCAT cat_name
       CLOSE      NO
       SUBPAGES   1
       BUFFERPOOL BP1
       PCTFREE    10;
```

Figure 78. CBRISQLX SAMPLIB Member (Part 2 of 3)

```
CREATE INDEX OAMADMIN.CBRCLTX3
       ON OAMADMIN.CBR_COLLECTION_TBL
       (
        ODCLSGNM ASC
       )
       USING      VCAT cat_name
       CLOSE      NO
       SUBPAGES   1
       BUFFERPOOL BP1
       PCTFREE    10;
COMMIT;
GRANT ALL ON
       OAMADMIN.CBR_MGT_CLASS_TBL
     TO auth_id;
GRANT ALL ON
       OAMADMIN.CBR_STO_CLASS_TBL
     TO auth_id;
GRANT ALL ON
       OAMADMIN.CBR_COLLECTION_TBL
     TO auth_id;
COMMIT;
```

Figure 78. CBRISQLX SAMPLIB Member (Part 3 of 3)

CBRISQLY

SAMPLIB member CBRISQLY, as shown in Figure 79 on page 451, provides the DB2 definitions for part of the OAM administration database. You must modify and run the job successfully before you use OAM.

```
//CBRISQLY JOB  MSGLEVEL=(1,1),MSGCLASS=A
//*************************************************************
//*
//*  $SEG(CBRISQLY) COMP(OSR) PROD(OAM):
//*
//*  OAM DB2 Database Definition Job (for Administration
//*  Databases).
//*
//*  This job will create additional unique indexes for
//*  the OAM Administration Databases in DB2.
//*
//*  Prior to executing this job you need to make the
//*  following modifications:
//*
//*  1. Change "cat_name" to the DB2 VCAT name used
//*     for defining the VSAM data sets in CBRIALCY.
//*
//*  2. Change the name in the DSN SYSTEM(DB2) statement to
//*     the name of the DB2 Subsystem in your installation.
//*
//*  3. Change the data set name in the RUN statement
//*     LIB('DB2.RUNLIB.LOAD') phrase to the data set name used
//*     in your installation for the DB2 RUNLIB.LOAD data set.
//*
//*  4. Change the PLAN name (DSNTIA21) in the RUN statement to
//*     match your current DB2 version and release level.
//*
//*  5. If you plan to run OAM under DB2 4.1 or above level
//*     and you have specified the Default Index Type = 2 when
//*     you installed the DB2, change "CREATE UNIQUE INDEX" to
//*     "CREATE TYPE 1 UNIQUE INDEX".
//*
//*************************************************************
//CREATE EXEC PGM=IKJEFT01,DYNAMNBR=20,COND=(4,LT)
//SYSTSPRT DD SYSOUT=*
//SYSTSIN  DD *
 DSN SYSTEM(DB2)
 RUN  PROGRAM(DSNTIAD) PLAN(DSNTIA21) -
      LIB('DB2.RUNLIB.LOAD')
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *
          CREATE UNIQUE INDEX OAMADMIN.CBRMGTY
                 ON OAMADMIN.CBR_MGT_CLASS_TBL
                 (
                  ODMCNAME ASC
                 )
                 USING      VCAT cat_name
                 CLOSE      NO
                 SUBPAGES   1
                 BUFFERPOOL BP1
                 PCTFREE    10;
          CREATE UNIQUE INDEX OAMADMIN.CBRSTOY
                 ON OAMADMIN.CBR_STO_CLASS_TBL
                 (
                  ODSCNAME ASC
                 )
                 USING      VCAT cat_name
                 CLOSE      NO
                 SUBPAGES   1
                 BUFFERPOOL BP1
                 PCTFREE    10;
          COMMIT;
```

Figure 79. CBRISQLY SAMPLIB Member

CBRSAMPL installs the optical configuration database in a new installation. For an example of this SAMPLIB member, see "CBRSAMPL."

Sample Migration Jobs

SAMPLIB members CBRSMB2, CBRSM150, CBRSMR13, CBRSMR15, CBRSMR18, CBRSMERG, and CBRSG100 help you install or migrate to the current release of OAM:

- **CBRSMB2** performs the migration necessary for the TAPEVOL table to add a column used for the IBM 3590-E1*x* tape device. For an example of this SAMPLIB member, see "CBRSMB2" on page 459.
- **CBRSMPDS** performs the migration necessary for the TAPEVOL table, adding a column in support of the new object tape dataset name format. The object tape dataset name format, with SETOAM parmlib specification, allows the storage group name to be appended to the object tape dataset names. For an example of this SAMPLIB member, see "CBRSMPDS" on page 461.
- **CBRSM150** performs a migration job that adds additional columns to the LIBRARY, DRIVE, VOLUME, and TAPEVOL optical configuration database tables. For an example of this SAMPLIB member, see "CBRSM150" on page 463.
- **CBRSMR13** performs the migration necessary to use multiple object backup storage groups and the second backup copies of objects function in OAM/OSMC. It adds a new column BKTYPE to the existing TAPEVOL table. It also performs the migration from the base version of the OAM object directory tables to the current version, which supports second backup copies of objects. It adds new columns ODBK2LOC and ODBK2SEC to the existing object directory tables. For an example of this SAMPLIB member, see "CBRSMR13" on page 465.
- **CBRSMR15** adds two new columns, OUNITNAM and DATACLAS, to the DB2 TAPEVOL table. For an example of this SAMPLIB member, see "CBRSMR15" on page 469.
- **CBRSMR18** adds a new LOB location indicator column to the object directory table. For an example of this SAMPLIB member, see "CBRSMR18" on page 441
- **CBRSMERG** merges two OAM configuration databases, while **CBRSG100** performs a database merge of two OAM object storage and administration databases. Both of these jobs are executed to allow DB2 data sharing in an OAMplex. For examples of these SAMPLIB members, see "CBRSMERG" on page 471 and "CBRSG100" on page 478.

CBRSAMPL

SAMPLIB member CBRSAMPL, as shown in Figure 80 on page 453, creates the optical configuration database.

```
//CBRSAMPL JOB MSGLEVEL=(1,1),MSGCLASS=A
//*********************************************************************
//*
//*  $SEG(CBRSAMPL) COMP(DBM) PROD(OAM):
//*
//*  OAM DB2 Database Definition Job (for Optical Configuration
//*  Database).
//*
//*  This job will create the LCS databases, tables, and indexes
//*  in DB2 for the Optical Configuration Database.
//*
//*  Before running this job, you must change the following:
//*
//*  1. Change "vol_ser" to the volume serials that your
//*     target database should reside on.
//*
//*  2. Change "cat_name" to the name of the catalog you
//*     will be using under DB2.
//*
//*  3. Change "pass_word" to the name of the catalog
//*     password.
//*
//*  4. Change the name in the DSN SYSTEM(DB2) statement to
//*     the name of the DB2 Subsystem in your installation.
//*
//*  5. Change the data set name in the RUN statement
//*     LIB('DBxxx.RUNLIB.LOAD') phrase to the data set name used
//*     in your installation for the DB2 RUNLIB.LOAD data set.
//*
//*  6. Change the PLAN name (DSNTIAxx) in the RUN statement to
//*     match your current DB2 version and release level.
//*
//*  CHANGE ACTIVITY:
//*    $L0=JDP3227 320 890601 TUCJRL: Initial Release
//*    $L1=JDP3331 331 900815 TUCJRL: Added the deleted objects
//*                                   table. Changed NUMSLOTS and
//*                                   NUMESLOT to INTEGER in
//*                                   OLIBRARY table. Added DEVTYPE
//*                                   and LIBRDES to OLIBRARY table.
//*                                   Added DEVTYPE and DRIVDES to
//*                                   DRIVE table. Added FRESPACE,
//*                                   DELSPACE, DELCOUNT, FRAGIDX,
//*                                   MEDIATYP, CREDATE, ERRSTAT,
//*                                   VOLEMPTY, and RECOUNT to
//*                                   VOLUME table.
//*    $P1=KBI0238 331 900904 TUCKHB: CHANGED LABEL FOR VOLUMSET
//*                                   TO STORAGE_GROUP.
//*
//*    $L2=CAPELLA2 120 921203 TUCGRD: ADDED CLIBRARY, MEDIATYP AND
//*                                   LIBINDEX TO OLIBRARY TABLE.
//*                                   ADDED CAPACITY TO VOLUME TABLE
//*
//*    $L3=FRBTAPE  332 920220 TUCKHB: ADDED TAPEVOL TABLE FOR
//*                                   FRB TAPE SUPPORT.
//*
//*    $L4=OBJTAPE  120 930523 TUCKMF: UPDATED TAPEVOL STEPS TO ADD
//*                                   NEW 120 COLUMNS FOR LOGICAL
//*                                   KB DELETED AND TAPE COMPACTION
//*                                   INDICATOR.
//*    $L5=OPTSPE   130 950823 TUCSMC: Added new DRIVENUM to the
//*                                    DRIVE table.
//*    $L6=HDZ11D0  140 970331 TUCSPP: Specify TYPE 1 INDEX for
//*                                    DB2 4.1 or above level
```

Figure 80. CBRSAMPL SAMPLIB Member (Part 1 of 8)

```
//*    $L7=HDZ11E0  150 970812 TUCLJT: ADDED MEMBER TO OLIBRARY TABLE,
//*                                    DRIVE TABLE, VOLUME TABLE, AND
//*                                    TAPEVOL TABLE
//*                                    ADDED PLIBRARY TO OLIBRARY TABLE
//*                                    AND VOLUME TABLE
//*    $L8=OW38975  1E0 990609 TUCSPP: ADDED NEW EPI FIELD TO THE
//*                                    TAPE VOLUME TABLE
//*    $L9=HDZ11G0  R13 000915 TUCLJT: ADDED BKTYPE TO VOLUME TABLE AND
//*                                    TAPEVOL TABLE
//*    $LA=HDZ11H0  R15 011207 TUCBLC: ADDED OUNITNAM AND DATACLAS TO
//*                                    TAPEVOL TABLE
//*    $LB=WRM3592  1J0 042904 TUCLJS: ADDED DSNFMT TO TAPEVOL TABLE
//*                                     (OA07105)
//*
//*********************************************************************
//OCDBTABS EXEC PGM=IKJEFT01,DYNAMNBR=20,COND=(4,LT)
//SYSTSPRT DD SYSOUT=*
//SYSTSIN  DD *
 DSN SYSTEM(DB2)
 RUN  PROGRAM(DSNTIAD) PLAN(DSNTIAxx) -
      LIB('DBxxx.RUNLIB.LOAD')
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *
  CREATE STOGROUP CBROAM
      VOLUMES (vol_ser)
      VCAT cat_name
      PASSWORD pass_word;

  CREATE DATABASE CBROAM
      STOGROUP CBROAM
      BUFFERPOOL BP0;

  CREATE TABLESPACE OCLIBTSP
     IN CBROAM
     USING STOGROUP CBROAM
     BUFFERPOOL BP0
     CLOSE NO;

  CREATE TABLESPACE OCDRVTSP
     IN CBROAM
     USING STOGROUP CBROAM
     BUFFERPOOL BP0
     CLOSE NO;

  CREATE TABLESPACE OCSLTTSP
     IN CBROAM
     USING STOGROUP CBROAM
     BUFFERPOOL BP0
     CLOSE NO;

  CREATE TABLESPACE OCVOLTSP
     IN CBROAM
     USING STOGROUP CBROAM
     BUFFERPOOL BP0
     CLOSE NO;

  CREATE TABLESPACE OCDELTSP
     IN CBROAM
     USING STOGROUP CBROAM
     BUFFERPOOL BP0
     CLOSE NO;
```

Figure 80. CBRSAMPL SAMPLIB Member (Part 2 of 8)

```
CREATE TABLESPACE OCTVLTSP
   IN CBROAM
   USING STOGROUP CBROAM
   BUFFERPOOL BP0
   CLOSE NO;

CREATE TABLE OLIBRARY
  (NAME      CHAR(8)    NOT NULL,
   ONLINE    CHAR(1)    NOT NULL,
   OPERATNL  CHAR(1)    NOT NULL,
   PATHSTAT  CHAR(1)    NOT NULL,
   COMMAND   CHAR(5)    NOT NULL WITH DEFAULT,
   PRIMCTC   CHAR(4)    NOT NULL WITH DEFAULT,
   PRIMPORT  CHAR(1)    NOT NULL WITH DEFAULT,
   ALTCTC    CHAR(4)    NOT NULL WITH DEFAULT,
   ALTPORT   CHAR(1)    NOT NULL WITH DEFAULT,
   FAULT     CHAR(3)    NOT NULL WITH DEFAULT,
   OLIBTYPE  CHAR(1)    NOT NULL,
   NUMSLOTS  INTEGER    NOT NULL WITH DEFAULT,
   NUMESLOT  INTEGER    NOT NULL WITH DEFAULT,
   NUMDRVS   SMALLINT   NOT NULL,
   RCOMMAND  CHAR(5)    NOT NULL WITH DEFAULT,
   DEVTYPE   CHAR(8)    NOT NULL WITH DEFAULT,
   LIBRDES   CHAR(120)  NOT NULL WITH DEFAULT,
   CLIBRARY  CHAR(8)    NOT NULL WITH DEFAULT,
   MEDIATYP  CHAR(8)    NOT NULL WITH DEFAULT,
   LIBINDEX  SMALLINT   NOT NULL WITH DEFAULT,
   MEMBER    CHAR(16)   NOT NULL WITH DEFAULT,
   PLIBRARY  CHAR(8)    NOT NULL WITH DEFAULT)
  IN CBROAM.OCLIBTSP;

CREATE TABLE DRIVE
  (NAME      CHAR(8)    NOT NULL,
   OLIBRARY  CHAR(8)    NOT NULL,
   CTC       CHAR(4)    NOT NULL,
   SCSI      CHAR(1)    NOT NULL,
   LUN       CHAR(1)    NOT NULL,
   ONLINE    CHAR(1)    NOT NULL,
   OPERATNL  CHAR(1)    NOT NULL,
   LDRIVENO  CHAR(1)    NOT NULL WITH DEFAULT,
   DRIVTYPE  CHAR(1)    NOT NULL,
   DEVTYPE   CHAR(8)    NOT NULL WITH DEFAULT,
   DRIVDES   CHAR(120)  NOT NULL WITH DEFAULT,
   DRIVENUM  SMALLINT   NOT NULL WITH DEFAULT,
   MEMBER    CHAR(16)   NOT NULL WITH DEFAULT)
  IN CBROAM.OCDRVTSP;

CREATE TABLE SLOT
  (NAME      CHAR(3)    NOT NULL,
   OLIBRARY  CHAR(8)    NOT NULL,
   OCCUPIED  CHAR(1)    NOT NULL,
   OPERATNL  CHAR(1)    NOT NULL,
   VOLSER0   CHAR(6)    NOT NULL WITH DEFAULT,
   VOLSER1   CHAR(6)    NOT NULL WITH DEFAULT)
  IN CBROAM.OCSLTTSP;

CREATE TABLE VOLUME
  (VOLSER    CHAR(6)    NOT NULL,
   OVOLSER   CHAR(6)    NOT NULL,
   LOCATION  CHAR(1)    NOT NULL,
   SLOT      CHAR(3)    NOT NULL,
   OLIBRARY  CHAR(8)    NOT NULL,
   SHELFLOC  CHAR(32)   NOT NULL WITH DEFAULT,
   MNTDATE   DATE       NOT NULL WITH DEFAULT,
   WRTDATE   DATE       NOT NULL WITH DEFAULT,
   EXPDATE   DATE       NOT NULL WITH DEFAULT,
```

Figure 80. CBRSAMPL SAMPLIB Member (Part 3 of 8)

```
EJECTDAT  DATE       NOT NULL WITH DEFAULT,
    LASTDATA  INTEGER    NOT NULL,
    LASTVTCL  INTEGER    NOT NULL,
    LASTVTCP  INTEGER    NOT NULL,
    VOLUMSET  CHAR(8)    NOT NULL,
    TYPE      CHAR(1)    NOT NULL,
    ORIENT    CHAR(1)    NOT NULL,
    FULL      CHAR(1)    NOT NULL,
    READABLE  CHAR(1)    NOT NULL,
    WRITABLE  CHAR(1)    NOT NULL,
    WRTPROT   CHAR(1)    NOT NULL,
    OWNERP    CHAR(1)    NOT NULL WITH DEFAULT,
    OWNER     CHAR(32)   NOT NULL WITH DEFAULT,
    FRESPACE  INTEGER    NOT NULL WITH DEFAULT,
    DELSPACE  INTEGER    NOT NULL WITH DEFAULT,
    DELCOUNT  INTEGER    NOT NULL WITH DEFAULT,
    FRAGIDX   SMALLINT   NOT NULL WITH DEFAULT,
    MEDIATYP  CHAR(2)    NOT NULL WITH DEFAULT,
    CREDATE   DATE       NOT NULL WITH DEFAULT,
    ERRSTAT   SMALLINT   NOT NULL WITH DEFAULT,
    VOLEMPTY  CHAR(1)    NOT NULL WITH DEFAULT,
    RECOUNT   SMALLINT   NOT NULL WITH DEFAULT,
    CAPACITY  INTEGER    NOT NULL WITH DEFAULT,
    MEMBER    CHAR(16)   NOT NULL WITH DEFAULT,
    PLIBRARY  CHAR(8)    NOT NULL WITH DEFAULT,
    BKTYPE    CHAR(1)    NOT NULL WITH DEFAULT)
   IN CBROAM.OCVOLTSP;

  CREATE TABLE DELOBJT
    (COLNAME   CHAR(44)   NOT NULL,
     OBJNAME   CHAR(44)   NOT NULL,
     VOLSER    CHAR(6)    NOT NULL,
     VTOCTOKN  INTEGER    NOT NULL,
     OBJSIZE   INTEGER    NOT NULL)
    IN CBROAM.OCDELTSP;

  CREATE TABLE TAPEVOL
    (VOLSER    CHAR(6)    NOT NULL,
     UNITNAME  CHAR(8)    NOT NULL,
     MEDIATYP  CHAR(2)    NOT NULL,
     STORGRP   CHAR(8)    NOT NULL,
     TYPE      CHAR(1)    NOT NULL,
     CREDATE   DATE       NOT NULL,
     MNTDATE   DATE       NOT NULL,
     WRTDATE   DATE       NOT NULL,
     EXPDATE   DATE       NOT NULL,
     CAPACITY  INTEGER    NOT NULL,
     FRESPACE  INTEGER    NOT NULL,
     LSTBLKID  INTEGER    NOT NULL,
     PFULL     SMALLINT   NOT NULL,
     NUMLBLKS  INTEGER    NOT NULL,
     NUMLKBW   INTEGER    NOT NULL,
     NUMPKBW   INTEGER    NOT NULL,
     NUMLKBDE  INTEGER    NOT NULL,
     FULL      CHAR(1)    NOT NULL,
     READABLE  CHAR(1)    NOT NULL,
     WRITABLE  CHAR(1)    NOT NULL,
     INUSE     CHAR(1)    NOT NULL,
     COPIED    CHAR(1)    NOT NULL,
     AVOLSER   CHAR(6)    NOT NULL,
     COMPACT   CHAR(1)    NOT NULL,
     EPI       SMALLINT   NOT NULL WITH DEFAULT,
```

Figure 80. CBRSAMPL SAMPLIB Member (Part 4 of 8)

```
MEMBER    CHAR(16)   NOT NULL WITH DEFAULT,
     BKTYPE    CHAR(1)    NOT NULL WITH DEFAULT,
     OUNITNAM  CHAR(8)    NOT NULL WITH DEFAULT,
     DATACLAS  CHAR(8)    NOT NULL WITH DEFAULT,
     DSNFMT    CHAR(1)    NOT NULL WITH DEFAULT)
    IN CBROAM.OCTVLTSP;

 CREATE UNIQUE INDEX LNAMINDX
   ON OLIBRARY
   (NAME ASC)
   USING STOGROUP CBROAM
   CLUSTER
   BUFFERPOOL BP0
   CLOSE NO;

 CREATE UNIQUE INDEX DNAMINDX
   ON DRIVE
   (NAME ASC)
   USING STOGROUP CBROAM
   BUFFERPOOL BP0
   CLOSE NO;

 CREATE UNIQUE INDEX DRIDINDX
   ON DRIVE
   (CTC, SCSI, LUN ASC)
   USING STOGROUP CBROAM
   BUFFERPOOL BP0
   CLUSTER
   CLOSE NO;

 CREATE UNIQUE INDEX SLIBINDX
   ON SLOT
   (NAME, OLIBRARY ASC)
   USING STOGROUP CBROAM
   BUFFERPOOL BP0
   CLUSTER
   CLOSE NO;

 CREATE UNIQUE INDEX VSERINDX
   ON VOLUME
   (VOLSER ASC)
   USING STOGROUP CBROAM
   BUFFERPOOL BP0
   CLUSTER
   CLOSE NO;

 CREATE INDEX DVOLINDX
   ON DELOBJT
   (VOLSER ASC)
   USING STOGROUP CBROAM
   BUFFERPOOL BP0
   CLOSE NO;

 CREATE UNIQUE INDEX DELOINDX
   ON DELOBJT
   (COLNAME, OBJNAME, VOLSER, VTOCTOKN ASC)
   USING STOGROUP CBROAM
   BUFFERPOOL BP0
   CLUSTER
   CLOSE NO;

 CREATE UNIQUE INDEX TVOLINDX
   ON TAPEVOL
   (VOLSER ASC)
   USING STOGROUP CBROAM
   BUFFERPOOL BP0
   CLUSTER
   CLOSE NO;
```

Figure 80. CBRSAMPL SAMPLIB Member (Part 5 of 8)

```
LABEL ON OLIBRARY
   (NAME IS 'NAME',
    ONLINE IS 'ONLINE',
    OPERATNL IS 'OPERATIONAL',
    PATHSTAT IS 'CURRENT_PATH',
    COMMAND IS 'CURRENT_COMMAND',
    PRIMCTC IS 'PRIMARY_CTC',
    PRIMPORT IS 'PRIMARY_PORT',
    ALTCTC IS 'ALTERNATE_CTC',
    ALTPORT IS 'ALTERNATE_PORT',
    FAULT IS 'FAULT_CODE',
    OLIBTYPE IS 'LIBRARY_TYPE',
    NUMSLOTS IS 'SLOTS',
    NUMESLOT IS 'EMPTY_SLOTS',
    NUMDRVS IS 'DRIVES',
    RCOMMAND IS 'RECOVERY_COMMAND',
    DEVTYPE IS 'DEVICE_TYPE',
    LIBRDES IS 'LIBRARY_DESCRIPTION',
    CLIBRARY IS 'CONTROLLING_LIBRARY',
    MEDIATYP IS 'DEFAULT_MEDIA_TYPE',
    LIBINDEX IS 'LIBRARY_INDEX',
    MEMBER IS 'OAM_XCF_MEMBER',
    PLIBRARY IS 'DEFAULT_PSEUDO_LIBRARY');

 LABEL ON DRIVE
   (NAME IS 'NAME',
    OLIBRARY IS 'OLIBRARY',
    CTC IS 'CTC',
    SCSI IS 'SCSI',
    LUN IS 'LUN',
    ONLINE IS 'ONLINE',
    OPERATNL IS 'OPERATIONAL',
    LDRIVENO IS 'DRIVE_NUMBER',
    DRIVTYPE IS 'DRIVE_TYPE',
    DEVTYPE IS 'DEVICE_TYPE',
    DRIVDES IS 'DRIVE_DESCRIPTION',
    DRIVENUM IS 'PHYS_DRIVE_NUMBER',
    MEMBER IS 'OAM_XCF_MEMBER');

 LABEL ON SLOT
   (NAME IS 'NAME',
    OLIBRARY IS 'OLIBRARY',
    OCCUPIED IS 'OCCUPIED',
    OPERATNL IS 'OPERATIONAL',
    VOLSER0 IS 'VOLSER0',
    VOLSER1 IS 'VOLSER1');

 LABEL ON VOLUME
   (VOLSER IS 'VOLSER',
    OVOLSER IS 'OTHER_VOLSER',
    LOCATION IS 'LOCATION',
    SLOT IS 'SLOT',
    OLIBRARY IS 'OLIBRARY',
    SHELFLOC IS 'SHELF_LOCATION',
    MNTDATE IS 'DATE_LAST_MOUNTED',
    WRTDATE IS 'DATE_LAST_WRITTEN',
    EXPDATE IS 'EXPIRATION_DATE',
    EJECTDAT IS 'EJECT/ENTER_DATE',
    LASTDATA IS 'LAST_DATA_SECTOR',
    LASTVTCL IS 'LAST_LOGICAL_VTOC_SECTOR',
    LASTVTCP IS 'LAST_PHYSICAL_VTOC_SECTOR',
    VOLUMSET IS 'STORAGE_GROUP',
    TYPE IS 'TYPE',
    ORIENT IS 'ORIENTATION',
    FULL IS 'FULL',
    READABLE IS 'VOLUME_READABLE_STATUS',
    WRITABLE IS 'VOLUME_WRITABLE_STATUS',
    WRTPROT IS 'WRITE_PROTECTED',
    OWNERP IS 'OWNER_INFORMATION_POSITION',
```

Figure 80. CBRSAMPL SAMPLIB Member (Part 6 of 8)

```
OWNER IS 'OWNER_INFORMATION',
    FRESPACE IS 'FREE_SPACE',
    DELSPACE IS 'DELETED_SPACE',
    DELCOUNT IS 'DELETED_OBJECTS',
    FRAGIDX IS 'FRAGMENTATION_INDEX',
    MEDIATYP IS 'MEDIA_TYPE',
    CREDATE IS 'CREATE_DATE',
    ERRSTAT IS 'VOLUME_ERROR_STATUS',
    VOLEMPTY IS 'VOLUME_EMPTY',
    RECOUNT IS 'DELETED_OBJECTS_RECOUNT',
    CAPACITY IS 'CAPACITY',
    MEMBER IS 'OAM_XCF_MEMBER',
    PLIBRARY IS 'PSEUDO_LIBRARY_FOR_VOLUME',
    BKTYPE IS 'BACKUP_TYPE');

 LABEL ON DELOBJT
   (COLNAME IS 'COLLECTION_NAME',
    OBJNAME IS 'OBJECT_NAME',
    VOLSER IS 'VOLSER',
    VTOCTOKN IS 'VTOC_TOKEN',
    OBJSIZE IS 'OBJECT_SIZE');

 LABEL ON TAPEVOL
   (VOLSER IS 'VOLSER',
    UNITNAME IS 'UNIT_NAME',
    MEDIATYP IS 'MEDIA_TYPE',
    STORGRP IS 'STORAGE_GROUP',
    TYPE IS 'TYPE',
    CREDATE IS 'CREATION_DATE',
    MNTDATE IS 'DATE_LAST_MOUNTED',
    WRTDATE IS 'DATE_LAST_WRITTEN',
    EXPDATE IS 'EXPIRATION_DATE',
    CAPACITY IS 'CAPACITY',
    FRESPACE IS 'FREE_SPACE',
    LSTBLKID IS 'LAST_BLOCKID',
    PFULL IS 'PERCENT_FULL',
    NUMLBLKS IS 'LOGICAL_BLOCKS_WRITTEN',
    NUMLKBW IS 'LOGICAL_KILOBYTES_WRITTEN',
    NUMPKBW IS 'PHYSICAL_KILOBYTES_WRITTEN',
    NUMLKBDE IS 'LOGICAL_KILOBYTES_DELETED',
    FULL IS 'FULL',
    READABLE IS 'VOLUME_READABLE_STATUS',
    WRITABLE IS 'VOLUME_WRITABLE_STATUS',
    INUSE IS 'IN_USE',
    COPIED IS 'COPIED',
```

Figure 80. CBRSAMPL SAMPLIB Member (Part 7 of 8)

```
AVOLSER IS 'ALTERNATE_VOLUME',
    COMPACT IS 'TAPE_COMPACTION_INDICATOR',
    EPI     IS 'EPI',
    MEMBER IS 'OAM_XCF_MEMBER',
    BKTYPE IS 'BACKUP_TYPE',
    OUNITNAM IS 'ORIGINAL_UNIT_NAME',
    DATACLAS IS 'DATACLASS',
    DSNFMT IS 'DATASET_NAME_FORMAT');


 COMMIT;
/*
```

Figure 80. CBRSAMPL SAMPLIB Member (Part 8 of 8)

CBRSMB2

SAMPLIB member CBRSMB2, as shown in Figure 81 on page 460, performs the migration necessary for the TAPEVOL table to add a column used for the IBM 3590-E1*x* tape device.

```
//CBRSMB2 JOB MSGLEVEL=(1,1),MSGCLASS=A
//*******************************************************************
//*
//*  $SEG(CBRSMB2) COMP(DBM) PROD(OAM):
//*
//*  OAM DB2 Database Migration Jobs (for Optical Configuration
//*  Database TAPEVOL Table).
//*
//*  This job performs the migration of the TAPEVOL
//*  table to the new version of the TAPEVOL table for
//*  IBM 3590-E1x tape device support.
//*
//*  It is recommended that you create a DB2 image copy of the
//*  existing TAPEVOL table prior to running the CBRSMB2  job.
//*
//*  ---------------------------------------------------------------
//*
//*  Before running these jobs, you must change the following:
//*
//*  1. Change the name in the DSN SYSTEM(DB2) statement to
//*     the name of the DB2 Subsystem in your installation.
//*
//*  2. Change the data set name in the RUN statement
//*     LIB('DB2.RUNLIB.LOAD') phrase to the data set name used
//*     in your installation for the DB2 RUNLIB.LOAD data set.
//*
//*  3. Change the PLAN name (DSNTIAxx) in the RUN statement to
//*     match your current DB2 version and release level.
//*
//*  ---------------------------------------------------------------
//*
//*
//*  STEP        DESCRIPTION
//*  --------    -----------
//*
//*  ALTERTVL -  This step adds the new EPI column
//*              to the TAPEVOL table.
//*
//*  LABELTVL -  This step provides the new label for the EPI column.
//*
//*  CHANGTVL - This step sets the EPI field to 255 ('FF'X)
//*             for each tape volume in the TAPEVOL table
//*             which means the volume was added to the
//*             OAM Tape Volume Table before the
//*             IBM 3590-E1X tape device support.
//*    NOTE:
//*    A return code of 4 is expected from CHANGTVL step
//*    because SQL issues a warning for an  UPDATE statement
//*    that does not include a WHERE clause.
//*    (SQLSTATE = 01504)
//*
//*  ---------------------------------------------------------------
//*
//*
//*   CHANGE ACTIVITY:
//*    $L0=OW38975  1E0 990611 TUCSPP: 3590-E1X TAPE DEVICE SUPPORT
//*
```

Figure 81. CBRSMB2 SAMPLIB Member (Part 1 of 2)

```
//*********************************************************************
//*  Alter the TAPEVOL table to add the new EPI
//*  column  for 3590-E1X tape device support.
//*********************************************************************
//ALTERTVL EXEC PGM=IKJEFT01,DYNAMNBR=20
//SYSTSPRT DD SYSOUT=*
//SYSTSIN  DD *
 DSN SYSTEM(DB2)
 RUN  PROGRAM(DSNTIAD) PLAN(DSNTIAxx) -
      LIB('DB2.RUNLIB.LOAD')
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *

 ALTER TABLE TAPEVOL ADD EPI SMALLINT      NOT NULL WITH DEFAULT;

 COMMIT;
/*
//*********************************************************************
//*  Place label on TAPEVOL table EPI column
//*********************************************************************
//LABELTVL EXEC PGM=IKJEFT01,DYNAMNBR=20,COND=(4,LT)
//SYSTSPRT DD SYSOUT=*
//SYSTSIN  DD *
 DSN SYSTEM(DB2)
 RUN  PROGRAM(DSNTIAD) PLAN(DSNTIAxx) -
      LIB('DB2.RUNLIB.LOAD')
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *

 LABEL ON TAPEVOL
   (EPI      IS 'EPI');

 COMMIT;
/*
//*********************************************************************
//*  Update the TAPEVOL table to set EPI value to 255 ('FF'X)
//*  which means that the volume was added to the TAPEVOL table
//*  before the 3590-E1X tape device support.
//*
//*  Note: Since EPI is defined not null with default, it will
//*        be set to 0 for all existing rows in the TAPEVOL table.
//*        EPI = '00'X means that the volume is first written by
//*                    a native tape device (NOT in emulation mode).
//*********************************************************************
//CHANGTVL EXEC PGM=IKJEFT01,DYNAMNBR=20,COND=(4,LT)
//SYSTSPRT DD SYSOUT=*
//SYSTSIN  DD *
 DSN SYSTEM(DB2)
 RUN  PROGRAM(DSNTIAD) PLAN(DSNTIAxx) -
      LIB('DB2.RUNLIB.LOAD')
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *

 UPDATE TAPEVOL
   SET EPI = 255;

 COMMIT;

/*
```

Figure 81. CBRSMB2 SAMPLIB Member (Part 2 of 2)

CBRSMPDS

CBRSMPDS performs the migration necessary for the TAPEVOL table, adding a column in support of the new object tape dataset name format. The object tape dataset name format, with SETOAM parmlib specification, allows the storage

group name to be appended to the object tape dataset names.

```
//CBRSMPDS JOB MSGLEVEL=(1,1),MSGCLASS=A
//*******************************************************************
//*
//*  $SEG(CBRSMPDS) COMP(DBM) PROD(OAM):
//*
//*  OAM DB2 Database Migration Jobs (for Optical Configuration
//*  Database).
//*
//*  This job performs the migration of the TAPEVOL table to the
//*  new version of the TAPEVOL table supporting the new object
//*  tape dataset name format.  The object tape dataset name
//*  format, with SETOAM parmlib specification, allows the storage
//*  group name to be appended to the object tape dataset names.
//*
//*  This job adds a new column DSNFMT to the existing TAPEVOL table.
//*
//*  For recovery purposes, it is recommended that you create a
//*  DB2 image copy of the existing TAPEVOL table prior to running
//*  this migration job.
//*
//*  ---------------------------------
//*
//*  Before running this job, you must change the following:
//*
//*  1. Change the name in the DSN SYSTEM(DB2) statement to
//*     the name of the DB2 Subsystem in your installation.
//*
//*  2. Change the PLAN name (DSNTIAxx) in the RUN statement to
//*     match your current DB2 version and release level.
//*
//*  3. Change the data set name in the RUN statement
//*     LIB('DB2.RUNLIB.LOAD') phrase to the data set name used
//*     in your installation for the DB2 RUNLIB.LOAD data set.
//*
//*  ---------------------------------
//*
//*  STEP        DESCRIPTION
//*  ----    -----
//*
//*  ALTERTVL -  This step adds the new DSNFMT column
//*              to the TAPEVOL table.
//*
//*  LABELTVL -  This step provides the new label for the DSNFMT
//*              column.
//*
//*  ---------------------------------
//*
//*   CHANGE ACTIVITY:
//*    $L0=OA07105  1J0 050504 TUCLJS: 3592 Enterprise WORM Tape
//*
```

Figure 82. CBRSMPDS SAMPLIB Member (Part 1 of 2)

```
//*********************************************************************
//*  Alter the TAPEVOL table to add the new DSNFMT column.
//*********************************************************************
//ALTERTVL EXEC PGM=IKJEFT01,DYNAMNBR=20
//SYSTSPRT DD SYSOUT=*
//SYSTSIN  DD *
 DSN SYSTEM(DB2)
 RUN  PROGRAM(DSNTIAD) PLAN(DSNTIAxx) -
      LIB('DB2.RUNLIB.LOAD')
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *

 ALTER TABLE TAPEVOL ADD DSNFMT CHAR(1) NOT NULL WITH DEFAULT;

 COMMIT;
/*
//*********************************************************************
//*  Place label on TAPEVOL table DSNFMT column
//*********************************************************************
//LABELTVL EXEC PGM=IKJEFT01,DYNAMNBR=20,COND=(4,LT)
//SYSTSPRT DD SYSOUT=*
//SYSTSIN  DD *
 DSN SYSTEM(DB2)
 RUN  PROGRAM(DSNTIAD) PLAN(DSNTIAxx) -
      LIB('DB2.RUNLIB.LOAD')
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *

 LABEL ON TAPEVOL
   (DSNFMT IS 'DATASET_NAME_FORMAT');

 COMMIT;
```

Figure 82. CBRSMPDS SAMPLIB Member (Part 2 of 2)

CBRSM150

SAMPLIB member CBRSM150, as shown in Figure 83 on page 464, migrates the optical configuration database from a DFSMS/MVS 1.4 release to the DFSMS/MVS 1.5 release to enable you to use OAM in a Parallel Sysplex.

```
//CBRSM150 JOB MSGLEVEL=(1,1),MSGCLASS=A
//*******************************************************************
//*
//*  $SEG(CBRSM150) COMP(DBM) PROD(OAM):
//*
//*  OAM DB2 Database Migration Job (for the Optical Configuration
//*  Database).
//*
//*  ---------------------------------------------------------------
//*  ---------------------------------------------------------------
//*
//*  CBRSM150
//*
//*  This job will perform the migration from the DFSMS/MVS 1.4.0
//*  (or DFSMS/MVS 1.3.0 after running CBRSM131 conversion job)
//*  version of the Optical Configuration Database to the DFSMS/MVS
//*  1.5.0 version which supports OAM in a sysplex environment
//*  using XCF communications.
//*
//*  This job will:
//*   1. add a new column MEMBER to the existing OLIBRARY, DRIVE,
//*      VOLUME, and TAPEVOL tables.
//*   2. add a new column PLIBRARY to the existing OLIBRARY table
//*   3. add a new column PLIBRARY to the existing VOLUME table and
//*      prime it with the value in the LIBRARY table, if the volume
//*      record currently indicates that the volume is shelf resident
//*
//*  It is recommended that you create a DB2 image copy of the
//*  existing OLIBRARY, DRIVE, VOLUME, and TAPEVOL tables prior
//*  to executing this CBRSM150 job.
//*
//*  Before running this job, you must change the following:
//*
//*    1.Change the name in the DSN SYSTEM(DB2) statement to
//*      the name of the DB2 Subsystem in your installation.
//*
//*    2.Change the PLAN name (DSNTIA31) in the RUN statement to
//*      match your current DB2 version and release level.
//*
//*    3.Change the data set name in the RUN statement
//*      LIB('DB310.RUNLIB.LOAD') phrase to the data set name used
//*      in your installation for the DB2 RUNLIB.LOAD data set.
//*
//*  CHANGE ACTIVITY:
//*    $L0=HDZ11E0  150 970812 TUCLJT: Initial Release
//*
//*******************************************************************
//*******************************************************************
//*  Alter the OLIBRARY table to add the MEMBER and PLIBRARY
//*  column definitions.
//*  Alter the DRIVE table to add the MEMBER column definition
//*  Alter the VOLUME table to add the MEMBER and PLIBRARY
//*  column definitions.
//*  Alter the TAPEVOL table to add the MEMBER column definition
//*******************************************************************
//ALTERTAB EXEC PGM=IKJEFT01,DYNAMNBR=20,COND=(4,LT)
//SYSTSPRT DD SYSOUT=*
//SYSTSIN  DD *
 DSN SYSTEM(DB2)
 RUN  PROGRAM(DSNTIAD) PLAN(DSNTIA31) -
      LIB('DB310.RUNLIB.LOAD')
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *
```

Figure 83. CBRSM150 SAMPLIB Member (Part 1 of 2)

```
 ALTER TABLE OLIBRARY ADD MEMBER CHAR(16) NOT NULL WITH DEFAULT;
 ALTER TABLE OLIBRARY ADD PLIBRARY CHAR(8) NOT NULL WITH DEFAULT;

 ALTER TABLE DRIVE ADD MEMBER CHAR(16) NOT NULL WITH DEFAULT;

 ALTER TABLE VOLUME ADD MEMBER CHAR(16) NOT NULL WITH DEFAULT;
 ALTER TABLE VOLUME ADD PLIBRARY CHAR(8) NOT NULL WITH DEFAULT;

 ALTER TABLE TAPEVOL ADD MEMBER CHAR(16) NOT NULL WITH DEFAULT;

 COMMIT;
/*
//*********************************************************************
//*  Place label in tables for new columns
//*********************************************************************
//LABELTAB EXEC PGM=IKJEFT01,DYNAMNBR=20,COND=(4,LT)
//SYSTSPRT DD SYSOUT=*
//SYSTSIN  DD *
 DSN SYSTEM(DB2)
 RUN  PROGRAM(DSNTIAD) PLAN(DSNTIA31) -
      LIB('DB310.RUNLIB.LOAD')
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *

 LABEL ON OLIBRARY
   (MEMBER IS 'OAM_XCF_MEMBER',
    PLIBRARY IS 'DEFAULT_PSEUDO_LIBRARY');

 LABEL ON DRIVE
   (MEMBER IS 'OAM_XCF_MEMBER');

 LABEL ON VOLUME
   (MEMBER IS 'OAM_XCF_MEMBER',
    PLIBRARY IS 'PSEUDO_LIBRARY_FOR_VOLUME');

 LABEL ON TAPEVOL
   (MEMBER IS 'OAM_XCF_MEMBER');

 COMMIT;
/*
//*********************************************************************
//*  Prime PLIBRARY field with value from OLIBRARY field for
//*  shelf resident volumes
//*********************************************************************
//PRIMVPLB EXEC PGM=IKJEFT01,DYNAMNBR=20,COND=(4,LT)
//SYSTSPRT DD SYSOUT=*
//SYSTSIN  DD *
 DSN SYSTEM(DB2)
 RUN  PROGRAM(DSNTIAD) PLAN(DSNTIA31) -
      LIB('DB310.RUNLIB.LOAD')
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *

 UPDATE VOLUME SET PLIBRARY = OLIBRARY WHERE LOCATION = 'S';

 COMMIT;
/*
```

Figure 83. CBRSM150 SAMPLIB Member (Part 2 of 2)

CBRSMR13

SAMPLIB member CBRSMR13, as shown in Figure 84 on page 466, performs the migration necessary to use multiple object backup storage groups and the second backup copies of objects function in OAM/OSMC. It also performs the migration from the base version of the OAM object directory tables to the current version,

which supports second backup copies of objects. This PARMLIB member has two jobs. SMR13A adds a new column BKTYPE to the existing to the existing TAPEVOL table and a new column BKTYPE to the existing VOLUME table. SMR13B adds new columns ODBK2LOC and ODBK2SEC to the existing object directory tables.

```
//SMR13A   JOB MSGLEVEL=(1,1),MSGCLASS=A
//*********************************************************************
//*
//*  $SEG(SMR13A) COMP(DBM) PROD(OAM):
//*
//*  OAM DB2 Database Migration Job (for the Optical Configuration
//*  Database).
//*
//*  -----------------------------------------------------------------
//*  -----------------------------------------------------------------
//*
//*  SMR13A
//*
//*  This job will perform the migration from the DFSMS/MVS 1.5.0
//*  or OS/390 R10 version of the Optical Configuration Database
//*  to the z/OS V1 R3 version which supports the multiple object
//*  backup storage groups and the second object backup function
//*  in OAM/OSMC.
//*
//*  This job will:
//*   1. add a new column BKTYPE to the existing VOLUME table
//*   2. add a new column BKTYPE to the existing TAPEVOL table
//*
//*  It is recommended that you create a DB2 image copy of the
//*  existing VOLUME and TAPEVOL tables prior to executing this
//*  migration job for recovery purposes.
//*
//*  Before running this job, you must change the following:
//*
//*    1.Change the name in the DSN SYSTEM(DB2) statement to
//*      the name of the DB2 Subsystem in your installation.
//*
//*    2.Change the PLAN name (DSNTIA31) in the RUN statement to
//*      match your current DB2 version and release level.
//*
//*    3.Change the data set name in the RUN statement
//*      LIB('DB310.RUNLIB.LOAD') phrase to the data set name used
//*      in your installation for the DB2 RUNLIB.LOAD data set.
//*
//*  CHANGE ACTIVITY:
//*    $L0=HDZ11G0  R13 000917 TUCLJT: Initial Release
//*
//*********************************************************************
```

Figure 84. CBRSMR13 SAMPLIB Member (Part 1 of 4)

```
//*********************************************************************
//*  Alter the VOLUME table to add the BKTYPE column definition
//*  Alter the TAPEVOL table to add the BKTYPE column definition
//*********************************************************************
//ALTERTAB EXEC PGM=IKJEFT01,DYNAMNBR=20,COND=(4,LT)
//SYSTSPRT DD SYSOUT=*
//SYSTSIN  DD *
 DSN SYSTEM(DB2)
 RUN  PROGRAM(DSNTIAD) PLAN(DSNTIA31) -
      LIB('DB310.RUNLIB.LOAD')
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *

 ALTER TABLE VOLUME ADD BKTYPE CHAR(1) NOT NULL WITH DEFAULT;

 ALTER TABLE TAPEVOL ADD BKTYPE CHAR(1) NOT NULL WITH DEFAULT;

 COMMIT;
/*
//*********************************************************************
//*  Place label in tables for new columns
//*********************************************************************
//LABELTAB EXEC PGM=IKJEFT01,DYNAMNBR=20,COND=(4,LT)
//SYSTSPRT DD SYSOUT=*
//SYSTSIN  DD *
 DSN SYSTEM(DB2)
 RUN  PROGRAM(DSNTIAD) PLAN(DSNTIA31) -
      LIB('DB310.RUNLIB.LOAD')
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *

 LABEL ON VOLUME
   (BKTYPE IS 'BACKUP_TYPE');

 LABEL ON TAPEVOL
   (BKTYPE IS 'BACKUP_TYPE');

 COMMIT;
/*
//*********************************************************************
//*  Prime BKTYPE field with '1' (for backup type 1) for backup volumes
//*********************************************************************
//PRIMVPLB EXEC PGM=IKJEFT01,DYNAMNBR=20,COND=(4,LT)
//SYSTSPRT DD SYSOUT=*
//SYSTSIN  DD *
 DSN SYSTEM(DB2)
 RUN  PROGRAM(DSNTIAD) PLAN(DSNTIA31) -
      LIB('DB310.RUNLIB.LOAD')
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *

 UPDATE VOLUME SET BKTYPE = '1' WHERE TYPE = 'B';

 UPDATE TAPEVOL SET BKTYPE = '1' WHERE TYPE = 'B';

 COMMIT;
/*
```

Figure 84. CBRSMR13 SAMPLIB Member (Part 2 of 4)

```
//SMR13B   JOB MSGLEVEL=(1,1),MSGCLASS=A
//*******************************************************************
//*
//*  $SEG(SMR13B) COMP(DBM) PROD(OAM):
//*
//*  OAM DB2 Database Migration Job (for the OAM Object Directories).
//*
//*  ----------------------------------------------------------------
//*  ----------------------------------------------------------------
//*
//*  SMR13B
//*
//*  This job will perform the migration from the base version of
//*  the OAM Object directory tables to the z/OS V1 R3 version,
//*  which supports second backup copies of objects.
//*
//*  This job will:
//*   1. add new columns ODBK2LOC and ODBK2SEC to the existing Object
//*      Directory tables.
//*
//*  It is recommended that you create a DB2 image copy of the
//*  existing Object Directory tables prior to executing this
//*  migration job for recovery purposes.
//*
//*  Before running this job, you must change the following:
//*
//*    1.Change the name in the DSN SYSTEM(DB2) statement to
//*      the name of the DB2 Subsystem in your installation.
//*
//*    2.Change the PLAN name (DSNTIA31) in the RUN statement to
//*      match your current DB2 version and release level.
//*
//*    3.Change the data set name in the RUN statement
//*      LIB('DB310.RUNLIB.LOAD') phrase to the data set name used
//*      in your installation for the DB2 RUNLIB.LOAD data set.
//*
//*    4.Update ALTER, DROP, and CREATE statements:
//*
//*     a.Repeat the set of ALTER, CROP, and CREATE statements
//*       for every Object Directory (Object Storage Group)
//*       in your configuration
//*
//*     b.Modify the table high level qualifier (hlq) in each of the
//*       statements to match that of a high level qualifier (for an
//*       Object Storage Group) in your configuration.
//*
//*     EXAMPLE:
//*       A configuration consists of 2 object storage groups,
//*       OBJGRP1 and OBJGRP2, with high level qualifiers of
//*       GRP1TBL and GRP2TBL, respectively.  The resulting
//*       statements would be:
//*
//*       ALTER TABLE GRP1TBL.OSM_OBJ_DIR ADD ODBK2LOC CHAR(6)
//*         NOT NULL WITH DEFAULT;
//*       ALTER TABLE GRP1TBL.OSM_OBJ_DIR ADD ODBK2SEC INTEGER
//*         NOT NULL WITH DEFAULT;
//*       DROP VIEW GRP1TBL.V_OSM_OBJ_DIR;
//*       CREATE VIEW GRP1TBL.V_OSM_OBJ_DIR
//*         AS SELECT ALL * FROM GRP1TBL.OSM_OBJ_DIR;
//*
```

Figure 84. CBRSMR13 SAMPLIB Member (Part 3 of 4)

```
//*       ALTER TABLE GRP2TBL.OSM_OBJ_DIR ADD ODBK2LOC CHAR(6)
//*         NOT NULL WITH DEFAULT;
//*       ALTER TABLE GRP2TBL.OSM_OBJ_DIR ADD ODBK2SEC INTEGER
//*         NOT NULL WITH DEFAULT;
//*       DROP VIEW GRP2TBL.V_OSM_OBJ_DIR;
//*       CREATE VIEW GRP2TBL.V_OSM_OBJ_DIR
//*         AS SELECT ALL * FROM GRP2TBL.OSM_OBJ_DIR;
//*
//*  CHANGE ACTIVITY:
//*    $L0=HDZ11G0  R13 000917 TUCLJT: Initial Release
//*
//*********************************************************************
//*********************************************************************
//*  Alter the Object Directories to add ODBK2LOC and ODBK2SEC
//*********************************************************************
//ALTERDIR EXEC PGM=IKJEFT01,DYNAMNBR=20,COND=(4,LT)
//SYSTSPRT DD SYSOUT=*
//SYSTSIN  DD *
 DSN SYSTEM(DB2)
 RUN  PROGRAM(DSNTIAD) PLAN(DSNTIA31) -
      LIB('DB310.RUNLIB.LOAD')
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *

 ALTER TABLE hlq.OSM_OBJ_DIR ADD ODBK2LOC CHAR(6) NOT NULL WITH DEFAULT;

 ALTER TABLE hlq.OSM_OBJ_DIR ADD ODBK2SEC INTEGER NOT NULL WITH DEFAULT;

 DROP VIEW hlq.V_OSM_OBJ_DIR;

 CREATE VIEW hlq.V_OSM_OBJ_DIR AS SELECT ALL * FROM hlq.OSM_OBJ_DIR;

 COMMIT;
/*
```

Figure 84. CBRSMR13 SAMPLIB Member (Part 4 of 4)

CBRSMR15

SAMPLIB member CBRSMR15, as shown in Figure 85 on page 470, performs the migration to the z/OS V1R5 version of the optical configuration database. After the migration is complete, you can expire object tape volumes that reside in Object storage groups and expire tape and optical volumes that reside in Object Backup storage groups. The CBRSMR15 job adds two new columns, OUNITNAM and DATACLAS, to the DB2 TAPEVOL table. The OUNITNAM fields represents the original esoteric that are associated with a tape volume that OAM is recycling or expiring. The DATACLAS field represents the data class of the tape volume.

```
//SMR15    JOB MSGLEVEL=(1,1),MSGCLASS=A
//*******************************************************************
//*
//*  $SEG(SMR15) COMP(DBM) PROD(OAM):
//*
//*  OAM DB2 Database Migration Job (for the Optical Configuration
//*  Database).
//*
//*  ---------------------------------------------------------------
//*  ---------------------------------------------------------------
//*
//*  SMR15
//*
//*  This job will perform the migration from the z/OS V1 R3
//*  version of the Optical Configuration Database
//*  to the z/OS V1 R5 version which supports expiration of tape
//*  volumes and expiration of optical and tape volumes that
//*  belong to an Object Backup storage group.
//*
//*  This job will:
//*   1. add a new column OUNITNAM to the existing TAPEVOL table
//*   2. add a new column DATACLAS to the existing TAPEVOL table
//*
//*  It is recommended that you create a DB2 image copy of the
//*  existing TAPEVOL table prior to executing this
//*  migration job for recovery purposes.
//*
//*  Before running this job, you must change the following:
//*
//*    1. Change the name in the DSN SYSTEM(DB2) statement to
//*       the name of the DB2 Subsystem in your installation.
//*
//*    2. Change the PLAN name (DSNTIA51) in the RUN statement to
//*       match your current DB2 version and release level.
//*
//*    3. Change the data set name in the RUN statement
//*       LIB('DB510.RUNLIB.LOAD') phrase to the data set name used
//*       in your installation for the DB2 RUNLIB.LOAD data set.
//*
//*    4. An OAMSCRATCH tape volume must have a valid OUNITNAM
//*       and DATACLAS in order to be a candidate to satisfy
//*       an outstanding write request. Tape volumes
//*       introduced into this table by OAM operating at z/OS V1R5
//*       level will have valid values filled in, however
//*       tape volumes that were introduced into the TAPEVOL table
//*       prior to z/OS V1R5 are primed as BLANKS. Therefore, in
//*       order to reuse these volumes that have been returned to
//*       OAMSCRATCH status the installation must either
//*         (1) manually update the OUNITNAM and DATACLASS fields
//*             in the TAPEVOL table, or
//*         (2) enable OAMSCRATCHSYNCH mode via SETOAM statement
//*             in the CBROAMxx Parmlib member.
//*       -- Refer to OAM Planning, Installation and Storage
//*          Administration Guide for Object Support.
//*
//*  CHANGE ACTIVITY:
//*    $L0=HDZ11H0  R15 011205 TUCBLC: Initial Release
```

Figure 85. CBRSMR15 SAMPLIB Member (Part 1 of 2)

```
/*********************************************************************
//*  Alter the TAPEVOL table to add the OUNITNAM and DATACLAS
//*  column definitions.
//*********************************************************************
//ALTERTAB EXEC PGM=IKJEFT01,DYNAMNBR=20,COND=(4,LT)
//SYSTSPRT DD SYSOUT=*
//SYSTSIN  DD *
 DSN SYSTEM(DB2)
 RUN  PROGRAM(DSNTIAD) PLAN(DSNTIA51) -
      LIB('DB510.RUNLIB.LOAD')
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *

 ALTER TABLE TAPEVOL ADD OUNITNAM CHAR(8) NOT NULL WITH DEFAULT;

 ALTER TABLE TAPEVOL ADD DATACLAS CHAR(8) NOT NULL WITH DEFAULT;

 COMMIT;
/*
//*********************************************************************
//*  Place label in table for new columns
//*********************************************************************
//LABELTAB EXEC PGM=IKJEFT01,DYNAMNBR=20,COND=(4,LT)
//SYSTSPRT DD SYSOUT=*
//SYSTSIN  DD *
 DSN SYSTEM(DB2)
 RUN  PROGRAM(DSNTIAD) PLAN(DSNTIA51) -
      LIB('DB510.RUNLIB.LOAD')
//SYSPRINT DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *

 LABEL ON TAPEVOL
   (OUNITNAM IS 'ORIGINAL_UNIT_NAME');

 LABEL ON TAPEVOL
   (DATACLAS IS 'DATACLASS');

 COMMIT;
/*
```

Figure 85. CBRSMR15 SAMPLIB Member (Part 2 of 2)

CBRSMERG

SAMPLIB member CBRSMERG, as shown in Figure 86 on page 472, assists you in merging the optical configuration databases (OCDBs) for use with DB2 data sharing in an OAMplex. Running CBRSMERG might not be the only way of performing this task. Use a method that best suits the requirements for your environment. All warnings, prerequisites, or recommendations apply regardless of the method that is used to perform this merge. If you choose to use this sample job, you must modify and run the job successfully before you use OAM.

```
//CBRSMERG JOB MSGLEVEL=(1,1),MSGCLASS=A
//*******************************************************************
//*
//*  $SEG(CBRSMERG) COMP(DBM) PROD(OAM):
//*
//*  OAM DB2 Database Merge Job (combining optical configuration
//*  databases from multiple systems)
//*
//*  ---------------------------------------------------------------
//*  ---------------------------------------------------------------
//*
//*  CBRSMERG
//*
//*  This job is intended to assist in the task of merging OAM
//*  configuration databases for use with DB2 data sharing in an
//*  OAMplex environment.
//*  DFSMS 1.5.0 provides OAM support in a parallel sysplex
//*  environment using XCF communications and DB2 data sharing.
//*
//*
//*  This job will:
//*   1. Load data from other system (DB2 data from other
//*      system's DB2 tables) into this system's OAM's tables.
//*
//*******************************************************************
//*
//*  Before running this job, you MUST obtain the following:
//*    - load the information from the OAM configuration tables
//*      from the other OAM/system where data is to be copied from
//*      onto a dataset on this system
//*      The simplest way to do this is to do an SQL SELECT * from
//*      the OAM configuration database tables on the other systems
//*      and editing the column headers out of the resulting output
//*      so that just the data from the rows remains.
//*    - Note the beginning and ending columns where the data
//*      resides for each column in the table rows.
//*
//*******************************************************************
//*
//*  It is recommended that you create a DB2 image copy of the
//*  existing tables:
//*    OAM configuration database tables:
//*       OLIBRARY
//*       DRIVE
//*       VOLUME
//*       TAPEVOL
//*       DELOBJT
//*       SLOT
//*  These tables will be modified directly by this job, so a
//*  backup copy is necessary in case recovery is needed.
//*
//*******************************************************************
//*
//*  Before running this job, you must change the following:
//*
//*    1.Change the PARM='DB2' in the JOB STEP statements to
//*      the name of the DB2 Subsystem in your installation.
//*
//*    2.Change the data set name SYS1.DB2.V4R1M0.SDSNLOAD
//*      in the STEPLIB statements to the data set name used
//*      for the DB2 SDSNLOAD dataset, if necessary.
//*
```

Figure 86. CBRSMERG SAMPLIB Member (Part 1 of 7)

```
//*    3.Change RESUME YES to RESUME NO if you are loading
//*      into empty tables.
//*
//*    4.Change the data set names in the CBRSMERx steps to
//*      the appropriate data set names for loading the DB2
//*      tables from other systems (this sample job is set up
//*      as though datasets are pre-allocated):
//*
//*      smerge.map      = map dataset for DB2 in the job (reused
//*                        in this job, or can use separate data
//*                        sets for each job step if desired
//*      smerge.err      = error dataset for DB2 in the job (reused
//*                        in this job, or can use separate data
//*                        sets for each job step if desired
//*
//*      input.libtable  = DSN with the OLIBRARY table row values
//*                        from the system to be merged
//*      workdsn.forlib  = work dataset for DB2 in job step
//*      sortdsn.forlib  = sort dataset for DB2 in job step
//*      discard.forlib  = DSN for the output of rows that could
//*                        not be merged from the other system
//*
//*      input.slttable  = DSN with the SLOT table row values
//*                        from the system to be merged
//*      workdsn.forslot = work dataset for DB2 in job step
//*      sortdsn.forslot = sort dataset for DB2 in job step
//*      discard.forslot = DSN for the output of rows that could
//*                        not be merged from the other system
//*
//*      input.drvtable  = DSN with the DRIVE table row values
//*                        from the system to be merged
//*      workdsn.fordrv  = work dataset for DB2 in job step
//*      sortdsn.fordrv  = sort dataset for DB2 in job step
//*      discard.fordrv  = DSN for the output of rows that could
//*                        not be merged from the other system
//*
//*      input.deltable  = DSN with the DELOBJT table row values
//*                        from the system to be merged
//*      workdsn.fordelo = work dataset for DB2 in job step
//*      sortdsn.fordelo = sort dataset for DB2 in job step
//*      discard.fordelo = DSN for the output of rows that could
//*                        not be merged from the other system
//*
//*      input.voltable  = DSN with the VOLUME table row values
//*                        from the system to be merged
//*      workdsn.forvol  = work dataset for DB2 in job step
//*      sortdsn.forvol  = sort dataset for DB2 in job step
//*      discard.forvol  = DSN for the output of rows that could
//*                        not be merged from the other system
//*
//*      input.tvoltable = DSN with the TAPEVOL table row values
//*                        from the system to be merged
//*      workdsn.fortvol = work dataset for DB2 in job step
//*      sortdsn.fortvol = sort dataset for DB2 in job step
//*      discard.fortvol = DSN for the output of rows that could
//*                        not be merged from the other system
//*
```

Figure 86. CBRSMERG SAMPLIB Member (Part 2 of 7)

```
//*      **NOTE: For these datasets, use size calculations that
//*              would be needed for your installation, using the
//*              DB2 guidelines in the DB2 Command and Utility
//*              Reference for the LOAD utility.
//*
//*    5.Change the POSITION(xx:yy) in the CBRSMER* job steps to
//*      correlate to the actual beginning, (and ending if needed),
//*      columns where the data for each column resides in the input
//*      datasets (the SYSREC DD statement dataset).
//*
//*    6.The integer fields are set up as EXTERNAL(zz) in the job
//*      steps, be sure that any integer values in the columns that
//*      are not the full length are padded with preceding zeros
//*      in the input dataset (the SYSREC DD statement dataset).
//*
//*******************************************************************
//*
//*  After running this job, do the following:
//*
//*    1.Check the return codes from the job to verify success
//*      or failure of the data merge.
//*
//*    2.Check the data sets below for any rows that could not
//*      be merged into the configuration database.  The most
//*      likely cause of failure would be duplicate rows.
//*
//*      discard.forlib  = DSN for the output of rows that could
//*                        not be merged from the other system
//*
//*      discard.forslot = DSN for the output of rows that could
//*                        not be merged from the other system
//*
//*      discard.fordrv  = DSN for the output of rows that could
//*                        not be merged from the other system
//*
//*      discard.fordelo = DSN for the output of rows that could
//*                        not be merged from the other system
//*
//*      discard.forvol  = DSN for the output of rows that could
//*                        not be merged from the other system
//*
//*      discard.fortvol = DSN for the output of rows that could
//*                        not be merged from the other system
//*
//*********************************************************************
//*  Load configuration tables from different DB2 database
//*********************************************************************
//CBRSMER1 EXEC PGM=DSNUTILB,DYNAMNBR=20,COND=(4,LT),PARM='DB2',
//         REGION=4096K
//STEPLIB  DD DSN=SYS1.DB2.V4R1M0.SDSNLOAD,DISP=SHR
//SYSTSPRT DD SYSOUT=*
//SYSREC   DD DSN=input.libtable,DISP=(OLD,KEEP)
//SYSUT1   DD DSN=workdsn.forlib,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SORTOUT  DD DSN=sortdsn.forlib,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSDISC  DD DSN=discard.forlib,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSMAP   DD DSN=smerge.map,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSERR   DD DSN=smerge.err,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSPRINT DD SYSOUT=*
//UTPRINT  DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *
```

Figure 86. CBRSMERG SAMPLIB Member (Part 3 of 7)

```
 LOAD DATA INDDN(SYSREC)
      RESUME YES
      INTO TABLE OLIBRARY
    (NAME       POSITION(xx)  CHAR(8),
     ONLINE     POSITION(xx)  CHAR(1),
     OPERATNL   POSITION(xx)  CHAR(1),
     PATHSTAT   POSITION(xx)  CHAR(1),
     COMMAND    POSITION(xx)  CHAR(5) DEFAULTIF(COMMAND=''),
     PRIMCTC    POSITION(xx)  CHAR(4) DEFAULTIF(PRIMCTC=''),
     PRIMPORT   POSITION(xx)  CHAR(1) DEFAULTIF(PRIMPORT=''),
     ALTCTC     POSITION(xx)  CHAR(4) DEFAULTIF(ALTCTC=''),
     ALTPORT    POSITION(xx)  CHAR(1) DEFAULTIF(ALTPORT=''),
     FAULT      POSITION(xx)  CHAR(3) DEFAULTIF(FAULT=''),
     OLIBTYPE   POSITION(xx)  CHAR(1),
     NUMSLOTS   POSITION(xx)  INTEGER EXTERNAL(3),
     NUMESLOT   POSITION(xx)  INTEGER EXTERNAL(3),
     NUMDRVS    POSITION(xx)  INTEGER EXTERNAL(3),
     RCOMMAND   POSITION(xx)  CHAR(5) DEFAULTIF(RCOMMAND=''),
     DEVTYPE    POSITION(xx)  CHAR(8) DEFAULTIF(RCOMMAND=''),
     LIBRDES    POSITION(xx:yy)  CHAR DEFAULTIF(LIBRDES=''),
     CLIBRARY   POSITION(xx)  CHAR(8) DEFAULTIF(CLIBRARY=''),
     MEDIATYP   POSITION(xx)  CHAR(8) DEFAULTIF(MEDIATYP=''),
     LIBINDEX   POSITION(xx)  INTEGER EXTERNAL(1),
     PLIBRARY   POSITION(xx)  CHAR(16) DEFAULTIF(MEMBER=''),
     MEMBER     POSITION(xx)  CHAR(8) DEFAULTIF(PLIBRARY=''))
/*
//*********************************************************************
//CBRSMER2 EXEC PGM=DSNUTILB,DYNAMNBR=20,COND=(4,LT),PARM='DB2',
//         REGION=4096K
//STEPLIB  DD DSN=SYS1.DB2.V4R1M0.SDSNLOAD,DISP=SHR
//SYSTSPRT DD SYSOUT=*
//SYSREC   DD DSN=input.slttable,DISP=(OLD,KEEP)
//SYSUT1   DD DSN=workdsn.forslot,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SORTOUT  DD DSN=sortdsn.forslot,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSDISC  DD DSN=discard.forslot,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSMAP   DD DSN=smerge.map,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSERR   DD DSN=smerge.err,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSPRINT DD SYSOUT=*
//UTPRINT  DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *

 LOAD DATA INDDN(SYSREC)
      RESUME YES
      INTO TABLE SLOT
    (NAME       POSITION(xx)  CHAR(3),
     OLIBRARY   POSITION(xx)  CHAR(8),
     OCCUPIED   POSITION(xx)  CHAR(1),
     OPERATNL   POSITION(xx)  CHAR(1),
     VOLSER0    POSITION(xx)  CHAR(6) DEFAULTIF(VOLSER0=''),
     VOLSER1    POSITION(xx)  CHAR(6) DEFAULTIF(VOLSER1=''))
 /*
//*********************************************************************
```

Figure 86. CBRSMERG SAMPLIB Member (Part 4 of 7)

```
//CBRSMER3 EXEC PGM=DSNUTILB,DYNAMNBR=20,COND=(4,LT),PARM='DB2',
//         REGION=4096K
//STEPLIB  DD DSN=SYS1.DB2.V4R1M0.SDSNLOAD,DISP=SHR
//SYSTSPRT DD SYSOUT=*
//SYSREC   DD DSN=input.drvtable,DISP=(OLD,KEEP)
//SYSUT1   DD DSN=workdsn.fordrv,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SORTOUT  DD DSN=sortdsn.fordrv,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSDISC  DD DSN=discard.fordrv,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSMAP   DD DSN=smerge.map,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSERR   DD DSN=smerge.err,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSPRINT DD SYSOUT=*
//UTPRINT  DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *

 LOAD DATA INDDN(SYSREC)
      RESUME YES
      INTO TABLE DRIVE
    (NAME       POSITION(xx)    CHAR(8),
     OLIBRARY   POSITION(xx)    CHAR(8),
     CTC        POSITION(xx)    CHAR(4),
     SCSI       POSITION(xx)    CHAR(1),
     LUN        POSITION(xx)    CHAR(1),
     ONLINE     POSITION(xx)    CHAR(1),
     OPERATNL   POSITION(xx)    CHAR(1),
     LDRIVENO   POSITION(xx)    CHAR(1) DEFAULTIF(LDRIVENO=''),
     DRIVTYPE   POSITION(xx)    CHAR(1),
     DEVTYPE    POSITION(xx)    CHAR(8) DEFAULTIF(DEVTYPE=''),
     DRIVEDES   POSITION(xx:yy) CHAR DEFAULTIF(DRIVDES=''),
     DRIVENUM   POSITION(xx)    INTEGER EXTERNAL(1),
     MEMBER     POSITION(xx)    CHAR(16) DEFAULTIF(MEMBER=''))
 /*
//*******************************************************************
//CBRSMER4 EXEC PGM=DSNUTILB,DYNAMNBR=20,COND=(4,LT),PARM='DB2',
//         REGION=4096K
//STEPLIB  DD DSN=SYS1.DB2.V4R1M0.SDSNLOAD,DISP=SHR
//SYSTSPRT DD SYSOUT=*
//SYSREC   DD DSN=input.voltable,DISP=(OLD,KEEP)
//SYSUT1   DD DSN=workdsn.forvol,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SORTOUT  DD DSN=sortdsn.forvol,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSDISC  DD DSN=discard.forvol,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSMAP   DD DSN=smerge.map,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSERR   DD DSN=smerge.err,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSPRINT DD SYSOUT=*
//UTPRINT  DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *
```

Figure 86. CBRSMERG SAMPLIB Member (Part 5 of 7)

```
 LOAD DATA INDDN(SYSREC)
      RESUME YES
      INTO TABLE VOLUME
    (VOLSER     POSITION(xx)  CHAR(6),
     OVOLSER    POSITION(xx)  CHAR(6),
     LOCATION   POSITION(xx)  CHAR(1),
     SLOT       POSITION(xx)  CHAR(3),
     OLIBRARY   POSITION(xx)  CHAR(8),
     SHELFLOC   POSITION(xx)  CHAR(32),
     MNTDATE    POSITION(xx)  DATE EXTERNAL(10),
     WRTDATE    POSITION(xx)  DATE EXTERNAL(10),
     EXPDATE    POSITION(xx)  DATE EXTERNAL(10),
     EJECTDAT   POSITION(xx)  DATE EXTERNAL(10),
     LASTDATA   POSITION(xx)  INTEGER EXTERNAL(1),
     LASTVTCL   POSITION(xx)  INTEGER EXTERNAL(1),
     LASTVTCP   POSITION(xx)  INTEGER EXTERNAL(1),
     VOLUMESET  POSITION(xx)  CHAR(8),
     TYPE       POSITION(xx)  CHAR(1),
     ORIENT     POSITION(xx)  CHAR(1),
     FULL       POSITION(xx)  CHAR(1),
     READABLE   POSITION(xx)  CHAR(1),
     WRITABLE   POSITION(xx)  CHAR(1),
     WRTPROT    POSITION(xx)  CHAR(1),
     OWNERP     POSITION(xx)  CHAR(1),
     OWNER      POSITION(xx)  CHAR(32),
     FRESPACE   POSITION(xx)  INTEGER EXTERNAL(7),
     DELSPACE   POSITION(xx)  INTEGER EXTERNAL(1),
     DELCOUNT   POSITION(xx)  INTEGER EXTERNAL(1),
     FRAGIDX    POSITION(xx)  INTEGER EXTERNAL(1),
     MEDIATYP   POSITION(xx)  CHAR(2),
     CREDATE    POSITION(xx)  DATE EXTERNAL(10),
     ERRSTAT    POSITION(xx)  INTEGER EXTERNAL(1),
     VOLEMPTY   POSITION(xx)  CHAR(1),
     RECOUNT    POSITION(xx)  INTEGER EXTERNAL(1),
     CAPACITY   POSITION(xx)  INTEGER EXTERNAL(7),
     PLIBRARY   POSITION(xx)  CHAR(8),
     MEMBER     POSITION(xx)  CHAR(16))
 /*
//*********************************************************************
//CBRSMER5 EXEC PGM=DSNUTILB,DYNAMNBR=20,COND=(4,LT),PARM='DB2',
//         REGION=4096K
//STEPLIB  DD DSN=SYS1.DB2.V4R1M0.SDSNLOAD,DISP=SHR
//SYSTSPRT DD SYSOUT=*
//SYSREC   DD DSN=input.deltable,DISP=(OLD,KEEP)
//SYSUT1   DD DSN=workdsn.fordelo,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SORTOUT  DD DSN=sortdsn.fordelo,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSDISC  DD DSN=discard.fordelo,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSMAP   DD DSN=smerge.map,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSERR   DD DSN=smerge.err,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSPRINT DD SYSOUT=*
//UTPRINT  DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *
```

Figure 86. CBRSMERG SAMPLIB Member (Part 6 of 7)

```
 LOAD DATA INDDN(SYSREC)
      RESUME YES
      INTO TABLE DELOBJT
    (COLNAME    POSITION(xx)  CHAR(44),
     OBJNAME    POSITION(xx)  CHAR(44),
     VOLSER     POSITION(xx)  CHAR(6),
     VTOCTOKN   POSITION(xx)  INTEGER EXTERNAL(1),
     OBJSIZE    POSITION(xx)  INTEGER EXTERNAL(6))
 /*
//*******************************************************************
//CBRSMER6 EXEC PGM=DSNUTILB,DYNAMNBR=20,COND=(4,LT),PARM='DB2',
//         REGION=4096K
//STEPLIB  DD DSN=SYS1.DB2.V4R1M0.SDSNLOAD,DISP=SHR
//SYSTSPRT DD SYSOUT=*
//SYSREC   DD DSN=input.tvoltble,DISP=(OLD,KEEP)
//SYSUT1   DD DSN=workdsn.fortvol,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SORTOUT  DD DSN=sortdsn.fortvol,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSDISC  DD DSN=discard.fortvol,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSMAP   DD DSN=smerge.map,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSERR   DD DSN=smerge.err,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSPRINT DD SYSOUT=*
//UTPRINT  DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *

 LOAD DATA INDDN(SYSREC)
      RESUME YES
      INTO TABLE TAPEVOL
    (VOLSER     POSITION(xx)     CHAR(6),
     UNITNAME   POSITION(xx)     CHAR(8),
     MEDIATYP   POSITION(xx)     CHAR(2),
     STORGRP    POSITION(xx)     CHAR(8),
     TYPE       POSITION(xx)     CHAR(1),
     CREDATE    POSITION(xx)     DATE EXTERNAL(10),
     MNTDATE    POSITION(xx)     DATE EXTERNAL(10),
     WRTDATE    POSITION(xx)     DATE EXTERNAL(10),
     EXPDATE    POSITION(xx)     DATE EXTERNAL(10),
     CAPACITY   POSITION(xx)     INTEGER EXTERNAL(8)
     FRESPACE   POSITION(xx)     INTEGER EXTERNAL(8)
     LSTBLKID   POSITION(xx)     INTEGER EXTERNAL(8)
     PFULL      POSITION(xx)     INTEGER EXTERNAL(2),
     NUMLBLKS   POSITION(xx)     INTEGER EXTERNAL(8)
     NUMLKBW    POSITION(xx)     INTEGER EXTERNAL(8)
     NUMPKBW    POSITION(xx)     INTEGER EXTERNAL(8)
     NUMLKBDE   POSITION(xx)     INTEGER EXTERNAL(8)
     FULL       POSITION(xx)     CHAR(1),
     READABLE   POSITION(xx)     CHAR(1),
     WRITABLE   POSITION(xx)     CHAR(1),
     INUSE      POSITION(xx)     CHAR(1),
     COPIED     POSITION(xx)     CHAR(1),
     AVOLSER    POSITION(xx)     CHAR(6),
     COMPACT    POSITION(xx)     CHAR(1),
     MEMBER     POSITION(xx)     CHAR(16));
 /*
```

Figure 86. CBRSMERG SAMPLIB Member (Part 7 of 7)

CBRSG100

SAMPLIB member CBRSG100, as shown in Figure 87 on page 479, helps you merge OAM administration databases and catalog entries and OAM object storage databases for use with DB2 data sharing in an OAMplex. You must perform the prerequisites and modify and run the job successfully before you use OAM.

```
//CBRSG100 JOB MSGLEVEL=(1,1),MSGCLASS=A
//*******************************************************************
//*
//*  $SEG(CBRSG100) COMP(DBM) PROD(OAM):
//*
//*  OAM Catalog Merge Job (combining collection name catalogs
//*  from multiple systems)
//*  OAM DB2 Admin Database Merge Job (combining OAM administration
//*  databases from multiple systems)
//*  OAM DB2 Object Database Merge Job (combining object directories
//*  and object storage databases from multiple systems)
//*
//*  ---------------------------------------------------------------
//*  ---------------------------------------------------------------
//*
//*  CBRSG100
//*
//*  This job is intended to assist in the task of merging OAM
//*  administration databases and catalog entries, and OAM object
//*  storage databases, for use with DB2 datasharing in an OAMplex
//*  environment.
//*  DFSMS 1.5.0 provides OAM support in a parallel sysplex
//*  environment using XCF communications and DB2 data sharing.
//*
//*  This job will:
//*   1. Load data from other system (DB2 data from other
//*      system's DB2 tables) into this system's OAM's tables.
//*
//*******************************************************************
//*
//*  Before running this job, you MUST verify the following:
//*
//*    1. There are no two storage groups across any systems
//*       which are being combined, which have the same collection
//*       name associated with them. A collection CANNOT span object
//*       storage groups, therefore may belong to one and only one
//*       object storage group.
//*       If this condition exists:
//*          - the collection name on one of the systems being
//*            combined must change, and the ACS routines updated
//*            accordingly.
//*            OR
//*          - the two storage groups must be combined into a
//*            single storage group.
//*
//*    2. There are no two collection names across any systems
//*       that are being combined, which have the same collection
//*       ID.  Objects are associated with a collection by its ID,
//*       and the collection ID is unique in the collection table.
//*       Any collections across systems being combined, which had
//*       the same collection ID, must have been changed, and the
//*       object directory entries using these collections IDs,
//*       must have been updated.
//*
```

Figure 87. CBRSG100 SAMPLIB Member (Part 1 of 10)

```
//*    3. There are no two management classes across any systems
//*       that are being combined, which have the same management
//*       class ID.  Objects are associated with a management class
//*       in the object directory by its ID, and the management class
//*       ID is unique in the management class table.
//*       Any management classes across systems being combined which
//*       had the same ID, must have been changed, and the object
//*       directory entries using the modified management class' ID
//*       must have been updated.
//*
//*    4. There are no two storage classes across any systems
//*       that are being combined, which have the same storage
//*       class ID.  Objects are associated with a storage class
//*       in the object directory by its ID, and the storage class
//*       ID is unique in the storage class table.
//*       Any storage classes across systems being combined which
//*       had the same ID, must have been changed, and the object
//*       directory entries using the modified storage class' ID
//*       must have been updated.
//*
//*
//*   NOTE1:  In order to 'correct' a duplicate collection ID
//*           situation you can do the following:
//*           - it is best to make changes to the data that is
//*             being moved rather than the data on the system
//*             where the data is being combined.
//*           1. On the system where the data is to be combined,
//*              determine what the next available collection ID
//*              is that can be used.
//*           2. On the system where the data is coming from, with
//*              the duplicate collection ID, change the collection
//*              ID associated with the collection name in the
//*              collection table to the ID determined in step 1.
//*           3. Change all of the object directory entries in the
//*              object directory for the storage group to which the
//*              collection belongs, where the collection ID is the
//*              ID previously associated with the collection to
//*              the new collection ID used from step 2.
//*           4. Use IDCAMS to catalog the new collection in the
//*              catalog on the target system.
//*           example:
//*           Object directories on system 1 and system 2 are to be
//*           combined.  COLL.SYS1.DATA1997 on system 1 has the
//*           same collection ID as COLL.SYS2.DATA1997 on system 2.
//*
//*           BEFORE:
//*           -------
//*           System 1                        System 2
//*           Coll-name          Coll-ID      Coll-name          Coll-ID
//*
//*           OBJCOLL.SYS1.TEST   001         OBJCOLL.SYS2.TEST   001
//*           COLL.SYS1.DATA1997  002         COLL.SYS2.DATA1997  002
//*           COLL.SYS1.DATA1998  004         COLL.SYS2.DATA1998  003
//*           COLL.SYS1.REPORTS   005
//*
```

Figure 87. CBRSG100 SAMPLIB Member (Part 2 of 10)

```
//*          System 1 will be the target system where data is combined
//*          OBJCOLL.SYS2.TEST will not be moved, as this is test data
//*          that is not needed on the combined system
//*
//*          Step 1:  The next available collection ID on
//*                   system 1 is 006
//*
//*          Step 2:  On System 2 before attempting the combine:
//*                   SQL UDPATE OAMADMIN.CBR_COLLECTION_TBL
//*                       SET ODCLID = 6 WHERE
//*                       ODCLNAME = 'COLL.SYS2.DATA1997';
//*                   COMMIT;
//*
//*          Step 3:  On System 2 before attempting the combine:
//*                   SQL UDPATE hlq.OSM_OBJ_DIR
//*                       SET ODCLID = 6 WHERE
//*                           ODCLID = 2;
//*                   COMMIT;
//*
//*          Step 4:  On System 1 before attempting the combine:
//*                   IDCAMS DEFINE NONVSAM RECATALOG -
//*                       COLLECTION NAME(COLL.SYS2.DATA1997)
//*
//*          AFTER:
//*          ------
//*          System 1                       System 2
//*          Coll-name          Coll-ID     Coll-name          Coll-ID
//*
//*          OBJCOLL.SYS1.TEST   001        OBJCOLL.SYS2.TEST   001
//*          COLL.SYS1.DATA1997  002        COLL.SYS2.DATA1997  006
//*          COLL.SYS1.DATA1998  004        COLL.SYS2.DATA1998  003
//*          COLL.SYS1.REPORTS   005
//*
//*
//* WARNING:  In order to 'correct' a duplicate collection name
//*           situation, you will have to investigate your SMS
//*           CDS more closely and see where the storage group is
//*           assigned based on the collection name and see if the
//*           data can be combined under one storage group, or if
//*           objects in one collection need to be changed to another
//*           collection altogether.  Then the ACS routines would have
//*           to also be updated to handle the new collection.
//*           This needs to be done with the assistance of your
//*           application interface and your systems programmer to
//*           determine the best plan for your installation.
//*
//*   NOTE2:  In order to 'correct' a duplicate management class
//*           number situation you can do similar steps as the ones
//*           to correct duplicate collection IDs, with the exception
//*           that the catalog step is not needed.
//*           In brief the steps would be:
//*           1. determine the next available management class number
//*              'x' below is the new management class number
//*              'y' below is the old management class number
//*           2. Change the management class number on the
//*              'from' system
//*              SQL UDPATE OAMADMIN.CBR_MGT_CLASS_TBL
//*                  SET MCNUM = x WHERE
//*                  ODMCNAME = 'duplicate.mc.name';
//*              COMMIT;
```

Figure 87. CBRSG100 SAMPLIB Member (Part 3 of 10)

```
//*           3. Change all of the object directory entries with the
//*              old management class number to the new management
//*              class number on the 'from' system
//*                    SQL UDPATE hlq.OSM_OBJ_DIR
//*                        SET ODMCNUM = x WHERE
//*                            ODMCNUM = y;
//*                    COMMIT;
//*
//*   NOTE3:  In order to 'correct' a duplicate storage class number
//*           situation you can do similar steps as the ones to
//*           correct duplicate collection IDs, with the exception
//*           that the catalog step is not needed.
//*           In brief the steps would be:
//*           1. determine the next available storage class number
//*              'x' below is the new storage class number
//*              'y' below is the old storage class number
//*           2. Change the storage class ID on the 'from' system
//*              SQL UDPATE OAMADMIN.CBR_STO_CLASS_TBL
//*                  SET SCNUM = x WHERE
//*                  ODMCNAME = 'duplicate.sc.name';
//*              COMMIT;
//*           3. Change all of the object directory entries with the
//*              old storage class number to the new storage class
//*              number on the 'from' system
//*                    SQL UDPATE hlq.OSM_OBJ_DIR
//*                        SET ODSCNUM = x WHERE
//*                            ODSCNUM = y;
//*                    COMMIT;
//*
//*********************************************************************
//*
//*  It is recommended that you create a DB2 image copy of the
//*  existing tables:
//*    OAM administration database tables:
//*       OAMADMIN.CBR_MGT_CLASS_TBL
//*       OAMADMIN.CBR_STO_CLASS_TBL
//*       OAMADMIN.CBR_COLLECTION_TBL
//*    OAM object directory and object storage database tables:
//*       all hlq.OSM_OBJ_DIR tables
//*       all hlq.OSM_04K_OBJ_TBL tables
//*       all hlq.OSM_32K_OBJ_TBL tables
//*
//*********************************************************************
//*
//*  Before running this job, you must change the following:
//*
//*    1.Change the PARM='DB2' in the JOB STEP statements to
//*      the name of the DB2 Subsystem in your installation.
//*
//*    2.Change the data set name SYS1.DB2.V4R1M0.SDSNLOAD
//*      in the STEPLIB statements to the data set name used
//*      for the DB2 SDSNLOAD dataset if necessary.
//*
//*    3.Change RESUME YES to RESUME NO if you are loading
//*      into empty tables.
//*
```

Figure 87. CBRSG100 SAMPLIB Member (Part 4 of 10)

```
//*    4. Change the data set names in the job steps to the
//*       appropriate data set names for loading the DB2
//*       tables from other systems (this sample job is set up
//*       as though datasets are pre-allocated):
//*
//*       sg100.map       = map dataset for DB2 in the job (reused
//*                         in this job, or can use separate data
//*                         sets for each job step if desired
//*       sg100.err       = error dataset for DB2 in the job (reused
//*                         in this job, or can use separate data
//*                         sets for each job step if desired
//*
//*       input.clntable  = DSN with the collection table row values
//*                         from the system to be merged
//*       workdsn.forcln  = work dataset for DB2 in job step
//*       sortdsn.forcln  = sort dataset for DB2 in job step
//*       discard.forcln  = DSN for the output of rows that could
//*                         not be merged from the other system
//*
//*       input.mctable   = DSN with the management class table row
//*                         values from the system to be merged
//*       workdsn.formc   = work dataset for DB2 in job step
//*       sortdsn.formc   = sort dataset for DB2 in job step
//*       discard.formc   = DSN for the output of rows that could
//*                         not be merged from the other system
//*
//*       input.sctable   = DSN with the storage class table row
//*                         values from the system to be merged
//*       workdsn.forsc   = work dataset for DB2 in job step
//*       sortdsn.forsc   = sort dataset for DB2 in job step
//*       discard.forsc   = DSN for the output of rows that could
//*                         not be merged from the other system
//*
//*       input.objdir    = DSN with the object directory table row
//*                         values from the system to be merged
//*       workdsn.forodir = work dataset for DB2 in job step
//*       sortdsn.forodir = sort dataset for DB2 in job step
//*       discard.forodir = DSN for the output of rows that could
//*                         not be merged from the other system
//*
//*       input.obj04k    = DSN with the object 4K table row
//*                         values from the system to be merged
//*       workdsn.for04k  = work dataset for DB2 in job step
//*       sortdsn.for04k  = sort dataset for DB2 in job step
//*       discard.for04k  = DSN for the output of rows that could
//*                         not be merged from the other system
//*
//*       input.obj32k    = DSN with the object 32K table row
//*                         values from the system to be merged
//*       workdsn.for32k  = work dataset for DB2 in job step
//*       sortdsn.for32k  = sort dataset for DB2 in job step
//*       discard.for32k  = DSN for the output of rows that could
//*                         not be merged from the other system
//*
//*      **NOTE: For these datasets, use size calculations that
//*              would be needed for your installation, using the
//*              DB2 guidelines in the DB2 Command and Utility
//*              Reference for the LOAD utility.
//*
```

Figure 87. CBRSG100 SAMPLIB Member (Part 5 of 10)

```
//*    5. Change storage_group_hlq in the job steps to the
//*       high level qualifier for the object storage group
//*       tables that are being merged.
//*
//*    6. Load the information from the OAM administration database
//*       tables and the object storage group databases tables from
//*       the other OAM/system where data is to be copied from into
//*       datasets on this system
//*       The simplest way to do this is to do an SQL SELECT * from
//*       the OAM tables to be merged on the other system and editing
//*       the column headers out of the resulting output so that just
//*       the data from the rows remains.
//*
//*    7. Note the beginning, (and ending if needed), columns
//*       where the data for each column resides in the table rows.
//*
//*    8. If necessary, change the POSITION(xx:yy) in the job
//*       steps to correlate to the actual beginning (and ending)
//*       columns where the data for each column resides in the
//*       input datasets (the SYSREC DD statement dataset).
//*
//*       - For columns which are defined as specific length,
//*         like CHAR(2), only the start position is needed and
//*         the end will be determined by the length of the column
//*       - For columns which are defined as VARCHAR, only a
//*         start position is needed if the first 2 bytes of
//*         the data is the length of the following data.
//*         Otherwise, a beginning and ending designation are
//*         needed.
//*
//*    9. The integer fields are set up as EXTERNAL(zz) in the job
//*       steps, be sure that any integer values in the columns that
//*       are not the full length are padded with preceding zeros
//*       in the input dataset (the SYSREC DD statement dataset).
//*
//*   10. If your input dataset (DD SYSREC) does not have the data
//*       always in specific columns because of the varying length
//*       fields, the easiest way to change the POSITION(xx:yy)
//*       statements would be to make the POSITION start column
//*       an offset from the end of the previous field.  For
//*       example:
//*
//*       LOAD DATA INDDN(SYSREC)
//*            REPLACE
//*            INTO TABLE OAMADMIN.CBR_COLLECTION_TBL
//*           (ODCLSCNM   POSITION(1 )  VARCHAR(30),
//*            ODCLMCNM   POSITION(+2)  VARCHAR(30),
//*            ODCLSGNM   POSITION(+2)  VARCHAR(30),
//*            ODCLID     POSITION(+2)     INTEGER,
//*            ODCLNAME   POSITION(+2)  VARCHAR(44));
//*
//*       In this example, the data for each subsequent column is
//*       expected to be 2 positions from the end of the preceding
//*       data, with the first 2 bytes of the VARCHAR fields being
//*       the actual length of the field's data.
//*
//*   11. Repeat steps CBRSG104-CBRSG106 for each set of object
//*       storage group tables that are being merged.
//*
//*********************************************************************
//*
```

Figure 87. CBRSG100 SAMPLIB Member (Part 6 of 10)

```
//*  After running this job, do the following:
//*
//*    1. Check the return codes from the job to verify success
//*       or failure of the data merge.
//*
//*    2. Check the data sets below for any rows that could not
//*       be merged into the configuration database.  The most
//*       likely cause of failure would be duplicate rows.
//*
//*       discard.forcln  = DSN for the output of rows that could
//*                         not be merged from the other system
//*
//*       discard.formc   = DSN for the output of rows that could
//*                         not be merged from the other system
//*
//*       discard.forsc   = DSN for the output of rows that could
//*                         not be merged from the other system
//*
//*       discard.forodir = DSN for the output of rows that could
//*                         not be merged from the other system
//*
//*       discard.for04k  = DSN for the output of rows that could
//*                         not be merged from the other system
//*
//*       discard.for32k  = DSN for the output of rows that could
//*                         not be merged from the other system
//*********************************************************************
//*  Load configuration tables from different DB2 database
//*********************************************************************
//CBRSG101 EXEC PGM=DSNUTILB,DYNAMNBR=20,COND=(4,LT),PARM='DB2',
//         REGION=4096K
//STEPLIB  DD DSN=SYS1.DB2.V4R1M0.SDSNLOAD,DISP=SHR
//SYSTSPRT DD SYSOUT=*
//SYSREC   DD DSN=input.clntable,DISP=(OLD,KEEP)
//SYSUT1   DD DSN=workdsn.forcln,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SORTOUT  DD DSN=sortdsn.forcln,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSDISC  DD DSN=discard.forcln,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSMAP   DD DSN=sg100.map,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSERR   DD DSN=sg100.err,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSPRINT DD SYSOUT=*
//UTPRINT  DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *

 LOAD DATA INDDN(SYSREC)
      REPLACE
      INTO TABLE OAMADMIN.CBR_COLLECTION_TBL
    (ODCLSCNM   POSITION(xx)     VARCHAR,
     ODCLMCNM   POSITION(xx)     VARCHAR,
     ODCLSGNM   POSITION(xx)     VARCHAR,
     ODCLID     POSITION(xx)     INTEGER EXTERNAL(3),
     ODCLNAME   POSITION(xx)     VARCHAR)
/*
//*********************************************************************
```

Figure 87. CBRSG100 SAMPLIB Member (Part 7 of 10)

```
//CBRSG102 EXEC PGM=DSNUTILB,DYNAMNBR=20,COND=(4,LT),PARM='DB2',
//         REGION=4096K
//STEPLIB  DD DSN=SYS1.DB2.V4R1M0.SDSNLOAD,DISP=SHR
//SYSTSPRT DD SYSOUT=*
//SYSREC   DD DSN=input.mctable,DISP=(OLD,KEEP)
//SYSUT1   DD DSN=workdsn.formc,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SORTOUT  DD DSN=sortdsn.formc,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSDISC  DD DSN=discard.formc,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSMAP   DD DSN=sg100.map,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSERR   DD DSN=sg100.err,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSPRINT DD SYSOUT=*
//UTPRINT  DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *

 LOAD DATA INDDN(SYSREC)
      REPLACE
      INTO TABLE OAMADMIN.CBR_MGT_CLASS_TBL
    (ODMCNUM    POSITION(xx)     INTEGER EXTERNAL(2),
     ODMCNAME   POSITION(xx)     VARCHAR)
 /*
//*******************************************************************
//CBRSG103 EXEC PGM=DSNUTILB,DYNAMNBR=20,COND=(4,LT),PARM='DB2',
//         REGION=4096K
//STEPLIB  DD DSN=SYS1.DB2.V4R1M0.SDSNLOAD,DISP=SHR
//SYSTSPRT DD SYSOUT=*
//SYSREC   DD DSN=input.sctable,DISP=(OLD,KEEP)
//SYSUT1   DD DSN=workdsn.forsc,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SORTOUT  DD DSN=sortdsn.forsc,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSDISC  DD DSN=discard.forsc,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSMAP   DD DSN=sg100.map,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSERR   DD DSN=sg100.err,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSPRINT DD SYSOUT=*
//UTPRINT  DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *

 LOAD DATA INDDN(SYSREC)
      REPLACE
      INTO TABLE OAMADMIN.CBR_STO_CLASS_TBL
    (ODSCNUM    POSITION(xx)     INTEGER EXTERNAL(2),
     ODSCNAME   POSITION(xx:yy)  VARCHAR)
 /*
```

Figure 87. CBRSG100 SAMPLIB Member (Part 8 of 10)

```
//*********************************************************************
//*  Combine hlq.OSM_OBJ_DIR tables from different
//*  DB2 systems for object storage group.
//*********************************************************************
//CBRSG104 EXEC PGM=DSNUTILB,DYNAMNBR=20,COND=(4,LT),PARM='DB2',
//         REGION=4096K
//STEPLIB  DD DSN=SYS1.DB2.V4R1M0.SDSNLOAD,DISP=SHR
//SYSTSPRT DD SYSOUT=*
//SYSREC   DD DSN=input.objdir,DISP=(OLD,KEEP)
//SYSUT1   DD DSN=workdsn.forodir,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SORTOUT  DD DSN=sortdsn.forodir,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSDISC  DD DSN=discard.forodir,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSMAP   DD DSN=sg100.map,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSERR   DD DSN=sg100.err,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSPRINT DD SYSOUT=*
//UTPRINT  DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *

 LOAD DATA INDDN(SYSREC)
      REPLACE
      INTO TABLE storage_group_hlq.OSM_OBJ_DIR
    (ODVER      POSITION(xx)     CHAR(1),
     ODSIZE     POSITION(xx)     INTEGER EXTERNAL(3),
     ODCREATS   POSITION(xx)     TIMESTAMP EXTERNAL(26),
     ODEXPDT    POSITION(xx)     DATE EXTERNAL(10),
     ODLREFDT   POSITION(xx)     DATE EXTERNAL(10),
     ODPENDDT   POSITION(xx)     DATE EXTERNAL(10),
     ODMCASDT   POSITION(xx)     DATE EXTERNAL(10),
     ODSCNUM    POSITION(xx)     INTEGER EXTERNAL(2),
     ODMCNUM    POSITION(xx)     INTEGER EXTERNAL(2),
     ODLOCFL    POSITION(xx)     CHAR(1),
     ODLSLOC    POSITION(xx)     CHAR(6),
     ODSECLOC   POSITION(xx)     INTEGER EXTERNAL(4),
     ODBKLOC    POSITION(xx)     CHAR(6),
     ODBKSEC    POSITION(xx)     INTEGER EXTERNAL(4),
     ODCLID     POSITION(xx)     INTEGER EXTERNAL(4),
     ODNAME     POSITION(xx:yy)  VARCHAR)
/*
//*********************************************************************
//*  Combine hlq.OSM_04K_OBJ_DIR tables from different
//*  DB2 systems for object storage group.
//*********************************************************************
//CBRSG105 EXEC PGM=DSNUTILB,DYNAMNBR=20,COND=(4,LT),PARM='DB2',
//         REGION=4096K
//STEPLIB  DD DSN=SYS1.DB2.V4R1M0.SDSNLOAD,DISP=SHR
//SYSTSPRT DD SYSOUT=*
//SYSREC   DD DSN=input.obj04k,DISP=(OLD,KEEP)
//SYSUT1   DD DSN=workdsn.for04k,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SORTOUT  DD DSN=sortdsn.for04k,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSDISC  DD DSN=discard.for04k,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSMAP   DD DSN=sg100.map,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSERR   DD DSN=sg100.err,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
```

Figure 87. CBRSG100 SAMPLIB Member (Part 9 of 10)

```
//SYSPRINT DD SYSOUT=*
//UTPRINT  DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *

 LOAD DATA INDDN(SYSREC)
      REPLACE
      INTO TABLE storage_group_hlq.OSM_04K_OBJ_TBL
    (OTVER      POSITION(xx)     CHAR(1),
     OTSEG      POSITION(xx)     INTEGER EXTERNAL(2),
     OTCLID     POSITION(xx)     INTEGER EXTERNAL(3),
     OTNAME     POSITION(xx:yy)  VARCHAR,
     OTOBJ      POSITION(xx:yy)  VARCHAR)
/*
//*********************************************************************
//*  Combine hlq.OSM_32K_OBJ_DIR tables from different
//*  DB2 systems for object storage group.
//*********************************************************************
//CBRSG106 EXEC PGM=DSNUTILB,DYNAMNBR=20,COND=(4,LT),PARM='DB2',
//         REGION=4096K
//STEPLIB  DD DSN=SYS1.DB2.V4R1M0.SDSNLOAD,DISP=SHR
//SYSTSPRT DD SYSOUT=*
//SYSREC   DD DSN=input.obj32k,DISP=(OLD,KEEP)
//SYSUT1   DD DSN=workdsn.for32k,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SORTOUT  DD DSN=sortdsn.for32k,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSDISC  DD DSN=discard.for32k,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSMAP   DD DSN=sg100.map,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSERR   DD DSN=sg100.err,DISP=(MOD,KEEP),UNIT=3390,
//         VOL=SER=DBPACK
//SYSPRINT DD SYSOUT=*
//UTPRINT  DD SYSOUT=*
//SYSUDUMP DD SYSOUT=*
//SYSIN    DD *

 LOAD DATA INDDN(SYSREC)
      REPLACE
      INTO TABLE storage_group_hlq.OSM_32K_OBJ_TBL
    (OTVER      POSITION(xx)     CHAR(1),
     OTSEG      POSITION(xx)     INTEGER EXTERNAL(2),
     OTCLID     POSITION(xx)     INTEGER EXTERNAL(3),
     OTNAME     POSITION(xx:yy)  VARCHAR,
     OTOBJ      POSITION(xx:yy)  VARCHAR)
/*
```

Figure 87. CBRSG100 SAMPLIB Member (Part 10 of 10)

Application Plans

DB2 BIND (CBRxBIND) and GRANT (CBRxGRNT) jobs are provided to create and authorize the DB2 application plans necessary for OSR, OSMC, LCS, and ISMF.

CBRPBIND

CBRPBIND performs a DB2 BIND for the packages that are needed to access the OAM object storage group tables. The use of DB2 packages allows user defined qualifiers for the object storage group table definitions. For release-to-release consistency, the job provides binds packages for 100 object storage groups (GROUP00–GROUP99). In DFSMS/MVS 1.5, the 100 Object storage group restriction is no longer valid, so this job must be modified to match your installation requirements. You must run this job before executing CBRABIND, CBRHBIND, or CBRIBIND.

CBRIBIND and CBRIGRNT

The CBRIBIND and CBRIGRNT SAMPLIB jobs create the OSR application plan, bind it to DB2, and grant authority for the plan to be used. Run these SAMPLIB jobs if you do not plan to create the optical configuration database, but you do plan to store objects without starting the OAM address space. If you plan on creating the optical configuration database and start the OAM address space, use CBRABIND and CBRAGRNT in place of these SAMPLIB members.

CBRHBIND and CBRHGRNT

The CBRHBIND and CBRHGRNT SAMPLIB jobs create the OSMC application plans, bind them to DB2, and grant authority for the plans to be used. Run these SAMPLIB jobs if you plan to start the OAM address space with OSMC.

CBRABIND and CBRAGRNT

The CBRABIND and CBRAGRNT SAMPLIB jobs create the LCS, OSR, and ISMF application plans, bind them to DB2, and grant authority for the plans to be used. Run these SAMPLIB jobs if you plan to create the optical configuration database and start the OAM address space for object storage.

OAM Installation Verification Program and OAMUTIL

Sample jobs are provided for the invocation of the OAM installation verification program using TSO/E and the OAM utility, OAMUTIL, to reformat 3995 optical cartridges. CBRSAMIV is the sample job for the OAM Installation Verification Program (OAMIVP).

CBRSAMIV

The OSREQ macro is a TSO/E command processor. OSREQ can be invoked for any of the following situations:

- At the TSO/E READY prompt when logged on to TSO/E
- Under option 6 “Command” under ISPF/PDF
- On the ISPF command line by prefacing the OSREQ command with the characters “TSO”
- From within a TSO/E CLIST
- From a batch job, by invoking the TSO/E terminal monitor program (TMP) in the batch job

SAMPLIB member CBRSAMIV invokes the OSREQ macro from an MVS batch job, which invokes the TSO/E terminal monitor program (IKJEFT01) that runs in the background. This job allows you to verify the installation of OAM to ensure object storage success.

```
//CBRSAMIV   JOB CLASS=A,MSGCLASS=A,MSGLEVEL=(1,1)
//*********************************************************************
//*                                                                   *
//*  $SEG(CBRSAMIV) COMP(OSR) PROD(OAM):                              *
//*                                                                   *
//* THIS SAMPLE JOB INVOKES THE OSREQ COMMAND PROCESSOR TO PERFORM    *
//* THE FOLLOWING ACTIONS:                                           *
//*                                                                   *
//* 1. STORE A 1 MB (1048576) OBJECT.                                *
//*                                                                   *
//* 2. ISSUE AN OSREQ QUERY TO LIST THE OAM DIRECTORY INFORMATION.    *
//*                                                                   *
//* 3. ISSUE A LISTCAT COMMAND TO LIST THE COLLECTION NAME ENTRY      *
//*    FROM THE ICF CATALOG.                                          *
//*                                                                   *
//* 4. ISSUE AN OSREQ CHANGE REQUEST TO CHANGE THE RETENTION PERIOD   *
//*    ASSOCIATED WITH THE OBJECT TO 365 DAYS.                        *
//*                                                                   *
//* 5. ISSUE AN OSREQ QUERY TO LIST THE OAM DIRECTORY INFORMATION.    *
//*                                                                   *
//* 6. ISSUE AN OSREQ RETRIEVE TO RETRIEVE THE PRIMARY COPY OF THE    *
//*    AND CHECK TO SEE IF IT CONTAINS THE PRE-DEFINED PATTERN DATA.  *
//*                                                                   *
//* 7. ISSUE AN OSREQ DELETE REQUEST TO DELETE THE OBJECT.            *
//*                                                                   *
//*                                                                   *
//* PRIOR TO EXECUTING THIS JOB YOU MAY NEED TO MAKE THE FOLLOWING    *
//* MODIFICATIONS:                                                   *
//*                                                                   *
//*  1. CHANGE THE JOB CARD PER YOUR INSTALLATION REQUIREMENTS.       *
//*                                                                   *
//*  2. CHANGE THE COLLECTION NAME, OBJECT NAME AND LENGTH OF         *
//*     OBJECT TO CONFORM TO YOUR INSTALLATION REQUIREMENTS.          *
//*                                                                   *
//*********************************************************************
//STEP1    EXEC PGM=IKJEFT01,REGION=4096K
//SYSPRINT DD   SYSOUT=*
//SYSTSPRT DD   SYSOUT=*
//SYSTSIN  DD   *
 OSREQ STORE    COLLECT.NAME OBJECT.NAME LENGTH(1048576)
 OSREQ QUERY    COLLECT.NAME OBJECT.NAME
 LISTCAT ENTRIES('COLLECT.NAME') ALL
 OSREQ CHANGE   COLLECT.NAME OBJECT.NAME RP(365)
 OSREQ QUERY    COLLECT.NAME OBJECT.NAME
 OSREQ RETRIEVE COLLECT.NAME OBJECT.NAME COMPARE VIEW(PRIMARY)
 OSREQ DELETE   COLLECT.NAME OBJECT.NAME
/*
/*
```

Figure 88. CBRSAMIV SAMPLIB Member

CBRSAMUT

SAMPLIB member CBRSAMUT, as shown in Figure 89 on page 491, uses the OAMUTIL utility to reformat a 3995 optical disk volume or both sides of a 3995 optical cartridge.

Related reading: For more information on this utility command, see "Reformatting a 3995 Optical Disk" on page 319.

```
//OAMUTIL  JOB CLASS=A,MSGCLASS=H,MSGLEVEL=(1,1)
//*******************************************************************
//*                                                                 *
//*  $SEG(CBRSAMUT) COMP(LCS) PROD(OAM):                            *
//*                                                                 *
//*                                                                 *
//* This sample job provides examples of invoking OAMUTIL command   *
//*      processor to reformat the 3995 optical disk cartridge.     *
//*                                                                 *
//* Following are some examples:                                    *
//*                                                                 *
//* example #01- conditionally reformat one side:                   *
//*                                                                 *
//*             OAMUTIL REFORMAT oldvs1                             *
//*                                                                 *
//* example #02- conditionally reformat one side on a specific      *
//*              operator accessible drive:                         *
//*                                                                 *
//*             OAMUTIL REFORMAT oldvs1 DRIVENAME(P21D5)            *
//*                                                                 *
//* example #03- conditionally reformat one side and rename it      *
//*              to a new volume serial number:                     *
//*                                                                 *
//*             OAMUTIL REFORMAT oldvs1 NEWVOL1(newvs1)             *
//*                                                                 *
//* example #04- Conditionally reformat both sides:                 *
//*                                                                 *
//*             OAMUTIL REFORMAT oldvs1 BOTH                        *
//*                                                                 *
//* example #05- Conditionally reformat both sides and              *
//*              return them to SCRATCH storage group:              *
//*                                                                 *
//*             OAMUTIL REFORMAT oldvs1 BOTH SCRATCH                *
//*                                                                 *
//* example #06- Conditionally reformat both sides on               *
//*              a specific operator accessible drive:              *
//*                                                                 *
//*             OAMUTIL REFORMAT oldvs1 BOTH DRIVENAME(P52D1)       *
//*                                                                 *
//* example #07- Conditionally reformat both sides and              *
//*              rename them to new volume serial numbers:          *
//*                                                                 *
//*             OAMUTIL REFORMAT oldvs1 BOTH NV1(newvs1) NV2(newvs2)  *
//*                                                                 *
//* example #08- Conditionally reformat both sides,                 *
//*              return them to SCRATCH storage group, and          *
//*              rename them to new volume serial numbers:          *
//*                                                                 *
//*             OAMUTIL REFORMAT oldvs1 BOTH NV1(newvs1)          + *
//*                                          NV2(newvs2) SCRATCH    *
//*                                                                 *
//* example #09- Conditionally reformat both sides on               *
//*              a specific operator accessible drive,              *
//*              return them to SCRATCH storage group, and          *
//*              rename them to new volume serial numbers:          *
//*                                                                 *
//*             OAMUTIL REFORMAT oldvs1 BOTH NV1(newvs1)          + *
//*                                      NV2(newvs2) D(P52D1) SCRATCH  *
//*                                                                 *
```

Figure 89. CBRSAMUT SAMPLIB Member (Part 1 of 2)

```
//* example #10- Unconditionally reformat one side:                  *
//*                                                                  *
//*             OAMUTIL REFORMAT oldvs1 FORCE                        *
//*                                                                  *
//* example #11- Unconditionally reformat one side on a specific     *
//*              operator accessible drive:                          *
//*                                                                  *
//*             OAMUTIL REFORMAT oldvs1 DRIVENAME(P21D5) FORCE       *
//*                                                                  *
//* example #12- Unconditionally reformat one side and rename it     *
//*              to a new volume serial number:                      *
//*                                                                  *
//*             OAMUTIL REFORMAT oldvs1 NEWVOL1(newvs1) FORCE        *
//*                                                                  *
//* example #13- Unconditionally reformat both sides:                *
//*                                                                  *
//*             OAMUTIL REFORMAT oldvs1 BOTH FORCE                   *
//*                                                                  *
//* example #14- Unconditionally reformat both sides and             *
//*              return them to SCRATCH storage group:               *
//*                                                                  *
//*             OAMUTIL REFORMAT oldvs1 BOTH SCRATCH FORCE           *
//*                                                                  *
//* example #15- Unconditionally reformat both sides on              *
//*              a specific operator accessible drive:               *
//*                                                                  *
//*             OAMUTIL REFORMAT oldvs1 BOTH DRIVENAME(P52D1) FORCE  *
//*                                                                  *
//* example #16- Unconditionally reformat both sides and             *
//*              rename them to new volume serial numbers:           *
//*                                                                  *
//*       OAMUTIL REFORMAT oldvs1 BOTH NV1(newvs1) NV2(newvs2) FORCE *
//*                                                                  *
//* example #17- Unconditionally reformat both sides,                *
//*              return them to SCRATCH storage group, and           *
//*              rename them to new volume serial numbers:           *
//*                                                                  *
//*             OAMUTIL REFORMAT oldvs1 BOTH NV1(newvs1)           + *
//*                                      NV2(newvs2) SCRATCH FORCE *
//*                                                                  *
//*                                                                  *
//* PRIOR TO EXECUTING THIS JOB YOU MAY NEED TO MAKE THE FOLLOWING   *
//* MODIFICATIONS:                                                   *
//*                                                                  *
//*  1. CHANGE THE JOB CARD PER YOUR INSTALLATION REQUIREMENTS.      *
//*                                                                  *
//*  2. CHANGE THE VOLUME SERIAL NUMBER(S), OPERATOR ACCESSIBLE       *
//*     DRIVE  TO CONFORM TO YOUR INSTALLATION REQUIREMENTS.         *
//*                                                                  *
//*******************************************************************
//STEP1    EXEC PGM=IKJEFT01,REGION=4096K
//SYSPRINT DD   SYSOUT=*
//SYSTSPRT DD   SYSOUT=*
//SYSTSIN  DD   *
 OAMUTIL REFORMAT oldvs1 NV1(newvs1)
 OAMUTIL REFORMAT oldvs1 BOTH NV1(newvs1) NV2(newvs2) D(P52D1)
 OAMUTIL REFORMAT oldvs1                                          +
                  NV1(newvs1) NV2(newvs2) D(P21D5) SCRATCH FORCE
/*
```

Figure 89. CBRSAMUT SAMPLIB Member (Part 2 of 2)

Automatic Class Selection

SAMPLIB members CBRHSC, CBRHMC, and CBRHSG are sample automatic class selection routines for the OAM environments.

CBRHSC

SAMPLIB member CBRHSC, as shown in Figure 90, provides a storage class ACS routine for STORE, CHANGE, and CTRANS.

```
/*********************************************************************/
/*                                                                   */
/* $SEG(CBRHSC) COMP(OSMC) PROD(OAM):                                */
/*                                                                   */
/* OAM Sample Storage Class ACS Routine                              */
/*                                                                   */
/* FUNCTION:SUPPLY A STORAGE CLASS FOR OAM OBJECTS                   */
/*                                                                   */
/* OPERATION:Supply a storage class for the following environments:  */
/*                                                                   */
/*              STORE   - Assign initial storage class of DASD or    */
/*                        optical library based on collection name.  */
/*              CHANGE  - The storage class of an object has been    */
/*                        requested to change.                       */
/*              CTRANS  - The object is moved in the hierarchy       */
/*                        according to management class.             */
/*                                                                   */
/* NOTES:    In this implementation, the collection name is used as  */
/*            the basis for determining whether explicit values will */
/*            be considered. This approach and all of the processing */
/*            indicated below is one of many differing possibilities */
/*            and is only for purposes of illustration to demonstrate*/
/*            the types of processing that can be accomplished in an */
/*            ACS routine. Actual implementations will vary.         */
/*                                                                   */
/* ASSUMPTIONS:                                                      */
/*   Collection name format                                          */
/*     CLLCT0mn                                                      */
/*       where m = 0 or 1 (0 indicates that explicit values will be  */
/*                         ignored, 1 indicates that explicit values */
/*                         are considered in some cases and may      */
/*                         result in an override)                    */
/*       where n = 0 - 9                                             */
/*   Object name format - has 5 levels as follows:                   */
/*     xxxx.xxx.xxxxxxxx.xxxxxxx.xxx                                 */
/*   Valid storage classes:                                          */
/*     DB2DASD  - DASD                                               */
/*     OLIBRARY - optical                                            */
/*     TAPESC   - tape                                               */
/*                                                                   */
```

Figure 90. CBRHSC SAMPLIB Member (Part 1 of 5)

```
/*********************************************************************/
/*            L O G I C       O V E R V I E W                        */
/*                                                                   */
/* If STORE environment                                              */
/* | If object name not specified (i.e. this is an invocation for   */
/* | the entire collection)                                         */
/* | | Select                                                        */
/* | | When the collection is in the set that we are defining to     */
/* | | allow overrides                                               */
/* | | | If storage class specified is not 'OLIBRARY'               */
/* | | | | Set the storage class to 'DB2DASD'                       */
/* | | | Endif                                                       */
/* | | When the collection is in the set that we are defining to     */
/* | | not allow overrides                                           */
/* | | | Set the storage class to 'OLIBRARY'                       */
/* | | Otherwise                                                     */
/* | | | Set error code                                            */
/* | | End                                                           */
/* | Else (an object name was specified)                           */
/* | | Select                                                        */
/* | | When the collection is in the set that we are defining to     */
/* | | allow overrides                                               */
/* | | | If storage class specified is not 'OLIBRARY'               */
/* | | | | Set the storage class to 'DB2DASD'                       */
/* | | | Endif                                                       */
/* | | When the collection is in the set that we are defining to     */
/* | | not allow overrides                                           */
/* | | | If the object name has exactly 5 levels and the 5th       */
/* | | | level indicates that the object should have a particular  */
/* | | | storage class                                             */
/* | | | | Set the storage class to 'DB2DASD'                      */
/* | | | Else                                                        */
/* | | | | Set the storage class to 'OLIBRARY'                     */
/* | | | Endif                                                       */
/* | | Otherwise                                                     */
/* | | | Set error code                                            */
/* | | End                                                           */
/* | Endif (object name specified)                                 */
/* Endif (STORE environment)                                         */
/*                                                                   */
/*                                                                   */
/* If CHANGE environment                                             */
/* | If the storage class specified is not a valid storage class   */
/* | | Set error code                                              */
/* | Endif                                                         */
/* Endif (CHANGE environment)                                        */
/*                                                                   */
/*                                                                   */
/* If CLASS_TRANSITION environment                                   */
/* | Select                                                          */
/* | When storage class is 'DB2DASD'                                 */
/* | | Set storage class to 'OLIBRARY'                               */
/* | When storage class is 'OLIBRARY'                                */
/* | | Set storage class to 'TAPESC'                                 */
/* | Otherwise                                                       */
/* | | Set error code                                              */
/* | End                                                             */
/* Endif                                                             */
```

Figure 90. CBRHSC SAMPLIB Member (Part 2 of 5)

```
/*********************************************************************/
/*      S T O R A G E    C L A S S   D E F I N I T I O N S           */
/*                                                                   */
/*Relevant                                                           */
/*Fields    DB2DASD OLIBRARY TAPESC                                  */
/*--------- ------- -------- -------                                 */
/*INITIAL                                                            */
/*ACCESS                                                             */
/*RESPONSE                                                           */
/*SECONDS       0      20      900                                   */
/*                                                                   */
/*SUSTAINED                                                          */
/*DATA                                                               */
/*RATE         n/a      1        3                                   */
/*                                                                   */
/*********************************************************************/


PROC STORCLAS                          /* Select a storage class     */

  FILTLIST BLANK    INCLUDE ('        ','')

/*********************************************************************/
/* STORE                                                             */
/*********************************************************************/
 IF &ACSENVIR = 'STORE' THEN           /* Object is being stored     */
   IF &MEMN = &BLANK THEN              /* If the object name is not
                                          specified (i.e. indicating
                                          an invocation for the entire
                                          collection)                */
     SELECT
     WHEN (&DSN = 'CLLCT010' | &DSN = 'CLLCT011' | &DSN = 'CLLCT012'
         | &DSN = 'CLLCT013' | &DSN = 'CLLCT014' | &DSN = 'CLLCT015'
         | &DSN = 'CLLCT016' | &DSN = 'CLLCT017' | &DSN = 'CLLCT018'
         | &DSN = 'CLLCT019')          /* For the collections which
                                          allow overrides            */
       IF &STORCLAS ¬= 'OLIBRARY' THEN /* If the storage class
                                          specified is not the one
                                          explicit storage class value
                                          that is considered valid
                                          for these collections      */
         SET &STORCLAS = 'DB2DASD'     /* Set the storage class to the
                                          desired value for these
                                          collections                */
     WHEN (&DSN = 'CLLCT000' | &DSN = 'CLLCT001' | &DSN = 'CLLCT002'
         | &DSN = 'CLLCT003' | &DSN = 'CLLCT004' | &DSN = 'CLLCT005'
         | &DSN = 'CLLCT006' | &DSN = 'CLLCT007' | &DSN = 'CLLCT008'
         | &DSN = 'CLLCT009')          /* For the collections which
                                          do not allow overrides     */
       SET &STORCLAS = 'OLIBRARY'      /* Set the storage class to the
                                          desired value for these
                                          collections                */
     OTHERWISE                         /* Otherwise the collection name
                                          is invalid                 */
       EXIT CODE(10)                   /* Indicate that an error
                                          occurred                   */
     END                               /* Select                     */
```

Figure 90. CBRHSC SAMPLIB Member (Part 3 of 5)

```
  ELSE                              /* If the object name is
                                       specified (i.e. indicating
                                       an invocation for the
                                       specific collection)      */
    SELECT
    WHEN (&DSN = 'CLLCT010' | &DSN = 'CLLCT011' | &DSN = 'CLLCT012'
        | &DSN = 'CLLCT013' | &DSN = 'CLLCT014' | &DSN = 'CLLCT015'
        | &DSN = 'CLLCT016' | &DSN = 'CLLCT017' | &DSN = 'CLLCT018'
        | &DSN = 'CLLCT019')        /* For the collections which
                                       allow overrides           */
      IF &STORCLAS ¬= 'OLIBRARY' THEN /* If the storage class
                                       specified is not the one
                                       explicit storage class value
                                       that is considered valid
                                       for these collections     */
        SET &STORCLAS = 'DB2DASD'    /* Set the storage class to the
                                       desired value for these
                                       collections               */
    WHEN (&DSN = 'CLLCT000' | &DSN = 'CLLCT001' | &DSN = 'CLLCT002'
        | &DSN = 'CLLCT003' | &DSN = 'CLLCT004' | &DSN = 'CLLCT005'
        | &DSN = 'CLLCT006' | &DSN = 'CLLCT007' | &DSN = 'CLLCT008'
        | &DSN = 'CLLCT009')        /* For the collections which
                                       do not allow overrides    */
      IF &MEMN = *.*.*.*.DZX THEN    /* If the object name contains
                                       a value indicating that this
                                       object should be treated
                                       differently than the
                                       other objects in these
                                       collections               */
        SET &STORCLAS = 'DB2DASD'    /* Set the storage class to the
                                       desired value for these
                                       objects that are treated
                                       differently               */
      ELSE                          /* Otherwise there is nothing
                                       special about this object
                                       name                      */
        SET &STORCLAS = 'OLIBRARY'   /* Set the storage class to the
                                       desired value for the objects
                                       in these collections      */
    OTHERWISE                       /* Otherwise the collection name
                                       is invalid                */
      EXIT CODE(11)                 /* Indicate that an error
                                       occurred                  */
    END                             /* Select                    */

/*********************************************************************/
/* CHANGE                                                            */
/*********************************************************************/
 IF &ACSENVIR = 'CHANGE' THEN       /* Object is being changed   */
   IF &STORCLAS ¬= 'DB2DASD'  AND
      &STORCLAS ¬= 'OLIBRARY' AND
      &STORCLAS ¬= 'TAPESC'  THEN   /* If the storage class specified
                                       is not a storage class that
                                       is considered valid       */
       EXIT CODE(12)                /* Indicate that an error
                                       occurred                  */
```

Figure 90. CBRHSC SAMPLIB Member (Part 4 of 5)

```
/*********************************************************************/
/* CLASS TRANSITION                                                  */
/*********************************************************************/
 IF &ACSENVIR = 'CTRANS' THEN          /* Object is being processed
                                          as a result of a class
                                          transition               */
   SELECT (&STORCLAS)

   WHEN ('DB2DASD')                    /* If current storage class
                                          indicates that object is on
                                          DASD                     */
     SET &STORCLAS = 'OLIBRARY'        /* Set storage class to indicate
                                          that the object should reside
                                          on optical               */
   WHEN ('OLIBRARY')                   /* If current storage class
                                          indicates that object is on
                                          optical                  */
     SET &STORCLAS = 'TAPESC'          /* Set storage class to indicate
                                          that the object should reside
                                          on tape                  */

   OTHERWISE                           /* Otherwise the storage class
                                          is invalid               */
     EXIT CODE(13)                     /* Indicate that an error
                                          occurred                 */
   END
END
```

Figure 90. CBRHSC SAMPLIB Member (Part 5 of 5)

CBRHMC

SAMPLIB member CBRHMC provides a management class ACS routine for OAM objects.

```
/*********************************************************************/
/*                                                                   */
/* $SEG(CBRHMC) COMP(OSMC) PROD(OAM):                                */
/*                                                                   */
/* OAM Sample Management Class ACS Routine                           */
/*                                                                   */
/* FUNCTION:SUPPLY A MANAGEMENT CLASS FOR OAM OBJECTS                */
/*                                                                   */
/*  OPERATION:Supply a management class for the following            */
/*             environments:                                         */
/*                                                                   */
/*               STORE   - Assign an initial management class based  */
/*                         on collection name and/or object name     */
/*                         and/or storage class.                     */
/*               CHANGE  - Validate a request to change the          */
/*                         management class for an object.           */
/*               CTRANS  - The object is moved in the hierarchy      */
/*                         according to its previous management      */
/*                         class.                                    */
/*                                                                   */
/* NOTES:    In this implementation, the collection name is used as  */
/*            the basis for determining whether explicit values will */
/*            be considered. This approach and all of the processing */
/*            indicated below is one of many differing possibilities */
/*            and is only for purposes of illustration to demonstrate*/
/*            the types of processing that can be accomplished in an */
/*            ACS routine. Actual implementations will vary.         */
/*                                                                   */
/* ASSUMPTIONS:                                                      */
/*   Collection name format                                          */
/*     CLLCT0mn                                                      */
/*       where m = 0 or 1 (0 indicates that explicit values will be  */
/*                         ignored, 1 indicates that explicit values */
/*                         are considered in some cases and may      */
/*                         result in an override)                    */
/*       where n = 0 - 9                                             */
/*   Object name format - has 5 levels as follows:                   */
/*     xxxx.xxx.xxxxxxxx.xxxxxxx.xxx                                 */
/*   Valid storage classes:                                          */
/*     DB2DASD  - DASD                                               */
/*     OLIBRARY - optical                                            */
/*     TAPESC   - Tape                                               */
/*   Valid management classes:                                       */
/*     MAGONLY  - 30 days on DASD, then expire                       */
/*     MAG30D   - 30 days on DASD, then transition                   */
/*     MAG30LIB - 6 months on optical, then transition               */
/*     TAPSEVEN - 7 years on tape, then expire                       */
/*     OPT6D    - 0 days on DASD, then transition                    */
/*     OPT6LIB  - 6 months on optical, then transition               */
/*     OPTTAPE  - 7 years on tape, the expire                        */
/*                                                                   */
```

Figure 91. CBRHMC SAMPLIB Member (Part 1 of 8)

```
/*********************************************************************/
/*            L O G I C       O V E R V I E W                        */
/*                                                                   */
/* If STORE environment                                              */
/* | If object name not specified (i.e. this is an invocation for   */
/* | the entire collection)                                         */
/* | | Select                                                        */
/* | | When the collection is in the set that we are defining to     */
/* | | allow overrides                                               */
/* | | | Select                                                      */
/* | | | When the storage class is 'DB2DASD' (i.e. DASD)             */
/* | | | | If management class specified is not 'MAGONLY'           */
/* | | | | | Set the management class to 'MAG30D'                   */
/* | | | | Endif                                                     */
/* | | | When the storage class is 'OLIBRARY' (i.e. Optical)         */
/* | | | | Set the management class to 'OPT6D'                     */
/* | | | Otherwise                                                   */
/* | | | | Set error code                                          */
/* | | | End                                                         */
/* | | When the collection is in the set that we are defining to     */
/* | | not allow overrides                                           */
/* | | | Select                                                      */
/* | | | When the storage class is 'DB2DASD' (i.e. DASD)             */
/* | | | | Set the management class to 'MAG30D'                    */
/* | | | When the storage class is 'OLIBRARY' (i.e. Optical)         */
/* | | | | Set the management class to 'OPT6D'                     */
/* | | | Otherwise                                                   */
/* | | | | Set error code                                          */
/* | | | End                                                         */
/* | | Otherwise                                                     */
/* | | | Set error code                                            */
/* | | End                                                           */
/* | Else (an object name was specified)                           */
/* | | Select                                                        */
/* | | When the collection is in the set that we are defining to     */
/* | | allow overrides                                               */
/* | | | If the object name has exactly 5 levels and the 5th       */
/* | | | level indicates that the object may have the management    */
/* | | | class overridden and the storage class is 'DB2DASD'       */
/* | | | | If management class specified is not 'MAGONLY'          */
/* | | | | | Set the management class to 'MAG30D'                  */
/* | | | | Endif                                                   */
/* | | | Else                                                      */
/* | | | | Select                                                  */
/* | | | | When the storage class is 'DB2DASD' (i.e. DASD)         */
/* | | | | | Set the management class to 'MAG30D'                  */
/* | | | | When the storage class is 'OLIBRARY' (i.e. Optical)     */
/* | | | | | Set the management class to 'OPT6D'                   */
/* | | | | Otherwise                                               */
/* | | | | | Set error code                                      */
/* | | | | End                                                     */
/* | | | Endif                                                     */
/* | | When the collection is in the set that we are defining to     */
/* | | not allow overrides                                           */
/* | | | Select                                                      */
/* | | | When the storage class is 'DB2DASD' (i.e. DASD)             */
/* | | | | Set the management class to 'MAG30D'                    */
/* | | | When the storage class is 'OLIBRARY' (i.e. Optical)         */
/* | | | | Set the management class to 'OPT6D'                     */
/* | | | Otherwise                                                   */
/* | | | | Set error code                                          */
/* | | | End                                                         */
/* | | Otherwise                                                     */
/* | | | Set error code                                            */
/* | | End                                                           */
/* | Endif (object name specified)                                 */
/* Endif (STORE environment)                                         */
/*                                                                   */
```

Figure 91. CBRHMC SAMPLIB Member (Part 2 of 8)

```
/*                                                                   */
/* If CHANGE environment                                             */
/* | Select                                                          */
/* | When storage class is 'DB2DASD'                                 */
/* | | If management class is not 'MAGONLY' or 'MAG30D'              */
/* | | | Set management class to 'MAG30D'                           */
/* | | Endif                                                         */
/* | When storage class is 'OLIBRARY'                                */
/* | | Set management class to 'OPT6LIB'                           */
/* | When storage class is 'TAPESC'                                  */
/* | | Set management class to 'OPTTAPE'                           */
/* | Otherwise                                                       */
/* | | Set error code                                              */
/* | End                                                             */
/* Endif (CHANGE environment)                                        */
/*                                                                   */
/*                                                                   */
/* If CLASS_TRANSITION environment                                   */
/* | Select                                                          */
/* | When storage class is 'OLIBRARY'                                */
/* | | Select                                                        */
/* | | When management class is 'OPT6D'                            */
/* | | | Set management class to 'OPT6LIB'                         */
/* | | When management class is 'MAG30D'                           */
/* | | | Set management class to 'MAG30LIB'                        */
/* | | Otherwise                                                     */
/* | | | Set error code                                            */
/* | | End                                                           */
/* | When storage class is 'TAPESC'                                  */
/* | | Select                                                        */
/* | | When management class is 'OPT6LIB'                          */
/* | | | Set management class to 'OPTTAPE'                         */
/* | | When management class is 'MAG30LIB'                         */
/* | | | Set management class to 'TAPSEVEN'                        */
/* | | Otherwise                                                     */
/* | | | Set error code                                            */
/* | | End                                                           */
/* | Otherwise                                                       */
/* | | Set error code                                              */
/* | End                                                             */
/* Endif                                                             */
/*********************************************************************/
/*  M A N A G E M E N T   C L A S S   D E F I N I T I O N S          */
/*                                                                   */
/*Relevant                                                           */
/*Fields    MAGONLY MAG30D  MAG30LIB TAPSEVEN OPT6D   OPT6LIB OPTTAPE*/
/*--------- ------- ------- -------- -------- ------- ------- -------*/
/*EXPIRE                                                             */
/*AFTER                                                              */
/*DAYS                                                               */
/*NON-USAGE NOLIMIT NOLIMIT NOLIMIT  NOLIMIT  NOLIMIT NOLIMIT NOLIMIT*/
/*                                                                   */
/*EXPIRE                                                             */
/*AFTER                                                              */
/*DATE/DAYS    30     2557    2557     2557     2557    2557    2557 */
/*                                                                   */
/*MAXIMUM                                                            */
/*RETENTION                                                          */
/*PERIOD       30   NOLIMIT NOLIMIT  NOLIMIT  NOLIMIT NOLIMIT NOLIMIT*/
/*                                                                   */
/*AUTO                                                               */
/*BACKUP      YES      NO      NO       NO       NO     YES      NO  */
/*                                                                   */
```

Figure 91. CBRHMC SAMPLIB Member (Part 3 of 8)

```
/*TIME                                                          */
/*SINCE                                                         */
/*CREATION                                                      */
/*YEARS        --      --      --       07       --      --      07  */
/*                                                              */
/*TIME                                                          */
/*SINCE                                                         */
/*CREATION                                                      */
/*MONTHS       --      --      06       --       --      06      --  */
/*                                                              */
/*TIME                                                          */
/*SINCE                                                         */
/*CREATION                                                      */
/*DAYS         --      30      --       --       00      --      --  */
/*                                                              */
/*****************************************************************/

PROC MGMTCLAS                          /* Select an Management class */

   FILTLIST BLANK   INCLUDE ('        ','')

/*****************************************************************/
/* STORE                                                         */
/*****************************************************************/
 IF &ACSENVIR = 'STORE' THEN           /* Object is being stored     */
   IF &MEMN = &BLANK THEN              /* If the object name is not
                                          specified (i.e. indicating
                                          an invocation for the entire
                                          collection)               */
     SELECT
     WHEN (&DSN = 'CLLCT010' | &DSN = 'CLLCT011' | &DSN = 'CLLCT012'
         | &DSN = 'CLLCT013' | &DSN = 'CLLCT014' | &DSN = 'CLLCT015'
         | &DSN = 'CLLCT016' | &DSN = 'CLLCT017' | &DSN = 'CLLCT018'
         | &DSN = 'CLLCT019')          /* For the collections which
                                          allow overrides           */
       SELECT (&STORCLAS)

       WHEN ('DB2DASD')                /* If current storage class
                                          indicates that object is on
                                          DASD                      */
         IF &MGMTCLAS ¬= 'MAGONLY' THEN /* If the specified management
                                          class value is not a valid
                                          override                  */
           SET &MGMTCLAS = 'MAG30D'    /* Set management class to
                                          indicate the DASD management
                                          specifications            */
       WHEN ('OLIBRARY')               /* If current storage class
                                          indicates that object is on
                                          optical                   */
         SET &MGMTCLAS = 'OPT6D'       /* Set management class to
                                          indicate the optical
                                          management specifications  */
       OTHERWISE                       /* Otherwise the storage class
                                          is invalid                */
         EXIT CODE(20)                 /* Indicate that an error
                                          occurred                  */
       END
```

Figure 91. CBRHMC SAMPLIB Member (Part 4 of 8)

```
   WHEN (&DSN = 'CLLCT000' | &DSN = 'CLLCT001' | &DSN = 'CLLCT002'
       | &DSN = 'CLLCT003' | &DSN = 'CLLCT004' | &DSN = 'CLLCT005'
       | &DSN = 'CLLCT006' | &DSN = 'CLLCT007' | &DSN = 'CLLCT008'
       | &DSN = 'CLLCT009')          /* For the collections which
                                        do not allow overrides     */
     SELECT (&STORCLAS)

     WHEN ('DB2DASD')                /* If current storage class
                                        indicates that object is on
                                        DASD                       */
       SET &MGMTCLAS = 'MAG30D'      /* Set management class to
                                        indicate the DASD management
                                        specifications             */
     WHEN ('OLIBRARY')               /* If current storage class
                                        indicates that object is on
                                        optical                    */
       SET &MGMTCLAS = 'OPT6D'       /* Set management class to
                                        indicate the optical
                                        management specifications  */
     OTHERWISE                       /* Otherwise the storage class
                                        is invalid                 */
       EXIT CODE(21)                 /* Indicate that an error
                                        occurred                   */
     END
   OTHERWISE                         /* Otherwise the collection name
                                        is invalid                 */
     EXIT CODE(22)                   /* Indicate that an error
                                        occurred                   */
   END                               /* Select                     */
 ELSE                                /* If the object name is
                                        specified (i.e. indicating
                                        an invocation for the
                                        specific collection)       */
   SELECT
   WHEN (&DSN = 'CLLCT010' | &DSN = 'CLLCT011' | &DSN = 'CLLCT012'
       | &DSN = 'CLLCT013' | &DSN = 'CLLCT014' | &DSN = 'CLLCT015'
       | &DSN = 'CLLCT016' | &DSN = 'CLLCT017' | &DSN = 'CLLCT018'
       | &DSN = 'CLLCT019')          /* For the collections which
                                        allow overrides            */
     IF &MEMN = *.*.*.*.IAX AND
        &STORCLAS = 'DB2DASD' THEN   /* If the object name contains
                                        a value indicating that this
                                        object should be treated
                                        differently than the
                                        other objects in these
                                        collections (i.e. only
                                        specific objects within
                                        these collections allow
                                        overrides) and the storage
                                        class indicates that the
                                        object is on DASD          */
       IF &MGMTCLAS ¬= 'MAGONLY' THEN /* If the specified management
                                        class value is not a valid
                                        override                   */
         SET &MGMTCLAS = 'MAG30D'    /* Set management class to
                                        indicate the DASD management
                                        specifications             */
       ELSE
         DO
         END
```

Figure 91. CBRHMC SAMPLIB Member (Part 5 of 8)

```
  ELSE                            /* Otherwise there is nothing
                                     special about this object
                                     name (i.e. so overrides
                                     will not be allowed)       */
    SELECT (&STORCLAS)

    WHEN ('DB2DASD')              /* If current storage class
                                     indicates that object is on
                                     DASD                       */
      SET &MGMTCLAS = 'MAG30D'    /* Set management class to
                                     indicate the DASD management
                                     specifications             */
    WHEN ('OLIBRARY')             /* If current storage class
                                     indicates that object is on
                                     optical                    */
      SET &MGMTCLAS = 'OPT6D'     /* Set management class to
                                     indicate the optical
                                     management specifications  */
    OTHERWISE                     /* Otherwise the storage class
                                     is invalid                 */
      EXIT CODE(23)               /* Indicate that an error
                                     occurred                   */
    END
  WHEN (&DSN = 'CLLCT000' | &DSN = 'CLLCT001' | &DSN = 'CLLCT002'
      | &DSN = 'CLLCT003' | &DSN = 'CLLCT004' | &DSN = 'CLLCT005'
      | &DSN = 'CLLCT006' | &DSN = 'CLLCT007' | &DSN = 'CLLCT008'
      | &DSN = 'CLLCT009')        /* For the collections which
                                     do not allow overrides     */
    SELECT (&STORCLAS)

    WHEN ('DB2DASD')              /* If current storage class
                                     indicates that object is on
                                     DASD                       */
      SET &MGMTCLAS = 'MAG30D'    /* Set management class to
                                     indicate the DASD management
                                     specifications             */
    WHEN ('OLIBRARY')             /* If current storage class
                                     indicates that object is on
                                     optical                    */
      SET &MGMTCLAS = 'OPT6D'     /* Set management class to
                                     indicate the optical
                                     management specifications  */
    OTHERWISE                     /* Otherwise the storage class
                                     is invalid                 */
      EXIT CODE(24)               /* Indicate that an error
                                     occurred                   */
    END
  OTHERWISE                       /* Otherwise the collection name
                                     is invalid                 */
    EXIT CODE(25)                 /* Indicate that an error
                                     occurred                   */
  END                             /* Select                     */
```

Figure 91. CBRHMC SAMPLIB Member (Part 6 of 8)

```
/*********************************************************************/
/* CHANGE                                                            */
/*********************************************************************/
 IF &ACSENVIR = 'CHANGE' THEN          /* Object is being changed    */
   SELECT (&STORCLAS)

   WHEN ('DB2DASD')                    /* If current storage class
                                          indicates that object is on
                                          DASD                       */
     IF &MGMTCLAS ¬= 'MAGONLY' AND
        &MGMTCLAS ¬= 'MAG30D' THEN     /* If the specified management
                                          class value is not a valid
                                          override                   */
       SET &MGMTCLAS = 'MAG30D'        /* Set management class to
                                          indicate the DASD management
                                          specifications             */
   WHEN ('OLIBRARY')                   /* If current storage class
                                          indicates that object is on
                                          optical                    */
     SET &MGMTCLAS = 'OPT6LIB'         /* Set management class to
                                          indicate the optical
                                          management specifications  */
   WHEN ('TAPESC')                     /* If current storage class
                                          indicates that object is on
                                          tape                       */
     SET &MGMTCLAS = 'OPTTAPE'         /* Set management class to
                                          indicate the tape
                                          management specifications  */
   OTHERWISE                           /* Otherwise the storage class
                                          is invalid                 */
     EXIT CODE(26)                     /* Indicate that an error
                                          occurred                   */
   END
/*********************************************************************/
/* CLASS TRANSITION                                                  */
/*********************************************************************/
 IF &ACSENVIR = 'CTRANS' THEN          /* Object is being processed
                                          as a result of a class
                                          transition                 */
   SELECT (&STORCLAS)

   WHEN ('OLIBRARY')                   /* If current storage class
                                          indicates that object is on
                                          optical                    */
     SELECT (&MGMTCLAS)

     WHEN ('OPT6D')                    /* If current management class
                                          indicates optical management
                                          specifications             */
       SET &MGMTCLAS = 'OPT6LIB'       /* Set management class to
                                          indicate the appropriate
                                          optical management
                                          specifications             */
     WHEN ('MAG30D')                   /* If current management class
                                          indicates DASD management
                                          specifications             */
       SET &MGMTCLAS = 'MAG30LIB'      /* Set management class to
                                          indicate the appropriate
                                          optical management
                                          specifications             */
     OTHERWISE                         /* Otherwise the management
                                          class is invalid           */
       EXIT CODE(27)                   /* Indicate that an error
                                          occurred                   */
     END
```

Figure 91. CBRHMC SAMPLIB Member (Part 7 of 8)

```
  WHEN ('TAPESC')                   /* If current storage class
                                       indicates that object is on
                                       tape                        */
    SELECT (&MGMTCLAS)

    WHEN ('OPT6LIB')                /* If current management class
                                       indicates optical management
                                       specifications              */
      SET &MGMTCLAS = 'OPTTAPE'     /* Set management class to
                                       indicate the appropriate
                                       tape management
                                       specifications              */
    WHEN ('MAG30LIB')               /* If current management class
                                       indicates optical management
                                       specifications              */
      SET &MGMTCLAS = 'TAPSEVEN'    /* Set management class to
                                       indicate the appropriate
                                       tape management
                                       specifications              */
    OTHERWISE                       /* Otherwise the management
                                       class is invalid            */
      EXIT CODE(28)                 /* Indicate that an error
                                       occurred                    */
    END
  OTHERWISE                         /* Otherwise the storage class
                                       is invalid                  */
    EXIT CODE(29)                   /* Indicate that an error
                                       occurred                    */
  END
END
```

Figure 91. CBRHMC SAMPLIB Member (Part 8 of 8)

CBRHSG

SAMPLIB member CBRHSG, as shown in Figure 92, provides a storage group ACS routines for OAM objects.

```
/*********************************************************************/
/*                                                                   */
/* $SEG(CBRHSG) COMP(OSMC) PROD(OAM):                                */
/*                                                                   */
/* OAM Sample Storage Group ACS Routine                              */
/*                                                                   */
/* FUNCTION:SUPPLY A STORAGE GROUP FOR OAM OBJECTS                   */
/*                                                                   */
/* OPERATION:Select a storage group based upon the collection name   */
/*           specified                                               */
/*                                                                   */
/* NOTES:    In this implementation, the collection name is used as  */
/*           the basis for determining whether explicit values will */
/*           be considered. This approach and all of the processing */
/*           indicated below is one of many differing possibilities */
/*           and is only for purposes of illustration to demonstrate*/
/*           the types of processing that can be accomplished in an */
/*           ACS routine. Actual implementations will vary.         */
/*                                                                   */
/* ASSUMPTIONS:                                                      */
/*   Collection name format                                          */
/*     CLLCT0mn                                                      */
/*       where m = 0 or 1 (0 indicates that explicit values will be  */
/*                         ignored, 1 indicates that explicit values */
/*                         are considered in some cases and may      */
/*                         result in an override)                    */
/*       where n = 0 - 9                                             */
/*   Valid storage groups:                                           */
/*     SGROUP00 - SGROUP09                                           */
/*                                                                   */
/*********************************************************************/
/*      S T O R A G E    G R O U P    D E F I N I T I O N S         */
/*                                                                   */
/*Relevant                                                           */
/*Fields    SGROUP00 SGROUP01 SGROUP02 SGROUP03 SGROUP04 SGROUP05    */
/*--------- -------- -------- -------- -------- -------- --------    */
/*SG                                                                 */
/*TYPE       OBJECT   OBJECT   OBJECT   OBJECT   OBJECT   OBJECT     */
/*                                                                   */
/*QUALIFIER  GROUP00  GROUP01  GROUP02  GROUP03  GROUP04  GROUP05    */
/*                                                                   */
/*CYCLE                                                              */
/*START        00       01       02       03       04       05      */
/*                                                                   */
/*CYCLE                                                              */
/*END          03       04       05       06       07       08      */
/*                                                                   */
/*LIBRARY                                                            */
/*NAMES       LIB1     LIB1     LIB1     LIB1     LIB1     LIB1      */
/*                             LIB2     LIB3     LIB2     LIB2      */
/*                                               LIB3     LIB3      */
/*                                                                   */
/*VOLUME                                                             */
/*FULL         32       32       32       32       32       32      */
/*                                                                   */
```

Figure 92. CBRHSG SAMPLIB Member (Part 1 of 3)

```
/*DRIVE                                                                 */
/*START       099      099      099      099      099      099       */
/*                                                                      */
/*WRITE                                                                 */
/*ERROR       YES      YES      YES      YES      YES      YES       */
/*                                                                      */
/*                                                                      */
/*                                                                      */
/*Relevant                                                              */
/*Fields    SGROUP06 SGROUP07 SGROUP08 SGROUP09                       */
/*--------- -------- -------- -------- --------                       */
/*SG                                                                    */
/*TYPE       OBJECT   OBJECT   OBJECT   OBJECT                         */
/*                                                                      */
/*                                                                      */
/*QUALIFIER  GROUP06  GROUP07  GROUP08  GROUP09                       */
/*                                                                      */
/*CYCLE                                                                 */
/*START        06       07       08       09                         */
/*                                                                      */
/*CYCLE                                                                 */
/*END          09       10       11       12                         */
/*                                                                      */
/*LIBRARY                                                               */
/*NAMES       LIB1     LIB1     LIB1     LIB1                         */
/*            LIB2     LIB2     LIB2     LIB2                         */
/*            LIB3     LIB3     LIB3     LIB3                         */
/*                                                                      */
/*VOLUME                                                                */
/*FULL         32       32       32       32                         */
/*                                                                      */
/*DRIVE                                                                 */
/*START       099      099      099      099                          */
/*                                                                      */
/*WRITE                                                                 */
/*ERROR       YES      YES      YES      YES                          */
/*                                                                      */
/************************************************************************/

 PROC STORGRP

 FILTLIST DSN_NAMES INCLUDE(CLLCT0%%)

 IF &DSN = &DSN_NAMES THEN             /* If the first 6 characters of
                                          the collection name are
                                          valid                       */
   IF &DSN ¬= ' ' THEN                 /* If the collection name is
                                          not blank (this test will
                                          always pass, but allows for
                                          the apparent assignment of
                                          the 'POOL' storage group
                                          which is a requirement of
                                          a storage group ACS
                                          routine)                    */
```

Figure 92. CBRHSG SAMPLIB Member (Part 2 of 3)

```
/*********************************************************************/
/* Map the collection name to a storage group, where the last digit  */
/* in the collection name corresponds to the last digit of the       */
/* storage group.                                                    */
/*********************************************************************/
     SELECT
     WHEN (&DSN = 'CLLCT000' | &DSN = 'CLLCT010')
       SET &STORGRP = 'SGROUP00'
     WHEN (&DSN = 'CLLCT001' | &DSN = 'CLLCT011')
       SET &STORGRP = 'SGROUP01'
     WHEN (&DSN = 'CLLCT002' | &DSN = 'CLLCT012')
       SET &STORGRP = 'SGROUP02'
     WHEN (&DSN = 'CLLCT003' | &DSN = 'CLLCT013')
       SET &STORGRP = 'SGROUP03'
     WHEN (&DSN = 'CLLCT004' | &DSN = 'CLLCT014')
       SET &STORGRP = 'SGROUP04'
     WHEN (&DSN = 'CLLCT005' | &DSN = 'CLLCT015')
       SET &STORGRP = 'SGROUP05'
     WHEN (&DSN = 'CLLCT006' | &DSN = 'CLLCT016')
       SET &STORGRP = 'SGROUP06'
     WHEN (&DSN = 'CLLCT007' | &DSN = 'CLLCT017')
       SET &STORGRP = 'SGROUP07'
     WHEN (&DSN = 'CLLCT008' | &DSN = 'CLLCT018')
       SET &STORGRP = 'SGROUP08'
     WHEN (&DSN = 'CLLCT009' | &DSN = 'CLLCT019')
       SET &STORGRP = 'SGROUP09'
     OTHERWISE
       EXIT CODE(30)
     END
   ELSE
     DO
       SET &STORGRP = 'POOL'
       EXIT CODE(31)
     END
 ELSE
   EXIT CODE(32)
 END
```

Figure 92. CBRHSG SAMPLIB Member (Part 3 of 3)

Appendix C. Understanding OAM Databases

OAM uses DB2 databases to store information about objects and to store the objects themselves. This appendix documents diagnosis and tuning information to help diagnose OAM problems. It contains information on DB2 databases and should be used only for diagnosis.

OAM uses the following DB2 databases:

- **Object Storage Databases**—Contain an object directory table and optional object storage tables.
- **Object Administration Database**—Contains the relationship between identifiers and the names of storage classes, management classes, and collections.
- **Optical Configuration Database**—Contains information about the optical hardware configuration and the optical disk volumes.

Object Storage Databases

The object storage databases are a set of DB2 databases containing two types of data:

- Descriptive information about objects
- Actual data for the objects stored at the DASD level of the OAM storage hierarchy

Each Object storage group has an object storage database.

Each object storage database contains tables for an object directory and object storage. The object directory table contains descriptive information about each object. Object storage tables contain the objects. A separate table space exists for each table. Each database has three required tables:

- An object directory table (contains descriptive information about objects)
- A 4 KB table (contains the data for small objects)
- A 32 KB table (contains the data for large objects)

LOB support requires the LOB storage structure in addition to the three tables mentioned above. The new structure stores object data that is greater than 32 KB or 32640 bytes for storage groups that are LOB enabled. The LOB storage structure consists of two tables:

- A LOB base table (resembles the 32 KB table with the addition of a ROWID column and changing the OTOBJ column datatype from 'long varchar' to BLOB.
- A LOB auxiliary table (contains the actual BLOB object represented by the OTOBJ column in the LOB base table).

Note: Reference to the LOB storage structure refers to both the LOB base table and the LOB auxiliary table.

OAM uses multiple object storage databases, each containing the three tables mentioned above. Table 53 shows the tables and table space names.

Table 53. Object Storage Database Naming Conventions

Database Name — hlq		
Table Name	**Table Space Name**	**Contents**

© Copyright IBM Corp. 1989, 2006

Table 53. Object Storage Database Naming Conventions (continued)

Database Name — hlq		
hlq.OSM_OBJ_DIR	OSMDTS	Object directory
hlq.OSM_04 KB_OBJ_TBL	OSMOTS04	Small objects
hlq.OSM_32 KB_OBJ_TBL	OSMOTS32	Large objects (LOB support enabled)
hlq.OSM_LOB_BASE_TBL	OSMLBTS	LOB base table
hlq.OSM_LOB_AUX_TBL	OTLOBAX1	Large objects (LOB support enabled)

Sample programs that define these databases and tables are shipped with OAM. You must update these programs to meet the requirements of your installation before they are run.

The tables defined by the storage administrator will not be used by OAM unless they are related to an Object storage group through the services of ISMF. This relationship results in the definition of the DASD level of the OAM hierarchy for the specified Object storage group, and the object directory for all levels of the object storage hierarchy in that storage group. (See Figure 93 on page 511.)

The object directory table from each three-table set contains an entry for each object stored in an Object storage group. The object itself might exist in one of the object storage tables on DASD or on optical disk.

Table indexes are necessary for performance. Within an Object storage group, the directory table has three indexes, and each object storage table has a single index. All indexes are unique. Indexes are searched in ascending sequence (ASC).

Note: You must calculate the space required for the indexes separately because it is not included in the directory and object field sizes outlined in each table.

Related reading: For the sample jobs CBRIALC0 and CBRISQL0, see Appendix B, "Sample Library Members," on page 429.

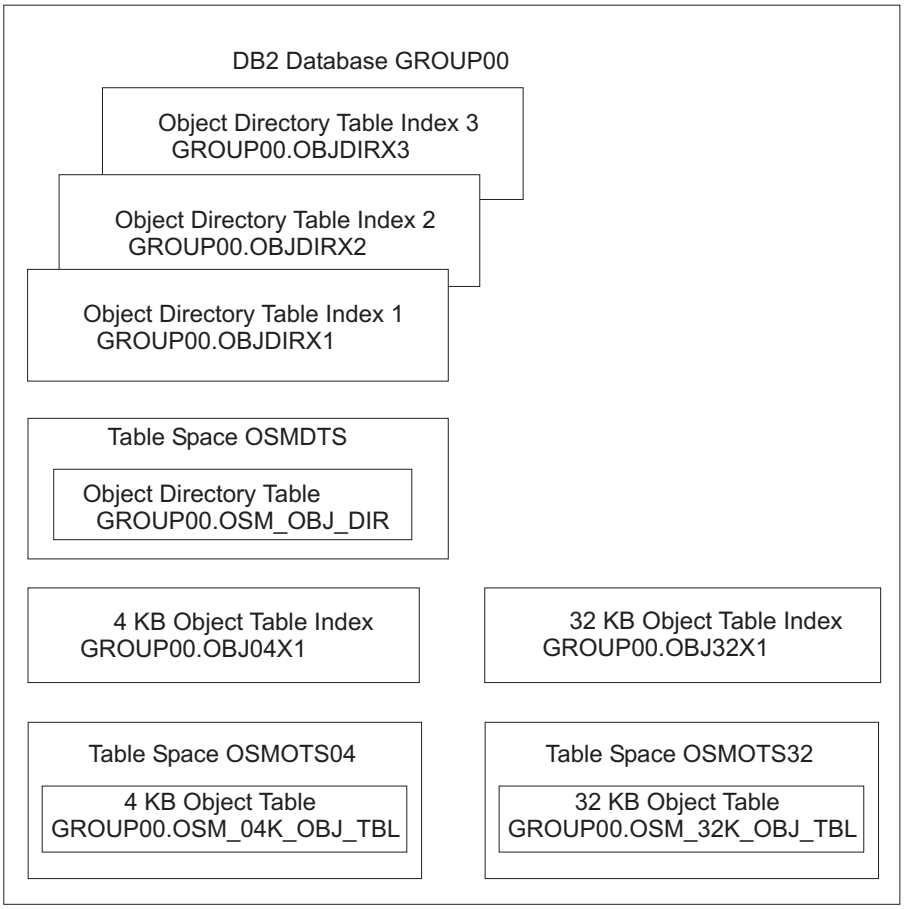

Figure 93. Object Storage Group Database Structure

Object Directory Tables

The object directory tables contain information about objects. OAM keeps track of all objects in the storage hierarchy by recording the collection name identifier, the object name, and other pertinent information in the object directory tables. The object directory tables contain entries for locating and describing objects in the storage hierarchy. OSR creates a directory entry for each object when the object is stored. OSMC uses the directory table to determine which objects need to be processed during each management cycle for an Object storage group.

Table 54 shows the fields for an entry in an object directory table.

The object directory table has three indexes:

- **Index 1**—Object Creation Time Stamp
- **Index 2**—Collection Name Identifier, Pending Action Date, and Object Creation Time Stamp
- **Index 3**—Object Name and Collection Name Identifier

Table 54. Object Directory Table

Column Description	Column Name	DB2 Field Type and Data Size	Indexes Where Used
Data Format Version	ODVER	CHAR (1)	

Table 54. Object Directory Table (continued)

Column Description	Column Name	DB2 Field Type and Data Size	Indexes Where Used
Object Size	ODSIZE	INTEGER	
Object Creation Time Stamp	ODCREATS	TIMESTAMP	Index 1, Index 2
Expiration Date	ODEXPDT	DATE	
Last Referenced Date	ODLREFDT	DATE	
Pending Action Date	ODPENDDT	DATE	Index 2
Management Class Assignment Date	ODMCASDT	DATE	
Storage Class Identifier	ODSCNUM	SMALLINT	
Management Class Identifier	ODMCNUM	SMALLINT	
Large Object Support Flag	ODLOBFL	CHAR (1)	
Object Location Flag	ODLOCFL	CHAR (1)	
Object Active Volume Serial Number	ODLSLOC	CHAR (6)	
Primary Copy Location Token	ODSECLOC	INTEGER	
Object Backup Volume Serial Number	ODBKLOC	CHAR (6)	
Backup Copy Location Token	ODBKSEC	INTEGER	
Second Backup Copy Volume Serial Number	ODBK2LOC	CHAR (6)	
Second Backup Copy Location Token	ODBK2SEC	INTEGER	
Collection Name Identifier	ODCLID	INTEGER	Index 2, Index 3
Object Name	ODNAME	VARCHAR (44)	Index 3

Note:
1. All columns are created with the NOT NULL attribute.
2. All indexes are unique by concatenation of identified columns.
3. All indexes are ordered in ascending value sequence.
4. Index 1 is a cluster index.
5. Maximum size of an object directory entry in bytes: 106.

Table 55 explains the column contents of an object directory table entry.

Table 55. Object Directory Table Field Contents

Column Description	Column Contents
Data Format Version	3
Object Size	Object size in bytes
Object Creation Time Stamp	Compressed form (DB2 format) (*yyyy.mm.dd-hh:mm:ss.mmmmmm*)

Table 55. Object Directory Table Field Contents (continued)

Column Description	Column Contents
Expiration Date	Compressed form (DB2 format) **0001-01-01** Use MC expiration *yyyy-mm-dd* Explicit expiration date **9999-12-31** Never expire
Last Referenced Date	Compressed form (DB2 format) Set to 0001-01-01 upon creation
Pending Action Date	Compressed form (DB2 format)
Management Class Assignment Date	Compressed form (DB2 format) Set to creation date on creation; otherwise, last date MC changed
Storage Class Identifier	Number identifying this storage class (associated with storage class name via Storage Class Identifier Table)
Management Class Identifier	Number identifying this management class (associated with management class name via Management Class Identifier Table)
Large Object Support Flag	Indicates whether this object resides in a LOB tablespace. Valid values are: • 'Blank' if ODLOCFL = 'D' or 'R', object currently resides in 4 KB or 32 KB data table; or if ODLOCFL = 'T', indicates that object resides on tape. • 'L' if ODLOCFL = 'D' or 'R', object currently resides in a LOB storage structure.
Object Location Flag	Blank—Optical copy T—Tape copy D—DASD copy R—Recalled state
Object Active Volume Serial Number	Standard MVS volume serial number (or blanks)
Primary Copy Location Token	If optical volume: Token for relative sector location (or zeros) of VTOC entry. If tape volume: Tape blockid
Object Backup Volume Serial Number	Standard MVS volume serial number (or blanks)
Backup Copy Location Token	If optical volume: Token for relative sector location (or zeros) of VTOC entry. If tape volume: Tape blockid.
Second Backup Copy Location Token	Volume serial number for the optical or tape volume that contains the second backup copy of the object in the corresponding row in the table.
Second Backup Copy Sector or Block ID	The optical volume sector location or the tape volume block ID on the volume in the ODBK2LOC field where the second backup copy of the object in the corresponding row in the table resides.
Collection Name Identifier	Number identifying the collection name (associated with collection name via Collection Name Identifier Table)

Table 55. Object Directory Table Field Contents (continued)

Column Description	Column Contents
Object Name	Standard MVS data set name.

Object Storage Tables

The object storage tables provide DASD storage for objects. Objects are stored in the 4 KB or 32 KB table or LOB storage structure, depending on size and whether or not LOB support is enabled. If an object is 3980 bytes or smaller, it is stored in the 4 KB table. If the object is larger than 3980 bytes but smaller or equal to 32640 bytes, it is stored in the 32 KB table. If the object is larger than 32640 bytes and LOB support is disabled, then it is stored in multiple rows in the 32 KB table. If the object is larger than 32640 bytes and LOB support is enabled, then it is stored in a LOB storage structure. Refer to "Changing System Libraries" on page 97 for more information on LOB support.

Objects stored in the 32 KB table might be broken into segments and stored as rows. Each row in the 32 KB table can contain up to 32 640 bytes of object data.

Table 56 shows the contents of an entry in a 4 KB or 32 KB object storage table.

Each object storage table has one index. The 4 KB table index is the concatenation of the collection name ID and object name in ascending-order sequence. The 32 KB table index is the concatenation of the collection name ID, object name and segment number in ascending-order sequence. When objects are retrieved, they are ordered by object segment number.

Table 56. Object Storage Table

Column Description	Column Name	DB2 Field Type and Data Size	Indexes Where Used
Data Format Version	OTVER	CHAR (1)	
Segment Number	OTSEG	SMALLINT	Index 1
Collection Name Identifier	OTCLID	INTEGER	Index 1
Object Name	OTNAME	VARCHAR (44)	Index 1
Object Data Segment	OTOBJ	LONG VARCHAR	

Note:
1. All columns are created with the NOT NULL attribute.
2. The object table columns are the same for the 4 KB and 32 KB tables.
3. Segment number is *not* used in the 4 KB table.
4. The index on each table is a unique cluster index.
5. Maximum sizes of object table entries:
   4 KB table is 3 980
   32 KB table is 32 640

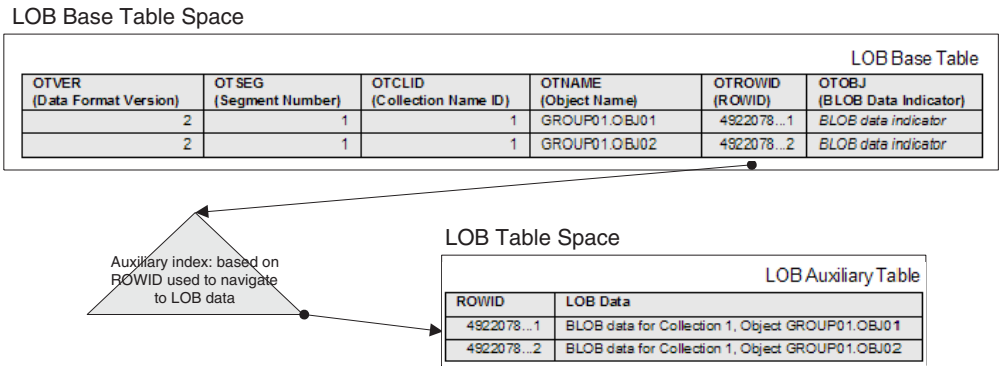

Figure 94. LOB Storage Structure

Table 57 shows the contents of an entry in a LOB storage table.

Table 57. LOB Storage Table

Column Description	Column Name	DB2 Field Type and Data Size	Indexes Where Used
Data Format Version	OTVER	CHAR (1)	
Segment Number	OTSEG	SMALLINT	
Collection Name Identifier	OTCLID	INTEGER	Index 1
Object Name	OTNAME	VARCHAR (44)	Index 1
Row ID	OTROWID	ROWID	
Object Data Segment	OTOBJ	BLOB(2G)	

Note:
1. All columns are created with the NOT NULL attribute.
2. The index on each table is a unique cluster index.
3. Maximum sizes of object table entries are 256 MB.
4. The LOB auxiliary table is managed exclusively by DB2 and is transparent to OAM.
5. Columns OTVER and OTSEG are reserved for future use.

Object Administration Database

Each object stored in the OAM storage hierarchy is part of a collection and is assigned a storage class and management class. These assignments are recorded in the object's directory entry. To conserve DASD space, OAM stores an identifier that represents those names instead of recording the names in each directory entry. OAM requires two tables to relate the identifiers to the storage class and management class names, and a third table to describe collections (see Figure 95 on page 516). Table 58 on page 516 through Table 66 on page 527 are used for diagnostic reference.

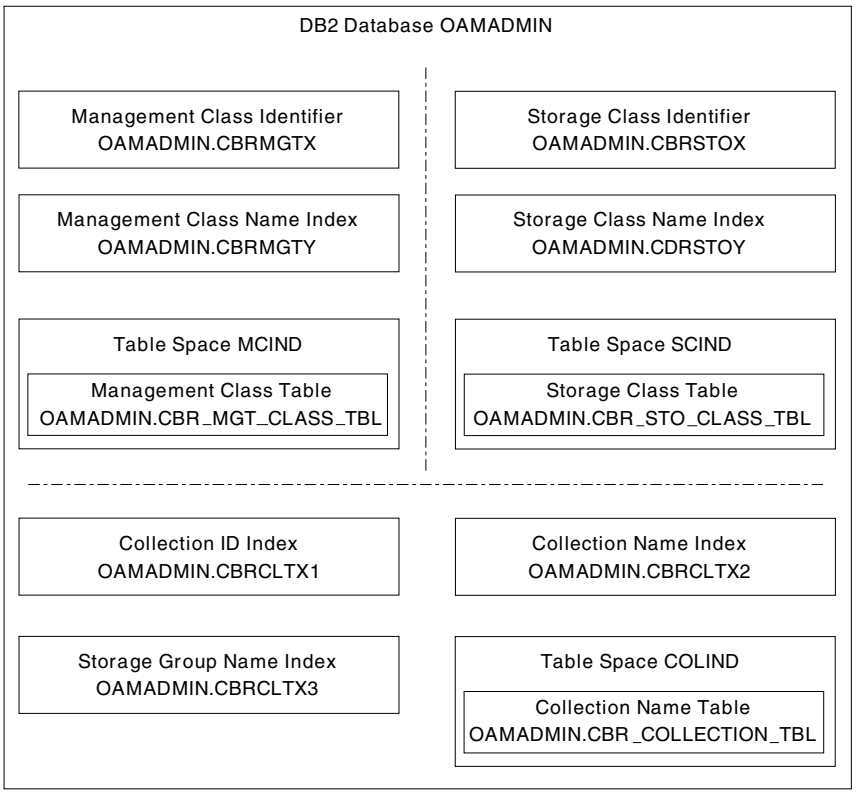

Figure 95. Object Administration Database Structure

Storage Class Identifier Table

Each object stored in the OAM storage hierarchy is assigned a storage class. This assignment is recorded in the object's directory entry as a storage class identifier. The storage class identifier table maps the identifier to the storage class name (see Table 58).

The storage class identifier table has one index: a unique, ascending cluster index on the storage class identifier.

Table 58. Storage Class Identifier Table

Column Description	Column Name	DB2 Field Type and Data Size	Max Byte	Index Structure
Storage Class Identifier	ODSCNUM	SMALLINT	(2)	Unique ASC
Storage Class Name	ODSCNAME	VARCHAR (30)	(32)	Unique ASC
Index Structure: ASC (ascending sequence)				

Management Class Identifier Table

Each object stored in the OAM storage hierarchy is assigned a management class. This assignment is recorded in the object's directory entry as a management class identifier. The management class identifier table maps the identifier to the management class name (see Table 59 on page 517).

The management class identifier table has one index: a unique, ascending cluster index on the management class identifier.

Table 59. Management Class Identifier Table

Column Description	Column Name	DB2 Field Type and Data Size	Max Byte	Index Definition
Management Class Identifier	ODMCNUM	SMALLINT	(2)	Unique ASC
Management Class Name	ODMCNAME	VARCHAR (30)	(32)	Unique ASC

Collection Name Identifier Table

Each object stored in the OAM storage hierarchy is a member of a collection. The name of the collection to which an object belongs is recorded in the object's directory entry as a collection name identifier. The collection name identifier table maps the identifier to the collection name (see Table 60). In addition, the collection name identifier table contains information about the storage class and management class for the collection and the name of the storage group that contains all members of the collection (see Table 61).

Table 60. Collection Name Identifier Table

Column Description	Column Name	DB2 Field Type and Data Size	Max Byte	Index Structure
Storage Class Name	ODCLSCNM	VARCHAR (30)	(32)	
Management Class Name	ODCLMCNM	VARCHAR (30)	(32)	
Directory Token (*)	ODCLSGNM	VARCHAR (30)	(32)	ASC
Collection Name Identifier (*)	ODCLID	INTEGER (4)	(4)	Unique ASC Cluster
Collection Name (*)	ODCLNAME	VARCHAR (44)	(46)	Unique ASC
Total Bytes per Table Entry	138	146		

Table 61. Collection Name Identifier Table Contents

Column Description	Contents
Storage Class Name	Default initial storage class for all objects in this collection (can be overridden by explicit storage class on OSREQ STORE)
Management Class Name	Default initial management class for all objects in this collection (can be overridden by explicit management class on OSREQ STORE)
Directory Token	Storage group name
Collection Name Identifier	Numeric index identifying the collection that includes this object (used to improve DASD space usage in object tables)
Collection Name	Standard MVS data set name

Optical Configuration Database

The optical configuration database (CBROAM) defines the optical hardware configuration and all of the optical volumes. It is a DB2 database and consists of the following tables:

- Library table (OLIBRARY)
- Drive table (DRIVE)

- Slot table (SLOT)
- Volume table (VOLUME)
- Deleted-Objects table (DELOBJT)
- Tape Volume table (TAPEVOL)

Figure 96 shows the organization of the optical configuration database. There are six table spaces, each containing a different table and its associated indexes.

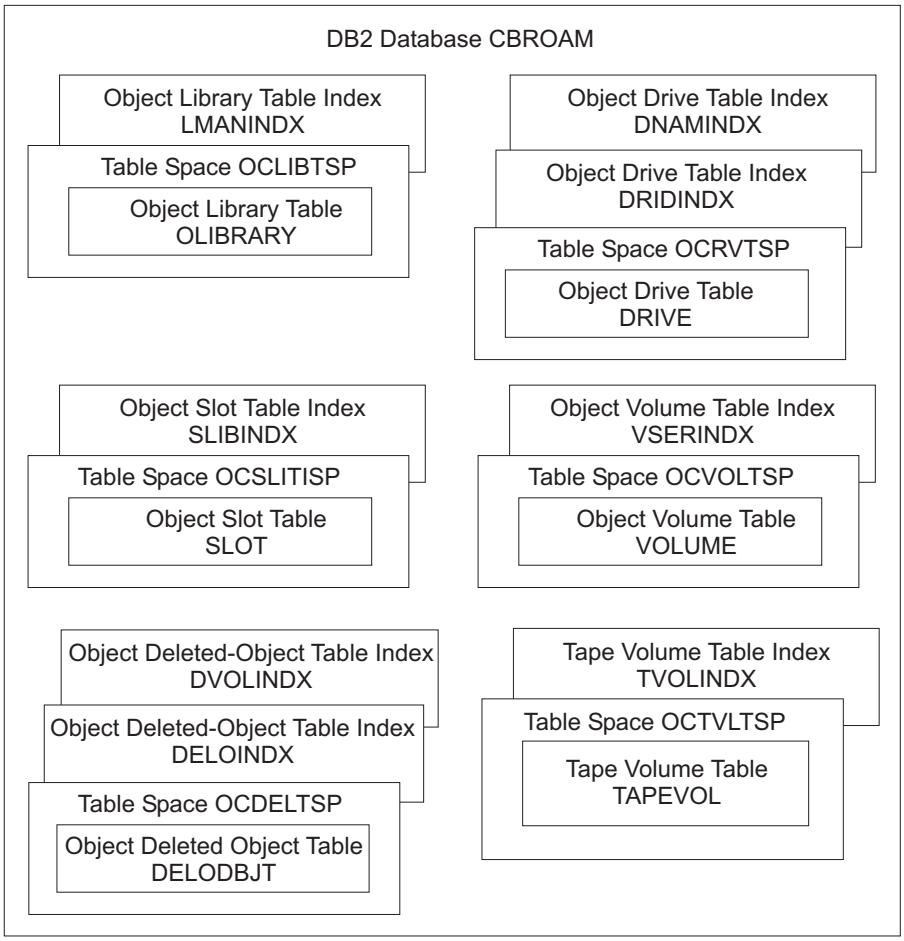

Figure 96. Optical Configuration Database

Table 62 on page 519, Table 63 on page 521, Table 64 on page 522, Table 65 on page 523, Table 66 on page 527, and Table 67 on page 528 describe the six tables in the optical configuration database. A description of special characteristics follows each table.

Each table is in its own table space and each table has at least one index.

Note: If DB2 searches a table without using an index, it must search the entire table space. Each table is within its own table space to decrease search time when an index is not used.

The deleted-objects table is used only with OAM rewritable media.

The following explains the information in the DB2 Attribute column of each figure:

NN This column is declared with the NOT NULL attribute. A value must be supplied.

NND This column is declared with the NOT NULL WITH DEFAULT attribute. If some other value is not given, the following DB2 data types and default values are supplied:

CHARACTER blanks
SMALLINT zero
INTEGER zero
DATE current date

The value column of each figure shows the columns that require specific values. When the value column contains any information other than blank, that column must contain a specific value. The possible values are listed in the value column. The explanations about each table define the specific values.

Library Table

The library table contains one row for each optical library. The DB2 name of the library table is OLIBRARY. The table is defined in table space OCLIBTSP. Table 62 describes the attributes of the columns in the OLIBRARY table. A row is inserted into the library table the first time that an optical library with a given name is defined using the ISMF Library Management application.

Table 62. Library Table Column Description

Column Description	Name	Index	DB2 Type	DB2 Attribute	Value	Report Label
Optical library name	NAME	U	CHAR(8)	NN		NAME
Online status	ONLINE		CHAR(1)	NN	Y|N	ONLINE
Operational status	OPERATNL		CHAR(1)	NN	Y|N	OPERATIONAL
Path status	PATHSTAT**		CHAR(1)	NN	P|A	CURRENT_PATH
Current command	COMMAND		CHAR(5)	NND		CURRENT_COMMAND
Primary CTC device number	PRIMCTC		CHAR(4)	NND		PRIMARY_CTC
Primary port	PRIMPORT**		CHAR(1)	NND		PRIMARY_PORT
Alternate CTC device number	ALTCTC		CHAR(4)	NND		ALTERNATE_CTC
Alternate port	ALTPORT**		CHAR(1)	NND		ALTERNATE_PORT
Fault code	FAULT**		CHAR(3)	NND		FAULT_CODE
Library type	OLIBTYPE		CHAR(1)	NN	P|R	LIBRARY_TYPE
Number of slots	NUMSLOTS		INTEGER	NND		SLOTS
Number of empty slots	NUMESLOT		INTEGER	NND		EMPTY_SLOTS
Number of drives	NUMDRVS		SMALLINT	NN		DRIVES
Current recovery command	RCOMMAND**		CHAR(5)	NND		RECOVERY_COMMAND
Device type	DEVTYPE		CHAR(8)	NND		DEVICE_TYPE
Library description	LIBRDES		CHAR(120)	NND		LIBRARY_ DESCRIPTION
Controlling Library	CLIBRARY		CHAR(8)	NND		CONTROLLING_LIBRARY
Default media type	MEDIATYP		CHAR(8)	NND		DEFAULT_MEDIA_TYPE

Table 62. Library Table Column Description (continued)

Column Description	Name	Index	DB2 Type	DB2 Attribute	Value	Report Label
Library index	LIBINDEX		SMALLINT	NND		LIBRARY_INDEX
OAM XCF member name	MEMBER		CHAR(16)	NND		OAM_XCF_MEMBER
Default pseudo library	PLIBRARY		CHAR(8)	NND		DEFAULT_PSEUDO_LIBRARY

The NAME column has a unique index. Therefore, each optical library defined in the library table must have a unique name.

The online status, operational status, path status, library type, and device type columns in the library table require specific values:

ONLINE Indicates the online status of the library to a specific system.
- **Y** Library is online to a system.
- **N** Library is offline to a system.

OPERATNL Indicates the operational status of the library.
- **Y** Library is operational.
- **N** Library is not operational.

PATHSTAT Indicates which path is being used.
- **P** Primary path is being used.
- **A** Alternate path is being used.

Note: If this is a pseudo library, the PATHSTAT column is blank. Path status does not apply to pseudo libraries.

OLIBTYPE Indicates the library type.
- **P** This is a pseudo library.
- **R** This is a real library.

DEVTYPE Indicates the device type associated with the library.
- **3995-111** This device is a 3995 Model 111.
- **3995-112** This device is a 3995 Model 112.
- **3995-113** This device is a 3995 Model 113.
- **3995-131** This device is a 3995 Model 131.
- **3995-132** This device is a 3995 Model 132.
- **3995-133** This device is a 3995 Model 133.
- **3995-SW3** This device is a 3995 Model SW3. Valid for pseudo libraries only.
- **3995-SW4** This device is a 3995 Model SW4. Valid for pseudo libraries only.
- **3995-C3A** This device is a 3995 Model C3A.
- **3995-C12** This device is a 3995 Model C12.
- **3995-C16** This device is a 3995 Model C16.
- **3995-C18** This device is a 3995 Model C18.
- **3995-C32** This device is a 3995 Model C32.
- **3995-C34** This device is a 3995 Model C34.
- **3995-C36** This device is a 3995 Model C36.
- **3995-C38** This device is a 3995 Model C38.

MEMBER The instance of OAM, to which the library is online, that is managing the library within the Parallel Sysplex.

PLIBRARY This is either the name of the default target pseudo library for volumes ejected from this library if the library is a real library type, or this field is blank.

Drive Table

The drive table contains one row for each optical drive, whether operator-accessible or library-resident. The DB2 name of the drive table is DRIVE. The table is defined in table space OCDRVTSP. Table 63 describes the attributes of the columns in the drive table. A row is inserted into the drive table the first time that an optical disk drive with a given name is defined using the ISMF Library Management application.

Table 63. Drive Table Column Description

Column Description	Name	Index	DB2 Type	DB2 Attribute	Value	Report Label
Optical drive name	NAME	U	CHAR(8)	NN		NAME
Optical library name	OLIBRARY		CHAR(8)	NN		OLIBRARY
CTC device number	CTC	P	CHAR(4)	NN		CTC
SCSI bus address	SCSI**	P	CHAR(1)	NN		SCSI
Logical unit number	LUN**	P	CHAR(1)	NN		LUN
Online status	ONLINE		CHAR(1)	NN	Y|N	ONLINE
Operational status	OPERATNL		CHAR(1)	NN	Y|N	OPERATIONAL
Library drive number	LDRIVENO		CHAR(1)	NND		DRIVE_NUMBER
Drive type	DRIVTYPE		CHAR(1)	NN	L|S	DRIVE_TYPE
Device type	DEVTYPE		CHAR(8)	NND		DEVICE_TYPE
Drive description	DRIVDES		CHAR(120)	NND		DRIVE_DESCRIPTION
Physical Drive Number	DRIVENUM		SMALLINT	NND		PHY_DRIVE_NUMBER
OAM XCF member name	MEMBER		CHAR(16)	NND		OAM_XCF_MEMBER
Note: **Applies only to 9247.						

The NAME column has a unique index. Therefore, each optical disk drive defined in the drive table must have a unique name.

The combination of CTC, SCSI, and LUN must be unique for each optical drive defined in the drive table, because there is a partitioned index on the CTC, SCSI, and LUN columns. CTC, SCSI, and LUN constitute the device address of the optical disk drive. This address is used by OAM to address the optical drive during I/O operations.

The online status, operational status, drive type, and device type columns in the drive table require specific values:

ONLINE Indicates whether the optical drive is online or offline to a particular system.

- **Y** The optical drive is online to a specific system.
- **N** The optical drive is offline to a specific system.

OPERATNL Indicates the operational status of the optical drive.

Y Optical drive is operational.
N Optical drive is not operational.

DRIVTYPE Indicates the type of optical drive.

L Optical drive is in a library.

S Optical drive is a operator-accessible (stand-alone).

DEVTYPE Indicates the device type of the optical disk drive.
3995-131 This device is a 3995 Model 131.
3995-132 This device is a 3995 Model 132.
3995-133 This device is a 3995 Model 133.
3995SW3 This device is a 3995 Model SW3.
3995SW4 This device is a 3995 Model SW4.

MEMBER The instance of OAM, to which the drive is online, that is managing the optical drive within the Parallel Sysplex.

Slot Table

The slot table contains one row for each slot in an optical library. The DB2 name of the slot table is SLOT. The table is defined in table space OCSLTTSP. The row for each slot gives the status of the slot. Also, a row exists for the optical library input/output station and the optical library cartridge access mechanism. Table 64 describes the attributes of the columns in the SLOT table.

Table 64. Slot Table Column Description

Column Description	Name	Index	DB2 Type	DB2 Attribute	Value	Report Label
Slot name	NAME	P	CHAR(3)	NN		NAME
Optical library name	OLIBRARY	P	CHAR(8)	NN		OLIBRARY
Occupied status	OCCUPIED		CHAR(1)	NN	Y|N	OCCUPIED
Operational status	OPERATNL		CHAR(1)	NN	Y|N	OPERATIONAL
Side 0 volume serial number	VOLSER0		CHAR(6)	NND		VOLSER0
Side 1 volume serial number	VOLSER1		CHAR(6)	NND		VOLSER1
Note: This table is not used for 3995 libraries.						

The combination of NAME and OLIBRARY must be unique for each slot defined in the slot table because there is a partitioned index on the NAME and OLIBRARY columns.

During OAM initialization, all necessary rows are inserted into the slot table based on the optical libraries defined in the library table.

The occupied status and operational status columns in the slot table require specific values:

OCCUPIED Indicates the status of the slot within the library.
Y Slot is occupied.
N Slot is not occupied.

OPERATNL Indicates the operational status of the slot within the library.
Y Slot is operational.
N Slot is not operational.

Volume Table

The volume table contains one row for each optical disk volume. The DB2 name of the volume table is VOLUME. The table is defined in table space OCVOLTSP. Table 65 describes the attributes of the columns in the volume table. Two rows are inserted into the volume table when the two optical volumes comprising an optical disk are identified to OAM. The two optical volumes are identified to OAM when the following conditions exist:

- The two volumes are labeled on an operator-accessible optical disk drive in response to an OAM LABEL command.
- The two volumes are labeled on a library-resident optical disk drive when the operator enters an unlabeled optical cartridge into the input/output station of an optical library.
- The two volumes comprising an already labeled, but unknown, optical cartridge are verified as part of the cartridge being entered into an optical library.

Should OAM discover minor discrepancies with the Volume table at initialization, the following recovery actions are automatically invoked to circumvent failure of the initialization:

- The row that is in error is skipped over, and a corresponding volume or tape volume control block is not built. A message is issued indicating the row that was skipped and the reason it was bypassed.
- The table row is corrected when a valid value is easily recognizable, and a message is issued stating the correction that is made by OAM and what steps can be taken if the correction is not acceptable to the customer.
- More detailed messages containing recovery actions are provided and issued during OAM initialization for database discrepancies.

Table 65. Volume Table Column Description

Column Description	Name	DB2 Type	DB2 Attribute	Value	Report Label
Volume serial number	VOLSER	CHAR(6)	NN		VOLSER
Other side VOLSER	OVOLSER	CHAR(6)	NN		OTHER_VOLSER
Location	LOCATION	CHAR(1)	NN	L|S	LOCATION
Slot name	SLOT[2]	CHAR(3)	NN		SLOT
Library name	OLIBRARY	CHAR(8)	NN		OLIBRARY
Shelf location	SHELFLOC	CHAR(32)	NND		SHELF_LOCATION
Last-mounted date	MNTDATE	DATE	NND		DATE_LAST_MOUNTED
Last-written date	WRTDATE	DATE	NND		DATE_LAST_WRITTEN
Expiration date	EXPDATE	DATE	NND		EXPIRATION_DATE
Eject/Enter date	EJECTDAT	DATE	NND		EJECT/ENTER_DATE
Address of last data sector	LASTDATA[2]	INTEGER	NN		LAST_DATA_SECTOR
Address of last logical OVTOC sector	LASTVTCL[2]	INTEGER	NN		LAST_LOGICAL_VTOC_SECTOR
Address of last physical OVTOC sector	LASTVTCP[2]	INTEGER	NN		LAST_PHYSICAL_VTOC_SECTOR

Table 65. Volume Table Column Description (continued)

Column Description	Name	DB2 Type	DB2 Attribute	Value	Report Label
Storage group name	VOLUMSET	CHAR(8)	NN		STORAGE_GROUP
Volume type	TYPE	CHAR(1)	NN	B|G|S	TYPE
Orientation	ORIENT[2]	CHAR(1)	NN	0|1	ORIENTATION
Full status	FULL	CHAR(1)	NN	Y|N	FULL
Readable	READABLE	CHAR(1)	NN	Y|N	VOLUME_READABLE_STATUS
Writable	WRITABLE	CHAR(1)	NN	Y|N	VOLUME_WRITABLE_STATUS
Write-protected status	WRTPROT	CHAR(1)	NN	Y|N	WRITE_PROTECTED
Owner information part	OWNERP	CHAR(1)	NND	1|2	OWNER_INFORMATION_POSITION
Owner information	OWNER	CHAR(32)	NND		OWNER_INFORMATION
Free space	FRESPACE	INTEGER	NND		FREE_SPACE
Deleted space	DELSPACE[1]	INTEGER	NND		DELETED_SPACE
Number of deleted objects	DELCOUNT[1]	INTEGER	NND		DELETED_OBJECTS
Fragmentation index	FRAGIDX[1]	SMALLINT	NND		FRAGMENTATION_INDEX
Media type	MEDIATYP	CHAR(2)	NND		MEDIA_TYPE
Volume creation date	CREDATE	DATE	NND		CREATE_DATE
Volume error status	ERRSTAT[3]	SMALLINT	NND		VOLUME_ERROR_STATUS
Volume empty	VOLEMPTY[1]	CHAR(1)		Y|N	VOLUME_EMPTY
Deleted objects recount	RECOUNT[1]	SMALLINT		0|1	DELETED_OBJECTS_ RECOUNT
Volume Capacity	CAPACITY	INTEGER	NND		CAPACITY
OAM XCF member name	MEMBER	CHAR(16)	NND		OAM_XCF_MEMBER
Pseudo library name	PLIBRARY	CHAR(8)	NND		PSEUDO_LIBRARY_FOR_VOLUME
Backup type	BKTYPE	CHAR(1)	NND	1|2|blank	BKTYPE

Note:

- [1] DELSPACE, DELCOUNT, FRAGIDX, VOLEMPTY, and RECOUNT apply only to OAM rewritable media.
- [3] Applies only to the 3995.

The VOLSER column has a unique index. Therefore, each optical disk volume defined in the volume table must have a unique volume serial number. The optical disk volume serial number must be unique across all types of media used by the installation. The optical disk volume serial number must not conflict with the volume serial number of a tape volume being used by OAM. The optical disk volume serial number must not conflict with the serial number of any SMS-managed DASD volume or any mounted non-SMS-managed DASD volume.

The columns labeled volume location, volume type, volume orientation, volume full, volume readable, volume writable, write-protected status, owner information position, media type, volume error status, volume empty, and deleted objects recount in the volume table require specific values:

VOLSER The volume serial number on one side of the optical disk.

OVOLSER The volume serial number on the opposite side of the optical disk.

LOCATION The location of the optical volume
- **L** This volume is in a library.
- **S** This volume is on the shelf.

SLOT The library slot location for the optical volume.

OLIBRARY The library name in which the volume resides.

SHELFLOC The shelf location of the shelf-resident optical volume.

MNTDATE The date that OAM last mounted the volume.

WRTDATE The date that OAM last wrote to the volume.

EXPDATE The expiration date of the volume. This date is the latest expiration date of all the objects that reside on the optical volume.

EJECTDAT This date is when the volume was last entered into or ejected out of the optical library.

LASTDATA The address of the last data sector on the optical volume. This field is not used for 3995 volumes.

LASTVTCL The address of the last logical optical VTOC sector on the optical volume. This field is not used for 3995 volumes.

LASTVTCP The address of the last physical optical VTOC sector on the optical volume. This field is not used for 3995 volumes.

VOLUMESET The name of the storage group to which the optical volume is associated.

TYPE The type of the optical volume.
- **B** This is a BACKUP volume.
- **G** This is a GROUPED volume.
- **S** This is a SCRATCH volume.

FULL The capacity of the optical volume.
- **Y** This volume is full.
- **N** This volume is not full.

READABLE Specifies whether the optical volume is readable.
- **Y** This volume can be read.
- **N** This volume cannot be read.

WRITABLE Specifies whether the optical volume is writable.
- **Y** This volume can be written on.
- **N** This volume cannot be written on.

WRTPROT Specifies whether the optical volume is write-protected.
- **Y** This volume is write-protected.
- **N** This volume is not write-protected.

OWNERP Position of the owner information.
- **1** This is part 1 of the owner information.
- **2** This is part 2 of the owner information.

OWNER The volume owner information.

FRESPACE The available free space left for writing data, in kilobyte units (1 kilobyte = 1 024 bytes) on the optical volume.

DELSPACE The amount of deleted space on a rewritable optical disk.

DELCOUNT The amount of deleted objects marked for deletion from the rewritable optical disk.

FRAGIDX The fragmentation index on a rewritable optical disk.

MEDIATYP The media type of the optical volume.
01 3995 5.25-inch, single-density, rewritable volume
03 3995 5.25-inch, single-density, WORM volume
11 3995 5.25-inch, double-density, rewritable volume
13 3995 5.25-inch, double-density, WORM volume
15 3995 5.25-inch, double-density, CCW volume
21 3995 5.25-inch, quad-density, rewritable volume
23 3995 5.25-inch, quad-density, WORM volume
25 3995 5.25-inch, quad-density, CCW volume
31 3995 5.25-inch, 8*x*-density, rewritable volume
33 3995 5.25-inch, 8*x*-density, WORM volume
35 3995 5.25-inch, 8*x*-density, CCW volume

CREDATE The date the optical volume was created.

ERRSTAT The error status of the optical volume.
0 No error status. This is the initial setting.
101 This volume has an entry in the OCDB but AUDIT found no corresponding entry in the outboard inventory.
102 The cartridge is missing from its assigned slot in the library (empty slot found).
103 AUDIT found the wrong volser in the slot.
105 An error occurred when attempting to read the volume serial number while auditing a volume.
201 This volume has an entry in the OCDB but REMAP found no corresponding entry in the outboard inventory.

VOLEMPTY Specifies whether the optical volume can be erased.
Y This 3995 rewritable volume can be reformatted.
N This 3995 write-once-read-many volume cannot be erased.

RECOUNT Specifies whether a recount of the logically deleted objects, or a summing up of the available deleted kilobytes, is performed.
0 No recount of the number of logically deleted objects, or summing up of the available kilobytes that have been deleted, is performed.
1 A recount of the number of logically deleted objects, or summing up of the available kilobytes that have been deleted, is performed.

MEMBER Specifies the name of the OAM within a Parallel Sysplex that is managing this optical volume.

- For library-resident optical volumes, this member name is the equivalent of the member name for the library in which this volume resides if the library is online. This MEMBER field is blank if the library is offline.
- For shelf-resident optical volumes that are mounted on operator-accessible drives, this member name is the equivalent of

the member name for the operator-accessible drive (where the operator-accessible drive is online).

- For shelf-resident optical volumes that are not mounted on an operator-accessible drive, this member name is blank.

PLIBRARY The name of the pseudo library the volume is assigned to when it is no longer a library-resident volume.

- For shelf-resident optical volumes, this field value is the same as the OLIBRARY column in the DB2 row that represents the volume.
- For library-resident optical volumes the field value is either of the following values:
  - The pseudo library that the volume was associated with, if it was shelf-resident prior to being entered into the library
  - Blank if the volume was not shelf-resident prior to being entered into the library.

BKTYPE This indicates whether this volume is used for first or second backup copies of an object when the volume has a type of "B", which indicates that it is a backup volume belonging to an Object Backup storage group.

Deleted Objects Table

The deleted objects table contains one row for each object to be deleted. The name of the deleted objects table is DELOBJT. The table is defined in table space OCDELTSP. Table 66 describes the attributes of the columns in the deleted objects table.

The combination of the COLNAME, OBJNAME, VOLSER, and VTOCTOKN columns must be unique throughout the table. However, multiple entries in the table might have the same VOLSER number.

Table 66. Deleted Object Table Column Description

Column Description	Name	Index	DB2 Type	DB2 Attribute	Report Label
Collection name	COLNAME	P	CHAR(44)	NN	COLLECTION_NAME
Object name	OBJNAME	P	CHAR(44)	NN	OBJECT_NAME
Volume serial number	VOLSER	PN	CHAR(6)	NN	VOLSER
VTOC token	VTOCTOKN	P	INTEGER	NN	VTOC_TOKEN
Object size	OBJSIZE		INTEGER	NN	OBJECT_SIZE
Note: The deleted-objects table is used with OAM rewritable media.					

Tape Volume Table

The tape volume table contains one row for each tape volume used by OAM. The DB2 name of the tape volume table is TAPEVOL. The table is defined in table space ODTVLTSP. Table 67 on page 528 describes the attributes of the columns in the ODTVLTSP table. A row is inserted into the tape volume table for each tape volume used by OAM to track its status.

Note: Should OAM discover minor discrepancies with the tape volume table at initialization, the following recovery actions are automatically invoked to circumvent failure of the initialization:

- The row that is in error is skipped over, and a corresponding volume or tape volume control block is not built. A message is issued indicating the row that was skipped and the reason it was bypassed.
- The table row is corrected when a valid value is easily recognizable, and a message is issued stating the correction that is made by OAM and what steps can be taken if the correction is not acceptable to the customer.
- More detailed messages containing recovery actions are provided and issued during OAM initialization for database discrepancies.

Table 67. Tape Volume Table Column Description

Column Description	Name	DB2 Type	DB2 Attribute	Report Label
Volume Serial number	VOLSER	CHAR(6)	Not Null	VOLSER
Unit Name	UNITNAME	CHAR(8)	Not Null	UNIT_NAME
Media type	MEDIATYP	CHAR(2)	Not Null	MEDIA_TYPE
Storage group name	STORGRP	CHAR(8)	Not Null	STORAGE_GROUP
Volume type	TYPE	CHAR(1)	Not Null	TYPE
Volume creation date	CREDATE	DATE	Not Null	CREATION_DATE
Last mounted date	MNTDATE	DATE	Not Null	DATE_LAST_MOUNTED
Last written date	WRTDATE	DATE	Not Null	DATE_LAST_WRITTEN
Expiration date	EXPDATE	DATE	Not Null	EXPIRATION_DATE
Capacity of tape	CAPACITY	INTEGER	Not Null	CAPACITY
Free space remaining	FRESPACE	INTEGER	Not Null	FREE_SPACE
Block id of last data block written	LSTBLKID	INTEGER	Not Null	LAST_BLOCKID
Percent Full	PFULL	SMALLINT	Not Null	PERCENT_FULL
Number of logical blocks written	NUMLBLKS	INTEGER	Not Null	LOGICAL_BLOCKS_WRITTEN
Number of logical kilobytes written	NUMLKBW	INTEGER	Not Null	LOGICAL_KILOBYTES_WRITTEN
Number of physical kilobytes written	NUMPKBW	INTEGER	Not Null	PHYSICAL_KILOBYTES_WRITTEN
Full status	FULL	CHAR(1)	Not Null	FULL
Readable	READABLE	CHAR(1)	Not Null	VOLUME_READABLE_STATUS
Writable	WRITABLE	CHAR(1)	Not Null	VOLUME_WRITABLE_STATUS
In use status	INUSE	CHAR(1)	Not Null	IN_USE
Copied status	COPIED	CHAR(1)	Not Null	COPIED
Alternate volume	AVOLSER	CHAR(6)	Not Null	ALTERNATE_VOLUME
Number of logical kilobytes deleted	NUMLKBDE	INTEGER	Not Null with Default	LOGICAL_KILOBYTES_DELETED
Tape compaction indicator	COMPACT	CHAR(1)	Not Null with Default	TAPE_COMPACTION_INDICATOR
OAM XCF member name	MEMBER	CHAR(16)	Not Null with Default	OAM_XCF_MEMBER
Physical Identifier	EPI	SMALLINT	Not Null with Default	EPI

Table 67. Tape Volume Table Column Description (continued)

Column Description	Name	DB2 Type	DB2 Attribute	Report Label
Backup type	TYPE	CHAR(1)	Not Null with Default	BKTYPE
Original unit name	OUNITNAM	CHAR(8)	Blank	OUNITNAM
Data class	DATACLAS	CHAR(8)	Blank	DATACLAS
Data Set Name Format	DSNFMT	CHAR(1)	Blank	DATASET_NAME_FORMAT

The **VOLSER** column has a unique index. Therefore, each tape volume used by OAM must have a unique volume serial number. The tape volume serial number must be unique across all types of media used by the installation. The tape volume serial number must not conflict with the volume serial number of an optical volume being used by OAM. The tape volume serial number must not conflict with the serial number of any SMS-managed DASD volume or any mounted non-SMS-managed DASD volume.

Rows are dynamically inserted into the TAPEVOL table as unknown scratch tape volumes mounted in a response to a mount scratch request during allocation.

The following describes the columns in the tape volume table:

VOLSER The volume serial number of the tape volume. All other columns in the tape volume table row apply to this volume.

UNITNAME The MVS unit name used when the tape volume is initially mounted for OAM use. This unit name is used by OAM whenever this tape volume is subsequently allocated by OAM. This parameter is only valid for stand-alone tape drives. If the tape volume is library-resident, or if an automated or manual tape library dataserver is chosen for the request at the time of allocation, this parameter is ignored (in the case of a library-resident volume mount request), or overridden (in the case of an ATLDS or MTLDS being chosen to handle the request at allocation).

MEDIATYPE The media type of the tape volume
- **02** IBM Cartridge System Tape
- **04** IBM Enhanced Capacity Cartridge System Tape
- **05** IBM High Performance Cartridge Tape
- **06** Extended High Performance Cartridge Tape
- **07** Enterprise Tape Cartridge
- **08** Enterprise Economy Tape Cartridge
- **09** Enterprise WORM Tape Cartridge
- **10** Enterprise Economy WORM Tape Cartridge
- **12** IBM Enterprise Extended Tape Cartridge
- **14** IBM Enterprise Extended WORM Tape Cartridge

STORGRP The name of the Object or Object Backup storage group to which the tape volume is associated.

TYPE The type of tape volume:
- **B** Backup volume associated with an Object Backup storage group.
- **G** Group volume associated with an Object storage group.

S Scratch volume that can be assigned to either an Object or Object Backup storage group when another volume is needed by OAM.

CREDATE The date that the volume was first used by OAM and when the row for this volume was created in the TAPEVOL table.

MNTDATE The date that the volume was last mounted by OAM.

WRTDATE The date that the volume was last written by OAM.

EXPDATE The expiration date of the volume. The expiration date of the volume is the latest expiration date of all objects that reside on the volume.

CAPACITY The approximate number of kilobytes of data which can be written for the volume allowing variance for different manufacturers.

218 554
Represents the approximate number of kilobytes of data that can be written for an IBM Cartridge System Tape written in 18-track format on an IBM 3480 or 3490 Magnetic Tape Subsystem. The installation can overwrite this default capacity by specifying a value between 1 and 2 147 483 646 kilobytes using the TAPECAPACITY parameter of the SETOAM command.

437 109
Represents the approximate number of kilobytes of data that can be written for an IBM Cartridge System Tape written in 36-track format on an IBM 3490E Magnetic Tape Subsystem. The installation can overwrite this default capacity by specifying a value between 1 and 2 147 483 646 kilobytes using the TAPECAPACITY parameter of the SETOAM command.

874 218
Represents the approximate number of kilobytes of data that can be written for an IBM Enhanced Capacity Cartridge System Tape written in 36-track format on an IBM 3490E Magnetic Tape Subsystem. The installation can overwrite this default capacity by specifying a value between 1 and 2 147 483 646 kilobytes using the TAPECAPACITY parameter of the SETOAM command.

9 764 864
Represents the approximate number of kilobytes of data for an IBM High Performance Cartridge Tape written in 128-track format on an IBM TotalStorage Enterprise High Performance Tape System 3590 Model B subsystem.

If the 3590 Model B subsystem is installed in native non-emulation mode, this value is returned from the drive and is used as an approximation that is close to the actual value.

19 530 752
Represents the approximate number of kilobytes of data for an IBM Extended High Performance Cartridge Tape written in 128-track format on a 3590 Model B subsystem.

If the 3590 Model B subsystem is installed in native non-emulation mode, this value is returned from the drive and is used as an approximation that is close to the actual value.

19 530 752
Represents the approximate number of kilobytes of data for an

IBM High Performance Cartridge tape written in 256-track recording technology on an IBM TotalStorage Enterprise High Performance Tape System 3590 Model E subsystem.

This value is returned from the drive and is used as an approximation that is close to the actual value.

39 061 504
Represents the approximate number of kilobytes of data for an IBM Extended High Performance Cartridge tape written in 256-track recording technology on an 3590 Model E subsystem.

This value is returned from the drive and is used as an approximation that is close to the actual value.

29 296 640
Represents the approximate number of kilobytes of data for an IBM High Performance Cartridge tape written in 348-track recording technology on an IBM TotalStorage Enterprise High Performance Tape System 3590 Model H subsystem.

This value is returned from the drive and is used as an approximation that is close to the actual value.

58 593 280
Represents the approximate number of kilobytes of data for an IBM Extended High Performance Cartridge tape written in 348-track recording technology on a 3590 Model H subsystem.

This value is returned from the drive and is used as an approximation that is close to the actual value.

60 653 568
Represents the approximate number of kilobytes of data for an IBM TotalStorage Enterprise Economy Tape Cartridge or for an IBM TotalStorage Enterprise Economy WORM Tape Cartridge written in Enterprise Format 1 (EFMT1) recording technology on a 3592 Model J tape drive.

This value is returned from the drive and is used as an approximation that is close to the actual value.

292 968 448
Represents the approximate number of kilobytes of data for an IBM TotalStorage Enterprise Tape Cartridge written in Enterprise Format 1 (EFMT1) recording technology on a 3592 Model J tape drive.

This value is returned from the drive and is used as an approximation that is close to the actual value.

97 655 808
Represents the approximate number of kilobytes of data for an IBM TotalStorage Enterprise Economy Tape Cartridge or for an IBM TotalStorage Enterprise Economy WORM Tape Cartridge written in Enterprise Format 2 (EFMT2) recording technology on a 3592 Model E05 tape drive. This value is returned from the drive and is used as an approximation that is close to the actual value.

488 281 088
Represents the approximate number of kilobytes of data for an IBM TotalStorage Enterprise Tape Cartridge written in Enterprise Format 2 (EFMT2) recording technology on a 3592

Model E05 tape drive. This value is returned from the drive and is used as an approximation that is close to the actual value.

TBD
Represents the approximate number of kilobytes of data for an IBM Enterprise Extended Tape Cartridge or for an IBM Enterprise Extended WORM Tape Cartridge written in Enterprise Format 2 (EFMT2) recording technology on a 3592 Model E05 tape drive. This value is returned from the drive and is used as an approximation that is close to the actual value.

Note: For tape volumes written using 18-track or 36-track format on IBM Cartridge System Tape or IBM Enhanced Capacity Cartridge System Tape on an IBM 3480, 3490, or 3490E Magnetic Tape Subsystem, the user can specify any capacity from 1 to 2 147 483 646 kilobytes of data. If the tape cartridge is scaled to its optimal performance capacity, the approximate number of kilobytes of data is 60 653 568.

The user defines the tape capacity in OAM with SETOAM TAPECAPACITY statement of SYS1.PARMLIB(CBROAM*xx*). This statement enables the user to set capacities higher or lower than the standard capacities described previously. If the user has specified a capacity with the SETOAM TAPECAPACITY statement that is higher than the tape volume is physically capable of managing, the data is written to the tape volume until the natural end of volume is reached. In this case, the displayed capacity value is the value that is indicated on the SETOAM TAPECAPACITY statement, even though it is not possible to write to that capacity.

FRESPACE The available free space left for writing data in kilobyte units on the volume. This value reflects the reduction of the percent-full (PFULL) value associated with the storage group for this tape volume.

LSTBLKID The block ID of the last block written on the volume.

PFULL An indication of what percent of the tape has been written.

NUMLBLKS The number of logical blocks of data that OAM has written to the volume.

NUMLKBW The number of logical kilobytes of data that OAM has written to the volume. This value includes OAM control information recorded on the tape volume as well as user object data.

NUMPKBW The number of physical kilobytes of data that has been physically recorded on the tape medium. This includes OAM control information recorded on the tape volume as well as user object data.

Note: If the data on a tape represented by a row in this table is being written in a compacted format, the number of logical KB of data on the tape and the number of physical KB of data on the tape might not be the same.

FULL An indication of whether the volume is considered full by OAM. The possible values of this column are listed below:
Y The volume is considered full by OAM.
N The volume is not full.

READABLE An indication of whether the volume is considered readable by OAM. The possible values are listed below:
Y The volume is readable.
N The volume is not readable.

WRITABLE An indication of whether the volume is considered writable by OAM.
Y The volume is writable.
N The volume is not writable. The WRITABLE column is set to N when a permanent data check occurs while writing data to the volume. This prevents the volume from being selected by OAM for the writing of additional objects.

INUSE An indication of whether the volume is in use by an OAM process. The possible values are listed below:
Y The volume is in use by an OAM process.
N The volume is not in use by an OAM process.

COPIED Reserved for future use.

AVOLSER Reserved for future use.

NUMLKBDE The number of logical kilobytes (KB) of data which have been deleted from the tape volume.

Note: This number is an **approximation**. Due to the fact that the application can issue a DB2 ROLLBACK for the OSREQ DELETE, and OSMC can issue a DB2 ROLLBACK after the TAPEVOL row update for NUMLKBDE has been submitted to the OAM address space, this number might be greater than the actual amount of data which has been deleted from this tape volume.

COMPACT The tape compaction indicator for this tape volume. The only valid values for this field are:
Y The tape volume was written in compacted format.
N The tape volume was written in noncompacted format.

MEMBER Indicates the name of the OAM within a Parallel Sysplex that is managing the tape volume.

- For tape volumes that are mounted and allocated on a tape drive for use by OAM, this member name is the member name of the OAM on the system to which the tape drive is online and allocated.
- For tape volumes that are not mounted and allocated on a tape drive for use by OAM, this member name is blank.

EPI The ERDS Physical Identifier which indicates the real underlying device type that is used to write OAM objects to this volume. This column is used to assist in problem diagnosis in a mixed device environment where native and emulated devices coexist.

BKTYPE The first or second backup copies of an object when the volume has a type of "B", which indicates that it is a backup volume belonging to an Object Backup storage group.

OUNITNAM The original esoteric or generic name for the tape volume. The esoteric or generic device type is inherited from the Object or Object Backup storage group for the volume. If the allocated tape drive is in an IBM tape library, this field is stored before the UNITNAME field is changed to a generic device type. If the allocated tape drive is not in an IBM tape library, the OUNITNAM field is the same as UNITNAME field. OAM uses this field to allocate the tape volume to an Object or Object Backup storage group after OAM returns the volume to OAM scratch status. Options for initializing the OUNITNAM field include:

- Leaving the OUNITNAM field blank.
- Enabling OAMSCRATCHSYNCH mode using the SETOAM statement. OAM fills in the esoteric name automatically.
- Copying the value from the UNITNAME field to the OUNITNAM field, if you are *not* using tapes in an Automated Tape Library.
- Setting the OUNITNAM field to the appropriate esoteric name, if you are using tapes in an Automated Tape Library and plan to return expired tape volumes to OAM scratch status.

DATACLAS This field represents the data class that is associated with a tape volume. The data class is inherited from the Object storage group that this volume was assigned to when it was originally allocated. If SMS does not assign a data class when it allocates this volume, the DATACLAS field is blank. OAM uses this field to allocate the tape volume to an Object or Object Backup storage group after OAM returns the volume to OAM scratch status. Options for initializing the DATACLAS field include:

- Leaving the DATACLAS field blank.
- Enabling OAMSCRATCHSYNCH mode using the SETOAM OAMSCRATCHSYNCH statement.
- Setting the DATACLAS field that is based on the Object or Object Backup storage group to which the volume belongs.

DSNFMT This field indicates the data set name format written on the tape volume.

- If this field contains a blank, then the data set name written on the volume is the original data set name format with no storage group name low-level qualifier or the volume has no current OAM data set written on the tape volume.
- If this field contains a character “G” for group, then the data set name written on the volume has the storage group name appended.

Appendix D. OAM System Management Facility Records

The following information provides details concerning the OAM System Management Facility (SMF) records, which measure OAM performance at the OSREQ macro interface level. The SMF Type for all Subtypes listed is SMF Type 85.

Related reading: For an overview of this function, see "Measuring OAM Transaction Performance Using SMF" on page 211.

OAM SMF Record Header

The OAM SMF record header, as shown in Table 68, is at the beginning of each SMF record written by OAM:

Table 68. Header Format for OAM SMF Records

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
0 0	SMF85LEN	2	binary	Record length.
2 2	SMF85SEG	2	binary	Segment descriptor.
4 4	SMF85FLG	1	binary	System indicator. **BIT** **MEANING WHEN SET** **0** Reserved. **1** Subtypes are valid. **2** Reserved. **3** MVS/SP™ Version 4 and above. bits 3, 4, 5, and 6 are on. See note. **4** MVS/SP Version 3. bits 4, 5, and 6 are on. **5** MVS/SP Version 2. bits 5 and 6 are on. **6** VS2 bit 6 is on. **7** Reserved. **Recommendation:** Use record type 30 to obtain the z/OS product level.
5 5	SMF85RTY	1	binary	Record type (decimal 85, hexadecimal X'55').
6 6	SMF85TME	4	binary	Time since midnight in hundredths of a second that the record was presented to SMF.
10 A	SMF85DTE	4	binary	Date the record was presented to SMF in the form of 0*cyydddF*, where F is the sign.
14 E	SMF85SID	4	EBCDIC	System Identification (from SID parameter).
18 12	SMF85SSI	4	EBCDIC	Subsystem identification, contains 'OAM' for all OAM SMF records.
22 16	SMF85STY	2	binary	Record subtype.
24 18	SMF85TRN	2	binary	Number of triplets in this record. A triplet is a set of offset/length/number values that defines a section of the record.
26 1A	SMF85PSO	4	binary	Offset to OAM product section.
30 1E	SMF85PSL	2	binary	Length of OAM product section.
32 20	SMF85PSN	2	binary	Number of OAM product section.
34 22	SMF85OSO	4	binary	Offset to OAM subtype data section.

© Copyright IBM Corp. 1989, 2006

Table 68. Header Format for OAM SMF Records (continued)

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
38 26	SMF85OSL	2	binary	Length of OAM subtype data section.
40 28	SMF85OSN	2	binary	Number of OAM subtype data sections.
42 2A	*	6	binary	Reserved.

OAM SMF Record Product Section

Each OAM SMF record has a 112-byte OAM product section following the standard SMF record header. The OAM product section contains product identification information and common information to all OAM SMF record subtypes. If a field is not used for a particular subtype and the format of the field is shown as EBCDIC in the FORMAT column of the table describing the SMF record subtype, the field contains EBCDIC blanks. If a field is not used for a particular subtype and the format of the field is shown as binary in the FORMAT column of the table describing the SMF record subtype, the field contains binary zeros. Table 69 describes the format of the product section:

Table 69. Product Section Format for OAM SMF Subtypes

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
0 0	R85PCID	9	EBCDIC	Component ID for OAM. For DFSMS, this field contains the characters '5695DF180'.
9 9	R85PVID	1	binary	Version number for DFSMS.
10 A	R85PRID	1	binary	Release number for DFSMS.
11 B	R85PMID	1	binary	Modification level for DFSMS.
12 C	R85PFMID	8	EBCDIC	SMP/E FMID for OAM.
20 14	*	4	binary	Reserved.
24 18	R85PCPUI	8	binary	CPU ID as stored by S/390® Store CPU ID (STIDP) instruction.
32 20	R85PJOBN	8	EBCDIC	Job name.
40 28	R85PSTPN	8	EBCDIC	Step name.
48 30	R85PPRCN	8	EBCDIC	Procedure name.
56 38	R85PPGMN	8	EBCDIC	Contains the job step program name. The job step program name is the name of the program specified on the job control language (JCL) EXEC statement with the PGM= keyword.
64 40	R85USRID	8	EBCDIC	User identification or blanks.
72 48	R85PTRXN	8	EBCDIC	Contains the transaction name for subtypes 2-6. The transaction names are specified as follows. For all other subtypes, this field contains blanks. **Environment** — **Meaning** **CICS** — The name of the CICS transaction that invoked the OSREQ macro. **IMS** — The name of the IMS transaction that invoked the OSREQ macro. **OTHER** — This field contains blanks, if the OSREQ macro was invoked from any other environment.
80 50	R85PSTRT	8	binary	Starting time of the function in 8-byte STCK format.

Table 69. Product Section Format for OAM SMF Subtypes (continued)

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
88 58	R85PENDT	8	binary	Ending time of the function in 8-byte STCK format.
96 60	R85PRESP	4	binary	Elapsed time of the function in milliseconds (.001 second units).
100 64	*	12	binary	Reserved.
Note: STCK = S/390 STORE CLOCK				

OSREQ Activity Subtypes 1–7 Data Section Format

The format of the subtype data section for all OSREQ macro functions is identical; although, not all of the fields are applicable to all OSREQ functions. Also, with the exception of the OSREQ return code (ST1RC), the rest of the fields are not valid if the OSREQ function fails. The following are subtypes and descriptions for the functions of the OSREQ macro:

1 OSREQ ACCESS
2 OSREQ STORE
3 OSREQ RETRIEVE
4 OSREQ QUERY
5 OSREQ CHANGE
6 OSREQ DELETE
7 OSREQ UNACCESS

Table 70 shows the format of the subtype data section for all OSREQ functions (subtypes 1–7):

Table 70. Subtype Data Section Format for OSREQ functions

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
0 0	ST1COLN	44	EBCDIC	Collection name. Valid for subtypes 2, 3, 4, 5, and 6.
44 2C	ST1OBJN	44	EBCDIC	Object name. Valid for subtypes 2, 3, 4, 5, and 6.
88 58	ST1SGN	8	EBCDIC	Storage group name. Valid for subtypes 2, 3, 4, 5, and 6.
96 60	ST1SCN	8	EBCDIC	Storage class name. Valid for subtypes 2, 4, and 5.
104 68	ST1MCN	8	EBCDIC	Management class name. Valid for subtypes 2, 4, and 5.
112 70	ST1OFF	4	binary	Offset for partial object retrieve (subtype 3). Zero for all others.
116 74	ST1LEN	4	binary	Length. Valid for subtypes 2, 3, 4, and 6. **SUBTYPE** **MEANING** **1** Unused, contains binary zero. **2** Length of object stored. **3** Number of bytes retrieved. **4** Number of QEL elements returned to the application program. **5** Unused, contains binary zero. **6** Length of object deleted. **7** Unused, contains binary zero.

Table 70. Subtype Data Section Format for OSREQ functions (continued)

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
120 78	ST1TTOK	16	binary	OSREQ tracking token supplied with TTOKEN keyword on the OSREQ macro. **Note:** Any application programs that want to use the new TTOKEN keyword interface need to be recompiled with the new OSREQ macro. For more information concerning the TTOKEN keyword, see Table 43 on page 254 and *z/OS DFSMS OAM Application Programmer's Reference*.
136 88	ST1TOK	8	binary	OSREQ token.
144 90	ST1VSN	6	EBCDIC	Volume serial number. Valid for subtypes 2, 3, and 6. For an OSREQ STORE request (subtype 2), this field contains the volume serial number of the tape or optical volume to which the primary copy of the object was stored. Only valid if bit 1 or 2 is on in field ST2FLGS. For an OSREQ RETRIEVE request (subtype 3), this field contains the volume serial number of the tape or optical volume from which the copy of the object was retrieved. Either the first or the second backup copy is retrieved as determined by the VIEW=BACKUP | BACKUP2 option indicated on the RETRIEVE request. Valid if bit 1, 2, 3, 4, 5, or 6 is on in field ST3FLGS. For an OSREQ DELETE request (subtype 6), this field contains the volume serial number of the tape or optical volume from which the primary copy of the object was deleted. Valid if bit 1 or 2 is on in field ST6FLGS.

Table 70. Subtype Data Section Format for OSREQ functions (continued)

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
150 96	ST1VMT	2	EBCDIC	Volume media type. Valid for subtype 2, 3, and 6. If a volume serial number is contained in the previous field (ST1VSN), this field contains the media type of the volume whose volume serial number is in field ST1VSN as follows: **VALUE MEANING** **00** IBM 9247 12-inch 2000-MB optical disk media. **01** IBM 3995 5.25-inch 650-MB rewritable optical disk media. **02** IBM 3480 Cartridge System Tape. **03** IBM 3995 5.25-inch 650-MB WORM optical disk media. **04** IBM 3480 Enhanced Capacity Cartridge System Tape. **05** IBM High Performance Cartridge Tape. **06** IBM Extended High Performance Cartridge Tape. **07** IBM Enterprise Tape Cartridge. **08** IBM Enterprise WORM Tape Cartridge. **09** IBM Enterprise Economy Tape Cartridge. **10** IBM Enterprise Economy WORM Tape Cartridge. **11** IBM 3995 5.25-inch 1300-MB rewritable optical disk media. **12** IBM Enterprise Extended Tape Cartridge. **13** IBM 3995 5.25-inch 1300-MB WORM optical disk media. **14** IBM Enterprise Extended WORM Tape Cartridge. **15** IBM 3995 5.25-inch 1300-MB CCW optical disk media. **21** IBM 3995 5.25-inch 2600-MB rewritable optical disk media. **23** IBM 3995 5.25-inch 2600-MB WORM optical disk media. **25** IBM 3995 5.25-inch 2600-MB CCW optical disk media. **31** IBM 3995 5.25-inch 5.2-GB rewritable optical disk media. **33** IBM 3995 5.25-inch 5.2-GB WORM optical disk media. **35** IBM 3995 5.25-inch 5.2-GB CCW optical disk media. **Note:** CCW = continuous composite WORM media. WORM = write-once-read-many.
152 98	ST1RC	4	binary	OSREQ return code. Value in register 15 following the OSREQ macro invocation.
156 9C	ST1RS	4	binary	OSREQ reason code. Value in register 0 following the OSREQ macro invocation.
160 A0	ST1FLGS	4	binary	Processing flags. For subtype 1, all bits contain zero.

Table 70. Subtype Data Section Format for OSREQ functions (continued)

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
160 A0	ST2FLGS	4	binary	Processing flags. The meaning is dependent on the record subtype. Unless specified below, all bits are zero and reserved. For subtype 2, the following bit definitions apply: **BIT** **MEANING** **0** When on, the object is stored to DASD. **1** When on, the object is stored to optical. **2** When on, the object is stored to tape. **3** Unused. **4** Unused. **5** When on, the OSREQ STORE request resulted in the mounting of a shelf-resident removable media volume (tape or optical) by an operator. This bit is only valid if bit 1 or 2 is on. **6** When on, the OSREQ STORE request resulted in the mounting of a library-resident removable media volume (tape or optical) inside an automated storage library. This bit is only valid if bit 1 or 2 is on. **7** When on, the OSREQ STORE request was satisfied using an already mounted removable media volume (tape or optical). This bit is only valid if bit 1 or 2 is on. **8** When on, an immediate backup copy is scheduled for this object. **9** When on, the object is stored to LOB storage structure.

Table 70. Subtype Data Section Format for OSREQ functions (continued)

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
160 A0	ST3FLGS	4	binary	Processing flags. The meaning is dependent on the record subtype. Unless specified below all bits are zero and reserved. For subtype 3, the following bit definitions apply: **BIT** **MEANING** **0** When on, the primary copy of the object was retrieved from DASD. **1** When on, the primary copy of the object was retrieved from optical. **2** When on, the primary copy of the object was retrieved from tape. **3** When on, either the first or the second backup copy of the object was retrieved from optical as a result of VIEW=BACKUP or VIEW=BACKUP2 being specified on the OSREQ macro. See bit 10 to indicate which backup copy was retrieved. **4** When on, either the first or the second backup copy of the object was retrieved from tape as a result of VIEW=BACKUP or VIEW=BACKUP2 being specified on the OSREQ macro. See bit 10 to indicate which backup copy was retrieved. **5** When on, either the first or the second backup copy of the object was retrieved from optical as a result of the primary copy of the object being unavailable and the automatic access to backup being active. See bit 10 for indication which backup copy was retrieved. **6** When on, either the first or the second backup copy of the object was retrieved from tape as a result of the primary copy of the object being unavailable and the automatic access to backup being active. See bit 10 for indication which backup copy was retrieved. **7** When on, the OSREQ RETRIEVE request resulted in the mounting of a shelf-resident removable media volume (tape or optical) by an operator. This bit is only valid if bit 1, 2, 3, 5, or 6 is on. **8** When on, the OSREQ RETRIEVE request resulted in the mounting of a library-resident removable media volume (tape or optical) inside an automated storage library. This bit is only valid if bit 1, 2, 3, 5, or 6 is on. **9** When on, the OSREQ RETRIEVE request was satisfied using an already mounted removable media volume (tape or optical). This bit is only valid of bit 1, 2, 3, 5, or 6 is on. **10** When on, the second backup copy of the object was retrieved. **11** When on, a recall is scheduled for this object. **12** When on, a recall was explicitly specified on the OSREQ RETRIEVE request. **13** When on, the primary copy of the object was retrieved from a LOB table.
160 A0	ST4FLGS	4	binary	Processing flags. For subtype 4, all bits contain zero.

Table 70. Subtype Data Section Format for OSREQ functions (continued)

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
160 A0	ST5FLGS	4	binary	Processing flags. The meaning is dependent on the record subtype. Unless specified below, all bits are zero and reserved. For subtype 5, the following bit definitions apply: **BIT** **MEANING** **0** When on, management class is specified on the OSREQ CHANGE macro. **1** When on, storage class is specified on the OSREQ CHANGE macro. **2** When on, retention period is specified on the OSREQ CHANGE macro.
160 A0	ST6FLGS	4	binary	Processing flags. The meaning is dependent on the record subtype. Unless specified below, all bits are zero and reserved. For subtype 6, the following bit definitions apply: **BIT** **MEANING** **0** When on, the primary copy of the object is deleted from DASD. **1** When on, the primary copy of the object is deleted from optical. **2** When on, the primary copy of the object is deleted from tape. **3** When on, the first backup copy of the object is deleted from optical. **4** When on, the first backup copy of the object is deleted from tape. **5** When on, the second backup copy of the object is deleted from optical. **6** When on, the second backup copy of the object is deleted from tape. **7** When on, the primary copy of the object is deleted from LOB table.
160 A0	ST7FLGS	4	binary	Processing flags. For subtype 7, all bits contain zero.

Although subtypes 1–7 share a common subtype data section, not all fields are valid for each of the seven subtypes. Table 71 identifies which fields in the OAM subtype data section are valid for each of the seven OSREQ subtypes:

Table 71. Valid Subtype Data Section Fields for OSREQ Functions

FIELD NAME	OSREQ ACCESS Subtype 1	OSREQ STORE Subtype 2	OSREQ RETRIEVE Subtype 3	OSREQ QUERY Subtype 4	OSREQ CHANGE Subtype 5	OSREQ DELETE Subtype 6	OSREQ UNACCESS Subtype 7
ST1COLN		X	X	X	X	X	
ST1OBJN		X	X	X	X	X	
ST1SGN		X	X	X	X	X	
ST1SCN		X		X	X		
ST1MCN		X		X	X		
ST1OFF			X				
ST1LEN		X	X	X		X	
ST1TTOK	X	X	X	X	X	X	X

Table 71. Valid Subtype Data Section Fields for OSREQ Functions (continued)

FIELD NAME	OSREQ ACCESS Subtype 1	OSREQ STORE Subtype 2	OSREQ RETRIEVE Subtype 3	OSREQ QUERY Subtype 4	OSREQ CHANGE Subtype 5	OSREQ DELETE Subtype 6	OSREQ UNACCESS Subtype 7
ST1TOK	X	X	X	X	X	X	X
ST1VSN		X	X			X	
ST1VMT		X	X			X	
ST1RC	X	X	X	X	X	X	X
ST1RS	X	X	X	X	X	X	X
ST1FLGS		X	X		X	X	

OSMC Storage Management Activity (Subtypes 32–35)

Table 72 describes the format of the subtype data section for the following OAM SMF record subtypes:

32 OSMC Storage Group Processing
33 OSMC DASD Space Management Processing
34 OAM Volume Recovery Utility
35 OSMC Move Volume Utility

Table 72. Format of the Subtype Data Section for Subtypes 32–35

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
0 0	ST32SGN	8	EBCDIC	Object or Object Backup storage group name.
8 8	ST32VSN0	6	EBCDIC	Volume serial number of a tape or optical volume. Valid for subtypes 34 and 35. This field contains blanks for all other subtypes. If the RECYCLE or DELETE option was specified, this field lists the volume serial number for the volume being recycled or deleted, and field ST32VSN0 lists the volume serial number for the opposite side of the optical volume.
14 E	ST32VSN1	6	EBCDIC	Volume serial number of the opposite side of the optical volume. Valid for subtypes 34 and 35. If the volume serial number contained in field ST32VSN0 is the volume serial number of a tape volume, this field contains blanks. This field contains blanks for all other subtypes. If the RECYCLE or DELETE option was specified, this field lists the volume serial number for the optical platter.

Table 72. Format of the Subtype Data Section for Subtypes 32–35 (continued)

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
20 14	ST32OMT	2	EBCDIC	Media type of the volume identified in field ST32VSN0. Valid for subtypes 34 and 35. This field contains blanks for all other subtypes. **VALUE MEANING** **00** IBM 9247 12-inch 2000-MB optical disk media. **01** IBM 3995 5.25-inch 650-MB rewritable optical disk media. **02** IBM 3480 Cartridge System Tape. **03** IBM 3995 5.25-inch 650-MB WORM optical disk media. **04** IBM 3480 Enhanced Capacity Cartridge System Tape. **05** IBM High Performance Cartridge Tape. **06** IBM Extended High Performance Cartridge Tape. **07** IBM Enterprise Tape Cartridge. **08** IBM Enterprise WORM Tape Cartridge. **09** IBM Enterprise Economy Tape Cartridge. **10** IBM Enterprise Economy WORM Tape Cartridge. **11** IBM 3995 5.25-inch 1300-MB rewritable optical disk media. **12** IBM Enterprise Extended Tape Cartridge. **13** IBM 3995 5.25-inch 1300-MB WORM optical disk media. **14** IBM Enterprise Extended WORM Tape Cartridge. **15** IBM 3995 5.25-inch 1300-MB CCW optical disk media. **21** IBM 3995 5.25-inch 2600-MB rewritable optical disk media. **23** IBM 3995 5.25-inch 2600-MB WORM optical disk media. **25** IBM 3995 5.25-inch 2600-MB CCW optical disk media. **31** IBM 3995 5.25-inch 5.2-GB rewritable optical disk media. **33** IBM 3995 5.25-inch 5.2-GB WORM optical disk media. **35** IBM 3995 5.25-inch 5.2-GB CCW optical disk media. **Note:** CCW = continuous composite WORM media. WORM = write-once-read-many.
22 16	*	2	binary	Reserved.
24 18	ST32PDWO	4	binary	Number of primary objects written to DASD.
28 1C	ST32PDWK	4	binary	Number of kilobytes of primary object data written to DASD.
32 20	ST32PDRO	4	binary	Number of primary objects read from DASD.
36 24	ST32PDRK	4	binary	Number of kilobytes of primary object data read from DASD.
40 28	ST32PDDO	4	binary	Number of primary objects deleted from DASD.
44 2C	ST32PDDK	4	binary	Number of kilobytes of primary object data deleted from DASD.

Table 72. Format of the Subtype Data Section for Subtypes 32–35 (continued)

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
48 30	ST32POWO	4	binary	Number of primary objects written to optical.
52 34	ST32POWK	4	binary	Number of kilobytes of primary object data written to optical.
56 38	ST32PORO	4	binary	Number of primary objects read from optical.
60 3C	ST32PORK	4	binary	Number of kilobytes of primary object data read from optical.
64 40	ST32PODO	4	binary	Number of primary objects deleted from optical.
68 44	ST32PODK	4	binary	Number of kilobytes of primary object data deleted from optical.
72 48	ST32PTWO	4	binary	Number of primary objects written to tape.
76 4C	ST32PTWK	4	binary	Number of kilobytes of primary object data written to tape.
80 50	ST32PTRO	4	binary	Number of primary objects read from tape.
84 54	ST32PTRK	4	binary	Number of kilobytes of primary object data read from tape.
88 58	ST32PTDO	4	binary	Number of primary objects deleted from tape.
92 5C	ST32PTDK	4	binary	Number of kilobytes of primary object data deleted from tape.
96 60	ST32BOWO	4	binary	Number of backup objects written to optical.
100 64	ST32BOWK	4	binary	Number of kilobytes of backup object data written to optical.
104 68	ST32BORO	4	binary	Number of backup objects read from optical.
108 6C	ST32BORK	4	binary	Number of kilobytes of backup object data read from optical.
112 70	ST32BODO	4	binary	Number of backup objects deleted from optical.
116 74	ST32BODK	4	binary	Number of kilobytes of backup object data deleted from optical.
120 78	ST32BTWO	4	binary	Number of backup objects written to tape.
124 7C	ST32BTWK	4	binary	Number of kilobytes of backup object data written to tape.
128 80	ST32BTRO	4	binary	Number of backup objects read from tape.
132 84	ST32PTRK	4	binary	Number of kilobytes of backup object data read from tape.
136 88	ST32BTDO	4	binary	Number of backup objects deleted from tape.
140 8C	ST32BTDK	4	binary	Number of kilobytes of backup object data deleted from tape.
144 90	ST32B2OWO	4	binary	Number of BACKUP2 objects written to optical.
148 94	ST32B2OWK	4	binary	Number of kilobytes of BACKUP2 objects written to optical.
152 98	ST32B2ORO	4	binary	Number of BACKUP2 objects read from optical.
156 9C	ST32B2ORK	4	binary	Number of rows kilobytes of BACKUP2 objects read from optical.
160 A0	ST32B2ODO	4	binary	Number of BACKUP2 objects deleted from optical.

Table 72. Format of the Subtype Data Section for Subtypes 32–35 (continued)

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
164 A4	ST32B2ODK	4	binary	Number of kilobytes of BACKUP2 objects deleted from optical.
168 A8	ST32B2TWO	4	binary	Number of BACKUP2 objects written to tape.
172 AC	ST32B2TWK	4	binary	Number of kilobytes of BACKUP2 objects written to tape.
176 B0	ST32B2TRO	4	binary	Number of BACKUP2 objects read from tape.
180 B4	ST32B2TRK	4	binary	Number of kilobytes of BACKUP2 objects read from tape.
184 B8	ST32B2TDO	4	binary	Number of BACKUP2 objects logically deleted from tape.
188 BC	ST32B2TDK	4	binary	Number of kilobytes of BACKUP2 objects logically deleted from tape.
192 C0	ST32DTUP	4	binary	Number of rows updated in the object directory table.
196 C4	ST32DTDE	4	binary	Number of rows deleted from the object directory table.
200 C8	ST324KIN	4	binary	Number of rows inserted into the 4 KB object storage table.
204 CC	ST324KDE	4	binary	Number of rows deleted from the 4 KB object storage table.
208 D0	ST3232KI	4	binary	Number of rows inserted into the 32 KB object storage table.
212 D4	ST3232KD	4	binary	Number of rows deleted from the 32 KB object storage table.
216 D8	ST32NCE	4	binary	Number of optical cartridges expired. Valid only for Subtype 32.
220 DC	ST32FLGS	4	binary	Processing flags. **BIT** **MEANING** **0** When on, the MOVEVOL was invoked automatically under software control as a result of RECYCLE. **1** When on, this process was invoked by a MODIFY OAM,START command issued from an MVS console. **2** When on, this process was invoked using an ISMF line operator. **3** When on, volume recovery was invoked with the BACKUP1 keyword or defaulted to BACKUP1. **4** When on, volume recovery was invoked with the BACKUP2 keyword. **5** When on, the DELETE option was specified for the RECOVER or MOVEVOL utility. **6** When on, the RECYCLE option was specified for the MOVEVOL utility. **7** When on, the Object storage group was processed. **8** When on, the Object Backup storage group was processed. **9** When on, the storage group cycle ended because the CYCLE END TIME was exceeded. **10–31** Reserved.

Table 72. Format of the Subtype Data Section for Subtypes 32–35 (continued)

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
224 E0	ST32NTE	4	binary	Number of tape volumes expired. Valid only for subtype 32.
228 E4	ST32RCLD	4	binary	Number of recalled objects processed this storage group cycle. Valid only for subtype 32.
232 E8	ST32RCLK	4	binary	Number of kilobytes of recalled objects processed this storage group cycle. Valid only for subtype 32.
236 EC	ST32LOBI	4	binary	Number of rows inserted into the LOB storage structure.
240 F0	ST32LOBD	4	binary	Number of rows deleted from the LOB storage structure.
Note: For subtypes 32–35, each object size is rounded up to the next whole KB before being added to the total.				

OSMC Single Object Recovery Utility (Subtype 36)

Table 73 describes the format of the subtype data section for a subtype 36 OAM SMF record for the single object recovery utility.

Table 73. Format of the Subtype Data Section for Subtype 36

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
0 0	ST36COLN	44	EBCDIC	Collection name.
44 2C	ST36CNID	4	binary	Collection ID.
48 30	ST36OBJN	44	EBCDIC	Object name.
92 5C	ST36SGN	8	EBCDIC	OBJECT storage group name.
100 64	ST37OLEN	4	binary	Object length.
104 68	ST36BVSN	6	EBCDIC	Volume serial number of the optical or tape volume from which the backup copy of the object was read. The backup copy can be either the first or the second backup copy as determined by options specified on the F OAM,RECOVERY command. The options are: BACKUP1 | BACKUP2.

Table 73. Format of the Subtype Data Section for Subtype 36 (continued)

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
110 6E	ST36BMT	2	EBCDIC	Media type of volume from which the backup copy of the object was read: **VALUE MEANING** **00** IBM 9247 12-inch 2000-MB optical disk media. **01** IBM 3995 5.25-inch 650-MB rewritable optical disk media. **02** IBM 3480 cartridge System Tape. **03** IBM 3995 5.25-inch 650-MB WORM optical disk media. **04** IBM 3480 Enhanced Capacity Cartridge System Tape. **05** IBM High Performance Cartridge Tape. **06** IBM Extended High Performance Cartridge Tape. **07** IBM Enterprise Tape Cartridge. **08** IBM Enterprise WORM Tape Cartridge. **09** IBM Enterprise Economy Tape Cartridge. **10** IBM Enterprise Economy WORM Tape Cartridge. **11** IBM 3995 5.25-inch 1300-MB rewritable optical disk media. **12** IBM Enterprise Extended Tape Cartridge. **13** IBM 3995 5.25-inch 1300-MB WORM optical disk media. **14** IBM Enterprise Extended WORM Tape Cartridge. **15** IBM 3995 5.25-inch 1300-MB CCW optical disk media. **21** IBM 3995 5.25-inch 2600-MB rewritable optical disk media. **23** IBM 3995 5.25-inch 2600-MB WORM optical disk media. **25** IBM 3995 5.25-inch 2600-MB CCW optical disk media. **31** IBM 3995 5.25-inch 5.2-GB rewritable optical disk media. **33** IBM 3995 5.25-inch 5.2-GB WORM optical disk media. **35** IBM 3995 5.25-inch 5.2-GB CCW optical disk media. **Note:** CCW = continuous composite WORM media. WORM = write-once-read-many.
112 70	ST36BTKN	4	binary	Volume location token associated with the backup copy of the object on the volume specified in the ST36BVSN field.
116 78	ST36TVSN	6	EBCDIC	Volume serial number of the target optical or tape volume to which the new primary copy of the object was written. This field contains blanks if the new location is on DASD.

Table 73. Format of the Subtype Data Section for Subtype 36 (continued)

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
122 7E	ST36TMT	2	EBCDIC	Media type of target optical or tape volume to which the new primary copy of the object was written. This field contains blanks if the new primary copy of the object was written to DASD: **VALUE MEANING** **00** IBM 9247 12-inch 2000-MB optical disk media. **01** IBM 3995 5.25-inch 650-MB rewritable optical disk media. **02** IBM 3480 Cartridge System Tape. **03** IBM 3995 5.25-inch 650-MB WORM optical disk media. **04** IBM 3480 Enhanced Capacity Cartridge System Tape. **05** IBM High Performance Cartridge Tape. **06** IBM Extended High Performance Cartridge Tape. **07** IBM Enterprise Tape Cartridge. **08** IBM Enterprise WORM Tape Cartridge. **09** IBM Enterprise Economy Tape Cartridge. **10** IBM Enterprise Economy WORM Tape Cartridge. **11** IBM 3995 5.25-inch 1300-MB rewritable optical disk media. **12** IBM Enterprise Extended Tape Cartridge. **13** IBM 3995 5.25-inch 1300-MB WORM optical disk media. **14** IBM Enterprise Extended WORM Tape Cartridge. **15** IBM 3995 5.25-inch 1300-MB CCW optical disk media. **21** IBM 3995 5.25-inch 2600-MB rewritable optical disk media. **23** IBM 3995 5.25-inch 2600-MB WORM optical disk media. **25** IBM 3995 5.25-inch 2600-MB CCW optical disk media. **31** IBM 3995 5.25-inch 5.2-GB rewritable optical disk media. **33** IBM 3995 5.25-inch 5.2-GB WORM optical disk media. **35** IBM 3995 5.25-inch 5.2-GB CCW optical disk media. **Note:** CCW = continuous composite WORM media. WORM = write-once-read-many.
124 80	ST36OVSN	6	EBCDIC	Volume serial number of the original optical or tape volume on which the primary copy of the object resided prior to the start of the single object recovery utility. This field contains blanks if the original location was on DASD.

Table 73. Format of the Subtype Data Section for Subtype 36 (continued)

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
130 82	ST36OMT	2	EBCDIC	Media type of the original optical or tape volume on which the primary copy of the object resided prior to the start of the single object recovery utility. This field contains blanks if the primary copy of the object resides on DASD: **VALUE MEANING** **00** IBM 9247 12-inch 2000-MB optical disk media. **01** IBM 3995 5.25-inch 650-MB rewritable optical disk media. **02** IBM 3480 Cartridge System Tape. **03** IBM 3995 5.25-inch 650-MB WORM optical disk media. **04** IBM 3480 Enhanced Capacity Cartridge System Tape. **05** IBM High Performance Cartridge Tape. **06** IBM Extended High Performance Cartridge Tape. **07** IBM Enterprise Tape Cartridge. **08** IBM Enterprise WORM Tape Cartridge. **09** IBM Enterprise Economy Tape Cartridge. **10** IBM Enterprise Economy WORM Tape Cartridge. **11** IBM 3995 5.25-inch 1300-MB rewritable optical disk media. **12** IBM Enterprise Extended Tape Cartridge. **13** IBM 3995 5.25-inch 1300-MB WORM optical disk media. **14** IBM Enterprise Extended WORM Tape Cartridge. **15** IBM 3995 5.25-inch 1300-MB CCW optical disk media. **21** IBM 3995 5.25-inch 2600-MB rewritable optical disk media. **23** IBM 3995 5.25-inch 2600-MB WORM optical disk media. **25** IBM 3995 5.25-inch 2600-MB CCW optical disk media. **31** IBM 3995 5.25-inch 5.2-GB rewritable optical disk media. **33** IBM 3995 5.25-inch 5.2-GB WORM optical disk media. **35** IBM 3995 5.25-inch 5.2-GB CCW optical disk media. **Note:** CCW = continuous composite WORM media. WORM = write-once-read-many.
132 84	ST36FLGS	4	binary	Processing flags. **BIT MEANING** **0** When on, object recovery was invoked with the BACKUP1 keyword or defaulted to BACKUP1. **1** When on, object recovery was invoked with the BACKUP2 keyword. **2–31** Reserved.

OSMC Library Space Management (Subtype 37)

Table 74 describes the format of the subtype data section for a subtype 37 OAM SMF record for OSMC library space management.

Table 74. Format of the Subtype Data Section for Subtype 37

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
0 0	ST37LIBN	8	EBCDIC	Library name.
8 8	ST37LIBD	8	EBCDIC	Library device type.
16 10	ST37NOCE	4	binary	Number of optical disk cartridges ejected.
20 14	ST37FLGS	4	binary	Processing flags. **BIT** **MEANING** **0** When on, library space management is invoked automatically under software control due to a storage group out-of-space condition in the specified library. **1** When on, library space management is invoked by a **F OAM,START,LIBMGT** command issued from an MVS console. **2–31** Reserved.

OSMC RECALL to DB2 DASD (Subtype 38)

Table 75 describes the format of the subtype data section for a subtype 38 OAM SMF record for OSMC RECALL to DB2 DASD.

Table 75. Format of the Subtype Data Section for Subtype 38

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
0 0	ST38COLN	44	EBCDIC	Collection name.
44 2C	ST38CNID	4	binary	Collection ID.
48 30	ST38OBJN	44	EBCDIC	Object name.
92 5C	ST38SGN	8	EBCDIC	Object storage group name.
100 64	ST38OLEN	4	binary	Object length.
104 68	ST38VSN	6	EBCDIC	Volume serial number of the optical or tape volume from which the copy of the object was read.

Table 75. Format of the Subtype Data Section for Subtype 38 (continued)

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
110 6E	ST38MT	2	EBCDIC	Media type of volume from which the copy of the object was read:. **Value** **MEANING** **00** IBM 9247 12–inch 2000–MB optical disk media. **01** IBM 3995 5.25–inch 650–MB rewritable optical disk media. **02** IBM 3480 Cartridge System Tape. **03** IBM 3995 5.25–inch 650–MB WORM optical disk media. **04** IBM 3480 Enhanced Capacity Cartridge System Tape. **05** IBM High Performance Cartridge Tape. **06** IBM Extended High Performance Cartridge Tape. **07** IBM Enterprise Tape Cartridge. **08** IBM Enterprise WORM Tape Cartridge. **09** IBM Enterprise Economy Tape Cartridge. **10** IBM Enterprise Economy WORM Tape Cartridge. **11** IBM 3995 5.25–inch 1300–MB rewritable optical disk media. **12** IBM Enterprise Extended Tape Cartridge. **13** IBM 3995 5.25-inch 1300-MB WORM optical disk media. **14** IBM Enterprise Extended WORM Tape Cartridge. **15** IBM 3995 5.25–inch 1300–MB CCW optical disk media. **21** IBM 3995 5.25–inch 2600–MB rewritable optical disk media. **23** IBM 3995 5.25–inch 2600–MB WORM optical disk media. **25** IBM 3995 5.25–inch 2600–MB CCW optical disk media. **31** IBM 3995 5.25–inch 5.2–GB rewritable optical disk media. **33** IBM 3995 5.25–inch 5.2–GB WORM optical disk media. **Note:** WORM=write once read many CCW=continuous composite WORM media
112 70	ST38TKN	4	binary	Volume location token associated with the copy of the object on the volume specified in the ST36BVSN field.
116 74	ST38RCLD	4	binary	Number of days specified for object recall.
120 78	ST38VT	1	EBCDIC	Volume type:. **Value** **MEANING** **G** Volume is a grouped volume belonging to an OBJECT storage group. **B** Volume is a backup volume belonging to an OBJECT BACKUP storage group.

Table 75. Format of the Subtype Data Section for Subtype 38 (continued)

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
121 79	ST38BT	1	EBCDIC	Backup type:. **Value** **MEANING** **1** Volume belonging to a backup one OBJECT BACKUP storage group. **2** Volume belonging to a backup two OBJECT BACKUP storage group.
122 7A	*	2	binary	Reserved.
124 7C	ST38FLGS	4	binary	Processing flags:. **Bit** **MEANING** **0** When on, Object Recall was successful. **1–31** Reserved.

Immediate Backup Copy (Subtype 39)

Table 76 describes the format of the subtype data section for a subtype 39 OAM SMF record for Immediate Backup Copy.

Table 76. Format of the Subtype Data Section for Subtype 39

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
0 0	ST39COLN	44	EBCDIC	Collection name.
44 2C	ST39CNID	4	binary	Collection ID.
48 30	ST39OBJN	44	EBCDIC	Object name.
92 5C	ST39SGN	8	EBCDIC	OBJECT storage group name.
100 64	ST39MCN	8	EBCDIC	Management Class name.
108 6C	ST39OLEN	4	binary	Object length.
112 70	ST39SVSN	6	EBCDIC	Source Volume serial number of the optical or tape volume on which the primary object was read. Only valid if the bit 1 or 2 is ON in field ST39FLGS.

Table 76. Format of the Subtype Data Section for Subtype 39 (continued)

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
118 76	ST39SMT	2	EBCDIC	Source volume Media type. Only valid if the bit 1 or 2 is ON in field ST39FLGS. **Value** **MEANING** **00** IBM 9247 12–inch 2000–MB optical disk media. **01** IBM 3995 5.25–inch 650–MB rewritable optical disk media. **02** IBM 3480 Cartridge System Tape. **03** IBM 3995 5.25–inch 650–MB WORM optical disk media. **04** IBM 3480 Enhanced Capacity Cartridge System Tape. **05** IBM High Performance Cartridge Tape. **06** IBM Extended High Performance Cartridge Tape. **07** IBM Enterprise Tape Cartridge. **08** IBM Enterprise WORM Tape Cartridge. **09** IBM Enterprise Economy Tape Cartridge. **10** IBM Enterprise Economy WORM Tape Cartridge. **11** IBM 3995 5.25–inch 1300–MB rewritable optical disk media. **12** IBM Enterprise Extended Tape Cartridge. **13** IBM 3995 5.25-inch 1300-MB WORM optical disk media. **14** IBM Enterprise Extended WORM Tape Cartridge. **15** IBM 3995 5.25–inch 1300–MB CCW optical disk media. **21** IBM 3995 5.25–inch 2600–MB rewritable optical disk media. **23** IBM 3995 5.25–inch 2600–MB WORM optical disk media. **25** IBM 3995 5.25–inch 2600–MB CCW optical disk media. **31** IBM 3995 5.25–inch 5.2–GB rewritable optical disk media. **33** IBM 3995 5.25–inch 5.2–GB WORM optical disk media. **35** IBM 3995 5.25–inch 5.2–GB CCW optical disk media.
120 78	ST39TVSN	6	EBCDIC	Target Volume serial number of the optical or tape volume on which the backup copy of the object was written.
126 7E	ST39TMT	2	EBCDIC	Target Volume Media type: Refer to ST39SMT for the values.
128 80	ST39BTKN	4	binary	Volume location token on the ST39TVSN.

Table 76. Format of the Subtype Data Section for Subtype 39 (continued)

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
132 84	ST39FLGS	4	binary	Processing flags: **Bit** **MEANING** **0** When on, the primary copy is stored to DASD. **1** When on, the primary copy is stored to optical. **2** When on, the primary copy is stored to tape. **3** Reserved. **4** Reserved. **5** When on, the backup copy is stored to optical. **6** When on, the backup copy is stored to tape. **7** Reserved. **8** When on, write to backup was successful. **9** Reserved.

Tape Recycle (Subtype 40)

Table 77 describes the format of the subtype data section for a subtype 40 OAM SMF record for Tape Recycle.

Table 77. Format of the Subtype Data Section for Subtype 40

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
0 0	ST40STRD	10	EBCDIC	DATE RECYCLE CMD STARTED.
10 A	ST40ENDD	10	EBCDIC	DATE RECYCLE CMD ENDED.
20 14	ST40VOLN	2	BINARY	NUMBER OF VOLS COMPLETED.
22 16	ST40PCTV	2	BINARY	PERCENTVALID .
24 18	ST40LIM	2	BINARY	LIMIT.
26 1A		2	BINARY	RESERVED.
28 1C	ST40VSN	240	EBCDIC	ARRAY of up to 40 volume serials that are completed.

LCS Optical Library/Drive Vary Online/Offline (Subtypes 64–67)

Table 78 describes the format of the subtype data section for the following subtypes:

64 LCS optical drive vary online.
65 LCS optical drive vary offline.
66 LCS optical library vary online.
67 LCS optical library vary offline.

Table 78. Format of the Subtype Data Section for Subtypes 64–67

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
0 0	ST64OLN	8	EBCDIC	Contains the real optical library name for the operator-accessible drive.
8 8	ST64OLDT	8	EBCDIC	Optical library device type.
16 10	ST64OLDN	4	EBCDIC	MVS device number corresponding to the optical library.
20 14	ST64ODN	8	EBCDIC	Optical drive name. Valid for subtypes 64 and 65. This field contains blanks for other subtypes.

Table 78. Format of the Subtype Data Section for Subtypes 64–67 (continued)

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
28 1C	ST64ODDT	8	EBCDIC	Optical drive device type. Valid for subtypes 64 and 65. This field contains blanks for other subtypes.
36 24	ST64ODDN	4	EBCDIC	MVS device number corresponding to the optical drive. Valid for subtypes 64 and 65. This field contains blanks for other subtypes.
40 28	ST64VSN0	6	EBCDIC	Volume serial number of the currently mounted volume. Valid for subtypes 64 and 65. This field contains blanks for other subtypes.
46 2E	ST64VSN1	6	EBCDIC	Volume serial number of the opposite side of the currently mounted volume. Valid for subtypes 64 and 65. This field contains blanks for other subtypes.
52 34	ST64OMT	2	EBCDIC	Optical media type. Valid for subtypes 64 and 65. This field contains blanks for other subtypes. **VALUE MEANING** **00** IBM 9247 12-inch 2000-MB optical disk media. **01** IBM 3995 5.25-inch 650-MB rewritable optical disk media. **03** IBM 3995 5.25-inch 650-MB WORM optical disk media. **11** IBM 3995 5.25-inch 1300-MB rewritable optical disk media. **13** IBM 3995 5.25-inch 1300-MB WORM optical disk media. **15** IBM 3995 5.25-inch 1300-MB CCW optical disk media. **21** IBM 3995 5.25-inch 2600-MB rewritable optical disk media. **23** IBM 3995 5.25-inch 2600-MB WORM optical disk media. **25** IBM 3995 5.25-inch 2600-MB CCW optical disk media. **31** IBM 3995 5.25-inch 5.2-GB rewritable optical disk media. **33** IBM 3995 5.25-inch 5.2-GB WORM optical disk media. **35** IBM 3995 5.25-inch 5.2-GB CCW optical disk media. **Note:** CCW = continuous composite WORM media. WORM = write-once-read-many.
54 36	ST64ODT	1	EBCDIC	Optical drive type. Valid for subtypes 64 and 65. This field contains blanks for other subtypes. **VALUE MEANING** **L** Optical drive is a library-resident drive. **S** Optical drive is a stand-alone or operator-accessible drive.
55 37	ST64OVT	1	EBCDIC	Optical volume type. Valid for subtypes 64 and 65. This field contains blanks for other subtypes. **VALUE MEANING** **B** Optical volume is a backup volume belonging to an OBJECT BACKUP storage group. **G** Optical volume is a grouped volume belonging to an OBJECT storage group. **S** Optical volume is a scratch volume.

Table 78. Format of the Subtype Data Section for Subtypes 64–67 (continued)

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
56 38	ST64SGN	8	EBCDIC	Storage group name. Valid for subtypes 64 and 65. This field contains blanks for other subtypes.
64 40	ST64LIQT	4	binary	LCS input-work-queue time. The amount of time in milliseconds this request has spent on the LCS input-work-queue waiting to be processed.
68 44	ST64LDQT	4	binary	LCS dispatcher-queued time. The amount of time in milliseconds this request has spent on the LCS dispatcher-queue waiting to be processed.
72 48	ST64LEQT	4	binary	LCS execution-queue time. The amount of time in milliseconds this request has spent on the LCS execution-queue being processed.
76 4C	ST64LTQT	4	binary	LCS library task queue time. The amount of time in milliseconds that this request has spent on the LCS library queue waiting to be processed. Normally, this field represents the cartridge transport mechanism wait time. That is, the time spent waiting for the cartridge transport mechanism within the automated optical disk library to become available. Valid for subtypes 66 and 67.
80 50	ST64LTPT	4	binary	LCS library task processing time. The amount of time in milliseconds that this request took to be processed by the library task. Normally, this field represents the cartridge transport mechanism service time. This is, the time spent by the cartridge transport mechanism within the automated optical disk library performing mechanical motion to move cartridges within the optical disk library. Valid for subtypes 66 and 67.
84 54	ST64RC	4	binary	LCS return code
88 58	ST64RS	4	binary	LCS reason code.
92 5C	ST64FLGS	4	binary	Processing flags. **BIT** **MEANING** **0–31** Reserved

Although subtypes 64–67 share a common subtype data section, not all fields are valid for each of the four subtypes. Table 79 identifies which fields in the OAM subtype data section are valid for each of the four subtypes.

Table 79. Valid Subtype Data Section Fields for Subtypes 64–67

FIELD NAME	DRIVE ONLINE Subtype 64	DRIVE OFFLINE Subtype 65	LIBRARY ONLINE Subtype 66	LIBRARY OFFLINE Subtype 67
ST64OLN	X	X	X	X
ST64OLDT	X	X	X	X
ST64OLDN	X	X	X	X
ST64ODN	X	X		
ST64ODDT	X	X		
ST64ODDN	X	X		
ST64VSN0	See table note 1.	See table note 2.		
ST64VSN1	See table note 1.	See table note 2.		

Table 79. Valid Subtype Data Section Fields for Subtypes 64–67 (continued)

FIELD NAME	DRIVE ONLINE Subtype 64	DRIVE OFFLINE Subtype 65	LIBRARY ONLINE Subtype 66	LIBRARY OFFLINE Subtype 67
ST64OMT	See table note 1.	See table note 2.		
ST64ODT	X	X		
ST64OVT	See table note 1.	See table note 2.		
ST64SGN	See table note 1.	See table note 2.		
ST64LIQT				
ST64LDQT	X	X	X	X
ST64LTQT			X	X
ST64LTPT			X	X
ST64RC	X	X	X	X
ST64RS	X	X	X	X
ST64FLGS	X	X	X	X

Note:
1. This field is only valid if there is an optical disk cartridge mounted in the drive at the time the **VARY SMS,DRIVE(***drive_name***),ONLINE** is issued.
2. This field is only valid if there is an optical disk cartridge mounted in the drive at the time the **VARY SMS,DRIVE(***drive_name***),OFFLINE** is issued.

LCS Optical Cartridge Entry, Eject, Label, Audit, Mount, and Demount (Subtypes 68–73)

Table 80 describes the format of the subtype data section for the following OAM SMF record subtypes:

68 LCS optical cartridge entry
69 LCS optical cartridge eject
70 LCS optical cartridge label
71 LCS optical volume audit
72 LCS optical volume mount
73 LCS optical volume demount

Table 80. Format of the Subtype Data Section for Subtypes 68–73

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
0 0	ST68OLN	8	EBCDIC	Optical library name. This field contains the real library name of an operator-accessible drive.
8 8	ST68OLDT	8	EBCDIC	Optical library device type.
16 10	ST68OLDN	4	EBCDIC	MVS device number that corresponds to the optical library.
20 14	ST68ODN	8	EBCDIC	Optical drive name.
28 1C	ST68ODDT	8	EBCDIC	Optical drive device type.
36 24	ST688ODDN	4	EBCDIC	MVS device number that corresponds to the optical drive.
40 28	ST68VSN0	6	EBCDIC	Volume serial number.
46 2E	ST68VSN1	6	EBCDIC	Volume serial number of the opposite side of the optical disk.

Table 80. Format of the Subtype Data Section for Subtypes 68–73 (continued)

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
52 34	ST68OMT	2	EBCDIC	Optical media type **VALUE MEANING** **00** IBM 9247 12-inch 2000-MB optical disk media. **01** IBM 3995 5.25-inch 650-MB rewritable optical disk media. **03** IBM 3995 5.25-inch 650-MB WORM optical disk media. **11** IBM 3995 5.25-inch 1300-MB rewritable optical disk media. **13** IBM 3995 5.25-inch 1300-MB WORM optical disk media. **15** IBM 3995 5.25-inch 1300-MB CCW optical disk media. **21** IBM 3995 5.25-inch 2600-MB rewritable optical disk media. **23** IBM 3995 5.25-inch 2600-MB WORM optical disk media. **25** IBM 3995 5.25-inch 2600-MB CCW optical disk media. **31** IBM 3995 5.25-inch 5.2-GB rewritable optical disk media. **33** IBM 3995 5.25-inch 5.2-GB WORM optical disk media. **35** IBM 3995 5.25-inch 5.2-GB CCW optical disk media. **Note:** CCW = continuous composite WORM media. WORM = write-once-read-many.
54 36	ST68ODT	1	EBCDIC	Optical drive type: **VALUE MEANING** **L** Optical drive is a library-resident drive. **S** Optical drive is a stand-alone or operator-accessible drive.
55 37	ST68OVT	1	EBCDIC	Optical volume type: **VALUE MEANING** **B** Optical volume is a backup volume belonging to an OBJECT BACKUP storage group. **G** Optical volume is a grouped volume belonging to an OBJECT storage group. **S** Optical volume is a scratch volume.
56 38	ST68SGN	8	EBCDIC	Storage group name.
64 40	ST68LIQT	4	binary	LCS input-work-queue time. The amount of time in milliseconds this request has spent on the LCS input-work-queue waiting to be processed.
68 44	ST68LDQT	4	binary	LCS dispatcher-queue time. The amount of time in milliseconds this request has spent on the LCS dispatcher-queue waiting to be processed.
72 48	ST68LEQT	4	binary	LCS execution-queue time. The amount of time in milliseconds this request has spent on the LCS execution-queue being processed.

Table 80. Format of the Subtype Data Section for Subtypes 68–73 (continued)

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
76 4C	ST68LTQT	4	binary	LCS library task queue time. The amount of time in milliseconds this request has spent on the LCS library queue waiting to be processed. Normally, this field represents the cartridge transport mechanism wait time. That is, the time spent waiting for the cartridge transport mechanism within the automated optical disk library to become available.
80 50	ST68LTPT	4	binary	LCS library task processing time. The amount of time in milliseconds this request took to be processed by the library task. Normally, this field represents the cartridge transport mechanism service time. That is, the time spent by the cartridge transport mechanism within the automated optical disk library performing mechanical motion to move cartridges within the optical disk library.
84 54	ST68RC	4	binary	LCS return code.
88 58	ST68RS	4	binary	LCS reason code.
92 5C	ST68FLGS	4	binary	Processing flags. The meaning is dependent on the record subtype. The following bit definitions apply for record subtype 68: **BIT** **MEANING** **0** When on, the volume serial number described by field ST68VSN0 required formatting as part of the optical cartridge entry processing. **1** When on, the volume serial number described by field ST68VSN1 required formatting as part of optical cartridge entry processing. **2** When on, the volume serial number described by field ST68VSN0 was not known to OAM at the time of being entered into the optical library. There was no row for this optical disk volume in the Volume table in the OCDB. **3** When on, the volume serial number described by field ST68VSN1 was not known to OAM at the time of being entered into the optical library. There was no row for this optical disk volume in the Volume table in the OCDB. **4–31** Reserved.
92 5C	ST69FLGS	4	binary	Processing flags. The meaning is dependent on the record subtype. The following bit definitions apply for record subtype 69: **BIT** **MEANING** **0** When on, this optical cartridge was automatically ejected by the system due to an error condition known as a system-initiated eject request. **1–31** Reserved.
92 5C	ST70FLGS	4	binary	Processing flags. The meaning is dependent on the record subtype. The following bit definitions apply for record subtype 70: **BIT** **MEANING** **0–31** Reserved.

Table 80. Format of the Subtype Data Section for Subtypes 68–73 (continued)

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
92 5C	ST71FLGS	4	binary	Processing flags. The meaning is dependent on the record subtype. The following bit definitions apply for record subtype 71: **BIT** **MEANING** **0–31** Reserved.
92 5C	ST72FLGS	4	binary	Processing flags. The meaning is dependent on the record subtype. The following bit definitions apply for record subtype 72: **BIT** **MEANING** **0** When on, the volume serial number described by field ST68VSN0 required formatting as part of the optical volume mount processing. **1** When on, the volume serial number described by field ST68VSN1 required formatting as part of the optical volume mount processing. **2–31** Reserved.
92 5C	ST73FLGS	4	binary	Processing flags. The meaning is dependent on the record subtype. The following bit definitions apply for record subtype 73: **BIT** **MEANING** **0–31** Reserved.
96 60	ST68TMNT	4	binary	Elapsed time in milliseconds that the optical disk volume was mounted. Valid for subtypes 69 and 73.
100 64	ST68NOW	4	binary	Number of objects written to this optical disk volume while it was mounted. Valid for subtypes 69 and 73.
104 68	ST68NKBW	4	binary	Number of kilobytes of object data written to this optical disk volume while it was mounted. Valid for subtypes 69 and 73.
108 6C	ST68NOR	4	binary	Number of objects read from this optical disk volume while it was mounted. Valid for subtypes 69 and 73.
112 70	ST68NKBR	4	binary	Number of kilobytes of object data read from this optical disk volume while it was mounted. Valid for subtypes 69 and 73.
116 74	ST68NOD	4	binary	Number of objects deleted from this optical disk volume while it was mounted. Valid for subtypes 69 and 73.
120 78	ST68NKBD	4	binary	Number of kilobytes of object data deleted from this optical disk volume while it was mounted. Valid for subtypes 69 and 73.
Note: For subtypes 69 and 73, each object size is rounded up to the next whole KB before being added to the total.				

Although subtypes 68–73 share a common subtype data section, not all fields are valid for each of the six subtypes. Table 81 on page 562 identifies which fields in the OAM subtype data section are valid for each of the six subtypes.

Table 81. Valid Subtype Data Section Fields for Subtypes 68–73

FIELD NAME	OPTICAL CARTRIDGE ENTRY Subtype 68	OPTICAL CARTRIDGE EJECT Subtype 69	OPTICAL CARTRIDGE LABEL Subtype 70	OPTICAL VOLUME AUDIT Subtype 71	OPTICAL VOLUME MOUNT Subtype 72	OPTICAL VOLUME DEMOUNT Subtype 73
ST68OLN	X	X	X	X	X	X
ST68OLDT	X	X	X	X	X	X
ST68OLDN	X	X	X	X	X	X
ST68ODN	X	See table note.	X	X	X	X
ST68ODDT	X	See table note.	X	X	X	X
ST68ODDN	X	See table note.	X	X	X	X
ST68VSN0	X	X	X	X	X	X
ST68VSN1	X	X	X	X	X	X
ST68OMT	X	X	X	X	X	X
ST68ODT	X	See table note.	X	X	X	X
ST68OVT	X	X	X	X	X	X
ST68SGN	X	X	X	X	X	X
ST68LIQT		X	X	X		
ST68LDQT	X	X	X	X		
ST668LEQT	X	X	X	X		
ST68LTQT		X		X		
ST68LTPT		X		X		
ST68RC	X	X	X	X	X	X
ST68RS	X	X	X	X	X	X
ST68FLGS	X	X	X	X	X	X
ST68TMNT		See table note.				X
ST68NOW		See table note.				X
ST68NKBW		See table note.				X
ST68NOR		See table note.				X
ST68NKBR		See table note.				X
ST68NOD		See table note.				X
ST68NKBD		See table note.				X

Note: This field contains valid data if the optical disk volume being ejected is mounted in an optical disk drive at the time that the **LIBRARY,EJECT,***volser* command or **F OAM,EJECT,***volser* command is received to eject the volume.

LCS Optical Write, Read, Logical Delete, Physical Delete (Subtypes 74–77)

Table 82 on page 563 describes the format of the subtype data section for the following OAM SMF record subtypes:

74 LCS optical write request
75 LCS optical read request
76 LCS optical delete request (logical)
77 LCS optical delete request (physical)

Table 82. Format of the Subtype Data Section for Subtypes 74–77

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
0 0	ST74ORMN	16	EBCDIC	OAM request member name. Valid for subtypes 74 and 75.
16 10	ST74OTMN	16	EBCDIC	OAM target member name. Valid for subtypes 74 and 75.
32 20	ST74OLN	8	EBCDIC	Optical library name.
40 28	ST74OLDT	8	EBCDIC	Optical library device type.
48 30	ST74OLDN	4	EBCDIC	MVS device number that corresponds to the optical library.
52 34	ST74ODN	8	EBCDIC	Optical drive name.
60 3C	ST74ODDT	8	EBCDIC	Optical drive device type.
68 44	ST748ODDN	4	EBCDIC	MVS device number that corresponds to the optical drive.
72 48	ST74ODT	1	EBCDIC	Optical drive type: **VALUE MEANING** **L** Optical drive is a library-resident drive. **S** Optical drive is a stand-alone or operator-accessible drive.
73 49	ST74OVT	1	EBCDIC	Optical volume type **VALUE MEANING** **B** Optical volume is a backup volume belonging to an OBJECT BACKUP storage group. **G** Optical volume is a grouped volume belonging to an OBJECT storage group.
74 4A	ST74SGN	8	EBCDIC	Storage group name.
82 52	ST74LIQT	4	binary	LCS input-work-queue time. The amount of time in milliseconds that this request has spent on the LCS input-work-queue waiting for processing.
86 56	ST74LDQT	4	binary	LCS dispatcher-queue time. The amount of time in milliseconds that this request has spent on the LCS dispatcher-queue waiting for processing.
90 5A	ST74LEQT	4	binary	LCS execution-queue time. The amount of time in milliseconds that this request has spent on the LCS execution-queue processing.
94 5E	ST74LXQT	4	binary	XCF cross system processing-queue time. The amount of time in milliseconds that this request spent being processed on the XCF cross system queue. For subtypes 76 and 77, this field contains binary zeros.
98 62	ST74OVMT	4	binary	Optical volume mount time. The amount of time in milliseconds that it took to mount the optical disk volume required by this request. This field is valid if bit 1, 2, or 3 in field ST74FLGS is on. This field is valid for subtypes 74, 75, and 77.
102 66	ST74OVDT	4	binary	Optical volume demount time. This is the amount of time in milliseconds that it took to demount the optical disk volume that was mounted prior to mounting the optical disk volume required by this request. The field is valid if bit 3 in field ST74FLGS is on. This field is valid for subtypes 74, 75, and 77.

Table 82. Format of the Subtype Data Section for Subtypes 74–77 (continued)

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
106 6A	ST74FLGS	4	binary	Processing flags **BIT** **MEANING** **0** This request was processed using a mounted optical disk volume and did not require an unmounted optical disk volume to be mounted. Valid for subtypes 74, 75, and 77. Not valid for subtype 76. **1** This request was processed using the opposite side of a mounted optical disk volume. Therefore, this request required the optical disk volume to be turned over in order to access the volume on the opposite side of the mounted volume. Valid for subtypes 74, 75, and 77. Not valid for subtype 76. **2** This request required an unmounted optical disk volume to be mounted and the optical disk drive that was used to process this request was empty at the time of the request. Therefore, this request did not require a mounted optical disk volume to be demounted prior to mounting the required optical disk volume. Valid for subtypes 74, 75, and 77. Not valid for subtype 76. **3** This request required an unmounted optical disk volume to be mounted and the optical disk drive that was selected for this request was full. Therefore, this request required a mounted optical disk volume to be demounted prior to mounting the required optical disk volume. Valid for subtypes 74, 75, and 77. Not valid for subtype 76. **4–31** Reserved.
110 6E	ST74NOBJ	4	binary	Total number of objects in this request. The maximum possible for this field is 280. With 280 object entries, the maximum SMF record size is 32 744 bytes.
114 72	ST74NKBP	4	binary	Total number of kilobytes of object data in this request.
118 76	ST74SOBJ	4	binary	Total number of objects in this request that processed successfully.
122 7A	ST74SKBP	4	binary	Total number of kilobytes of object data in this request that processed successfully.
126 7E	*	14	binary	Reserved.
Note: The following fields (comprising 116 bytes) are repeated for each object in the chained request, that is for the number of objects specified in the ST74NOBJ field. The maximum number of times that the following fields will be repeated is 280. With 280 object entries, the maximum SMF record size is 32 744 bytes.				
140 8C	ST74COLN	44	EBCDIC	Collection name.
184 B8	ST74OBJN	44	EBCDIC	Object name.
228 E4	ST74OLEN	4	binary	Object length.
232 E8	ST74OOFF	4	binary	Object offset. Valid for a subtype 75 partial object read.
236 EC	ST74VSN	6	EBCDIC	Volume serial number.

Table 82. Format of the Subtype Data Section for Subtypes 74–77 (continued)

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
242 F2	ST74OMT	2	EBCDIC	Optical media type: **VALUE MEANING** **00** IBM 9247 12-inch 2000-MB optical disk media. **01** IBM 3995 5.25-inch 650-MB rewritable optical disk media. **03** IBM 3995 5.25-inch 650-MB WORM optical disk media. **11** IBM 3995 5.25-inch 1300-MB rewritable optical disk media. **13** IBM 3995 5.25-inch 1300-MB WORM optical disk media. **15** IBM 3995 5.25-inch 1300-MB CCW optical disk media. **21** IBM 3995 5.25-inch 2600-MB rewritable optical disk media. **23** IBM 3995 5.25-inch 2600-MB WORM optical disk media. **25** IBM 3995 5.25-inch 2600-MB CCW optical disk media. **31** IBM 3995 5.25-inch 5.2-GB rewritable optical disk media. **33** IBM 3995 5.25-inch 5.2-GB WORM optical disk media. **35** IBM 3995 5.25-inch 5.2-GB CCW optical disk media. **Note:** CCW = continuous composite WORM media. WORM = write-once-read-many.
244 F4	ST74OTKN	4	binary	Object volume location token.
248 F8	ST74RC	4	binary	LCS return code.
252 FC	ST74RS	4	binary	LCS reason code.

Although subtypes 74–77 share a common subtype data section, not all fields are valid for each of the four subtypes. Table 83 identifies which fields in the OAM subtype data section are valid for each of the four subtypes.

Table 83. Valid Subtype Data Section Fields for Subtypes 74–77

FIELD NAME	OPTICAL WRITE REQUEST Subtype 74	OPTICAL READ REQUEST Subtype 75	OPTICAL DELETE REQUEST (LOGICAL) Subtype 76	OPTICAL DELETE REQUEST (PHYSICAL) Subtype 77
ST74ORMN	X	X		
ST74OTMN	X	X		
ST74OLN	X	X	X	X
ST74OLDT	X	X	X	X
ST74OLDN	X	X	X	X
ST74ODN	X	X		X
ST74ODDT	X	X		X
ST74ODDN	X	X		X
ST74ODT	X	X		X
ST74OVT	X	X	X	X

Table 83. Valid Subtype Data Section Fields for Subtypes 74–77 (continued)

FIELD NAME	OPTICAL WRITE REQUEST Subtype 74	OPTICAL READ REQUEST Subtype 75	OPTICAL DELETE REQUEST (LOGICAL) Subtype 76	OPTICAL DELETE REQUEST (PHYSICAL) Subtype 77
ST74SGN	X	X	X	X
ST74LIQT	X	X	X	
ST74LDQT	X	X		
ST74LEQT	X	X		X
ST74LXQT	X	X		
ST74LVMT	X	X		X
ST74LVDT	X	X		X
ST74NOBJ	X	X	X	X
ST74NKBP	X	X	X	X
ST74FLGS	X	X	X	X
ST74SOBJ	X	X	X	X
ST74SKBP	X	X	X	X
ST74COLN	X	X	X	X
ST74OBJN	X	X	X	X
ST74OLEN	X	X	X	X
ST74OOFF		X		
ST74VSN	X	X	X	X
ST74OMT	X	X	X	X
ST74OTKN	X	X	X	X
ST74RC	X	X	X	X
ST74RS	X	X	X	X

LCS Tape Write and Read Request (Subtypes 78–79, and 88)

Table 84 describes the format of the subtype data section for the following OAM SMF record subtypes:

78 LCS tape write request
79 LCS tape read request
88 LCS object tape logical delete request

Table 84. Format of Subtype Data Section for Subtypes 78–79

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
0 0	ST78ORMN	16	EBCDIC	OAM request member name. Valid for subtype 79 only.
16 10	ST78OTMN	16	EBCDIC	OAM target member name. Valid for subtype 79 only.
32 20	ST78TDUN	8	EBCDIC	Tape drive unit name.
40 28	ST78TDDN	4	EBCDIC	MVS device number of the tape drive.
44 2C	ST78TVT	1	EBCDIC	OAM tape volume type. **VALUE MEANING** **B** Tape volume is a backup volume belonging to an OBJECT BACKUP storage group. **G** Tape volume is a grouped volume belonging to an OBJECT storage group.
45 2D	*	3	binary	Reserved.
48 30	ST78SGN	8	EBCDIC	Name of the OBJECT or OBJECT BACKUP storage group to which the tape volume belongs.
56 38	ST78LIQT	4	binary	LCS input-work-queue time. The amount of time in milliseconds this request has spent on the LCS input-work-queue waiting to be processed. For subtype 88, this field contains binary zeros.
60 3C	ST78LDQT	4	binary	LCS dispatcher-queue time. The amount of time in milliseconds this request has spent on the LCS dispatcher-queue waiting to be processed. For subtype 88, this field contains binary zeros.
64 40	ST78LEQT	4	binary	LCS execution-queue time. The amount of time in milliseconds that this request has spent on the LCS execution-queue being processed. For subtype 88, this field contains binary zeros.
68 44	ST78LXQT	4	binary	XCF cross system processing-queue time. The amount of time in milliseconds that this request has spent being processed on the XCF cross system queue. For subtypes 78 and 88, this field contains binary zeros.
72 48	ST78LMAT	4	binary	MVS dynamic allocation time. This is the amount of time in milliseconds that was required by MVS dynamic allocation (SVC 99) to dynamically allocate the tape drive. For subtypes 78 and 79, this field is only valid if bit 1 in field ST78FLGS is on. For subtype 88, this field contains binary zeros.
76 4C	ST78LMDT	4	binary	MVS dynamic deallocation time. This is the amount of time in milliseconds that was required by MVS dynamic deallocation (SVC99) to dynamically deallocate the tape drive. For subtypes 78 and 79, this field is only valid if bit 2 in field ST78FLGS is on. For subtype 88, this field contains binary zeros.

Table 84. Format of Subtype Data Section for Subtypes 78–79 (continued)

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
80 50	ST78LDCT	4	binary	DFP CLOSE time. This is the amount of time in milliseconds that was required by DFP CLOSE processing to close an already-opened tape data set. For subtypes 78 and 79, this field is only valid if bit 2 in field ST78FLGS is on. For subtype 88, this field contains binary zeros.
84 54	ST78LDOT	4	binary	DFP OPEN time. This is the amount of time in milliseconds that was required by DFP OPEN processing to open the tape data set. For subtypes 78 and 79, this field is only valid if bit 1 or 2 in field ST78FLGS is on. For subtype 88, this field contains binary zeros.
88 58	ST78LDPT	4	binary	DFP POINT time. This is the amount of time in milliseconds that was required by DFP POINT processing to position to the correct block-ID on the tape media. For subtype 88, this field contains binary zeros.
92 5C	ST78LBRT	4	binary	BSAM READ time. This is the amount of time in milliseconds that OAM spent in BSAM READ processing reading data from the tape volume. Valid for subtype 79.
96 60	ST78LBWT	4	binary	BSAM WRITE time. This is the amount of time in milliseconds that OAM spent in BSAM WRITE processing writing data to the tape volume. Valid for subtype 78.
100 64	ST78LBCT	4	binary	BSAM CHECK time. This is the amount of time in milliseconds that OAM spent in BSAM CHECK processing waiting for I/O operations to the tape volume to complete. Valid for subtype 78 and 79.
104 68	ST78FLGS	4	binary	Processing flags. For subtype 88, this field contains binary zeros. **BIT** **MEANING** **0** This request was processed using a mounted tape volume and did not require an unmounted tape volume to be mounted. **1** This request required an unmounted tape volume to be mounted and the tape drive that was used to process this request was empty at the start of processing this request. Therefore, this request did not require a mounted tape volume to be demounted prior to mounting the required tape volume. **2** This request required an unmounted tape volume to be mounted and the tape drive that was used to process this request was full at the start of processing this request. Therefore, this request required a mounted tape volume to be demounted prior to mounting the required tape volume. **3** This request was processed using a tape drive inside an automated tape library dataserver. **4–31** Reserved

Table 84. Format of Subtype Data Section for Subtypes 78–79 (continued)

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
108 6C	ST78NOBJ	4	binary	Total number of objects in this request. The maximum value for this field is 280. With 280 object entries in this record, the maximum SMF record size for subtype 78 is 32 744 bytes.
112 70	ST78NKBP	4	binary	Total number of kilobytes of object data in this request.
116 74	ST78SOBJ	4	binary	Total number of objects in this request that processed successfully.
120 78	ST78SKBP	4	binary	Total number of kilobytes of object data in this request that processed successfully.
124 7C	*	16	binary	Reserved.
Note: The following fields (comprising 116 bytes) are repeated for each object in the chained request, that is for the number of objects specified in the ST78NOBJ field. The maximum number of times that the following fields will be repeated is 280. With 280 object entries, the maximum SMF record size for subtype 78 is 32 744 bytes.				
140 8C	ST78COLN	44	EBCDIC	Collection name.
184 B8	ST78OBJN	44	EBCDIC	Object name.
228 E4	ST78OLEN	4	binary	Object length.
232 E8	ST78OOFF	4	binary	Object offset. Valid for a subtype 79 partial object read.
236 EC	ST78VSN	6	EBCDIC	Volume serial number.
242 F2	ST78TMT	2	EBCDIC	Tape media type: **VALUE MEANING** **02** IBM 3480 Cartridge System Tape. **04** IBM 3480 Enhanced Capacity Cartridge System Tape. **05** IBM High Performance Cartridge Tape. **06** IBM Extended High Performance Cartridge Tape. **07** IBM Enterprise Tape Cartridge. **08** IBM Enterprise WORM Tape Cartridge. **09** IBM Enterprise Economy Tape Cartridge. **10** IBM Enterprise Economy WORM Tape Cartridge. **12** IBM Enterprise Extended Tape Cartridge. **14** IBM Enterprise Extended WORM Tape Cartridge.
244 F4	ST78OTKN	4	binary	Object volume location token.
248 F8	ST78RC	4	binary	LCS return code.
252 FC	ST78RS	4	binary	LCS reason code.

OAM Tape Volume Demount (Subtype 87)

Table 85 describes the format of the subtype 87 data section.

Table 85. Format of Subtype Data Section for Subtype 87

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
0 0	ST87TDDN	4	EBCDIC	MVS device number that corresponds to the tape drive on which the volume was mounted.
4 4	ST87TDDT	4	EBCDIC	MVS UCB device type associated with the tape drive on which the volume was mounted.

Table 85. Format of Subtype Data Section for Subtype 87 (continued)

OFFSETS	NAME	LENGTH	FORMAT	DESCRIPTION
8 8	ST87TVUN	8	EBCDIC	Unit name associated with the tape volume and used to allocate the tape drive.
16 10	ST87VSN	6	EBCDIC	Volume serial number of the tape volume.
22 16	ST87TMT	2	EBCDIC	Tape media type. **VALUE MEANING** **02** IBM 3480 Cartridge System Tape. **04** IBM 3480 Enhanced Capacity Cartridge System Tape. **05** IBM High Performance Cartridge Tape. **06** IBM Extended High Performance Cartridge Tape. **07** IBM Enterprise Tape Cartridge **08** IBM Enterprise WORM Tape Cartridge **09** IBM Enterprise Economy Tape Cartridge **10** IBM Enterprise Economy WORM Tape Cartridge **12** IBM Enterprise Extended Tape Cartridge **14** IBM Enterprise Extended WORM Tape Cartridge
24 18	ST87TVT	1	EBCDIC	OAM tape volume type. **VALUE MEANING** **B** Tape volume is a backup volume belonging to an OBJECT BACKUP storage group. **G** Tape volume is a grouped volume belonging to an OBJECT storage group.
25 19	*	3	binary	Reserved.
28 1C	ST87SGN	8	EBCDIC	Name of the OBJECT or OBJECT BACKUP storage group.
36 24	ST87RC	4	binary	LCS return code.
40 28	ST87RS	4	binary	LCS reason code.
44 2C	ST87FLGS	4	binary	Processing flags. **BIT MEANING** **0–31** Reserved.
48 30	ST87TMNT	4	binary	Elapsed time in milliseconds that the tape volume was mounted, measured from the time that the first DFP OPEN macro completed to the time the tape volume was deallocated via a SVC 99 dynamic deallocation request.
52 34	ST87NOW	4	binary	Number of objects written to this tape volume while it was mounted.
56 38	ST87NKBW	4	binary	Number of logical kilobytes of object data written to this tape volume while it was mounted.
60 3C	ST87NOR	4	binary	Number of objects read from this tape volume while it was mounted.
64 40	ST87NKBR	4	binary	Number of kilobytes of object data read from this tape volume while it was mounted.
Note: For subtype 87, each object size is rounded up to the next whole KB before being added to the total.				

Invoking the SMF PARMLIB Member

The MVS operator can dynamically change which SMF records and record subtypes are being recorded by one of two methods:

- Issue a **SET SMF** = *xx* command at an MVS console to activate a new SMF PARMLIB member. The *xx* identifies the **SMFPRM***xx* member of the SYS1.PARMLIB that is to be activated by SMF.
- Issue a **SETSMF** command at an MVS system console to add a SUBPARM parameter or to replace any previously specified parameter in the active SMF PARMLIB member except for the ACTIVE, PROMPT, SID, or EXITS parameters.

Related reading: For more information regarding the SET SMF, SETSMF, and the SMF PARMLIB member, see the following documents:

- *z/OS MVS System Management Facilities (SMF)*
- *z/OS MVS System Commands*
- *z/OS MVS Initialization and Tuning Reference*

Changing SMF Recording

The MVS system operator or MVS system programmer can dynamically change OAM SMF recording using one of the following two methods:

- Update the SMF PARMLIB member (SMFPRM*xx*) to include the OAM SMF record subtypes:

  SYS(TYPE(85(2:3)))

  and activate the SMF PARMLIB member (SMFPRM*xx*) by entering the following MVS operator SET command:

  SET SMF=*xx*

  Note: The above example activates the OAM SMF recording for subtypes 2 and 3.
- Update the SMF options dynamically by entering the following MVS operator SETSMF command:

  SETSMF SYS(TYPE(85(4:6)))

  Note: The above example activates the OAM SMF recording for subtypes 4, 5, and 6.

Below are several examples of the format of the SETSMF command to activate various OAM SMF record subtypes from an MVS console:

- To exclude collecting all OAM SMF records, enter the following command:

  SETSMF SYS(NOTYPE(85)))
- To activate all OAM SMF record subtypes for the OSREQ macro application programming interface (subtypes 1–7), enter the following command:

  SETSMF SYS(TYPE(85(1:7)))
- To activate the OAM SMF record subtype for the OSMC storage group processing (subtype 32), enter the following command:

  SETSMF SYS(TYPE(85(32)))

- To activate the OAM SMF record subtype for the OSREQ RETRIEVE (subtype 3), LCS optical volume mount (subtype 72), and LCS optical read request (subtype 75), enter the following command:

  SETSMF SYS(TYPE(85(3,72,75)))
- To activate the OAM SMF record subtypes to track all optical library subsystem activity: optical cartridge entry (subtype 68), optical cartridge eject (subtype 69), optical volume audit (subtype 71), optical volume mount (subtype 72) and optical volume demount (subtype 73), enter the following command:

  SETSMF SYS(TYPE(85(68,69,71,72,73)))
- To activate the OAM SMF record subtypes to track all objects being retrieved from tape: OSREQ RETRIEVE (subtype 3) and LCS tape read requests (subtype 79), enter the following command:

  SETSMF SYS(TYPE(85(3,79)))

Related reading: For more information regarding the SET SMF and SETSMF commands see *z/OS MVS System Commands*.

DASD Space Allocation

The number of OAM SMF records written to the SMF data sets is dependent on two major factors:
- The amount of OAM activity that occurs on the processor complex, and
- The OAM SMF record subtypes that the system programmer has selected to be recorded in the SMF data sets.

Depending on the number of SMF records being recorded in the SMF data sets, the system programmer should perform the following activities:
- Determine which OAM SMF record subtypes should be captured.
- Make a preliminary determination of the number of each OAM SMF record subtype that will occur each hour or day.
- Calculate the additional DASD space requirements needed for SMF data sets based on the above two factors. The OAM SMF record subtype sizes are provided in the Table 31 on page 212. Variables and formulas for determining DASD requirements can be found in Table 8 on page 66, Table 9 on page 66, and Table 10 on page 67.
- Determine if the DASD space allocation quantities for the existing SMF data sets will be satisfactory given the additional space required by the OAM SMF records. If the DASD space allocation quantity for the existing SMF data sets is insufficient based on how frequently the system programmer wishes SMF to switch data sets, perform one or both of the following:
  - Reallocate the SMF data set with a larger primary space allocation quantity
  - Increase the number of SMF data sets
- Determine the adequacy of the DASD subsystem containing the SMF data sets to determine if the additional I/O activity caused by OAM recording the selected SMF records is going to introduce unacceptable levels of utilization and I/O contention on the DASD subsystem components, including:
  - DASD device level I/O contention
  - Control unit I/O contention
  - Channel path contention and utilization

Appendix E. Auto-Delete Installation Exit

This appendix contains product-sensitive programming interface and associated guidance information that describes how to tailor the OAM auto-delete installation exit to suit your needs.

Related reading: See *z/OS DFSMS OAM Planning, Installation, and Storage Administration Guide for Tape Libraries* for information on the following tape library-related exits:

- Cartridge Entry Installation Exit (CBRUXENT)
- Change Use Attribute Installation Exit (CBRUXCUA)
- Cartridge Eject Installation Exit (CBRUXEJC)
- Volume Not in Library Installation Exit (CBRUXVNL)

Auto-Delete Installation Exit (CBRHADUX)

You can use the auto-delete installation exit (CBRHADUX) to confirm or bypass automatic deletion of objects during an OSMC management cycle in your OAM system.

This installation exit executes as part of the OAM Storage Management Component (OSMC) mainline processing. OSMC can delete an object when its lifetime expires in accordance with the definition of the management class assigned to the object. An object can also expire through an explicit expiration date. If the object has an explicit expiration date, that takes precedence over the defined management class for the object. Before any object is deleted, OSMC calls the auto-delete installation exit to approve or deny the request for object deletion. This approval or disapproval for object deletion is dependent upon the return code returned by the installation exit. The installation exit also records the deletion of the object so that other applications are kept in synchronization with the OAM directory.

Exception: The installation exit is not called when a user requests deletion of an object during an OSREQ macro call.

OSMC performs the storage management cycle using a separate task for each storage group. The auto-delete installation exit can execute concurrently; therefore, it must be reentrant. A *reentrant* program is serially reusable. Each time the user enters the program, a fresh copy of working storage is provided. If any values must be saved, the user must save them in other storage areas or files.

The installation exit is called for every object that is to be deleted by OSMC and one last time when there are no more objects to delete. This last call does not include object deletion information.

Related reading: See *z/OS DFSMS OAM Application Programmer's Reference* for information on how to use the OSREQ macro in your application.

Installing and Replacing the CBRHADUX Installation Exit

You can use and modify the sample auto-delete installation exit that is provided in SAMPLIB (see "Sample Auto-Delete Installation Exit" on page 577), or you can write a new installation exit. If you modify or write your own auto-delete

© Copyright IBM Corp. 1989, 2006

installation exit, you must reassemble the data set, and link-edit the control section (CSECT) into SYS1.LINKLIB. The name of the load module must be CBRHADUX.

In an OAMplex, when a new CBRHADUX load module is installed, make sure that changes are consistent on all OAMs within the OAMplex.

Writing the CBRHADUX Exit

In general, the routines you code for the auto-delete installation exit should follow these criteria:

- Written in Assembler H or High Level Assembler
- Handle multiple requests (reentrant)
- Reside in SYS1.LINKLIB
- Include any valid combination of AMODE and RMODE
- Return to the caller using the BSM instruction

The sample auto-delete installation exit has a "Sample Auto-Delete Installation Exit" on page 577 that prevents objects from being deleted. It also contains code to allow automatic deletion of objects which can be activated with a simple code modification. Once this simple code modification has been made, the sample auto-delete installation exit reads a data set that contains a list of all the objects that should not be deleted. This data set is created by the installation when it finds certain objects that should be retained for longer periods of time. The data set should be small because finding these objects that need to be kept for a longer retention period happens infrequently. The data set records are read and the object names are stored in an in-storage table known as the verify table, which is referenced for each call. If the object appears in the verify table, the "do not delete" return code is sent back to the caller.

Attention: Take care to avoid processing overhead because it can affect the time it takes to process the OSMC storage management cycle. For example, when the two lines of bypass code are removed, the sample exit, "Sample Auto-Delete Installation Exit" on page 577, reads the names of the objects once per cycle. It maintains the verify table to avoid I/O for each object, and it issues I/O to a data set instead of a teleprocessing link to allow for notification of deleted objects.

If the object name is *not* found in the verification table, the exit approves deletion. When the object is deleted, the name is written to a sequential data set called the notify data set. Fully qualified data set names contain both the object name and the collection name, allowing uniqueness across OSMC and concurrent I/O from the different tasks. A concatenation of these data sets (one for each group) provides input to other applications that need to synchronize their directories with the OAM object directories.

The sample uses the auto-delete installation field (ADUUFLD) to store a pointer to a dynamic area. Dynamic areas contain: save areas, system services parameter lists, and data control blocks (DCBs) that require updating.

The sample executes in 24-bit addressing mode. It can execute in 31-bit mode if you modify it to remove 24-bit dependencies. Input to the routine is always addressable in 24-bit mode. The following are 24-bit dependencies:

- The first GETMAIN should have LOC=BELOW because it has DCBs and OPEN and CLOSE short lists. The OPEN and CLOSE parameter lists can be in storage above the line if MODE=31 is coded on the list and execute forms. LOC=ABOVE can be added to other GETMAINs.

- SYNAD and EODAD must reside below the line by having RMODE 24 for the CSECTs or there must be a DCBE with SYNAD and EODAD.
- Optionally add RMODE 31=BUFF to a DCBE to get QSAM buffers above the line. If so, you can delete the FREEPOOL macro.

Registers on Entry to the Auto-Delete Exit Routine

The following information is found in the registers on entry to the auto-delete exit routine.

Register	Contents
0	Unpredictable, must be saved and restored
1	Address of the auto-delete parameter list (mapped by macro CBRADUP)
2-12	Unpredictable, must be saved and restored
13	Address of a standard 18-word save area
14	Addressing mode and return address
15	Address of the auto-delete installation exit

Auto-Delete Installation Exit Parameter List

The auto-delete installation exit parameter list contains a user field (ADUUFLD). This field is binary zero on the first call to the installation exit. It is not changed by the system on any subsequent calls; therefore, the auto-delete installation exit can use it to save pertinent information. For example: the reentrant requirement makes it necessary to obtain (GETMAIN) virtual storage for save areas and temporary values. If your exit needs a dynamic work area, you can use GETMAIN once and store the address of the work area in ADUUFLD. This allows the exit to use the same storage area on subsequent calls in the cycle. Function code 2 (ADUDONE) is placed in ADUFUNC on the last call in the cycle. Your exit should check ADUFUNC and at end-of-cycle free up the dynamic work area space and any other resources it used.

Register 1 contains the address of the input parameter list for the auto-delete installation exit. The CBRADUP macro maps the parameter list, which contains the fields in Table 86.

Table 86. Auto-Delete Parameter List, CBRADUP

Offset	Type	Length or Bit Pattern	Name	Description
00 (X'00')	CHARACTER	160	CBRADUP	Class selection parm list
00 (X'00')	CHARACTER	16	ADUHDR	Header section
00 (X'00')	CHARACTER	4	ADUID	Block ID 'ADU'
	CHARACTER ADU		ADUIDV	Control block ID
04 (X'04')	FIXED	4	ADULEN	Length of parameter list
08 (X'08')	FIXED	1	ADUVER	Version number
	DECIMAL 1		ADUVERV	Version number
09 (X'09')	FIXED	1	ADUREV	Revision number
	DECIMAL 0		ADUREVV	Revision number
10 (X'0A')	FIXED	1	ADUSP	Subpool number
	DECIMAL 0		ADUSPV	Subpool number
11 (X'0B')	FIXED	1	*	Reserved
12 (X'0C')	FIXED	4	*	Reserved
16 (X'10')	CHARACTER	8	ADULINK	Queue linkage section
16 (X'10')	ADDRESS	4	*	Reserved for coexistence Must contain zero
20 (X'14')	ADDRESS	4	*	Reserved for coexistence. Must contain zero

Table 86. Auto-Delete Parameter List, CBRADUP (continued)

Offset	Type	Length or Bit Pattern	Name	Description
24 (X'18')	FIXED	1	ADUFUNC	Function code
	DECIMAL 1		ADUNOTFY	Notify delete call
	DECIMAL 2		ADUDONE	End of auto delete cycle call
25 (X'19')	BITSTRING	3	*	Reserved
28 (X'1C')	CHARACTER	44	ADUONAME	The object name
72 (X'48')	CHARACTER	1	ADUBLANK	Separator blank
73 (X'49')	CHARACTER	44	ADUCLNAM	Collection name
117 (X'75')	CHARACTER	8	ADUCDAT	Object creation date
125 (X'7D')	CHARACTER	1	*	Reserved
126 (X'7E')	DECIMAL	2	ADUSCLEN	Length of storage class name
128 (X'80')	CHARACTER	30	ADUSCNAM	Name of the storage class to which object belongs
158 (X'9E')	DECIMAL	2	ADUMCLEN	Length of management class name
160 (X'A0')	CHARACTER	30	ADUMCNAM	Name of the management class to which object belongs
190 (X'BE')	DECIMAL	4	ADUSGLEN	Length of storage group name
194 (X'C2')	CHARACTER	8	ADUSGNAM	Name of the storage group to which object belongs
202 (X'CA')	CHARACTER	8	ADUSGDB2	DB2 storage group name
210 (X'D2')	CHARACTER	4	ADUDSSID	Name of the DB2 SSID
214 (X'D6')	CHARACTER	32	ADUUFLD	User field
246 (X'F6')	CHARACTER	16	*	Reserved

Registers on Return from the CBRHADUX Installation Exit

The primary output from the installation exit is a return code in register 15 upon return to OSMC (see return code definitions listed in the input parameter list).

Other output includes information necessary to notify other applications when objects are deleted. Table 87 describes the return codes returned from the auto-delete Installation exit.

Table 87. Auto-Delete Return Codes, CBRADUP

Return Code	Name	Description
DECIMAL 0	ADUDELOK	Exit OKs object deletion.
DECIMAL 4	ADUNODEL	Exit rejects object deletion.
DECIMAL 8	ADUFAILC	Exit fails and should not be called again for this cycle deletions continue.
DECIMAL 12	ADUFAILN	Exit fails and should not be called again for this cycle. Deletions do not continue.

CBRHADUX Return and Reason Codes

00 (X'00') IT IS OK TO DELETE THE OBJECT.
04 (X'04') DO NOT DELETE THE OBJECT.
08 (X'08') DELETE ALL OBJECTS WITHIN THIS GROUP WITHOUT CALLING THIS EXIT.
12 (X'12') DO NOT DELETE ANY OBJECTS WITHIN THIS GROUP AND DO NOT CALL THIS EXIT AGAIN.

Sample Auto-Delete Installation Exit

SYS1.SAMPLIB member SAMPADUX, as shown in Figure 97, is the sample auto-delete installation exit.

```
*********************************************************************
*                                                                   *
* $MOD(CBRHADUX),COMP(OSMC),PROD(OAM):                              *
*                                                                   *
*  MODULE NAME:  CBRHADUX                                           *
*                                                                   *
*                                                                   *
*  DESCRIPTIVE NAME:  OSMC SAMPLE AUTO-DELETE INSTALLATION EXIT     *
*                                                                   *
*                                                                   *
*PROPRIETARY V3 STATEMENT                                           *
*LICENSED MATERIALS - PROPERTY OF IBM                               *
*5695-DF1                                                           *
*(C) COPYRIGHT 1994  IBM CORP.                                      *
*END PROPRIETARY V3 STATEMENT                                       *
*                                                                   *
*********************************************************************
*********************************************************************
*                                                                   *
*  NOTE:                                                            *
*                                                                   *
*  THIS SAMPLE PROGRAM, IF INSTALLED AS IS, WILL PREVENT OBJECTS    *
*  FROM BEING DELETED.                                              *
*                                                                   *
*  RETURNS:       12 - DO NOT DELETE ANY OBJECTS WITHIN THIS GROUP  *
*                      AND DO NOT CALL THIS EXIT AGAIN FOR THIS     *
*                      GROUP                                        *
*                                                                   *
*  ADDITIONAL SAMPLE CBRHADUX FUNCTION HAS BEEN PROVIDED.           *
*  TO ENABLE MORE FUNCTION, CBRHADUX WILL HAVE TO BE ALTERED.       *
*  TWO LINES OF CODE FOLLOWING THE STANDARD ENTRY CODE BYPASS       *
*  THE FUNCTION DESCRIBED BELOW IN THIS PROLOGUE.                   *
*                                                                   *
*********************************************************************
*********************************************************************
*  FUNCTION:    VERIFY THE AUTOMATIC DELETION OF AN OBJECT. THE     *
*               VERIFICATION IS ACCOMPLISHED BY FIRST COMPARING     *
*               THIS OBJECT'S MANAGEMENT CLASS NAME WITH A          *
*               TABLE OF MANAGEMENT CLASS NAMES WHOSE OBJECTS,      *
*               RESIDING IN THE MANAGEMENT CLASS, SHOULD NOT        *
*               BE AUTOMATICALLY DELETED. THE VERIFICATION CONTINUES *
*               BY READING A SEQUENTIAL DATA SET THAT CONTAINS      *
*               THE NAMES OF OBJECTS THAT SHOULD NOT BE AUTO-       *
*               MATICALLY DELETED.  AN OBJECT'S COLLECTION NAME     *
*               IS STORED WITH OBJECT NAME IN THIS SEQUENTIAL       *
*               DATA SET TO DIFFERENTIATE BETWEEN OBJECTS WITH      *
*               SAME NAME BUT IN DIFFERENT COLLECTIONS.             *
*               RECORDS ARE ADDED TO THIS DATA SET WHEN OBJECTS     *
*               NEED TO BE KEPT LONGER THAN NORMAL.  WHEN THE       *
*               OBJECT IS NO LONGER NEEDED, ITS RECORD CAN BE       *
*               REMOVED FROM THE DATA SET.  IF THE DATA SET DOES    *
*               NOT EXIST (I.E., IS NOT CATALOGED), IT IS ASSUMED   *
*               THERE ARE NO OBJECTS THAT NEED VERIFICATION         *
*               AND THE PROCESS IS SKIPPED.                         *
*                                                                   *
```

Figure 97. Sample OSMC Auto-Delete Installation Exit (Part 1 of 14)

```
*              NOTIFY THAT AN OBJECT HAS BEEN DELETED. THE          *
*              NOTIFICATION IS ACCOMPLISHED BY ADDING AN OBJECT'S   *
*              NAME ALONG WITH ITS COLLECTION NAME TO A SEQUENTIAL  *
*              DATA SET.  THIS DATA SET SHOULD BE USED BY THE       *
*              INSTALLATION TO SYNCHRONIZE ITS DATA BASE WITH THE   *
*              OBJECT DIRECTORY (I.E., IF AN OBJECT IS DELETED FROM *
*              MANAGED STORAGE IT SHOULD ALSO BE DELETED FROM THE   *
*              APPLICATION FOLDER MANAGEMENT DATA BASE).            *
*                                                                   *
*    OPERATION: (COMPARE THE INPUT MANAGEMENT CLASS WITH THE TABLE  *
*              MANAGEMENT CLASSES WHOSE OBJECTS ARE NOT TO BE       *
*              DELETED--OPTIONAL CODE.)                             *
*              DYNAMICALLY ALLOCATE AND OPEN A SEQUENTIAL DATA SET  *
*              AND READ ALL OF THE NAMES TO BE VERIFIED INTO MAIN   *
*              STORAGE. THE OBJECTS ARE ONLY READ ONCE, THE FIRST   *
*              CALL. THE AREA REMAINS IN STORAGE FOR THE DURATION   *
*              OF THE OSMC CYCLE (FROM FIRST CALL TO END OF CYCLE   *
*              CALL.)                                               *
*              ALLOCATE AN OUTPUT DATA SET WITH A STATUS OF MOD     *
*              ALLOWING FOR THE ADDITION OF NAMES TO THE DATA SET.  *
*              OPEN THE OUTPUT DCB. THE OUTPUT DATA SET CONTAINS    *
*              ALL OF THE NAMES OF ALL OBJECTS (AND THEIR CORRES-   *
*              PONDING COLLECTION NAMES) THAT ARE DELETED.  THE     *
*              DATA SET REMAINS OPEN FOR THE DURATION OF THE OSMC   *
*              CYCLE.                                               *
*              COMPARE EACH INPUT OBJECT NAME AGAINST THOSE IN THE  *
*              MAIN STORAGE TABLE, IF A MATCH, CHECK TO SEE IF IN   *
*              THE SAME COLLECTION.  IF SAME COLLECTION, REJECT     *
*              THE DELETE.  IF NO MATCH, ADD THE OBJECT NAME ALONG  *
*              WITH ITS COLLECTION NAME TO THE OUTPUT DATA SET.     *
*              WHEN THE LAST CALL FUNCTION IS SPECIFIED, FREE THE   *
*              IN-STORAGE TABLE AND CLOSE THE OUTPUT DATA SET.      *
*              NAMES ARE COMPARED IN THEIR ENTIRETY. THAT IS THE    *
*              FULLY QUALIFIED NAME IS INPUT, ONE WHICH CONTAINS    *
*              THE OMDS SUFFIX, AND THEREFORE THE INPUT(VERIFY)     *
*              DATA SET MUST ALSO CONTAIN THE OBJECT NAME WITH THAT *
*              SUFFIX. SIMILARLY, THE OUTPUT (NOTIFY) DATA SET WILL *
*              CONTAIN THE FULLY QUALIFIED NAME.                    *
*                                                                   *
*  NOTES:                                                           *
*                                                                   *
*     DEPENDENCIES: THIS ROUTINE IS CALLED ON A GROUP BASIS. THAT   *
*                   IS, THE FIRST AND EVERY CALL OF A SINGLE        *
*                   INSTANCE OF THIS ROUTINE IS FOR THE SAME GROUP. *
*                   THIS ALLOWS: A RETURN CODE INDICATING THE       *
*                   ROUTINE IS NOT INTERESTED IN A CERTAIN GROUP    *
*                   (E.G., 100 PEL GROUPS) AND THAT THE OUTPUT DATA *
*                   SET(S) CAN BE SEGREGATED BY GROUP ALLOWING FOR  *
*                   PROCESSING OVERLAP (I.E., MORE THAN ONE TASK    *
*                   CAN HAVE AN INSTANCE OF THIS ROUTINE BECAUSE    *
*                   EACH TASK IS WRITING TO A SEPARATE DATA SET).   *
*                                                                   *
*                   THE END OF CYCLE CALL DOES NOT INCLUDE THE NAME *
*                   OF AN OBJECT TO BE DELETED.                     *
*                                                                   *
```

Figure 97. Sample OSMC Auto-Delete Installation Exit (Part 2 of 14)

```
*                                                                     *
*    CHARACTER CODE: EBCDIC                                           *
*                                                                     *
*    RESTRICTIONS: NONE                                               *
*                                                                     *
*    REGISTER CONVENTIONS:                                            *
*                                                                     *
*              STANDARD ENTRY LINKAGE                                 *
*                                                                     *
*              R0 AND R1 USED FOR SYSTEM SERVICE INVOCATION           *
*              R2 AND R3 ARE WORK REGISTERS                           *
*              R4  CONTAINS THE ADU ADDRESS                           *
*              R5 THROUGH R10 ARE WORK REGISTERS                      *
*              R11 CONTAINS THE ADDRESS OF THE DYNAMIC AREA           *
*              R12 IS THE BASE REGISTER                               *
*                                                                     *
*                                                                     *
*  INPUT:      THE ADU.                                               *
*                                                                     *
*              A SEQUENTIAL DATA SET CONTAINING OBJECT NAMES THAT     *
*              SHOULD NOT BE DELETED. THE DATA SET CONTAINS 89-BYTE   *
*              LOGICAL RECORDS EACH OF WHICH CONTAINS A SINGLE        *
*              OBJECT NAME, A SEPARATING BLANK, AND OBJECT'S          *
*              COLLECTION NAME.  THE NAMING CONVENTION FOR THIS       *
*              DATA SET:                                              *
*               PCATALOG.OBJECT.DELETE.VERIFY                         *
*               (WHERE: PCATALOG IS THE NAME OF A PRIVATE CATALOG)    *
*              THE ATTRIBUTES OF THE DATA SET ARE: FIXED BLOCKED,      *
*              LOGICAL RECORD LENGTH = 89 AND BLOCK SIZE = 8900.      *
*              BECAUSE THE LOGICAL RECORD LENGTH IS 89 AND IF         *
*              SEQUENCING IS USED, SEQUENCE NUMBERS WILL START        *
*              AT COLUMN 83 THRU 89 AND THEREFORE, RESULTS WILL       *
*              BE INVALID. THERE SHOULD NOT BE ANY SEQUENCE NUMBER    *
*              IN THE INPUT DATA SET.                                 *
*                                                                     *
*  OUTPUT:     THE ADUUFLD CONTAINS THE ADDRESS OF THE DYNAMIC AREA   *
*              OBTAINED AT THE FIRST CALL. THIS AREA CONTAINS THE     *
*              ADDRESS OF THE MAIN STORAGE VERIFY TABLE AND THE       *
*              OUTPUT DCB THAT REMAINS OPEN ACROSS CALLS.             *
*                                                                     *
*              A SEQUENTIAL DATA SET CONTAINING 89 BYTE RECORDS.      *
*              EACH RECORD CONTAINS THE FULLY QUALIFIED NAME (THE     *
*              OBJECT NAME INCLUDES THE OMDS SUFFIX) OF THE OBJECT    *
*              THAT HAS BEEN DELETED. FULLY QUALIFIED COLLECTION      *
*              NAME FOLLOWS THE OBJECT NAME USING A BLANK AS A        *
*              SEPARATOR.  THE NAMING CONVENTION FOR DATA SET:        *
*               PCATALOG.SGRPNAME.OBJECT.DELETE.NOTIFY                *
*               (WHERE: PCATALOG IS THE NAME OF A PRIVATE CATALOG     *
*                       SGRPNAME IS THE NAME OF THE STORAGE GROUP *
*                       BEING PROCESSED)                              *
*   NOTE:  IF THIS DATASET IS PREALLOCATED PRIOR TO THE INVOCATION    *
*          OF THIS ROUTINE, THE DCB DECLARES OF THE DATASET SHOULD    *
*          BE REMOVED FROM THIS ROUTINE.  OTHERWISE, THE ALLOCATION   *
*          HERE WILL OVERRIDE THE PREALLOCATION OF THE DATASET,       *
*          CAUSING UNEXPECTED OUTPUT.                                 *
```

Figure 97. Sample OSMC Auto-Delete Installation Exit (Part 3 of 14)

```
*   NOTE:  PRIOR TO RUNNING THIS JOB,  YOU MUST MODIFY THE FOLLOWING *
*          STATEMENTS TO YOUR PRIVATE CATALOG AND STORAGE GROUP NAME.*
*          FIND THE FOLLOWING STATEMENTS IN THE CODE AND CHANGE      *
*          THE PCATALOG AND THE XXXXXXXX TO YOUR INSTALLATIONS NAMES:*
*                1)  D1                                              *
*                2)  NTFYDSN                                         *
*                3)  NTFYDS2                                         *
*                                                                    *
*                                                                    *
*    RETURN CODES = 0  IT IS OKAY TO DELETE THE OBJECT               *
*                   4  DO NOT DELETE THE OBJECT                      *
*                   8  DELETE ALL OBJECTS WITHIN THIS GROUP WITHOUT  *
*                      CALLING THIS EXIT                             *
*                  12 DO NOT DELETE ANY OBJECTS WITHIN THIS GROUP    *
*                      AND DO NOT CALL THIS EXIT AGAIN               *
*                                                                    *
* $L0=OAM,110,082687,TUCWV:  INITIAL RELEASE                         *
* $L1=JDP3227,320,890523,TUCHTT:  RELEASE 1                          *
* $D1=JDP3227,320,890523,TUCLJS:  COLLECTION NAMES                   *
* $L2=PRESCOTT,331,901112,TUCLJS:  PRESCOTT SUPPORT                  *
**********************************************************************
         EJECT
CBRHADUX CSECT
* CBRHADUX  AMODE 31
* CBRHADUX  RMODE ANY
ADUX     DS    0H                  ENTRY POINT
         USING *,R15
         B     PASTID              BRANCH AROUND ID
         DC    CL8'CBRHADUX'
         DC    CL8'&
SYSDATE'
PASTID   DS    0H
         STM   R14,R12,12(R13)     SAVE CALLERS REGS
         LR    R12,R15             SET BASE REG
         DROP  R15
         USING ADUX,R12            ADDRESSIBILITY
         LR    R4,R1               GET INPUT PARAMETER LIST
         USING CBRADUP,R4
**********************************************************************
*                                                                    *
*    DO NOT DELETE OBJECTS IN THIS STORAGE GROUP AND DO NOT CALL     *
*               CBRHADUX AGAIN FOR THIS STORAGE GROUP                *
*                  -- TWO LINES OF BYPASS CODE --                    *
*                                                                    *
**********************************************************************
*                                                                    *
         LA    R2,ADUFAILN         LOAD RETURN CODE 12 INTO R2
         B     NOR13               BYPASS ALL CODE EXCEPT EXIT CODE
*                                                                    *
**********************************************************************
         L     R11,ADUUFLD         GET ADDRESS OF DYNAMIC AREA
         LTR   R11,R11             IS THIS THE FIRST CALL
         BNZ   NOGMAIN             NO, DO NOT GETMAIN
         GETMAIN RU,LV=DATALEN,SP=0  GET DYNAMIC AREA
         LR    R11,R1              GET STORAGE ADDRESS FOR DYNAMIC AREA
         USING DATAREA,R11         SET DYNAMIC AREA ADDRESSIBILITY FOR
```

Figure 97. Sample OSMC Auto-Delete Installation Exit (Part 4 of 14)

```
*                                REENTRANCY
         SLR   R1,R1              GET A ZERO
         ST    R1,RETCODE         ZERO THE RETURN CODE
         ST    R1,VRECSPTR        ZERO THE IN-STORAGE NAMES FIELD
         STC   R1,FLAGS           ZERO THE FLAGS BYTE
         ST    R11,ADUUFLD        SAVE DYNAMIC AREA FOR NEXT CALL
NOGMAIN  DS    0H
         ST    R13,SAVE1+4        BACKCHAIN SAVE AREAS
         LA    R2,SAVE1           GET SAVE AREA ADDRESS
         ST    R2,8(,R13)         FORWARDCHAIN SAVE AREAS
         LR    R13,R2             ESTABLISH SAVE AREA ADDRESS
         SR    R2,R2              CLEAR FOR ZERO
         ST    R2,RETCODE         ZERO THE INTERNAL RETURN CODE
         CLC   ADUSGNAM,=CL8'GROUP00' DO NOT PROCESS FURTHER IF
         BNE   NOTGRP00           100 PEL GROUP BEING PROCESSED
         LA    R2,ADUFAILC        INDICATE DELETES ARE OKAY BUT
         ST    R2,RETCODE         DO NOT CALL ADUX AGAIN
         B     ENDADUX            FOR THIS CYCLE
NOTGRP00 DS    0H
         CLI   ADUFUNC,ADUDONE    IS THIS AN END OF CYCLE CALL
         BE    DOFREE             YES, GO CLEANUP
         TM    FLAGS,TABUILT      HAS VERIFY TABLE BEEN BUILT
         BO    DOVERIFY           YES, DO NOT RE-OPEN DATA SET
         BAL   R14,OPENDS         FIRST CALL OPEN INPUT AND OUTPUT
         OI    FLAGS,TABUILT      INDICATE TABLE BUILT FOR NEXT CALL
*                                VRECSPTR WILL BE ZERO IF NO
*                                ENTRIES IN TABLE
DOVERIFY DS    0H
         L     R2,RETCODE         GET RETURN CODE
         LTR   R2,R2              DO NOT CONTINUE IF NON-ZERO
         BNZ   ENDADUX            END ADUX IF NON-ZERO CODE
         L     R10,VRECSPTR       GET ADDRESS OF IN-CORE VERIFY RECS
         LTR   R10,R10            IS THERE ANY VERIFY TABLE
         BZ    NOVERIFY           IF ZERO NO VERIFY NEEDED
         BAL   R14,VERIFY         CALL VERIFY ROUTINE
NOVERIFY DS    0H                 FREEMAIN TABLE
         L     R2,RETCODE         GET THE RETURN CODE
         LTR   R2,R2              IF NOT ZERO VERIFY FAILED
         BNZ   NONOTIFY           NO NOTIFY IF VERIFY FAILED
         BAL   R14,NOTIFY         ADD OBJECT TO NOTIFY DATA SET
NONOTIFY DS    0H                 DO NOT NOTIFY IF NON-ZERO CODE
ENDADUX  DS    0H                 END OF CBRHADUX
         LA    R3,ADUFAILC        RETURN CODE INDICATING NO
*                                RECALL OF ADUX FOR
*                                THIS CYCLE
         C     R3,RETCODE         IF ADUX IS TO BE CALLED AGAIN
         BH    NOFREE             DO NOT FREE AND CLOSE
DOFREE   DS    0H                 FREE THE VERIFY TABLE AND CLOSE
*                                THE OUTPUT DATA SET
         BAL   R14,FREETAB        FREEMAIN THE VERIFY TABLE
         BAL   R14,CLOSEDS        CLOSE AND FREE OUTPUT DATA SET
         L     R13,SAVE1+4        GET CALLERS SAVE AREA ADDRESS
         L     R2,RETCODE         GET RETURN CODE
         SLR   R1,R1              GET A ZERO
```

Figure 97. Sample OSMC Auto-Delete Installation Exit (Part 5 of 14)

```
         ST    R1,ADUUFLD          CLEAR THE USER FIELD TO AVOID
*                                  INADVERTANT USE OF FREEMAINED
*                                  STORAGE
         FREEMAIN RU,LV=DATALEN,SP=0,A=(R11)  FREE DYNAMIC AREA
         B     NOR13               BYPASS R13 RESTORE
NOFREE   DS    0H                  BYPASS FREEMAIN
         L     R13,4(R13)          RESTORE CALLERS SAVE AREA
NOR13    DS    0H                  BYPASS R13 RESTORE IF FREEMAIN PATH
         L     R14,12(R13)         GET RETURN ADDRESS
         LR    R15,R2              GET RETURN CODE
         LM    R0,R12,20(R13)      RESTORE CALLERS REGS
         BSM   0,R14               RETURN TO CALLER
         EJECT
MCVERIFY DS    0H                  MC VERIFY SUBROUTINE
*********************************************************************
* MC VERIFY SUBROUTINE                                              *
*           SEARCH THE TABLE TO DETERMINE IF THIS OBJECT CAN BE     *
*           DELETED. IF THE INPUT MANAGEMENT CLASS IS LISTED IN     *
*           THE TABLE THEN NO OBJECTS WITH THIS MANAGEMENT CLASS    *
*           ARE TO BE DELETED.                                      *
*********************************************************************
         SPACE 1
         ST    R14,SAVE14          SAVE RETURN ADDRESS
         LA    R11,MCCNT           LOAD NUMBER OF TABLE ENTRIES
         LA    R10,MCTAB           LOAD ADDRESS OF TABLE IN R10
         USING TAB,R10             USE DSECT
COMPMC   CLC   MCNAME,ADUMCNAM     COMPARE MC NAMES
         BE    VMCMATCH
         LA    R10,TABLEN(,R10)
         BCT   R11,COMPMC
VMCMATCH DS    0H                  MC NAME IS IN VERIFY TABLE
         LA    R1,ADUNODEL         GOOD COMPARE, DO NOT DELETE
         ST    R1,RETCODE          SET DO NOT DELETE RETURN CODE
ENDMC    DS    0H                  END MC VERIFY SUBROUTINE
         L     R14,SAVE14          GET SAVED R14
         BR    R14                 RETURN TO MAINLINE
         EJECT
OPENDS   DS    0H                  OPENDS SUBROUTINE
*********************************************************************
*                                                                   *
* OPENDS SUBROUTINE                                                 *
*                                                                   *
*           OPEN THE INPUT DATA SET THAT CONTAINS THE NAMES OF      *
*           OBJECTS THAT SHOULD NOT BE DELETED.                     *
*                                                                   *
*           BUILD A TABLE CONTAINING THOSE NAMES. THE TABLE POINTER *
*           IS SAVE SO THIS PROCESSING ONLY HAPPENS ONCE PER CYCLE.  *
*           THE TABLE IS A CHAINED SET OF 4K BLOCKS THAT. EACH BLOCK *
*           CONTAINS 44 CHARACTER OBJECT NAMES IN SEQUENCE ALONG WITH *
*           44 CHARACTER COLLECTION NAME.  THE FIRST WORD IN THE     *
*           BLOCK CONTAINS A COUNTER OF THE NUMBER OF ENTRIES IN THE *
*           BLOCK AND THE SECOND WORD CONTAINS A POINTER TO THE NEXT *
*           BLOCK IF ANY.  A NEXT BLOCK ADDRESS OF ZERO INDICATES THE *
*           END OF CHAIN.                                           *
*                                                                   *
```

Figure 97. Sample OSMC Auto-Delete Installation Exit (Part 6 of 14)

```
*          OPEN THE OUTPUT DATA SET. THIS DATA SET WILL CONTAIN THE  *
*          NAMES OF ALL OBJECTS THAT WERE AUTOMATICALLY DELETED.     *
*                                                                    *
**********************************************************************
         SPACE 2
         ST    R14,SAVE14          SAVE RETURN ADDRESS
         LA    R2,RENTAREA         GET TARGET ADDRESS FOR MOVE
         LA    R3,MOVELN           GET THE LENGTH OF THE MOVE
         LA    R6,STATAREA         GET SOURCE ADDRESS OF THE MOVE
         LR    R7,R3               GET LENGTH OF THE MOVE AND
*                                  PAD WITH ZEROS
         MVCL  R2,R6               COPY CONTROL BLOCKS TO
*                                  DYNAMIC AREA FROM STATIC AREA
         LA    R2,DYNRB            GET DYNAMIC RB ADDRESS
         ST    R2,S99RBPTR         STORE IN DYNAMIC RB POINTER FIELD
         OI    S99RBPTR,X'80'      SET END OF LIST FLAG
         LA    R2,TXTPTRV          GET DYNAMIC VERSION OF TXTPTR
         ST    R2,TXTPTR           STORE IN SVC 99 RB DYNAMIC VERSION
         LA    R2,0                GET ZERO FOR DDNAME TEXT UNIT PTR
         ST    R2,TXTDDN           PUT IT IN THE TXT UNIT PTR
         MVC   RETTXT(6),RETSTAT   MOVE FROM STATIC TO DYNAMIC
         LA    R2,RETTXT           LET SYSTEM DETERMINE DDNAME
         ST    R2,TXTRET
         LA    R1,S99RBPTR         SETUP REG 1 FOR SVC 99 CALL
         DYNALLOC                  ALLOCATE INPUT DATA SET
         LA    R2,4                GET DYNAMIC ENVIRONMENT ERROR
         CR    R15,R2              WAS DYNALLOC OKAY
         BL    DOOPENI             YES, OPEN VERIFY DATA SET
         BE    CHKNODS             IF A 4 SEE IF NO DATA SET
         LA    R15,ADUFAILN        ERROR CAUSES NO RETURN TO ADUX
         ST    R15,RETCODE         SET RETURN CODE
         B     ENDOPEN             END ADUX
CHKNODS  DS    0H                  ENVIRONMENT ERROR
         LH    R15,=X'1708'        GET NO CATALOGED DS FAIL CODE
         CH    R15,DYNRB+4         FAILED BECAUSE DS NOT CATALOGED
         BE    NOOPENI             SO PROCEED WITHOUT VERIFY
         LA    R15,ADUFAILN        ERROR CAUSES NO RETURN TO ADUX
         ST    R15,RETCODE         SET RETURN CODE
         B     ENDOPEN             END ADUX
DOOPENI  DS    0H                  ALLOCATED, DO OPEN
         LA    R1,OPENL            GET OPEN LIST ADDRESS
         LA    R8,DCBI             GET INPUT DCB ADDRESS
         USING IHADCB,R8
         MVC   DCBDDNAM,RETTXT+6   MOVE SYSTEM GENERATED DDN INTO DCB
         OPEN  ((R8),INPUT),MF=(E,(1)) OPEN INPUT DCB
         TM    DCBOFLGS,DCBOFOPN   WAS DS OPENED PROPERLY
         BO    OPENI               BUILD VERIFY TABLE
         LA    R15,ADUFAILN        ERROR CAUSES NO RETURN TO ADUX
         ST    R15,RETCODE         SET RETURN CODE
         B     ENDOPEN             END ADUX
OPENI    DS    0H
         GETMAIN RU,LV=4096,SP=0   GET BLOCK FROM SUBPOOL ZERO
         LR    R5,R1               GET THE VERIFY TABLE ADDRESS
         SLR   R6,R6               GET A ZERO
*                                  ALSO, USE AS A RECORD COUNTER
```

Figure 97. Sample OSMC Auto-Delete Installation Exit (Part 7 of 14)

```
         ST    R6,0(,R5)           INDICATE IN-CORE TABLE NOT YET SET
         ST    R6,4(,R5)           INDICATE IN-CORE TABLE NOT YET SET
         LA    R9,8(,R5)           GET PAST RECORD COUNTER
         ST    R5,VRECSPTR         SAVE TABLE ADDRESS
GETINPUT DS    0H
         LA    R1,DCBI             GET INPUT DCB ADDRESS
         LR    R0,R9               ADDRESS OF RECORD
         GET   (1),(0)             READ A RECORD
         L     R2,RETCODE          CHECK FOR SYNAD ENTRY
         LTR   R2,R2               IF NON-ZERO SYNAD ENTERED
         BNZ   REODAD              CLOSE DATA SET AND END
         LA    R9,89(R9)           GET TO NEXT SLOT IN VERIFY TBL
         LA    R6,1(0,R6)          INCREMENT NUMBER OF RECORDS
         ST    R6,0(0,R5)          UPDATE COUNTER IN BLOCK
         C     R6,MAXNAMES         SEE IF MAX NAMES IN TABLE YET
         BE    GNEXTBLK            IF SO, GET A NEW BLOCK
         B     GETINPUT            READ UNTIL EODOD
GNEXTBLK DS    0H
         GETMAIN RU,LV=4096,SP=0   GET BLOCK FROM SUBPOOL ZERO
         ST    R1,4(0,R5)          CHAIN TO CURRENT TABLE
         LR    R5,R1               GET THE VERIFY TABLE ADDRESS
         SLR   R6,R6               CLEAR TO ZERO
         ST    R6,0(,R5)           INDICATE IN-CORE TABLE NOT YET SET
         ST    R6,4(,R5)           INDICATE IN-CORE TABLE NOT YET SET
         LA    R9,8(,R5)           GET PAST RECORD COUNTER
         B     GETINPUT            READ UNTIL EODOD
REODAD   DS    0H                  END OF DATA ON READ
         LA    R2,DCBI             GET INPUT DCB POINTER
         LA    R1,OPENL            GET AREA FOR CLOSE LIST
         CLOSE ((R2)),MF=(E,(1))   CLOSE INPUT DCB
         FREEPOOL DCBI             RELEASE BUFFER POOL
NOOPENI  DS    0H                  NO VERIFY DATA SET
         L     R2,RETCODE          CHECK FOR ERROR
         LTR   R2,R2               IF NON-ZERO ERROR OCCURRED
         BNE   ENDOPEN             END PROCESSING
         LA    R6,NTFYDS2
         L     R7,ADUSGLEN
         LA    R8,ADUSGNAM
         L     R9,ADUSGLEN
         MVCL  R6,R8
*
* UPDATE TEXT UNIT POINTERS FOR THE NOTIFY DATA SET
*
         LA    R3,0                GET ZERO FOR DDNAME TEXT UNIT PTR
         ST    R3,TXTDDN           PUT IT IN THE TXT UNIT PTR
         LA    R3,DSNTXTN          GET NOTIFY DSNAME TEXT UNIT PTR
         ST    R3,TXTDSN           PUT IT IN THE TXT UNIT PTR
*                                  INSTEAD OF VERIFY DSNAME
         LA    R3,MODTXT           GET STAT=SHR TEXT UNIT PTR
         ST    R3,TXTSTAT          STORE NEW TEXT UNIT PTR
         LA    R3,CTLGTXT          GET DISP=,KEEP TEXT UNIT PTR
         ST    R3,TXTDISP          STORE NEW TEXT UNIT PTR
         LA    R3,TRKTXT           GET TRACK ALLOCATION TU PTR
         ST    R3,TXTTRK           STORE NEW TEXT UNIT PTR
         LA    R3,PRIMTXT          GET PRIMARY AMOUNT TU PTR
```

Figure 97. Sample OSMC Auto-Delete Installation Exit (Part 8 of 14)

```
         ST    R3,TXTPRIM          STORE NEW TEXT UNIT PTR
         LA    R3,SECTXT           GETSECONDARY AMOUNT TU PTR
         ST    R3,TXTSEC           STORE NEW TEXT UNIT PTR
         MVC   RETTXT(6),RETSTAT   MOVE FROM STATIC TO DYNAMIC
         LA    R3,RETTXT           LET SYSTEM DETERMINE DDNAME
         ST    R3,TXTRET
         LA    R1,S99RBPTR         SET UP FOR SVC 99
         DYNALLOC                  FREE THE DATA SET
         LTR   R15,R15             IF DYNALLOC OKAY
         BZ    OPENO               OPEN NOTIFY DATA SET
         LA    R15,ADUFAILN        ERROR CAUSES NO RETURN TO ADUX
         ST    R15,RETCODE         SET RETURN CODE
         B     ENDOPEN             END ADUX
OPENO    DS    0H                  OPEN OUTPUT DATA SET
         LA    R1,OPENL            GET OPEN LIST ADDRESS
         LA    R8,DCBO             GET INPUT DCB ADDRESS
         MVC   DCBDDNAM,RETTXT+6   MOVE SYSTEM GENERATED DDN INTO DCB
         OPEN  ((R8),OUTPUT),MF=(E,(1)) OPEN OUTPUT DCB
         USING IHADCB,R8
         TM    DCBOFLGS,DCBOFOPN   WAS DS OPENED PROPERLY
         BNO   NOOPENO             SET NO NOTIFY TABLE
         OI    FLAGS,ODCBO         INDICATE NOTIFY DATA SET IS OPEN
         B     ENDOPEN             END DATA SET OPENING
NOOPENO  DS    0H                  OUTPUT DATA SET DID NOT OPEN
         LA    R2,ADUFAILN         SET FAILING RETURN CODE
         ST    R2,RETCODE          DO NOT RECALL ADUX
ENDOPEN  DS    0H                  END OF OPENDS SUBROUTINE
         L     R14,SAVE14          GET RETURN ADDRESS
         BR    R14                 RETURN TO MAINLINE
         EJECT
VERIFY   DS    0H                  VERIFY SUBROUTINE
*********************************************************************
* VERIFY SUBROUTINE                                                 *
*           SEARCH THE TABLE BUILT BY OPENDS. IF THE INPUT OBJECT    *
*           NAME IS IN THE TABLE, SEND A RETURN CODE INDICATING      *
*           THE AUTODELETE SHOULD NOT BE DONE.                       *
*********************************************************************
         SPACE 1
         ST    R14,SAVE14          SAVE RETURN ADDRESS
         L     R5,VRECSPTR         GET FIRST TABLE ADDRESS
COMPLOOP DS    0H                  COMPARE LOOP
         L     R3,0(,R5)           GET COUNT OF ENTRIES
         LA    R2,8(,R5)           GET ADDRESS OF FIRST NAME
         LTR   R3,R3               IF EMPTY FILE
         BZ    ENDVERF             GO TO ENDVERF
COMPNAME DS    0H                  NAME COMPARE LOOP
         CLC   0(44,R2),ADUONAME   COMPARE NAME IN VERIFY TABLE
*                                  AGAINST OBJECT BEING DELETED
         BE    VCOLNAM             IF MATCH, CHECK COLLECTION NAME
DIFCOLNM LA    R2,89(,R2)          GET ADDRESS OF NEXT NAME
         BCT   R3,COMPNAME         COMPARE NEXT NAME
         L     R5,4(,R5)           GET NEXT TABLE SECTION ADDRESS
         LTR   R5,R5               IS THERE IS A NEXT SECTION
         BZ    ENDVERF             END VERIFY IF NOT
         B     COMPLOOP            COMPARE NEXT NAME
```

Figure 97. Sample OSMC Auto-Delete Installation Exit (Part 9 of 14)

```
VCOLNAM  DS    0H                  OBJ MATCH, CHECK COL NAME
         CLC   45(44,R2),ADUCLNAM  OBJ MATCH, SAME COL NAME?
         BE    VMATCH              IF MATCH, DO NOT DELETE
         B     DIFCOLNM            NO MATCH, GET NEXT OBJ NAME
VMATCH   DS    0H                  OBJECT NAME IS IN VERIFY TABLE
         LA    R1,ADUNODEL         GOOD COMPARE, DO NOT DELETE
         ST    R1,RETCODE          SET DO NOT DELETE RETURN CODE
ENDVERF  DS    0H                  END VERIFY SUBROUTINE
         L     R14,SAVE14          GET SAVED R14
         BR    R14                 RETURN TO MAINLINE
         EJECT
NOTIFY   DS    0H                  NOTIFY SUBROUTINE
*********************************************************************
* NOTIFY SUBROUTINE                                                 *
*        WRITE THE OBJECT AND COLLECTION NAMES TO NOTIFY DATA SET.  *
*        THIS DATA SET WILL BE READ BY THE IMS SYSTEM LATER TO REMOVE *
*           THE OBJECT FROM THE IMS DATA BASE.                      *
*********************************************************************
         SPACE 1
         ST    R14,SAVE14          SAVE RETURN ADDRESS
         LA    R1,DCBO             GET OUTPUT DCB ADDRESS
         LA    R0,ADUOBJCL         GET OBJECT NAME ADDRESS
         PUT   (1),(0)             WRITE NAME TO NOTIFY DATA SET
         L     R14,SAVE14          GET SAVED R14
         BR    R14                 RETURN TO MAINLINE
         EJECT
FREETAB  DS    0H                  FREEMAIN VERIFY TABLE SUBROUTINE
*********************************************************************
* FREETAB SUBROUTINE                                                *
*           FREEMAIN THE IN-STORAGE VERIFY TABLE                    *
*********************************************************************
         SPACE 1
         ST    R14,SAVE14          SAVE RETURN ADDRESS
         L     R5,VRECSPTR         GET FIRST TABLE ADDRESS
FREELOOP DS    0H                  LOOP THROUGH CHAINED TABLES
         L     R3,4(,R5)           GET NEXT TABLE ADDRESS
         LTR   R5,R5               IS THERE A TABLE ADDRESS
         BZ    ENDFREE             IF NOT, END FREEMAIN LOOP
         FREEMAIN RU,LV=4096,A=(R5) FREE TABLE SECTION
         LR    R5,R3               ADDRESS NEXT SECTION TO FREE
         B     FREELOOP            FREEMAIN NEXT SECTION
ENDFREE  DS    0H                  END OF TABLE FREEMAIN LOOP
         L     R14,SAVE14          GET SAVED R14
         BR    R14                 RETURN TO MAINLINE
         EJECT
CLOSEDS  DS    0H                  CLOSE DATA SET SUBROUTINE
*********************************************************************
*                                                                   *
* CLOSEDS SUBROUTINE                                                *
*                                                                   *
*           CLOSE THE OPEN NOTIFY DATA SET                          *
*                                                                   *
*********************************************************************
```

Figure 97. Sample OSMC Auto-Delete Installation Exit (Part 10 of 14)

```
         SPACE 1
         ST    R14,SAVE14          SAVE RETURN ADDRESS
         TM    FLAGS,ODCBO         CHECK TO SEE IF OUTPUT DS IS OPEN
         BNO   NOCLOSE             DO NOT ISSUE CLOSE IF NOT OPEN
         LA    R1,OPENL            GET AREA FOR CLOSE LIST
         LA    R2,DCBO             GET DCB ADDRESS
         CLOSE ((R2)),MF=(E,(1))   CLOSE OUTPUT DCB NOTIFY DSN
         FREEPOOL DCBO             RELEASE OUTPUT BUFFER POOL
NOCLOSE  DS    0H                  DO NOT CLOSE
         L     R14,SAVE14          GET SAVED R14
         BR    R14                 RETURN TO MAINLINE
         EJECT
ADUXSYN  DS    0H
*************************************************************************
*                                                                       *
* I/O ERROR SYNAD                                                       *
*                                                                       *
*      AN I/O ERROR DURING READ OR WRITE RESULTS IN SETTING THE         *
*      RETURN CODE INDICATING DO NOT DELETE AND DO NOT CALL             *
*      ADUX AGAIN FOR THIS CYCLE.                                       *
*                                                                       *
*************************************************************************
         SPACE 1
         LA    R2,ADUFAILN         SET FAIL CODE TO NO DELETE AND
         ST    R2,RETCODE          DO NOT CALL ADUX FOR THIS CYCLE
         BR    R14                 RETURN TO MAINLINE
         EJECT
R0       EQU   0
R1       EQU   1
R2       EQU   2
R3       EQU   3
R4       EQU   4
R5       EQU   5
R6       EQU   6
R7       EQU   7
R8       EQU   8
R9       EQU   9
R10      EQU   10
R11      EQU   11
R12      EQU   12
R13      EQU   13
R14      EQU   14
R15      EQU   15
MCTAB    DC    C'MCNODEL1'         MANAGEMENT CLASS TABLE
         DC    C'MCNODEL2'
MCCNT    EQU   (*-MCTAB)/8
MAXNAMES DC    F'92'               MAXIMUM NUMBER OF NAMES IN
*                                  A 4K BLOCK OF VERIFY TABLE
RETSTAT  DC    AL2(85)
         DC    AL2(1)
         DC    AL2(8)
DDNMTXT  DS    0F
         DC    AL2(1)
         DC    AL2(1)
         DC    AL2(ENDDDN-STRTDDN)
```

Figure 97. Sample OSMC Auto-Delete Installation Exit (Part 11 of 14)

```
STRTDDN  DC    C'CBRADUXI'
ENDDDN   EQU *
MODTXT   DC    AL2(4)              STATUS=MOD
         DC    AL2(1)
         DC    AL2(1)
         DC    AL1(2)
SHRTXT   DC    AL2(4)              STATUS=SHR
         DC    AL2(1)
         DC    AL2(1)
         DC    AL1(8)
TRKTXT   DC    AL2(7)              TRACK ALLOCATION IF NOT OLD
         DC    AL2(0)
PRIMTXT  DC    AL2(10)
         DC    AL2(1)
         DC    AL2(3)
         DC    AL3(10)             10 TRACKS PRIMARY ALLOCATION
SECTXT   DC    AL2(11)
         DC    AL2(1)
         DC    AL2(3)
         DC    AL3(10)             10 TRACKS SECONDARY ALLOCATION
CTLGTXT  DC    AL2(5)              DISP=CATLG
         DC    AL2(1)
         DC    AL2(1)
         DC    AL1(2)
KEEPTXT  DC    AL2(5)              DISP=KEEP
         DC    AL2(1)
         DC    AL2(1)
         DC    AL1(8)
UNITTXT  DC    AL2(21)
         DC    AL2(1)
         DC    AL2(5)
         DC    C'SYSDA'
CLOSTXT  DC    AL2(28)             FREE DATA SET WHEN CLOSED
         DC    AL2(0)
DSNTXT   DC    AL2(2)
         DC    AL2(1)
         DC    AL2(ENDDSN-VRFYDSN)
VRFYDSN  DC    C'PCATALOG.OBJECT.DELETE.VERIFY'
ENDDSN   EQU   *
STATAREA DS    0F                  STATIC CBS TO BE MOVED
         OPEN   (,),MF=L
DCBSTAT  DS    0F
*   NOTE:  IF THIS DATASET IS PREALLOCATED PRIOR TO THE INVOCATION   *
*          OF THIS ROUTINE, THE DCB DECLARES OF THE DATASET SHOULD   *
*          BE REMOVED FROM THIS ROUTINE.  OTHERWISE, THE ALLOCATION  *
*          HERE WILL OVERRIDE THE PREALLOCATION OF THE DATASET,      *
*          CAUSING UNEXPECTED OUTPUT.                                *
*                                                                    *
         DCB  DDNAME=CBRADUXO,MACRF=(PM),OPTCD=W,LRECL=89,BLKSIZE=8900,
               DSORG=PS,RECFM=FB,SYNAD=ADUXSYN
         DCB  DDNAME=CBRADUXI,MACRF=(GM),LRECL=89,BLKSIZE=8900,
               DSORG=PS,RECFM=FB,SYNAD=ADUXSYN,EODAD=REODAD
```

Figure 97. Sample OSMC Auto-Delete Installation Exit (Part 12 of 14)

```
DYNRBC   DS    0F
         DC    AL1(20)             RB LENGTH
         DC    AL1(01)             DSNAME ALLOCATION
         DC    X'C0'               FLAGS1 - NO EXIST ALLOC
         DC    X'0' FLAGS1
         DC    F'0'                ERROR CODES
         DC    A(0)                TEXT UNIT POINTERS
         DC    F'0'                RESERVED
         DC    X'00'               WAIT FOR VOLS,UNITS,DSNS AND MOUNTS
*        DC    X'D1'               WAIT FOR VOLS,UNITS,DSNS AND MOUNTS
         DC    AL3(0)
TXTPTRC  DS    0F
         DC    A(DSNTXT)
         DC    A(DDNMTXT)
         DC    A(SHRTXT)
         DC    A(KEEPTXT)
         DC    A(0)                TRACK TEXT UNIT FOR OUTPUT DS
         DC    A(0)                PRIMARY TEXT UNIT FOR OUTPUT DS
         DC    A(0)                SECONDARY TEXT UNIT FOR OUTPUT DS
         DC    A(0)                RETURN DDNAME FOR OUTPUT DS
         DC    A(UNITTXT)          UNIT TEXT UNIT FOR OUTOUT DS
         DC    A(CLOSTXT)          FREE (UN-ALLOCATE) AT CLOSE
         DC    X'80'
         DC    AL3(0)
         DC    AL2(2)
         DC    AL2(1)
         DC    AL2(ENDD1-D1)
D1       DC    C'PCATALOG.XXXXXXXX.OBJECT.DELETE.NOTIFY'
ENDD1    EQU   *
MOVELN   EQU   *-STATAREA
         EJECT
         CBRADUP
         EJECT
*********************************************************************
*
*      MANAGEMENT CLASS DSECT TO MAP TO MCTAB
*
*********************************************************************
TAB      DSECT ,
MCLEN    DS    H
MCNAME   DS    CL30
TABLEN   EQU   *-TAB
DATAREA  DSECT
SAVE1    DS    18F                 SAVE AREA
SAVE14   DS    1F                  R14 SAVE AREA FOR SUBROUTINES
FLAGS    DS    X                   FLAG AREA
TABUILT  EQU   X'80'               VERIFY TABLE HAS BEEN BUILT
ODCBO    EQU   X'40'               NOTIFY DATA SET IS OPEN
VRECSPTR DS    F                   ADDRESS OF THE IST 4K BLOCK OF
RETTXT   DS    AL2
         DS    AL2
         DS    AL2
         DS    CL8
*                                  OBJECT NAMES READ FROM THE VERIFY
*                                  DATA SET
```

Figure 97. Sample OSMC Auto-Delete Installation Exit (Part 13 of 14)

```
RETCODE  DS    F                   INTERNAL RETURN CODE
S99RBPTR DS    F                   ADDRESS OF SVC99 RB
RENTAREA DS    0F                  REENTRANT COPY OF STATIC DEFINED
*                                  CONTROL BLOCKS
OPENL    OPEN   (,),MF=L
DCBS     DS    0F
DCBO     DCB  DDNAME=CBRADUXO,MACRF=(PM),OPTCD=W,LRECL=89,BLKSIZE=8900,
               DSORG=PS,RECFM=FB,SYNAD=ADUXSYN
DCBI     DCB  DDNAME=CBRADUXI,MACRF=(GM),LRECL=89,BLKSIZE=8900,
               DSORG=PS,RECFM=FB,SYNAD=ADUXSYN,EODAD=REODAD
DYNRB    DS    0F
         DC    AL1(20)             RB LENGTH
         DC    AL1(01)             DSNAME ALLOCATION
         DC    X'C0'               FLAGS1 - NO EXIST ALLOC
         DC    X'0' FLAGS1
         DC    F'0'                ERROR CODES
TXTPTR   DC    A(TXTPTRV)          TEXT UNIT POINTERS
         DC    F'0'                RESERVED
*        DC    X'D1'               WAIT FOR VOLS,UNITS,DSNS AND MOUNTS
         DC    X'00'
         DC    AL3(0)
TXTPTRV  DS    0F
TXTDSN   DC    A(DSNTXT)
TXTDDN   DC    A(DDNMTXT)
TXTSTAT  DC    A(SHRTXT)
TXTDISP  DC    A(KEEPTXT)
TXTTRK   DC    A(0)
TXTPRIM  DC    A(0)
TXTSEC   DC    A(0)
TXTRET   DC    A(0)
TXTUNIT  DC    A(UNITTXT)
         DC    A(CLOSTXT)
         DC    X'80'
         DC    AL3(0)
DSNTXTN  DC    AL2(2)
         DC    AL2(1)
         DC    AL2(ENDDSNN-NTFYDSN)
NTFYDSN  DC    C'PCATALOG.'
NTFYDS2  DC    C'XXXXXXXX.OBJECT.DELETE.NOTIFY'
ENDDSNN  EQU   *
DATALEN  EQU   *-DATAREA
         DCBD    DSORG=QS
         IEFZB4D2
         END   CBRHADUX
```

Figure 97. Sample OSMC Auto-Delete Installation Exit (Part 14 of 14)

Appendix F. Accessibility

Accessibility features help a user who has a physical disability, such as restricted mobility or limited vision, to use software products successfully. The major accessibility features in z/OS enable users to:

- Use assistive technologies such as screen readers and screen magnifier software
- Operate specific or equivalent features using only the keyboard
- Customize display attributes such as color, contrast, and font size

Using assistive technologies

Assistive technology products, such as screen readers, function with the user interfaces found in z/OS. Consult the assistive technology documentation for specific information when using such products to access z/OS interfaces.

Keyboard navigation of the user interface

Users can access z/OS user interfaces using TSO/E or ISPF. Refer to *z/OS TSO/E Primer*, *z/OS TSO/E User's Guide*, and *z/OS ISPF User's Guide Vol I* for information about accessing TSO/E and ISPF interfaces. These guides describe how to use TSO/E and ISPF, including the use of keyboard shortcuts or function keys (PF keys). Each guide includes the default settings for the PF keys and explains how to modify their functions.

z/OS information

z/OS information is accessible using screen readers with the BookServer/Library Server versions of z/OS books in the Internet library at:

`www.ibm.com/servers/eserver/zseries/zos/bkserv/`

© Copyright IBM Corp. 1989, 2006

Notices

This information was developed for products and services offered in the U.S.A. IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

IBM Director of Licensing
IBM Corporation
North Castle Drive
Armonk, NY 10504-1785
U.S.A.

For license inquiries regarding double-byte (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

IBM World Trade Asia Corporation Licensing
2-31 Roppongi 3-chome, Minato-ku
Tokyo 106, Japan

The following paragraph does not apply to the United Kingdom or any other country where such provisions are inconsistent with local law:
INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Licensees of this program who wish to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact:

© Copyright IBM Corp. 1989, 2006

IBM Corporation
Mail Station P300
2455 South Road
Poughkeepsie, NY 12601-5400
USA

Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this information and all licensed material available for it are provided by IBM under terms of the IBM Customer Agreement, IBM International Program License Agreement, or any equivalent agreement between us.

Programming interface information

This document helps you plan, install, and administer the object access method (OAM), a component of DFSMSdfp™. This document primarily documents intended programming interfaces that allow the customer to write programs to obtain the services of the OAM component of DFSMSdfp.

This document also documents information that is NOT intended to be used as Programming Interfaces of the OAM component of DFSMSdfp. This information is identified where it occurs, either by an introductory statement to a chapter or section or by the following marking:

NOT Programming Interface information

End of NOT Programming Interface information

Trademarks

The following terms are trademarks of International Business Machines Corporation in the United States, in other countries, or both:

IBM
3090
CICS
CICS/MVS
DATABASE 2
DB2
DFSMS/MVS
DFSMSdfp
DFSMSdss
DFSMShsm
DFSMSrmm
ESA/390
ESCON
ImagePlus
IBMLink
IMS
IMS/ESA
MVS/ESA
MVS/SP
OS/390
Parallel Sysplex
QMF
RACF
Resource Link
RMF
SAA
System 370
TotalStorage
z/Architecture
z/OS
zSeries
z/VM

UNIX is a registered trademark of The Open Group in the United States and other countries.

Microsoft, Windows, Windows NT, and the Windows logo are trademarks of Microsoft Corporation in the United States, other countries, or both.

Linux is a trademark of Linus Torvalds in the United States, other countries, or both.

Other company, product, and service names may be trademarks or service marks of others:

FileNet	FileNet Corporation
OSAR	Laser Magnetic Storage International
LaserDrive	LMSI

Glossary

This glossary defines technical terms and abbreviations used in DFSMS documentation. If you do not find the term you are looking for, refer to the index of the appropriate DFSMS manual or view the *Glossary of Computing Terms* located at:

http://www.ibm.com/ibm/terminology/

This glossary includes terms and definitions from:

- The *American National Standard Dictionary for Information Systems*, ANSI X3.172-1990, copyright 1990 by the American National Standards Institute (ANSI). Copies may be purchased from the American National Standards Institute, 11 West 42nd Street, New York, New York 10036. Definitions are identified by the symbol (A) after the definition.
- The *Information Technology Vocabulary* developed by Subcommittee 1, Joint Technical Committee 1, of the International Organization for Standardization and the International Electrotechnical Commission (ISO/IEC JTC1/SC1). Definitions of published part of this vocabulary are identified by the symbol (I) after the definition; definitions taken from draft international standards, committee drafts, and working papers being developed by ISO/IEC JTC1/SC1 are identified by the symbol (T) after the definition, indicating that final agreement has not yet been reached among the participating National Bodies of SC1.
- The *IBM Dictionary of Computing*, New York: McGraw-Hill, 1994.

The following cross-reference is used in this glossary:

See: This refers the reader to (a) a related term, (b) a term that is the expanded form of an abbreviation or acronym, or (c) a synonym or more preferred term.

Numerics

3480. IBM 3480 Magnetic Tape Subsystem. A group of magnetic tape controllers and drives supporting cartridge system tape (as opposed to reel tape). There are two controller models, A11 and A22, and two drive models, B11 and B22.

3490. IBM 3490 Magnetic Tape Subsystem. A group of magnetic tape controllers and drives supporting cartridge system tape (as opposed to reel tape). There are two controller models, A01 and A02, and two drive models, D31 and D32, in which the control unit function and tape drives are integrated.

3490E. IBM 3490E Magnetic Tape Subsystem. A group of enhanced capability tape controllers and drives supporting cartridge system tape (as opposed to reel tape). There are two controller models, A10 and A20, and two drive models, B10 and B20. In addition, there are two models, D41 and D42, in which the control unit function and tape drives are integrated.

3590. The IBM TotalStorage Enterprise Tape System 3590 is capable of coexisting with 3490 and 3490E devices in the IBM TotalStorage Enterprise Automated Tape Library (3495) and with the 3490E devices in the IBM TotalStorage Enterprise Automated Tape Library (3494), or as a stand-alone tape drive. The 3590 has a built-in control unit. This device supports the IBM High Performance Cartridge System Tape and the IBM Extended High Performance Cartridge System Tape media.

3590B1*x*. An IBM TotalStorage Enterprise Tape Drive 3590 Model B1*x* that uses the 3590 High Performance Cartridge, writes in 128-track format, and can emulate the 3490 Magnetic Tape System.

3590E1*x*. An IBM TotalStorage Enterprise Tape Drive 3590 Model E1*xx* that uses the 3590 High Performance Cartridge, can read 128- or 256-track format tapes, and writes in 256-track format. This drive emulates either the IBM 3490 magnetic tape drive or the IBM TotalStorage Enterprise Tape Drive 3590 Model B1*x*.

3590H1*x*. An IBM TotalStorage Enterprise Tape Drive 3590 Model H1*xx* that uses the 3590 High Performance Cartridge, can read 128-, 256-, or 384-track format tapes, and writes in 384-track format. This drive emulates either the IBM 3490 magnetic tape drive or the IBM TotalStorage Enterprise Tape Drive 3590 Model B1*x* or Model E1*x*.

3592J1A. An IBM TotalStorage Enterprise Tape Drive 3592 that uses the 3592 Enterprise Tape Cartridge (MEDIA5, MEDIA6, MEDIA7, and MEDIA8) and writes in Enterprise Format 1 (EFMT1). This drive emulates either the IBM 3490 magnetic tape drive or the IBM TotalStorage Enterprise Tape Drive 3590 Model B1*x*.

3592E05. An IBM Enterprise Tape Drive 3592 Model E05 that uses the 3592 Enterprise Tape Cartridges (MEDIA5, MEDIA6, MEDIA7, MEDIA8, MEDIA9, and MEDIA10) and writes 2 recording formats (Enterprise

© Copyright IBM Corp. 1989, 2006

| Format 1 (EFMT1) and Enterprise Format 2 (EFMT2)).
| This drive emulates the IBM TotalStorage Enterprise
| Tape Drive 3590 Model B1x.

A

access path. The path DB2 uses to get to data specified in SQL statements. An access path can involve an index, a sequential search, or a combination of both.

ACDS. See *active control data set.*

ACS. See *automatic class selection.*

active configuration. The configuration currently used by SMS to control the managed storage in the installation.

active control data set (ACDS). A VSAM linear data set that contains an SCDS that has been activated to control the storage management policy for the installation. When activating an SCDS, you determine which ACDS will hold the active configuration (if you have defined more than one ACDS). The ACDS is shared by each system that is using the same SMS configuration to manage storage. See *source control data set, communications data set*.

address space. One or more unique identifiers assigned to OAM and OTIS sessions. Also the complete range of addresses in memory available to a computer program.

aggregate group. A collection of related data sets and control information that have been pooled to meet a defined backup or recovery strategy. Aggregate group is used with the storage of DASD data, not within an OAM environment.

alphanumeric. The set of characters that contains only 0–9 and uppercase A–Z.

application plan. The control structure produced during the bind process and used by DB2 to process SQL statements during application execution.

ATLDS. See *automated tape library dataserver*.

attribute. A named property of an entity.

automated tape library dataserver (ATLDS). A device consisting of robotic components, cartridge storage areas, tape subsystems, and controlling hardware and software, together with the set of tape volumes that reside in the library and can be mounted on the library tape drives. Contrast with *manual tape library*. See *tape library*.

automatic class selection (ACS). A mechanism for assigning Storage Management Subsystem classes and storage groups to data sets.

automatic class selection (ACS) routine. A procedural set of ACS language statements. Based on a set of input variables, the ACS language statements generate the name of a predefined SMS class, or a list of names of predefined storage groups, for a data set.

B

backup. The first or second backup copy of a primary object in an Object Backup storage group.

base configuration. The part of an SMS configuration that contains general storage management attributes, such as the default management class, default unit, and default device geometry. It also identifies the systems or system groups that an SMS configuration manages.

bind. The process by which the output from the DB2 precompiler is converted to a usable control structure called an application plan. This process is the one during which access paths to the data are selected and some authorization checking is performed.

block. A string of data elements recorded, processed, or transmitted as a unit. The elements can be characters, words, or physical records.

byte stream. A simple sequence of bytes stored in a stream file.

C

cartridge. See *optical disk cartridge*.

Cartridge System Tape. The base tape cartridge media used with 3480 or 3490 Magnetic Tape Subsystems.

cartridge eject. For an IBM TotalStorage Enterprise Automated Tape Library (3494), IBM TotalStorage Enterprise Automated Tape Library (3495), or a manual tape library, the act of physically removing a tape cartridge, usually under robot control, by placing it in an output station. The software logically removes the cartridge by deleting or updating the tape volume record in the tape configuration database. For a manual tape library, the act of logically removing a tape cartridge from the manual tape library by deleting or updating the tape volume record in the tape configuration database.

cartridge entry. For either an IBM TotalStorage Enterprise Automated Tape Library (3494), IBM TotalStorage Enterprise Automated Tape Library (3495), or a manual tape library, the process of logically adding a tape cartridge to the library by creating or updating the tape volume record in the tape configuration database. The cartridge entry process includes the assignment of the cartridge to scratch or private category in the library.

CCW. Continuous composite WORM.

CDS. See *Control data set.*

CDS base. Control data set base.

central processing unit (CPU). The circuitry of a computer that controls the interpretation and execution of instructions. Traditionally, the complete unit was often regarded as the CPU, whereas today the CPU is often a microchip. In either case, the centrality of a processor or processing unit depends on the configuration of the system or network in which it is used.

CFRM. Coupling facility resource management.

channel-to-channel. A method of connecting two computing devices.

CICS. See *Customer Information Control System*.

class transition. A change in an object's management class, storage class, or both when an event occurs that brings about a change in an object's service level or management criteria. Class transition occurs during a storage management cycle.

collection. A group of objects that typically have similar performance, availability, backup, retention, and class transition characteristics. A collection is used to catalog a large number of objects which, if cataloged separately, could require an extremely large catalog.

commit. In DB2, to cause all changes that have been made to the database file since the last commitment operation to become permanent, and the records to be unlocked so they are available to other users.

communications data set (COMMDS). The primary means of communication among systems governed by a single SMS configuration. The COMMDS is a VSAM linear data set that contains the name of the ACDS and current utilization statistics for each system-managed volume, which helps balance space among systems running SMS. See *active control data set* and *source control data set*.

compaction. See *improved data recording capability*.

compatibility mode. The mode of running SMS in which no more than eight names—representing systems, system groups, or both—are supported in the SMS configuration.

complex. See *SMS complex*.

configuration. The arrangement of a computer system as defined by the characteristics of its functional units. See *SMS configuration*.

connectivity. Relationship establishing the eligibility of a given system in an SMS complex to access a VIO, pool, object, object backup, or tape storage group, or the individual volumes within a pool storage group. The relationship can be NOTCON (not connected), indicating eligibility, or any of the following, all of which imply some level of eligibility: ENABLE, QUIALL (quiesce all), QUINEW (quiesce new), DISALL (disable all), DISNEW (disable new).

construct. One of the following: data class, storage class, management class, storage group, aggregate group, base configuration.

control data set (CDS). With respect to SMS, a VSAM linear data set containing configurational, operational, or communication information. SMS uses three types of control data sets: the source control data set (SCDS), the active control data set (ACDS), and the communication data set (COMMDS).

controlling library. A 3995 model 131, 132, 133, or C3A optical library model containing the control unit for the 3995 Optical Library Dataserver.

coupling facility (CF). The hardware that provides high-speed caching, list processing, and locking functions in a Parallel Sysplex.

CPU. See *central processing unit*.

cross-system coupling facility (XCF). A component of z/OS that provides functions to support cooperation between authorized programs running within a sysplex.

CTC. See *channel-to-channel*.

Customer Information Control System (CICS). An IBM licensed program that provides online transaction processing services and management for critical business applications. CICS runs on many IBM and non-IBM platforms (from the desktop to the mainframe) and is used in various types of networks that range in size from a few terminals to many thousands of terminals. The CICS application programming interface (API) enables programmers to port applications among the hardware and software platforms on which CICS is available. Each product in the CICS family can interface with the other products in the CICS family, thus enabling interproduct communication.

D

DASD. See *Direct access storage device.*

DATABASE 2 (DB2). A relational database management system.

DATABASE 2 interactive (DB2I). An interactive relational database management program.

database request module. A data set member created by the DB2 precompiler that contains information about SQL statements. DBRMs are input into the bind process.

data class. A collection of allocation and space attributes, defined by the storage administrator, that are used to create a data set.

data compaction. See *improved data recording capability*.

Data Facility Storage Management Subsystem (DFSMS). An operating environment that helps automate and centralize the management of storage. To manage storage, SMS provides the storage administrator with control over data class, storage class, management class, storage group, and automatic class selection routine definitions.

Data Facility Storage Management Subsystem data facility product (DFSMSdfp). A DFSMS functional component and a base element of z/OS that provides functions for storage management, data management, program management, device management, and distributed data access.

DB2. DATABASE 2.

DB2 data sharing. The ability of concurrent DB2 subsystems or application programs to directly access and change the same data while maintaining data integrity.

DB2 data sharing group. A collection of one or more concurrent DB2 subsystems that directly access and change the same data while maintaining data integrity.

DB2I. See *DATABASE 2 interactive*.

DBRM. See *database request module*.

device. This term is used interchangeably with unit. For a disk or tape, a unit on which a volume may be mounted. For example, a tape drive is a device; a tape cartridge is a volume. Device also applies to other types of equipment, such as a card reader or a channel-to-channel (CTC) adapter.

device group. A group of devices that are interchangeable as far as z/OS allocation is concerned. Unless a request is for a specific device name, if one device in a given device group can satisfy a request, any other can also satisfy that request.

device name. This term is used interchangeably with device number, unit number, and unit name. It is the number by which a specific device is known. For example, and installation with two tape drives might assign them device names 181 and 182.

DFSMS. See *Data Facility Storage Management Subsystem.*

DFSMSdfp. A DFSMS functional component or base element of z/OS, that provides functions for storage management, data management, program management, device management, and distributed data access.

DFSMShsm. A DFSMS functional component or base element of z/OS, used for backing up and recovering data, and managing space on volumes in the storage hierarchy.

DFSMSrmm. A DFSMS functional component or base element of z/OS, that manages removable media.

DFSMSdss. A DFSMS functional component or base element of z/OS, used to copy, move, dump, and restore data sets and volumes.

direct access storage device (DASD). A device in which time is effectively independent of the location of the data.

DISALL (disable all). Relationship preventing a system from allocating new data sets in a VIO, pool, object, object backup, or tape storage group, or on individual volumes within a pool storage group.

disk. See *optical disk*.

drive definition. A set of attributes used to define an optical disk drive as a member of a real optical library or pseudo optical library.

E

EFMT1. Enterprise Recording Format 1 recording technology.

EFMT2. Enterprise Recording Format 2 recording technology.

Enhanced Capacity Cartridge System Tape. Cartridge system tape with increased capacity that can only be used with 3490E Magnetic Tape Subsystems.

Enterprise Economy Tape Cartridge. Cartridge system tape with increased capacity, but smaller than Enterprise Tape Cartridge, that can only be used with 3592 Magnetic Tape Subsystems.

Enterprise Tape Cartridge. Cartridge system tape with increased capacity that can only be used with 3592 Magnetic Tape Subsystems.

Enterprise Extended Tape Cartridge. Cartridge system tape with extended capacity that can only be used with 3592 Model E05 Magnetic Tape Subsystems.

Enterprise WORM Economy Tape Cartridge. Write Once Read Many cartridge system tape with increased capacity, but smaller than Enterprise WORM Tape Cartridge, that can only be used with 3592 Magnetic Tape Subsystems.

Enterprise WORM Tape Cartridge. Write Once Read Many cartridge system tape with increased capacity that can only be used with 3592 Magnetic Tape Subsystems.

Enterprise Extended WORM Tape Cartridge. Write Once Read Many cartridge system tape with extended capacity that can only be used with 3592 Model E05 Magnetic Tape Subsystems.

Environmental Record Editing and Printing program (EREP). The program that formats and prepares reports from the data contained within the environmental recording data set (ERDS).

EPI. ERDS Physical Identifier.

EREP. See *Environmental Record Editing and Printing program*.

ESCON. Enterprise System Connection.

esoteric unit name. A name used to define a group of devices having similar hardware characteristics, such as TAPE or SYSDA.

expiration. (1) The process by which data sets or objects are identified for deletion because their expiration date or retention period has passed. On DASD, data sets and objects are deleted. On tape, when all data sets have reached their expiration date, the tape volume is available for reuse. (2) In OAM, when all of the objects on the volume have expired, you can expire tape and optical volumes.

expiration date. The date at which a file is no longer protected against automatic deletion by the system.

expiration processing. The process of inventory management that ensures expired volumes are released and carries out required release actions on those volumes.

F

free space. The total amount of unused space in a page. The space that is not used to store records or control information is free space.

G

GB. See *gigabyte*.

generalized trace facility (GTF). An optional OS/VS service program that records significant system events, such as supervisor calls and start I/O operations, for the purpose of problem determination.

generic unit name. A name assigned to a class of devices with the same geometry (such as 3390).

gigabyte. 1 073 741 824 bytes.

GMT. Greenwich Mean Time.

grant. A DB2 process that authorizes users to access data.

GTF. See *generalized trace facility.*

H

hardware configuration definition (HCD). An interactive interface in z/OS that enables an installation to define hardware configurations from a single point of control.

HCD. See *hardware configuration definition*.

I

IARS. See *Initial Access Response Seconds.*

IBM TotalStorage Enterprise Tape Cartridge. A cartridge system tape with increased capacity that can only be used with 3592 Magnetic Tape Subsystems (MEDIA5, MEDIA6, MEDIA7, MEDIA8, MEDIA9, and MEDIA10).

ICF. See *Integrated catalog facility.*

ID. Identification.

identification. In computer security, the process that allows a system to recognize an entity by means of personal, equipment, or organizational characteristics or codes.

IDRC. See *Improved data recording capability.*

image copy. An exact reproduction of all or part of a table space. DB2 provides utilities to make full image copies or incremental image copies.

improved data recording capability (IDRC). A form of compression used when storing data on tape. This can increase the effective cartridge data capacity and the effective data transfer rate.

IMS. Information Management System.

index. A set of pointers that are logically ordered by the values of a key. Indexes provide quick access to data and can enforce uniqueness on the rows in a DB2 storage table.

Information Management System (IMS). A transaction and hierarchical database management system that organizes the data in different structures, depending on data type, to optimize storage and retrieval, and to ensure integrity and ease of recovery.

initial access response seconds (IARS). A parameter specified in the definition of an SMS storage class indicating the desired response time to locate, mount, and prepare a piece of media for data transfer.

initial program load (IPL). (1) The initialization procedure that causes an operating system to commence operation. (2) The process by which a

configuration image is loaded into storage at the beginning of a work day or after a system malfunction. (3) The process of leading system programs and preparing a system to run jobs. (4) Synonymous with system restart, system startup.

installation exit. The means specifically described in an IBM software product's documentation by which an IBM software product may be modified by a customer's system programmers to change or extend the functions of the IBM software product. Such modifications consist of exit routines written to replace one or more existing modules of an IBM software product, or to add one or more modules or subroutines to an IBM software product, for the purpose of modifying (including extending) the functions of the IBM software product.

integrated catalog facility (ICF). In the Data Facility Product (DFP), a facility that provides for integrated catalog facility catalogs.

Interactive Storage Management Facility (ISMF). The interactive interface of DFSMS that allows users and storage administrators access to the storage management functions.

Interactive System Productivity Facility (ISPF). An interactive base for ISMF.

IPL. See *initial program load.*

ISMF. See *Interactive Storage Management Facility*.

ISO. International Organization for Standardization.

ISPF. See *Interactive System Productivity Facility*.

K

KB. Kilobyte.

kilobyte (KB). A unit of measure for storage capacity. One kilobyte equals 1024 bytes.

L

LCS. See *Library Control System*.

Library Control System (LCS). Component of OAM that writes and reads objects on optical disk storage, and manipulates the optical volumes on which the objects reside.

library expansion unit. A 3995 model 111, 112, 113, C12, C16, C18, C32, C34, C36, or C38 that connects to a controlling library to expand the capacities of the 3995 Optical Library Dataserver.

M

magneto-optic (MO) recording. A method of storing information magnetically on optical media, which is sensitive only at high temperatures, while stable at normal temperatures. A laser is used to heat a small spot on the medium for recording. The ability to focus the laser tightly greatly increases the data density over standard magnetic media. MO media are erasable and rewritable.

management class. A named collection of management attributes describing the retention and backup characteristics for a group of data sets, or for a group of objects in an object storage hierarchy. For objects, the described characteristics also include class transition.

manual tape library (MTL). An installation-defined set of tape drives and the set of volumes that can be mounted on the drives.

max connects. The maximum amount of foreground and background users and TSO/E connections allowed to a DB2 subsystem.

MB. Megabyte.

MEDIA1. IBM Cartridge System Tape.

MEDIA2. IBM Enhanced Capacity Cartridge System Tape.

MEDIA3. IBM High Performance Cartridge Tape.

MEDIA4. IBM Extended High Performance Cartridge Tape.

MEDIA5. IBM TotalStorage Enterprise Tape Cartridge.

MEDIA6. IBM TotalStorage Enterprise WORM Tape Cartridge

MEDIA7. IBM TotalStorage Enterprise Economy Tape Cartridge

MEDIA8. IBM TotalStorage Enterprise Economy WORM Tape Cartridge

MEDIA9. IBM TotalStorage Enterprise Extended Tape Cartridge

MEDIA10. IBM TotalStorage Enterprise Extended WORM Tape Cartridge

media management system. A program that helps you manage removable media. DFSMSrmm is an example of a media management system.

megabyte (MB). 1 048 576 bytes.

MO. Magneto-optic recording technique for optical media.

mount. A host-linked operation that results in a tape cartridge being physically inserted into a tape drive.

MTL. See *manual tape library*.

MVS Configuration Program (MVSCP). A single-step, batch program that defines the input/output configuration to z/OS.

MVSCP. See *MVS configuration program*.

MVS/ESA. Multiple Virtual Storage/Enterprise Systems Architecture. A z/OS operating system environment that supports ESA/390.

O

OAM. See *object access method*.

OAMplex. The concept of connecting instances of OAM to a single XCF (cross-system coupling facility) group to create an OAMplex within the parallel sysplex environment. This includes using DB2 data sharing where the scope of a DB2 data sharing group equals the scope of the OAMplex.

OAM-managed volumes. Optical or tape volumes controlled by the object access method (OAM).

OAM Storage Management Component (OSMC). Where objects should be stored, manages object movement within the object storage hierarchy, and manages expiration attributes based on the installation storage management policy.

OAM thread isolation support (OTIS). An OAM subsystem providing OAM-DB2 functions that use a different thread to DB2 than the application program thread.

object. A named byte stream having no specific format or record orientation.

object access method (OAM). A program that provides object storage, object retrieval, and object storage hierarchy management. OAM isolates applications from storage devices, storage management, and storage device hierarchy management.

Object Backup storage group. A type of storage group that contains optical or tape volumes used for backup copies of objects. See *storage group* and *Object storage group*.

object directory tables. A collection of DB2 tables that contains information about the objects that have been stored in an SMS Object storage group.

Object Distribution Manager. The application that resides in the image host and provides services to the front-end application hosts for the storage, retrieval, and routing of image objects and coded data.

Object Storage and Retrieval (OSR). Component of OAM that stores, retrieves, and deletes objects. OSR stores objects in the storage hierarchy and maintains the information about these objects in DB2 databases.

object storage database. A DB2 database that contains an object directory for an Object storage group, a storage table for objects less than or equal to 3980 bytes, and a storage table for objects greater than 3980 bytes.

Object storage group. A type of storage group that contains objects on DASD, tape, or optical volumes. It consists of an object directory (DB2 table space), and object storage on DASD (DB2 table spaces) with optional library-resident and shelf-resident optical and or tape volumes. See *storage group* and *Object Backup storage group*.

object storage hierarchy. A hierarchy consisting of objects stored in DB2 table spaces on DASD, on optical or tape volumes that reside in a library, and on optical or tape volumes that reside on a shelf. See *storage hierarchy.*

object storage tables. A collection of DB2 tables that contain objects.

OCDB. See *optical configuration database*.

Optical Configuration Database (OCDB). The optical library table, the library slot table, the optical drive table, the optical volume table, and the tape volume table that reside in a DB2 database and describe the current OAM configuration.

optical disk. A disk that uses laser technology for data storage and retrieval.

optical disk cartridge. A plastic case that protects and contains the optical disk and permits insertion into an optical drive.

optical disk drive. The mechanism used to seek, read, and write data on an optical disk. An optical disk drive may reside in an optical library or as a stand-alone unit.

optical library. A set of optical disk drives and optical disks defined to the source control data set. An optical library can be a real library with the optical drives and optical disks residing within the same storage device, or a pseudo library that consists of operator-accessible drives and shelf-resident optical disks. See *real optical library, pseudo optical library*.

optical volume. One side of a double-sided optical disk.

OSMC. See *OAM Storage Management Component*.

OSR. See *Object Storage and Retrieval*.

OTIS. See *OAM thread isolation support*.

out-of-space condition.

- A library is considered to be out-of-space for a storage group when:
  - there are no scratch volumes in the optical library
  - any library-resident volumes for the storage group are full.
- The DB2 object database is considered to be out-of-space when a new row cannot be inserted into the object directory.

OVTOC. Optical Volume Table of Contents.

P

Parallel Sysplex. A sysplex that uses one or more coupling facilities.

PCA. Parallel channel adapter.

PLT. Program list table.

PPT. Program properties table.

primary. An object that is in the object storage hierarchy and can be retrieved by OSREQ RETRIEVE. There is no connection to the last time the object was used or its actual or expected frequency of use.

private. The state of a tape volume that contains user-written data. A private volume is requested by specifying the volume serial number.

pseudo optical library. A set of shelf-resident optical volumes associated with stand-alone, or operator-accessible, or both, optical disk drives.

Q

QEL. Query element list.

R

RCT. See *resource control table*.

real optical library. Physical storage device that houses optical disk drives and optical cartridges, and contains a mechanism for moving optical disks between a cartridge storage area and optical disk drives.

recording format. For a tape volume, the format of the data on the tape; for example, 18, 36, 128, 256, 384 tracks, or EFMT1.

Resource Control Table (RCT). The CICS table that contains customization information for a particular Object Distribution Manager installation.

resource measurement facility (RMF). An IBM licensed program or optional element of z/OS, that measures selected areas of system activity and presents the data collected in the format of printed reports, system management facilities (SMF) records, or display reports. Use RMF to evaluate system performance and identify reasons for performance problems. These reports provide a snapshot status of OAM's performance at a given time.

rewritable media. Media that can be erased, rewritten, or reused.

RMF. See *resource measurement facility*.

row. The horizontal component of a DB2 table. A row consists of a sequence of values, one for each column of a table.

S

SCDS. Source control data set.

scratch. The state of a tape volume that is available for general use. A scratch volume is requested by omitting the volume serial number.

scratch pool. The collection of tape cartridges from which requests for scratch tapes can be satisfied.

scratch tape. See *scratch volume*.

scratch volume. A tape volume that has been assigned the scratch use attribute by the software. If the cartridge resides in a tape library, it is assigned to a scratch category of the appropriate media type.

SCSI. See *Small Computer System Interface*.

SDR. See *sustained data rate*.

second backup object. The second backup copy of an object, which is stored in the Object Backup storage group that is specified as a second Object Backup storage group.

sector. On disk storage, an addressable subdivision of a track used to record one block of a program or data.

shelf. A place for storing removable media, such as tape and optical volumes, when they are not being written to or read.

shelf-resident optical volume. An optical volume that resides outside of an optical library.

shelf-resident tape volume. A tape volume that resides outside of a tape library.

slot. A space in a library where a cartridge is stored.

Small computer system interface (SCSI). A mechanical, electrical, and functional standard for a small computer input/output bus and command sets for peripheral device types commonly used with small

computers. **Note:** Laser Magnetic Storage International (LMSI) documentation sometimes uses ICI and ISI interchangeably with SCSI.

SMF. See *system measurement facility*.

SMP/E. See *System Modification Program/Extended*.

SMS. See *Storage Management Subsystem*.

SMS class. A list of attributes that SMS applies to data sets having similar allocation (data class), performance (storage class), or backup and retention (management class) needs.

SMS complex. A collection of systems or system groups that share a common configuration. All systems in an SMS complex share a common active control data set (ACDS) and a communications data set (COMMDS). The systems or system groups that share the configuration are defined to SMS in the SMS base configuration.

SMS-managed data set. A data set that has been assigned a storage class.

SPUFI. See *SQL Processing Using File Input*.

SQL. See *Structured Query Language*.

SQLCODE. Structured query language return code.

SQL Processing Using File Input. Used to perform groups of SQL statements in batch or online mode. SPUFI is option one under DB2I.

stand-alone optical drive. An optical drive housed outside of an optical library.

storage class. A collection of storage attributes that identify performance goals and availability requirements, defined by the storage administrator, used to select a device that can meet those goals and requirements.

storage group. A named collection of physical devices to be managed as a single object storage area. It consists of an object directory (DB2 table space) and object storage on DASD (DB2 table spaces), with optional library-resident and shelf-resident optical volumes.

storage hierarchy. An arrangement of storage devices with different speeds and capacities. The levels of the storage hierarchy include main storage (memory, DASD cache), primary storage (DASD containing uncompressed data), migration level 1 (DASD containing data in a space-saving format), and migration level 2 (tape cartridges containing data in a space-saving format). See *object storage hierarchy*.

storage management cycle. An invocation of the OAM Storage Management Component (OSMC). The storage management cycle ensures that every object scheduled for processing is placed in the correct level of the object storage hierarchy (as specified by its storage class), is expired or backed up (as specified by its management class or by an explicit application request). If necessary, the object is flagged for action during a subsequent storage management cycle.

Storage Management Subsystem (SMS). A DFSMS facility used to automate and centralize the management of storage. Using SMS, a storage administrator describes data allocation characteristics, performance and availability goals, backup and retention requirements, and storage requirements to the system through data class, storage class, management class, storage group, and ACS routine definitions.

structured query language (SQL). A DB2 query tool.

supervisor call (SVC). A request that serves as the interface into operating system functions, such as allocating storage. The SVC protects the operating system from inappropriate user entry. All operating system requests must be handled by SVCs.

sustained data rate (SDR). A parameter specified in the definition of an SMS storage class indicating the desired sustained data rate to read the next 4 KB block of a data entity assuming the prior 4 KB block has been read.

SVC. See *supervisor call*.

sysplex. A set of z/OS systems communicating and cooperating with each other through certain multisystem hardware components and software services to process customer workloads.

system-managed tape library. A collection of tape volumes and tape devices, defined in the tape configuration database. A system-managed tape library can be automated or manual. See *tape library.*

system measurement facility (SMF). An optional control program feature that provides the means for gathering and recording information that can be used to evaluate system usage.

System Modification Program/Extended (SMP/E). Basic tool for installing software changes in programming systems. It controls these changes at the element (module or macro) level, which helps protect system integrity.

T

table. In DB2, a named data object consisting of a specific number of columns and some number of unordered rows.

table space. A page set used to store the records of one or more DB2 tables.

tape cartridge. A case containing a reel of magnetic tape that can be put into a tape unit without stringing the tape between reels.

tape configuration database (TCDB). The set of tape library records and tape volume records that reside in ICF volume catalogs and describe the current tape library configuration.

tape library. A set of equipment and facilities that support an installation's tape environment. This can include tape storage racks, a set of tape drives, and a set of related tape volumes mounted on those drives. See *system-managed tape library, automated tape library data server*.

Tape Library Dataserver. A hardware device that maintains the tape inventory that is associated with a set of tape drives. An automated tape library dataserver also manages the mounting, removal, and storage of tapes.

tape storage group. A type of storage group that contains system-managed private tape volumes. The tape storage group definition specifies the system-managed tape libraries that can contain tape volumes. See *storage group*.

tape volume. A tape volume is the recording space on a single tape cartridge or reel. See *volume*.

TB. See *terabyte*.

TCDB. See *tape configuration database*.

Terabyte (TB). Terabyte as used in data processing (1 099 511 627 776 bytes).

Time Sharing Option Extensions (TSO/E). An option of the z/OS operating system that provides interactive time sharing from remote terminals.

TSO/E. See *Time Sharing Option/Extensions*.

U

user exit. A programming service provided by an IBM software product that may be requested by an application program for the service of transferring control back to the application program upon the later occurrence of a user-specified event.

V

vary offline. To change the status of an optical library or an optical drive from online to offline. Varying a library offline does not affect the online/offline status of the drives it contains. When a library or drive is offline, no data may be accessed on optical disks through the offline drive or the drives in the offline library.

vary online. To change the status of an optical library or an optical drive from offline to online. This makes the drive or drives in the library being varied online available for optical disk access.

virtual tape server (VTS). This subsystem, integrated into the IBM TotalStorage Enterprise Automated Tape Library (3494) or the IBM TotalStorage Enterprise Automated Tape Library (3495), combines the random access and high performance characteristics of DASD with outboard hierarchical storage management and virtual tape devices and tape volumes.

volume full threshold. When the number of free kilobytes on the volume falls below this threshold, the volume is marked full.

VOLSER. See *volume serial number*.

volume serial number (VOLSER). (1) An identification number in a volume label that is assigned when a volume is prepared for use on the system. For standard label volumes, the volume serial number is the VOL1 label of the volume. For no label volumes, the volume serial number is the name the user assigns to the volume. (2) In DFSMSrmm, volume serial numbers do not have to match rack numbers.

VTOC. Volume table of contents.

W

WORM. See *write-once, read-many*.

write-once, read-many (WORM) media. This type of optical disk media cannot be rewritten nor erased.

X

XCF. See *cross-system coupling facility*.

Index

Numerics

32 KB object storage table 514
3480 tape drive 39
3490 tape drive 39
3490E tape drive 39
3590-1 tape drive 39
3590-E tape drive 39
3590-H tape drive 39
3592-E05 tape drive 39
3592-J tape drive 39
4 KB object storage table 514

A

accessibility 591
ACDS (active control data set) 10
ACS (automatic class selection)
  assigning the storage group 14
  changing routines 194
  class transition
    description 22
    determining need 56
  constructs
    aggregate group 11
    assigning the management class 18
    data class 24, 167
    management class 22, 57, 77
    naming convention 22, 152
    storage class 18, 76
    storage group 12
  definition 10
  determining device allocation 46
  Environment variables (&ACSENVIR)
    CHANGE 160
    CTRANS 160
    STORE 160
  input variables
    CHANGE 160
    CTRANS 160
    STORE 160
  routines
    ALLOC environment 45
    coding for class transition 77
    defining the routines 171
    input variables 159
    overview 27
    SETOAM overrides 28
  SAMPLIB members
    CBRHMC 497
    CBRHSC 493
    CBRHSG 506
  specifying SMS definitions and programs 151
Action Message Retention facility (AMRF)
  keyword in the CONSOL*xx* PARMLIB member 100
active control data set (ACDS) 10
address space, OAM and OTIS 28
Administration Database
  CBRIALCX 434
  CBRIALCY 437
  CBRISQLX 447
  CBRISQLY 450
  overview 515
administrative tasks
  destroying and deleting expired data 246
  establishing recovery procedures 222
  identifying transaction activity with RMF 213
  measuring performance with SMF 211
  monitoring DB2 databases 195
  monitoring/maintaining optical volumes 182
  monitoring/maintaining SMS constructs and definitions 192
  monitoring/maintaining the optical configuration 177
  OAM planning 75
  processing expiration of objects 245
  tuning OAM 196
  using MOVEVOL 225
aggregate group 11
APLAN for LCS 134
application plans
  binding CBRIDBS 148
  creating application plans for
    ISMF (CBRISMF) 148
    LCS (CBROAM) 148
    OSMC (CBRH*) 147
    OSR (CBRIDBS) 148
  creating for OSR only 146
  custom 62
  DB2 installation verification 149
  granting authorization for CBRIDBS 146
  planning to program 74
application programming interface
  assigning storage class 22
  changing object assignment 18
  description 2
  dynamic allocation 47
  installation verification program (OAMIVP) 172, 489
  media selection
    writing to tape 44, 46
  OTIS address space 29, 385, 430
  performance recommendations 151
  positional parameters 254
  retrieval response time 205
  retrieving objects 12
  STORE request flowchart
    optical media 28
    tape media 19
  TSO command syntax 253
  verifying with ACS routines 27
ATLDS (automated tape library dataserver)
  data class 24, 167
  management class 22
  storage class 18
  storage group
    allocating a scratch tape 16, 45
    assigning the TAPE storage group 14
    understanding the concept 12
  tape volumes, describing 43
AUDIT
  generic messages 190
  line operator 179
  OAM scheduling errors 191
  operator command 379
  volume error status error results 188
authorization
  access verification 150
  APF for DB2 load module library 132
  CICS transactions 146
  OSMC transactions 148
  user ID access 134
Auto-Delete installation exit
  CBRADUP parameter list 575, 576
  diagnosing 56
  object deletion
    logical KB deleted 56
    modifying exit 97
  overview 573
  register contents 575
  return and reason codes
    CBRADUP 576
    CBRHADUX 576
  sample exit (SAMPADUX) 577, 590
  writing the CBRHADUX Exit 574
automatic access to backup processing
  starting 298
  stopping 384

B

backup
  Auto Backup parameter 15
  automatically accessing backup objects 225
  DB2 MERGECOPY 222
  determining DRIVE STARTUP THRESHOLD 154
  determining requirements for 56
  factors affecting tape capacity 42
  OAM.BACKUP.DATA sequential data set 45
  Object Backup storage group 12
  recovery procedures 222
  starting automatic access to backup objects 298
  stopping access backup 384
  volume 33, 44
  volume recovery utility 191, 223, 278

© Copyright IBM Corp. 1989, 2006

base configuration 10
buffer pools
  DSNTIJUZ DB2 job 94
  DSNTIPE panel 94
  max connects 94

C

capacity
  backup volume 34
  disk 29
  drive 29
  grouped volume 33
  scratch volume 33
  tape 42
capacity scaling, tape 43
cartridge
  data format on tape 45
  optical disk 31
  tape capacity 42
  tape volumes, describing 43
  types of tape 43
  volume recovery utility 191, 223, 278
Cartridge System Tape (MEDIA1) 43
catalog
  entries for a collection 1, 162
  ICF 51
  recovering entries 224
  shared 151
  user 150
CBRABIND
  binding the CBROAM, CBRISMF, and CBRIDBS application plans 148
CBRADUP
  parameter list 575
CBRAGRNT
  granting usage authority 148
CBRAPROC
  installation/migration instructions 132
  SAMPLIB member 430
CBRHADUX installation exit 573
CBRHBIND
  creating the OSMC application plans 147
CBRHGRNT
  granting usage authority 148
CBRHMC
  SAMPLIB member 497
CBRHSC
  SAMPLIB member 493
CBRHSG
  SAMPLIB member 506
CBRIALC0 library member
  job steps 431
  understanding the database creation jobs 136
CBRIALCX
  SAMPLIB member 434
CBRIALCY
  SAMPLIB member 437
CBRIBIND
  creating the OSR application plan 146
CBRIGRNT
  granting usage authority 146
CBRILOB
  SAMPLIB member 438
CBRIPROC
  installation/migration instructions 132
  SAMPLIB member 430
CBRISQL0 library member
  job steps 443
  understanding the database creation jobs 136
CBRISQLX
  SAMPLIB member 447
CBRISQLY
  SAMPLIB member 450
CBROAM*xx* PARMLIB member
  creating or updating SETOSMC statements 8, 14, 15, 74, 125, 126, 169, 223
CBRPBIND
  performing a DB2 BIND 488
CBRSAMPL
  creating the optical configuration database 140
  SAMPLIB member 452
CBRSAMUT
  SAMPLIB member 490
CBRSG100
  SAMPLIB member 478
CBRSMERG
  SAMPLIB member 471
CBRSMR18
  SAMPLIB member 441
CBRUXTVS
  return to MVS scratch exit 240
CICS (Customer Information Control System)
  changing installation parameters
    connecting DB2 96
    copying CBRICONN to DFHRPL 96
    program list table (PLT) 95
    program properties table (PPT) 95
    system initialization table (SIT) 96
    transaction authority 146
  OSR functions 6
class transition
  coding ACS routines 77
  CTRANS ACS environment 160
  definition 54
  determining requirements 56
  management 22
  sample ACS routine 492, 497, 506
  storage 18
class, management
  ACS environment
    CHANGE 160
    CTRANS 160
    STORE 160
  administration database (OAMADMIN)
    description 135
    management class identifier table 516
  case study examples 77
  changing constructs caution 195
  defining 168
class, management *(continued)*
  description 11, 22
  end of object life 97
  identifier table 516
  identifying management cycles
    class transitions 55, 56, 160
    developing 57
    establishing parameter values 159
  maintaining definitions 193
  modifying defaults 198
  parameters 168
    sample ACS routine 497
class, storage
  ACS environment
    CHANGE 160
    CTRANS 160
    STORE 160
  administration database (OAMADMIN)
    description 135
    storage class identifier table 516
  case study examples 76
  changing constructs caution 195
  collection name identifier table 517
  collections 1, 53
  description 11, 18
  establishing performance objectives 53, 159
  identifier table 516
  Initial Access Response 18
  maintaining definitions 192
  modifying defaults 198
    sample ACS routine 492
  service-level criteria 53
  Sustained Data Rate 18
CLEAROLDLOC 129
collection
  ACS routine input variables 160
  assignment 53
  characteristics 27
  class assignment 27
  considerations for planning 53
  defining user catalogs 150
  definition 1
  establishing 76
  ICF catalogs 51
  name identifier table 517
  Object storage group 12, 27
  overview 515
  recovering catalog entries 224
  storing object 162
command
  DISPLAY commands
    drive detail 336
    drive online/offline connectivity 333
    library detail 344
    library online/offline status 339
    OAM 322
    OAM XCF 325
    OAM XCF parameters 325
    OSMC summary 328
    OSMC task 329
    outstanding OAM messages 360
    SETOPT, SETOAM, and SETOSMC statements 357
    storage group detail 346

command *(continued)*
DISPLAY commands *(continued)*
volume 350
volumes with LOSTFLAG set 107, 356
DUMP 362
EJECT 309
LABEL 312
QUERY 361
reformat utility 319
RELABEL 318
RESTART 366
SETOPT statement 8, 114
start commands
automatic access to backup 298
DASD space management 277
library space manager 275
MOVE VOLUME utility 288, 298
OAM 267
OSMC 269
OTIS 266
single object recovery 285
storage management cycle 272
tape recycle 237
tape recycle utility 287
volume recovery 278
STOP commands
access backup 384
Move Volume utility 382
OAM 381
OSMC 381
OTIS 385
UPDATE
OAMXCF 376
SETOAM and SETOPT 368
VOLUME 378
varying online and offline
optical drives 302
optical libraries 303
compaction, tape 42
components
Library Control System (LCS) 7
OAM Storage Management Component (OSMC) 7, 268
Object Storage and Retrieval (OSR) 6
configuration
3995 sample 387
9246/9247 sample 387
considerations 61
creating the optical configuration database 140
defining devices with HCD 134, 396
hardware
grouping devices 17, 60, 114
interactions with OAM 3
overview 60
rejecting incompatible groups 114
IPLing the system 151
library discrepancies in REMAP 181
monitoring/maintaining 177
optical configuration database 67, 517
SCDS, defining 405
SMS base configuration 9
software prerequisites 62
tape storage combinations 39
tuning OAM 196
configuration *(continued)*
validating and activating 171
constructs
aggregate group 11
data class 24, 167
establishing 76
management class
description 22
developing 57
examples 77
overriding ACS routines 27
overview 9
specify SMS definitions and programs 151
storage class
description 18
examples 76
Initial Access Response 18
Sustained Data Rate 18
storage group 12, 53
copy
accessing backup objects 225
Auto Backup parameter 169
backup object 12
DB2 MERGECOPY utility 222
factors affecting tape capacity 42
optical library and drive definitions 425
copy pool 11
cross-system coupling (XCF)
group 4
messaging facilities 4
mode 4
restrictions 6
specifying members with OAMXCF statement 4
transaction shipping 5
within a parallel sysplex 4
within an OAMplex 4
cycle
OSMC processing system 158
START/END TIME parameter
controlling 155
storage management window 157
starting OSMC functions
DASD space management 277
library management cycle 275
move volume (MOVEVOL) utility 288
object processing for a storage group 274
single object recovery 285
storage management cycle 272
volume recovery 278
CYCLEWINDOW 127

D

DASD (direct access storage device)
considerations 63
device characteristics 66
object storage table 514
resource estimation
object storage database 66, 79, 136
starting the space management cycle 277
DASD (direct access storage device) *(continued)*
system paging 64
using RMF 213
data class
capacity scaling attribute 43
defining 167
description 11, 24
SETOAM 7, 101
TDSI attributes 24
data set
allocation, modifying 138
name qualifiers 64
required data sets 64
VSAM data sets 64
Database 2 (DB2)
application plans 134
buffer pools and max connects 94
CBRAGRNT (grants OSR, ISMF, LCS plans) 148, 489
CBRHBIND (binds OSMC application plans) 147, 489
CBRHGRNT (grants OSMC application plans) 147, 489
CBRIBIND (create.binds OSR application plans) 146, 489
CBRIGRNT (grants OSR application plans) 146, 489
CBRPBIND (creates/binds DB2 packages) 145, 488
changing installation parameters 93
connecting to CICS 96
data sharing, OAMPLEX 4, 134
database and subsystem sharing 4
DB2SSID keyword 98
DSNTIJUZ job 94
DSNTIPE panel 94
environmental descriptor management (EDM) pools 94
in conjunction with OSR 7
modifying DB2 tables
default storage and management classes 198
RUNSTATS utility 195
SQL statements 196
STORSPAC utility 196
monitoring/maintaining utilities
RUNSTATS utility 195
SQL statements 196
STOSPACE utility 196
object storage databases
allocation jobs 138
creation jobs 136
defining databases example 431
definition jobs 139
granting authority for CBRIDBS 146
merging (CBRSG100) 145, 478
structure 511
table and index descriptions 514
object storage groups 18
Optical Configuration Database
bind and grant authority 147, 148, 489
CBRSAMPL (creates all tables) 140, 452
CBRSM131 141

Database 2 (DB2) *(continued)*
Optical Configuration Database *(continued)*
CBRSM150 141
CBRSMERG 145
creating 140
Deleted Objects Table (OCDELTSP) 527
Drive Table (OCDRVTSP) 521
Library Table (OLIBRARY) 519
merging 145, 471
monitoring/maintaining 177
resource requirements 67
Slot Table (OCSLTTSP) 522
Tape Volume Table (ODTVLTSP) 527
Volume Table (OCVOLTSP) 523
packages 145, 471
parallel sysplex 4
partitioning tables 198, 199, 201
recovering databases 222
tuning OAM connections to 196
Verifying the installation 149
databases
Administration 68, 135, 177, 515
CBRABIND (creates/binds OSR, ISMF, LCS plans) 148, 489
CBRHBIND (binds OSMC applications) 147, 489
CBRHGRNT (grants OSMC applications) 147, 489
CBRIBIND (binds OSR applications) 146, 489
CBRIGRNT (grants OSR applications) 146, 489
CBRPBIND 145, 488
creating for object tables/directories 134, 509
migrating 141
modifying DB2 tables 198
object administration database creation
CBRIALCX 434
CBRIALCY 437
CBRISQLX 447
CBRISQLY 450
overview 136
object storage database
CBRIALC0 (data set allocation job) 136, 431
CBRISQL0 (database definition job) 443
deleting steps from database creation jobs 138
granting applications authority 146, 148, 488
modifying allocation jobs 138
modifying definition jobs 139
OAM diagnosis 509
running allocation jobs 138
running definition jobs 140
structure 511
Optical Configuration Database
bind and grant authority 146
CBROAM 517
CBRSAMPL (creates all tables) 140, 452
databases *(continued)*
Optical Configuration Database *(continued)*
creating 140
monitoring/maintaining 177
resource requirements 67
OSR and DB2 databases 7, 146, 511
packages for high-level qualifiers 141, 145
recovering DB2 databases 222
required data sets 64
tuning OAM connections to DB2 196
VSAM data sets 64
DATACLASS keyword 103, 115
date and time routines
GMT 98
ISO format 95
DB2
recalling objects to 206
deletion, object 50
checking for object deletion 56
deleted objects table (OCDELTSP) 527
determining class transition/backup 56
keywords for the IGDSMS*xx* PARMLIB member 97
logical KB deleted 56
modifying Auto-Delete exit 97
OAM Address Space dependencies 28, 140
process description 56
DEMOUNTWAITTIME keyword 104, 115
devices
allocation recovery 47
compatibility for object retrieval 48
defining with HCD 134, 396
displaying drive detail status 336
displaying library detail status 344
dynamic allocation of tape drives 46
grouping (esoterics) 17, 60, 114
ISMF management
altering optical drive 178, 424
auditing optical library 179
copying library and drive definitions 425
defining optical library 178
deleting optical library 178
remapping optical library 180
libraries for library-resident cartridges 71
OAM Address Space dependencies 28, 140
rejecting incompatible groupings 114
specifying SMS definitions and programs 151
stand-alone/operator-accessible drive
demounting/removing an optical disk 312
labeling a disk 312
mounting an optical disk 311
used for tape storage 39, 46
DFSMSrmm
releasing tape volumes 237
directory
creating the databases 134
directory *(continued)*
object tables 511
disability 591
DISABLED keyword 107
disaster recovery
automatic access of backup objects 225
catalog entries 224
DB2 database 222
DB2 MERGECOPY utility 222
establishing procedures 222
procedures 222
recovering collection name catalog entries 224
recovering DB2 databases 222
single objects recovery utility 223
volume recovery utility 223
DISPLAY command
drive detail 336
library detail 344
LOSTFLAG set 107, 356
OAM status 322
OAM XCF status 325
OSMC summary 327
OSMC task status 329
outstanding OAM messages 360
overview 322
SETOPT, SETOAM, and SETOSMC statement settings 357
storage group 346
syntax 322, 327, 329
volume status 350
drive
allocation recovery 47
compatibility for object retrieval 48
compatibility with media 48
defining devices with HCD 134, 396
demount wait time 104, 115
describing types of drives 34
library-resident 34
displaying drive detail status 336
displaying drive status 333
dynamic allocation 46
esoterics 17, 60, 114
ISMF management
altering optical drive 178, 424, 425
auditing optical drive 179
configuration, defining 3995 402
copying library and drive definitions 425
defining optical drive 178
deleting optical drive 178
rejecting incompatible groupings 114
stand-alone/operator-accessible drive
demounting/removing an optical disk 312
labeling a disk 312
mounting an optical disk 311
table (OCDRVTSP) 521
used for tape storage 39, 46
Drive Startup Threshold
concurrent writing 153
determining threshold for Object/Object Backup 154
exceeding the threshold 153
improving performance 153

Drive Startup Threshold *(continued)*
MAXS parameter 154, 158
MOVEVOL 225, 382
recommended values 154
DRIVE STARTUP THRESHOLD
description 153
drive, optical
altering 178
defining 178
deleting 178
description 34
displaying detail status 336
library-resident 34, 36, 71
operator-accessible 34, 36
stand-alone 35
stand-alone/operator-accessible
demounting/removing 312
labeling a disk 312
mounting 311
DSNWITHSGNAME keyword 104
DUMP 365
dynamic allocation
failing 47
OAMplex 5
overview 46

E

EDM (environmental descriptor management)
pool size suggestions 94
EJECT
a specific optical disk 309
line operator 190
parameter description 133
pseudo library specification 309
scheduling errors 191
ENABLED keyword 107
Enhanced Capacity Cartridge System Tape (MEDIA2) 43
ERDS Physical Identifier (EPI) 533
error, scheduling
in AUDIT, REMAP, and EJECT requests 191
esoterics
acceptable groupings 114
defining groups 60
description 17
rejecting incompatible groups 114
exit, installation
checking success 247
OAM Auto-delete description 573
return and reason codes 576
sample exit (SAMPADUX) 577
tape return to MVS scratch 240
writing CBRHADUX 574
expiration
destroying/deleting data 246
installation exit 573
objects using OSMC 573
processing 245
Extended High Performance Cartridge Tape (MEDIA4) 43

F

FIRSTBACKUPGROUP 127

G

GMT time parameter 98
GROUP keyword 111

H

hardware
9246/9247 components 387
configuring a 3995 387
considerations 61
deferring the ordering 61
estimating resource requirements
general considerations 62
libraries needed 71
interaction with OAM 3
recommendations 60
tape storage configurations 39
hierarchy
moving objects through 2
overview 2
High Performance Cartridge Tape (MEDIA3) 43

I

IBM 3480 Magnetic Tape Subsystem 39
IBM 3490 Magnetic Tape Subsystem 39
IBM 3490E Magnetic Tape Subsystem 39
IBM 3590 Model B Tape Subsystem 39
IBM 3590 Model E Tape Subsystem 39
IBM 3590 Model H Tape Subsystem 39
IBM TotalStorage Enterprise Economy Tape Cartridge (MEDIA7) 43
IBM TotalStorage Enterprise Economy WORM Tape Cartridge (MEDIA8) 43
IBM TotalStorage Enterprise Extended Cartridge (MEDIA9) 43
IBM TotalStorage Enterprise Extended WORM Cartridge (MEDIA10) 43
IBM TotalStorage Enterprise Tape Cartridge (MEDIA5) 43
IBM TotalStorage Enterprise Tape Drive 3592 Model E 05 39
IBM TotalStorage Enterprise Tape Drive 3592 Model J 39
IBM TotalStorage Enterprise WORM Tape Cartridge (MEDIA6) 43
index
object storage group 514
RUNSTATS for efficiency 195
scan access path 197
initial access response seconds (IARS)
description 167
installation
OAM/OAMPLEX
checklist for installation/migration 87, 88
overview 85
preparing for 86
processing environment preparation 86
installation *(continued)*
OAM/OAMPLEX *(continued)*
verifying prerequisites 85
planning
backup requirements 56
cartridges required per day 70
cartridges required per year 71
class transition 56
general considerations 51
libraries required 71
management classes 58
management cycles 54
maximizing retrieval rate 72
related products 51
shelf-resident cartridges needed 71
storage groups 53
procedures for
changing CICS installation parameters 95
changing DB2 installation parameters 93
changing system libraries 97
creating databases for tables and directories 134
defining user catalogs 150
IPLing the system 151
modifying Auto-Delete installation exit 97
specifying SMS definitions and programs 151
validating and activating the configuration 171
verifying object support installation (IVP) 172
verifying the DB2 installation 149
installation exit
checking success 247
OAM Auto-delete description 573
return and reason codes 576
sample exit (SAMPADUX) 577
writing CBRHADUX 574
IPL
the system at migration/installation 151
ISMF (Interactive Storage Management Facility)
AUDIT 179, 187, 190, 191
CBRABIND (creates/binds ISMF plans) 148, 489
CBRAGRNT (grants plans) 148, 489
creating application plan (CBROAM) 148
creating OAM definitions 162
drive management
defining 3995 413
EJECT 190
library management
altering optical library/drive 178, 424
auditing optical library 179
copying library and drive definitions 425
defining optical libraries and drives 178
deleting optical library/drive 178

ISMF (Interactive Storage Management Facility) *(continued)*
library management *(continued)*
monitoring/maintaining optical volumes 182
monitoring/maintaining SMS construct definitions 192
remapping optical library 180
overview 9
panels
3995 Drive Alter 424
3995 Drive Define 414
3995 Library Alter 418
3995 Library Define 405
3995 Library Status 422
Confirm Audit Request 179
Confirm Delete Request 427
Conversion Confirmation 423
Copy Entry 425
ISMF Primary Option Menu 402
Library Management Selection Menu 403
Mountable Optical Volume List 185
Mountable Optical Volume Selection Entry 183
Optical Drive Application Selection 414
pseudo library definition 39, 412

K

keyboard 591
keywords
APLAN 134
CLEAROLDLOC 129
CYCLEWINDOW 127
DATACLASS 103, 115
DB2SSID 98
DEMOUNTWAITTIME 104, 115, 369
DISABLED 107
EJECT 133
ENABLED 107
GROUP 111, 123, 125
MAXRECALLTASKS 128
MAXRECYCLETASKS 112
MAXS 133, 158
MAXTAPERETRIEVETASKS 105, 116
MAXTAPESTORETASKS 105, 116
MOUNTWAITTIME 106
MVSSCRATCH 111
OAM 133
OAMGROUPNAME 130
OAMMEMBERNAME 130
OAMSCRATCH 111, 123, 125
OAMSCRATCHSYNCH 107
OAMTASK 97
OPTICALDISPATCHERDELAY 122
OPTICALREINITMODE 122, 125
OSMC 132
PERCENTVALID 107
RECALLALL 128
RECALLNONE 128
RECALLOFF 128
RECALLOPTICAL 128
RECALLTAPE 128
SCRENTRYTHRESHOLD 124
keywords *(continued)*
SGMAXRECYCLETASKS 112
SGMAXTAPERETRIEVETASKS 113
SGMAXTAPESTORETASKS 113
STORAGEGROUP 112, 125
TAPECAPACITY 108
TAPECOMPACTION 116
TAPEDISPATCHERDELAY 109
TAPEEXPIRATION 109, 118
TAPEFULLTHRESHOLD 110, 119
TAPEPERCENTFULL 119
TAPERECYCLEMODE 110
TAPEUNITNAME 114
UNLOAD 133
UNLOADDRIVES 125
UNLOADTIMER 125
XCFTIMEOUT 130

L

LCS (Library Control System)
CBRABIND (creates/binds LCS plans) 148, 489
CBRAGRNT (grants plans) 148, 489
creating application plans 148
description 6
library
3995 Library Define 405
Application Selection Panel 404
capacity
optical disk 29
optical drive 29
tape cartridge 39, 42, 45
tape drive 39
changing system libraries 97
determining library requirements 71
discrepancies during a REMAP 181
Display commands
library connectivity 339
library detail status 344
ejecting an optical disk from a library
removing from input/output station 311
specifying pseudo libraries 310
specifying shelf location 310
entering optical disks into a library
a labeled disk 308
an unlabeled disk into a 3995 306
ISMF management 9
Library Table (OLIBRARY) 519
Management Selection Menu 403
optical 35
optical disk drive
operator-accessible 34
stand-alone 35
pseudo 36, 39, 412, 417
real 35
relating to storage groups 163
tape 39, 49
library-resident
determining number of libraries 71
drives, describing 34
estimating library-resident cartridges 71
volumes, describing 33
library, optical
altering 178, 424
library, optical *(continued)*
auditing 179
defining 178
deleting 178
description 35
discrepancies during a REMAP 181
estimating number of 71
maintaining volumes on 182
pseudo 36, 39, 412
real 35
remapping 180
line operator
AUDIT 179
EJECT 190
LISTVOL 179
RECOVER 191
REMAP 180
scheduling errors 191
LOB support 135
LookAt message retrieval tool xii
lost volume
clearing status of 357
LOSTFLAG set 356
LOSTFLAG, displaying 107, 356

M

macro, OSREQ
assigning storage class 22
changing object assignment 18
description 2
dynamic allocation 47
installation verification program (OAMIVP) 172, 489
media selection
writing to tape 44, 46
OTIS address space 29, 385, 430
performance recommendations 151
positional parameters 254
retrieval response time 205
retrieving objects 12
STORE request flowchart
optical media 28
tape media 19
TSO command syntax 253
verifying with ACS routines 27
magneto-optic (MO) rewritable recording technology 32
management class
ACS environment
CHANGE 160
CTRANS 160
STORE 160
administration database (OAMADMIN)
description 135
management class identifier table 516
case study examples 77
changing constructs caution 195
defining 168
description 11, 22
end of object life 97
identifier table 516
identifying management cycles
class transitions 55, 56, 160
developing 57

management class *(continued)*
identifying management cycles *(continued)*
establishing parameter values 159
maintaining definitions 193
modifying defaults 198
parameters 168
sample ACS routine 497
MARK FULL VOLUME AT FIRST WRITE-FAILURE OPTION
description 155
MAXRECALLTASKS 128
MAXRECYCLETASKS keyword 112
MAXS
parameter description 133, 158
resource contention 158
used with DRIVE STARTUP THRESHOLD 158
used with MOVEVOL 231
MAXTAPERETRIEVETASKS keyword 105, 116
MAXTAPESTORETASKS keyword 105, 116
media
allocating a scratch tape 16, 45
compatibility with tape devices 39
determining for Object Backup 15, 44
determining the optical disk volume 16
directing to a specific type 166
factors affecting tape capacity 42
format of object data on tape 45
media types 43, 407
optical disk description 29
optical drive/media compatibility 35
optical volume types 33, 34
recording process 32
recovering single objects from removable media 223
removable
continuous composite WORM (CCW) 31
estimating resources 69
magneto-optic (MO) 31
write-once-read-many (WORM) 31
selection for object storage 18
tape volume types 44
volume recovery utility 223, 278
MERGECOPY
utility description 222
message
displaying outstanding OAM messages 360
format conventions 264
message retrieval tool, LookAt xii
migration
checklist for installation/migration 87, 88
entering into a library
a labeled disk 308
an unlabeled disk into a 3995 306
overview 304
library-resident 35, 71
OAM overview 85
optical configuration database 517
migration *(continued)*
procedures for
changing CICS installation parameters 95
changing DB2 installation parameters 93
changing system libraries 97
IPLing the system 151
modifying Auto-Delete installation exit 97
moving OAM from one system to another 172
procedures for disaster recovery 222
specifying SMS definitions and programs 151
validating and activating the configuration 171
verifying DB2 installation 149
verifying object support installation (IVP) 172
processing environment preparation 86
sample migration jobs 452
stand-alone/operator-accessible drive
labeling a disk 312
stand-alone/operator-accessible drive 311
types 33, 34
MOUNTWAITTIME (optical volume) 122
MOUNTWAITTIME keyword 106
Move Volume utility
analyzing resources 231
creating indexes to improve performance 233
deleting volumes 50
MAXS considerations 231
minimizing system activity 230
overview 225
preparing to invoke 227
RECYCLE keyword 228
recycling volumes 50
starting the utility 288
stopping the utility 382
tuning OAM for MOVEVOL 231
updating and activating an SCDS 228
updating the volume expiration date 288
MTL (manual tape library)
allocating a scratch tape 16
Auto Backup parameter (AB) 15
creating CBROAM*xx* PARMLIB (SETOAM statements) 101
data class 24, 167
dynamic allocation 47
management class 22
media selection 18
SETOAM 7, 101
storage class 18
TAPE storage group 12
multifunction optical disk drive 35
MVSSCRATCH keyword 111

N

NOTAPECOMPACTION keyword 116
number of backup versions field 14, 15, 22, 24, 57, 76, 169

O

OAM (Object Access Method)
address space
CBRABIND (creates/binds OSR, ISMF, LCS plans) 148, 489
CBRAGRNT (grants OSR, ISMF, LCS plans) 148, 489
creating optical configuration database 67, 140
dynamic allocation 46
keywords for IGDSMS*xx* PARMLIB 97
OAMXCF statement for CBROAM*xx* PARMLIB 9
overview 28
SETOAM statement for CBROAM*xx* PARMLIB 101
SETOPT statement for CBROAM*xx* PARMLIB 121
administering
monitoring/maintaining the optical configuration 177
Object Administration database 515
Administration Database 68, 515
allocation recovery 47
Auto-delete Installation Exit 573
CBRAPROC SAMPLIB member 430
commands and syntax
DISPLAY SMS,DRIVE 336
DISPLAY SMS,OAM 322
DISPLAY SMS,OAMXCF 325
DISPLAY SMS,STORGRP 346, 350
DISPLAY SMS,VOLUME 351
F OAM RESTART 366
F OTIS,STOP 385
OAMUTIL REFORMAT 490
components 6
creating definitions with ISMF 162
creating LCS application plans 148
creating object storage databases 68, 135
administration database (OAMADMIN) 135, 515
creating OSMC application plans 147
defining devices with HCD 134, 396
defining user catalogs 150
definition 1
destroying/deleting data 246, 573
device compatibility for object retrieval
OAM.BACKUP.DATA 45
OAM.PRIMARY.DATA 45
valid CBROAM specification 48
displaying outstanding OAM messages 346
establishing performance objectives 53
installation verification program (OAMIVP) 489

OAM (Object Access Method) *(continued)*
installing
checklist for installation/ migration 87, 88
overview 85
preparing for 86
processing environment preparation 86
verifying prerequisites 85
IPLing the system 151
ISMF library management 9
Library Control System (LCS) 7
moving OAM from one system to another 172
OAM scratch volume 44
OAM Storage Management Component (OSMC)
automatic access to backup objects, starting 298
controlling cycles 155
library management cycle, starting 275
move volume utility, starting 288
object recovery for single objects, starting 285
overview 7
processing system name 158
storage management window 156
object database creation 431
object expiration problems 247
object expiration processing 245
Object Storage and Retrieval (OSR) 6
optical configuration database 452
planning for
estimating cartridges per day 70
estimating cartridges per year 71
shelf-resident cartridges 71
software requirement 62
related products 51
SETOAM statements
CBROAM*xx* PARMLIB member 101
overview of the statement 7
SETOSMC statements
CBROAM*xx* PARMLIB member 125
keyword definitions 126
stopping 381
storage management
class transition 55, 56
controlling cycles 155
estimating libraries required 72
naming conventions 152
policy overview 9
storage hierarchy 12
storage management window 157
understanding storage group concepts 12
tuning connections to DB2 196
tuning for MOVEVOL usage 231
understanding 1
validating and activating the configuration 171
volume mount, retry 48
OAM scratch tape
SETOAM OAMSCRATCHSYNCH statement 142
OAM scratch tape *(continued)*
synchronizing 244
OAMGROUPNAME 130
OAMIVP
SAMPLIB member 489
OAMMEMBERNAME 130
OAMSCRATCH keyword 111
OAMSCRATCHSYNCH keyword 107
OAMXCF 130
keyword 130
OAMGROUPNAME 130
OAMMEMBERNAME 130
OPTREADA 376
OPTREADM 376
OPTWRITA 377
OPTWRITM 377
TAPREADA 377
TAPREADM 377
XCFOPTREADA 131
XCFOPTREADM 131
XCFOPTWRITEA 131
XCFOPTWRITEM 131
XCFTAPEREADA 131
XCFTAPEREADM 131
XCFTIMEOUT 130
object
ACS routine input variables 160
allocating a scratch tape 16, 45
allocating to a tape drive 16
Auto-delete Installation Exit 573
backup copy
Auto Backup parameter 15
description 12
determining requirements 56
factors affecting tape capacity 42
BACKUP storage group
Auto Backup parameter 15, 22
backup volume 34, 44
defining 13
description 12
determining media 15
factors affecting tape capacity 42
OAM.BACKUP.DATA sequential data set 45
SETOAM 7, 101
TAPEPERCENTFULL 42
canceling/retrying a volume mount 48
characteristics 1, 76
class transition
description 22
determining requirements 56
constructs
aggregate group 11
data class 11, 167
management class 57
storage class 18
storage groups 12, 53
creating object storage databases 135
data set name qualifiers 64
database 4
destroying/deleting data 246
device compatibility for object retrieval 48
device/data compatibility for retrieval 48
object *(continued)*
directing to specific storage groups 17
directory index
OBJDIRX1 64
OBJDIRX2 64
OBJDIRX3 64
directory table
OSMDTS 64
OSMOTS04 64
OSMOTS32 64
expiration 22, 245
format on tape media 45
Initial Access Response 18
medium transitions 2
modifying data set allocation 138
Object Administration database
CBRIALCX 434
CBRIALCY 437
CBRISQLX 447
CBRISQLY 450
overview 515
object deletion 56
object storage database allocation job steps 136
object tape support 7, 101
planning team requirements
classification categories 52
establishing performance requirements 53
grouping 53
identifying management cycles 54
object characterization 75
prefetching 203
primary 12, 45
recovering single objects 223, 285
recovery utility, starting 278
retrieval time 203
storage database
calculating DASD 79
DB2 tables 18
storage groups 12, 53
storage hierarchy
class assignment 18
class transition 22, 55
creating CBROAM*xx* PARMLIB (SETOPT statements) 121
defining 12
media selection 18
tape storage 14, 39
storage management policy
class transitions 55, 56
controlling cycles 155
defining 9
deletion 56, 573
estimating libraries required 72
identifying management cycles 54
implementing with ACS routines 159
naming conventions 152
overview 9
storage hierarchy 12, 207
storage management window 157
understanding storage group concepts 12
storing objects in a collection 1, 162
Sustained Data Rate 18

object *(continued)*
system paging 64
table index
OBJT04X1 64
OBJT32X1 64
Object Backup storage group
description 13
expiring object tape and optical volumes 49
expiring optical volumes 239
expiring tape volumes 238
expiring volumes 49
Object Recall 206
Object Storage and Retrieval (OSR)
application plans 488, 489
CBRABIND (creates/binds OSR plans) 148, 489
CBRAGRNT (grants plans) 148, 489
CBRIBIND (binds OSR applications) 146, 489
CBRIGRNT (grants OSR applications) 146, 147, 489
CBRPBIND (creates/binds DB2 packages) 145, 488
creating (CBRIDBS) 146, 148
data set allocation 138
description 6
Object storage group
ACS routines 11, 159, 160
allocating a scratch tape 16
assigning the group 14
changing constructs caution 195
concepts and functions 12
concurrent writing 153
controlling cycle start and end times 156
creating object storage databases 135
DB2 space allocation (STOSPACE) 196, 272
defining 12, 13, 163
description 10, 53
determining DRIVE STARTUP THRESHOLD for Object Backup 154
determining media 15
directing to a specific type 166
directing to specific groups 17
displaying storage group status 346
estimating cartridges per day 70
estimating cartridges per year 71
expiring object tape and optical volumes 49
expiring object tape volumes 49
expiring optical volumes 239
expiring tape volumes 238
factors affecting tape capacity 42
maintaining definitions 193
management cycle, starting 275
media selection 18
OAM.PRIMARY.DATA sequential data set 45
object storage databases 509
object storage hierarchy 12
overview 53
Object storage group *(continued)*
parameters for optical storage
CYCLE START TIME/CYCLE END TIME 155
DRIVE STARTUP THRESHOLD 153
MARK VOLUME FULL AT FIRST WRITE-FAILURE OPTION 155
VOLUME FULL THRESHOLD 154
SETOAM 7, 101
SETOPT 8, 121
storage management window 157
TAPEPERCENTFULL 27, 42
types 12
Object 12
Object Backup 12
TAPE 12
understanding concepts 12
using DB2 18
object tape volume
deleting 50
expiring 49
recycling 50
online/offline
displaying status 322
varying optical drives 302
varying optical libraries 303
operator commands
DISPLAY SMS,LIBRARY 339, 344
F OAM,AUDIT 379
F OAM,DISPLAY 357
F OAM,REMAP 380
OAMUTIL REFORMAT 320
operator-accessible
3995 DRIVE DEFINE panel 417
allocating to tape drive 16
allocation recovery 47
canceling/retrying a volume mount 48
demounting/removing an optical disk 312
describing tape devices 39
description 34
displaying drive detail status 336
dynamic allocation 47
labeling an optical disk (9247) 312
mounting an optical disk 311
shelf storage class 18
tape volume attributes 25, 42
used as pseudo library 36
varying online/offline 302
optical configuration database (OCDB)
definition 10
optical disk
criteria 32
determining the volume 16
displaying volume status 350
drive, describing 34
effectively utilizing space 70
EJECT line operator 190
ejecting a disk from a library
associating pseudo libraries 310
LIBRARY EJECT 309
specifying shelf location 310, 311
entering into a library
a labeled disk 308
optical disk *(continued)*
entering into a library *(continued)*
an unlabeled disk into a 3995 306
overview 304
estimating cartridges per day 70
estimating cartridges per year 71
LCS control 7
libraries for library-resident cartridges 71
magneto-optic (MO) 31
pseudo optical library 36, 39, 412
real libraries 35
removing from input/output station 311
shelf-resident cartridge requirements 71
stand-alone/operator-accessible drive
demounting/removing an optical disk 312
labeling a disk 312
mounting an optical disk 311
reformatting a disk 319
relabeling a disk 318
volume and drive affinity 36
volume recovery utility 223, 278
volume table (OCVOLTSP) 523
write-once-read-many (WORM) 31
optical disk cartridge
ejecting a disk from a library
associating pseudo libraries 310
removing from input/output station 311
specifying shelf location 310
entering into a library
a labeled disk 308
an unlabeled disk into a 3995 306
estimating cartridges per day 70
estimating cartridges per year 71
shelf-resident cartridge requirements 71
stand-alone/operator-accessible drive
demounting/removing an optical disk 312
labeling a disk 312
mounting an optical disk 311
optical drive
defining devices with HCD 134, 396
display OAM status command 322
ISMF management
altering a library/drive 178, 424
copying library and drive definitions 425
defining drives 178
deleting drives 178
real libraries 35
resource contention 158
shelf volume 22
specifying DRIVE STARTUP THRESHOLD 153
specifying SMS definitions and programs 151
stand-alone/operator-accessible
demounting and removing optical disk 312
labeling a disk 312
mounting optical disk 311
varying online/offline 302, 303

optical library
altering 178, 424
altering 3995 library 418
auditing 179
balancing usage 209
copying library and drive definitions 425
defining 178
defining 3995 library 405
deleting 178
description 35
determining number of libraries required 71
discrepancies during a REMAP 181
drive table 521
estimating number of 71
ISMF management
altering library/drive 178, 424
auditing library/drive 179
copying library and drive definitions 425
defining library/drive 178, 405
deleting drives 178
generating a volume list 182, 185
remapping optical library 180
viewing a volume list 187
library table 519
maintaining volumes 182
maintaining volumes on 182
management class 22
media characteristics 34
pseudo 36, 39, 412
real 35
association with pseudo libraries 36
REMAP command 380
REMAP line operator 380
remapping 180
slot table 522
specifying SMS definitions and programs 151
varying online/offline 303
volume and drive affinity 36
optical media
description (MO) 31
description (WORM) 31
recording techniques
continuous composite WORM (CCW) 31
rewritable (MO) 31
WORM 31
types 34
optical volume
AUDIT command 379
AUDIT line operator 379
deleting 50, 236
determining the volume used 16
displaying volume status 350
effectively utilizing space 70
EJECT line operator 190
ejecting a disk from a library
associating pseudo libraries 310
LIBRARY EJECT command 309
removing from input/output station 311
specifying shelf location 310
estimating cartridges per day 70
optical volume *(continued)*
estimating cartridges per year 71
expiring 49, 239
library-resident description 35
number of libraries required 71
RECOVER line operator 191
recycling 50, 235, 236
reformatting 319
relabeling 318
shelf-resident cartridge requirements 71
shelf-resident description 35
stand-alone/operator-accessible drive
demounting/removing an optical disk 312
labeling a disk 312
mounting an optical disk 311
used with pseudo libraries 36
volume recovery utility 191, 223, 278
volume serial number restrictions 32
volume table 523
OPTICALDISPATCHERDELAY 122
OPTICALREINITMODE 123, 125
OSMC
cycle start and stop times 127
OSMC (OAM Storage Management Component)
administration database (OAMADMIN) 68, 135, 515
creating application plans 147
data set allocation 138
deleting objects 97
description 6, 22
diagnosing nondeletion 247
estimating libraries required 72
granting authority to application plans 148
identifying cycles 54
initializing with CBRAPROC SAMPLIB 132, 430
OAM Address Space 28, 140
object expiration 245, 573
processing system name 158
processing verification 55
starting 269
starting the library management cycle 275
stopping 381, 382
understanding cycles 55
volume recovery utility 223, 278
OSREQ
assigning storage class 22
changing object assignment 18
description 2
dynamic allocation 47
installation verification program (OAMIVP) 172, 489
media selection
writing to tape 44, 46
OTIS address space 29, 385, 430
performance recommendations 151
positional parameters 254
retrieval response time 205
retrieving objects 12
STORE request flowchart
optical media 28
tape media 19
OSREQ *(continued)*
TSO command syntax 253
verifying with ACS routines 27
OTIS (OAM Thread Isolation Support)
creating with CBRIPROC 430
starting 266
stopping 385

P

panels, ISMF
3995 Drive Alter 424
3995 Drive Define 414
3995 Library Alter 418
3995 Library Define 405
Confirm Audit Request 179
Confirm Delete Request 427
Conversion Confirmation 423
Copy Entry 425
ISMF Primary Option Menu 402
Library Management Selection Menu 403
Mountable Optical Volume List 185
Mountable Optical Volume Selection Entry 183
Optical Drive Application Selection 414
parameter
Auto Backup 15
CBRAPROC SAMPLIB
APLAN 134
EJECT 133
example 430
MAXS 133, 158
OAM 133
OSMC 132
RESTART 134
UNLOAD 133
CBROAM*xx*
OAMXCF 325
SETOAM 357
SETOPT 357
CICS installation 95
IEFSSN*xx* PARMLIB member
LOB 99
MOS 99
OTIS 99
UPD 99
IGDSMS**xx** PARMLIB
DB2SSID 98
OAMPROC 97
OAMTASK 97
Initial Access Response 18
OAMXCF
OAMGROUPNAME 130
OAMMEMBERNAME 130
OPTREADA 376
OPTREADM 376
OPTWRITA 377
OPTWRITM 377
TAPREADA 377
TAPREADM 377
XCFOPTREADA 131
XCFOPTREADM 131
XCFOPTWRITEA 131
XCFOPTWRITEM 131
XCFTAPEREADA 131

parameter *(continued)*
OAMXCF *(continued)*
XCFTAPEREADM 131
XCFTIMEOUT 130
object storage group
CYCLE START TIME/CYCLE END TIME 155
DRIVE STARTUP THRESHOLD 153
MARK VOLUME FULL AT FIRST WRITE-FAILURE OPTION 155
MAXS parameter 154
VOLUME FULL THRESHOLD 154
positional (OSREQ TSO Command Processor) 254
SETOAM GLOBAL level parameters
DATACLASS 16, 110
DEMOUNTWAITTIME 107
MAXTAPERETRIEVETASKS 47, 105
MAXTAPESTORETASKS 47, 105
MOUNTWAITTIME 48, 106
OAMSCRATCHSYNCH 244
STORAGEGROUP 104
TAPECAPACITY 108
TAPEDISPATCHERDELAY 109
TAPEEXPIRATION 110
TAPEFULLTHRESHOLD 105, 116
TAPERECYCLEMODE 228
TAPEUNITNAME 16
SETOAM storage group subparameters
DATACLASS 116
DEMOUNTWAITTIME 118
MAXTAPERETRIEVETASKS 119
MAXTAPESTORETASKS 116
TAPECOMPACTION 115
TAPEDRIVESTARTUP 115
TAPEEXPIRATION 119
TAPEFULLTHRESHOLD 115
TAPEPERCENTFULL 118
TAPEUNITNAME 112
SETOPT GLOBAL level parameters
OPTICALDISPATCHERDELAY 123
OPTICALREINITMODE 122
sample statement 121
SCRENTRYTHRESHOLD 124
STORAGEGROUP 123
UNLOADDRIVES 125
UNLOADTIMER 125
Sustained Data Rate 18
TIME= 98
PARMLIB members
CBRADUP parameter list 575
CBROAM*xx* 8, 101
CONSOL*xx* 100
IEAICS*xx* 100
IEFSSN*xx* 98
IGDSMS*xx* 97
SCHED*xx* 97
SMFPRM*xx* 100
partitioning DB2 tables 198
PERCENTVALID keyword 107
performance
collection 1
considerations 151
performance *(continued)*
identifying management cycles 54
medium transitions 2
OAM components 6
object hierarchical movement 12
objectives and requirements 53, 76
OSMC processing management in an OAMplex 59
OSMC processing system name 158
RMF 213
SMF 211
storage class
establishing parameter values 18
Initial Access Response 18
Sustained Data Rate 18
XCF transport classes 72, 209
performance scaling, tape 43
performance segmentation, tape 43
planning
case study 75
OAM installation 51
checklist for installation/migration 87, 88
preparing for 86
processing environment preparation 86
verifying prerequisites 85
object characterization 75
resource estimations
cartridges per day 70
DASD resources 78
estimating cartridges per year 71
formulas 66
general considerations 62
library requirements 71
miscellaneous considerations 72
removable media 69
team
analyzing the processing environment 60
business environment analysis 52
determining impact of custom applications 62
determining library requirements 71
establishing performance objectives 53
grouping objects 53
identifying management cycles 54
process 52
recommended knowledge 51
software requirements 61
system paging implications 64, 76
tape storage configuration table 39
to administer OAM 75
to program applications 74
PLT, program list table
generating or updating the table for migration 95
PPT, program properties table
generating or updating the table for migration 95
procedures
installation/migration
changing CICS parameters 95
changing DB2 parameters 93
procedures *(continued)*
installation/migration *(continued)*
changing system libraries 97
creating databases for tables and directories 134
defining user catalogs 150
for disaster recovery 222
IPLing the system 151
modifying Auto-Delete installation exit 97
moving OAM from one system to another 172
specifying SMS definitions and programs 151
validating and activating the configuration 171
verifying DB2 installation 149
verifying object support installation (IVP) 172
ISMF library management (optical library/drive)
altering 178
auditing 179
defining 178
deleting 178
ejecting optical volumes 190
generating a volume list 182
maintaining and verifying the volume list 187
maintaining management class definitions 193
maintaining storage class definitions 192
maintaining storage group definitions 193
recovering optical volumes 191
remapping 180
using AUDIT to verify optical volumes 187
PROCLIB
CBRAPROC SAMPLIB 132, 430
CBRIPROC SAMPLIB 132, 430
program list table (PLT)
generating or updating the table for migration 95
program properties table (PPT)
generating or updating the table for migration 95
pseudo optical library
3995 DRIVE DEFINE panel 417
3995 LIBRARY DEFINE panel 412
assigning volumes 405
associating 310
configurations 36
defining a library 39
description 36
determining number of libraries 71
estimating shelf-resident cartridges 71

Q

QUERY command
F OAM,QUERY,options 361

R

RACF authorization, releasing tape volumes 237
RECALLALL 128
recalling objects to DB2 206
RECALLNONE 128
RECALLOFF 128
RECALLOPTICAL 128
RECALLTAPE 128
RECOVERY
  accessing backup objects 225
  an entire volume 223
  deleting recovered volumes 50
  line operator 191
  MERGECOPY for image copies 222
  single objects 223, 285
  volume recovery utility 191, 223, 278
recovery, disaster
  automatic access of backup objects 225
  catalog entries 224
  DB2 database 222
  DB2 MERGECOPY utility 222
  deleting recovered volumes 50
  establishing procedures 222
  procedures 222
  recovering collection name catalog entries 224
  recovering DB2 databases 222
  single objects recovery utility 223
  volume recovery utility 223
REFORMAT 319
RELABEL 318
REMAP
  library discrepancies 181
  line operator 180
  operator command 380
  scheduling errors 191
  volume error status 181
REMAP command 380
report performance groups
  defining to the IEAICS*xx* PARMLIB member 100
  ICS SAMPLIB member 100
resource
  contention 158
  estimating requirements 62
    for OAM administration database 68
    for object databases 64
    for optical configuration database 67
    libraries for library-resident cartridges 71
    removable media 69
  formulas
    cartridges per day 70
    DASD 66, 79
    estimating cartridges per year 71
    libraries for library-resident cartridges 71
  system paging 64
resource measurement facility (RMF)
  activating an installation control specification 221
  description 213
resource measurement facility (RMF) *(continued)*
  initializing RMF and starting a Monitor I session 221
  Monitor I Workload Activity Report 217
  Monitor II Transaction Activity Report 220
  OAM transaction classes
    OSMC 216
    OSREQ 2, 214
  obtaining an RMF Monitor II transaction activity report 222
  starting and ending an RMF Monitor II session 221
RESTART command
  F OAM,RESTART 366
return tape to MVS scratch exit 240
rewritable optical volume
  expiring 239
RMF, resource measurement facility
  activating an installation control specification 221
  description 213
  initializing RMF and starting a Monitor I session 221
  Monitor I Workload Activity Report 217
  Monitor II Transaction Activity Report 220
  OAM transaction classes
    OSMC 216
    OSREQ 2, 214
  obtaining an RMF Monitor II transaction activity report 222
  starting and ending an RMF Monitor II session 221
RUNSTATS
  utility description 195

S

SAMPLIB
  ACS SAMPLIB members
    CBRHMC 497
    CBRHSC 493
    CBRHSG 506
  administration database creation jobs
    CBRIALCX 434
    CBRIALCY 437
    CBRISQLX 447
    CBRISQLY 450
  Auto-Delete installation exit 97, 577
  CBRABIND (creates/binds OSR, ISMF, LCS plans) 148, 489
  CBRAGRNT (grants OSR, ISMF, LCS plans) 148, 489
  CBRAPROC 132, 430
  CBRHBIND (binds OSMC applications) 147, 489
  CBRHGRNT (grants OSMC applications) 147, 489
  CBRILOB(creates the LOB storage structure) 438
  CBRIPROC 132, 430
  CBRSAMUT 490
SAMPLIB *(continued)*
  CBRSMR18(add a new LOB location indicator) 441
  OAMIVP (installation verification program) 489
  object storage database creation jobs
    CBRIALC0 (data set allocation job) 136, 431
    CBRISQL0 (database definition job) 136, 443
    object administration database creation 136
  Optical Configuration Database creation/migration jobs
    CBRSAMPL (creates all tables) 140, 452
    CBRSG100 145
    CBRSM131 141
    CBRSM150 141
    CBRSMERG 145, 471
SCDS (source control data set)
  parallel sysplex 6
  pseudo library 39
  updating and activating 228
scratch tape volume 44
  exit routine 240
SCRENTRYTHRESHOLD 124
SCRTCH Object storage group 44
SCSI (small computer system interface) bus address 337
second backup copy of an object
  assigning an Object Backup storage group for 12, 15, 127, 128, 157, 348
  assigning media type for 57
  automatically accessing 225, 301, 324, 541
  conceptual overview of storing 21
  definition of 12
  determining volume assignment of 16, 57, 128, 157, 350
  recovering an optical cartridge or tape volume using 270, 279, 547
  recovering single object from removable media using 223, 271, 278, 286
  SAMPLIB job for 142, 466
  tape data set name for object tape backup volumes (OAM.BACKUP2.DATA) 45
  using IARS and SDR parameters to store 21
  using ISMF RECOVER, no recovery from 182, 191
  using SETOSMC statement to assign an Object Backup storage group for 8, 14, 15, 57, 125, 157, 223
  using the number of backup versions field for 14, 57, 127, 128
  using the OSREQ VIEW keyword to specify retrieval of 258, 300, 538, 541
SECONDBACKUPGROUP 127
SETOAM
  CBROAM*xx* PARMLIB member sample 102
  directing to specific storage groups 17

SETOAM *(continued)*
esoteric device groups 17, 114
GLOBAL level parameters
DATACLASS 16, 24, 110
DEMOUNTWAITTIME 107
MAXTAPERETRIEVETASKS 105
MAXTAPESTORETASKS 47, 105
MOUNTWAITTIME 48, 106
OAMSCRATCHSYNCH 244
STORAGEGROUP 104
TAPECAPACITY 108
TAPEEXPIRATION 110
TAPEFULLTHRESHOLD 105, 116
TAPERECYCLEMODE 228
overview 7, 101
rejecting incompatible device groups 114
statement syntax 102
storagegroup subparameters
DATACLASS 116
DEMOUNTWAITTIME 118
MAXTAPERETRIEVETASKS 119
MAXTAPESTORETASKS 116
TAPECOMPACTION 115
TAPEDRIVESTARTUP 115
TAPEEXPIRATION 119
TAPEFULLTHRESHOLD 115
TAPEPERCENTFULL 118
TAPEUNITNAME 112
SETOPT
OPTICALDISPATCHERDELAY 123
OPTICALREINITMODE 122, 228
SCRENTRYTHRESHOLD 124
SETOPT Storagegroup subparameters
cartridge reinitialization 121
SETOPT overview 8
STORAGEGROUP 123
UNLOADDRIVES 125
UNLOADTIMER 125
updating CBROAM*xx* 121
SETOSMC 8
assigning storage groups to objects for second backup processing 14, 57, 125, 157
F OAM,DISPLAY,SETOSMC command 357
keyword parameters 357
sample command 360
sample display 360
syntax 357
keyword parameters 126
1st_bu_group 128
2nd_bu_group 128
global_1st_bu_group 127
global_2nd_bu_group 127
object_storage_group 128
FIRSTBACKUPGROUP 126
SECONDBACKUPGROUP 15, 126, 169
STORAGEGROUP 126
keyword use at global level 8, 126
keyword use at storage group level 8, 126
needed to process second backup copy of object 8, 15, 125
sample statement 126
SETOSMC *(continued)*
settings for single object recovery 223
syntax 126
SGMAXRECYCLETASKS keyword 112
SGMAXTAPERETRIEVETASKS keyword 113
SGMAXTAPESTORETASKS keyword 113
shared catalog
description 151
shelf-resident
assigning a shelf storage class 18
estimating requirements 71
optical volume, describing 35
stand-alone/operator-accessible drive
demounting/removing an optical disk 312
labeling a disk 312
mounting an optical disk 311
reformatting a disk 319
relabeling a disk 318
shortcut keys 591
SMS (Storage Management Subsystem)
ACS routines 27, 159, 194
allocation recovery 47
changing constructs caution 195
characteristics 2
commands and syntaxes
DISPLAY SMS,DRIVE 336
DISPLAY SMS,LIBRARY 339, 344
DISPLAY SMS,OAM 322
DISPLAY SMS,OAMXCF 325
DISPLAY SMS,OSMC 327
DISPLAY SMS,STORGRP 346
DISPLAY SMS,VOLUME 350
LIBRARY EJECT 309
VARY SMS,DRIVE 302
VARY SMS,LIBRARY 303
configuration 9
constructs
aggregate group 11
data class 24, 167
management class 22, 57
storage class 18
storage group 12, 53
creating OAM definitions 162
distributing resource consumption 158
Initial Access Response 18
maintaining definitions
management class 193
storage class 192
storage group 193
naming conventions 152
OAMplex 4
parallel sysplex support 4
storage hierarchy 2, 12
Sustained Data Rate 18
validating and activating 171
software
custom applications 62
estimating resource requirements 62
interaction with OAM 3
prerequisites 62
source control data set (SCDS)
parallel sysplex 6
source control data set (SCDS) *(continued)*
pseudo library 39
updating and activating 228
space management
DASD, starting 277
SQL statements
description 196
stand-alone drive
3995 DRIVE DEFINE panel 417
allocating to tape drive 16
allocation recovery 47
canceling/retrying a volume mount 48
demounting/removing an optical disk 312
describing tape devices 39
description 34
displaying drive detail status 336
dynamic allocation 47
labeling an optical disk (9247) 312
mounting an optical disk 311
shelf storage class 18
tape volume attributes 25, 42
used as pseudo library 36
varying online/offline 302
START command
automatic access to backup objects 298
OAM 267
object recovery for single objects 285
OSMC library space manager 275
OTIS 266
status (DISPLAY command)
drive detail 336
drive online/offline connectivity 333
library detail 344
library online/offline connectivity 339
OAM summary 322
OAMXCF status 325
OSMC summary 327
OSMC task 329
storage group 346
volume status 350
stopping
automatic access to backup objects 384
move volume utility 382
OAM 381
OSMC 381
OTIS 385
storage
considerations for DASD 63
hardware requirements, optical 60
storage class
ACS environment
CHANGE 160
CTRANS 160
STORE 160
administration database (OAMADMIN)
description 135
storage class identifier table 516
case study examples 76
changing constructs caution 195
collection name identifier table 517
collections 1, 53

storage class *(continued)*
description 11, 18
establishing performance objectives 53, 159
identifier table 516
Initial Access Response 18
maintaining definitions 192
modifying defaults 198
sample ACS routine 492
service-level criteria 53
Sustained Data Rate 18
storage group
ACS routines 11, 159, 160
allocating a scratch tape 16
assigning the group 14
changing constructs caution 195
concepts and functions 12
concurrent writing 153
controlling cycle start and end times 156
creating object storage databases 135
DB2 space allocation (STOSPACE) 196, 272
defining 12, 13, 163
description 10, 53
determining DRIVE STARTUP THRESHOLD for Object Backup 154
determining media 15
directing to a specific type 166
directing to specific groups 17
displaying storage group status 346
estimating cartridges per day 70
estimating cartridges per year 71
expiring object tape volumes 49
factors affecting tape capacity 42
maintaining definitions 193
management cycle, starting 275
media selection 18
OAM.PRIMARY.DATA sequential data set 45
object storage databases 509
object storage hierarchy 12
overview 53
parameters for optical storage
CYCLE START TIME/CYCLE END TIME 155
DRIVE STARTUP THRESHOLD 153
MARK VOLUME FULL AT FIRST WRITE-FAILURE OPTION 155
VOLUME FULL THRESHOLD 154
SETOAM 7, 101
SETOPT 8, 121
storage management window 157
TAPEPERCENTFULL 27, 42
types 12
Object 12
Object Backup 12
TAPE 12
understanding concepts 12
using DB2 18
storage management
contention 158
controlling cycles 155
identifying cycles 54
storage management *(continued)*
naming conventions 152
object storage hierarchy 12
storage group types 12
tuning the cycle 207
understanding cycles 55
understanding storage group concepts 12
window 157
STORAGEGROUP 125, 128
STORAGEGROUP keyword 112
STOSPACE
utility description 196
Sysplex, Parallel 4, 9, 129, 209
cross-system coupling facility (XCF) 209
DB2 data sharing group 4
DB2 sharing 4, 129
multiple instances of OAM in a single 6
overview 4
overview of an OAMplex 4, 9, 129, 209
CBROAM*xx* PARMLIB 4, 9, 129, 130
OAMXCF statement 4, 9, 129, 130
restrictions 6
vary online/offline 301
XCFTIMEOUT 129
SCDS 6
transaction shipping 5
transport classes 209
XCF group 4, 9, 129
XCF messaging facilities 4, 209
system
changing connectivity for a library 421
changing libraries 97
IPLing the system 151
moving OAM from one system to another 172
paging 64
system initialization table (SIT)
generating or updating the table for migration 96
system managed storage
hierarchical storage 2
overview 2
System Management Facility (SMF)
gathering performance measurements 535
invoking the SMF PARMLIB member 571
OAM activities used for reporting 211
start and end time accuracy 213
subtype data section format for
immediate backup copy 553
library/drive vary online/offline 555, 557
OAM tape volume demount 569
optical cartridge entry, eject, label, audit 558, 561
optical or tape mount, demount 558, 561
optical write, read logical delete, physical delete 563, 565
System Management Facility (SMF) *(continued)*
subtype data section format for *(continued)*
OSMC library space management 551, 553
OSMC single object recovery 547, 551
OSMC storage management 543, 547
OSREQ functions 2, 537, 542
tape recycle 555
tape write and read request 567, 569
Subtypes
description 212
OAM SMF record header 535
product section format 536, 537
valid fields for OSREQ functions 542
valid fields for subtypes 64–67 557
valid fields for subtypes 68–73 561
valid fields for subtypes 74–77 565

T

table
collection name identifier 517
management class identifier 516
Monitoring and maintaining DB2 tables
MERGECOPY 222
RUNSTATS utility 195
SQL statements 196
STOSPACE utility 196
object administration database
collection name identifier 517
management class identifier 516
storage class identifier 516
object storage database 18, 514
optical configuration database
deleted objects table (OCDELTSP) 527
drive (OCDRVTSP) 521
library (OCLIBTSP) 519
slot (OCSLTTSP) 522
tape volume table (ODTVLTSP) 527
volume (OCVOLTSP) 523
partitioned spaces
description 198
eliminating need for REORG 198
running RUNSTATS 198
scan access path 197
segmented spaces 198
storage class identifier 516
tape drive
3592 Model J attributes 43
allocating a volume to a drive 16, 17, 46
canceling/retrying a volume mount 48
data class 24, 167
DEMOUNTWAITTIME 104, 115

tape drive *(continued)*
describing tape libraries 49
description 46
esoterics (grouping devices) 60, 114
MAXTAPERETRIEVETASKS 47
MAXTAPESTORETASKS parameter 47
MOUNTWAITTIME 48
OAM Address space 28, 140
rejecting incompatible groupings 114
shelf volume 22
tape capacity and performance scaling 43
understanding tape storage 39
tape library (object support)
ACS routines 27
assigning to TAPE 14
overview 11
allocating a scratch tape 16
allocating volume to a drive 16, 45, 46
allocation recovery 47
assigning a shelf storage class 18
Auto Backup parameter (AB) 15
canceling/retrying a volume mount 48
describing tape volumes 43
description 49
determining compaction with DATACLASS 16
dynamic allocation 46
Improved Data Recording Capability (IDRC) 42
media selection 18
number required 71
SETOAM overview 7
TAPE storage group 12
Tape Volume Table (ODTVLTSP) 527
tape volume types 44
volume recovery utility 223, 278
tape volume
data format on tape 45
deleting 236
expiring 238
optical disk 31
recycling 235, 236
return to MVS scratch exit 240
synchronizing OAM scratch tape 244
tape capacity 42
tape volumes, describing 43
types of tape 43
volume recovery utility 191, 223, 278
TAPECAPACITY keyword 108
TAPECOMPACTION keyword 116
TAPEDISPATCHERDELAY keyword 109
TAPEDRIVESTARTUP keyword 118
TAPEEXPIRATION keyword 109, 118
TAPEFULLTHRESHOLD keyword 110, 119
TAPEPERCENTFULL keyword 119
TAPERECYCLEMODE keyword 110
TAPEUNITNAME keyword 114
tasks
developing appropriate management classes
steps for 58
tasks *(continued)*
installing OAM
steps for 73
operator
roadmap 263
undergoing the planning process
roadmap 51
threshold, drive startup
concurrent writing 153
determining threshold for Object/Object Backup 154
exceeding the threshold 153
improving performance 153
MAXS parameter 154, 158
MOVEVOL 225, 382
recommended values 154
time and date routines
GMT 98
ISO format 95
TSO Command
OSREQ syntax 253

U

UNLOAD parameter
description 133
UNLOADDRIVES 125
UNLOADTIMER 125
UPDATE
OAMXCF 376
SETOAM 368
SETOPT 368
VOLUME 377
user catalogs
defining 150
utilities
MERGECOPY 222
Move Volume 227
RUNSTATS utility 195
SQL statements 196
STOSPACE utility 196
Volume Recovery 278
volume reformat 319
utility, move volume
analyzing resources 231
creating indexes to improve performance 233
MAXS considerations 231
minimizing system activity 230
overview 225
preparing to invoke 227
starting the utility 288
stopping the utility 382
tuning OAM for MOVEVOL 231
updating and activating an SCDS 228
updating the volume expiration date 288

V

vary online/offline
optical drives 302
within an OAMplex 301
optical libraries 303
within an OAMplex 302
volume
allocating a scratch tape 16
allocating to a stand-alone 16
associated with object tape support 44
backup volume description 34, 44
canceling/retrying a mount request 48
completing, volume selection 183
determining compaction with DATACLASS 16
determining the appropriate optical disk volume 16
displaying volume status 350
drive compatibility 48
DRIVE STARTUP THRESHOLD description 153
effectively utilizing space 70
EJECT line operator 190
ejecting an optical volume from a library
removing from input/output station 311
specifying shelf location 310
entering into an optical library
a labeled disk 308
an unlabeled disk into a 3995 306
overview 304
estimating cartridges per day 70
estimating cartridges per year 71
factors affecting tape capacity 42
format compatibility 48
FULL THRESHOLD description 154
generating a volume list 182, 185
grouped volume description 33, 44
Improved Data Recording Capability (IDRC) 42
library-resident description 35
lost, displaying 107, 356
maintaining/monitoring with ISMF 182
MARK VOLUME FULL AT FIRST WRITE-FAILURE OPTION 155
media types 43
Move Volume Utility 227
object data format on tape media 45
optical configuration database 517
optical types 33, 34
RECOVER line operator 191
RECOVERY command/utility 278
recovery utility 191, 223, 278
REFORMAT 319
RELABEL 318
rewritable media (MO) 31
scratch volume description 33, 45
serial number restrictions 32
shelf-resident cartridge requirements 71
shelf-resident description 35
single object recovery 285
stand-alone tape volume attributes 25, 43
TAPEEXPIRATION 110, 119
TAPEFULLTHRESHOLD 105, 115, 116
TLDS tape volume attributes 24, 43
UPDATE 377

volume *(continued)*
viewing a volume list 187
volume and drive affinity 36
volume error status 181, 188
volume table (OCVOLTSP) 523
write-once-read-many (WORM) 31
Volume Recovery utility
deleting recovered volumes 50
VSAM (virtual storage access method)
object database 64, 135

W

WORM optical volume
expiring 239
WORM, tape volume 39

X

XCF, cross-system coupling
group 4
messaging facilities 4
mode 4
restrictions 6
specifying members with OAMXCF statement 4
transaction shipping 5
within a parallel sysplex 4
within an OAMplex 4
XCFTIMEOUT 130

Readers' Comments — We'd Like to Hear from You

z/OS
DFSMS Object Access Method Planning, Installation, and Storage Administration Guide for Object Support

Publication No. SC35-0426-04

Overall, how satisfied are you with the information in this book?

	Very Satisfied	Satisfied	Neutral	Dissatisfied	Very Dissatisfied
Overall satisfaction	☐	☐	☐	☐	☐

How satisfied are you that the information in this book is:

	Very Satisfied	Satisfied	Neutral	Dissatisfied	Very Dissatisfied
Accurate	☐	☐	☐	☐	☐
Complete	☐	☐	☐	☐	☐
Easy to find	☐	☐	☐	☐	☐
Easy to understand	☐	☐	☐	☐	☐
Well organized	☐	☐	☐	☐	☐
Applicable to your tasks	☐	☐	☐	☐	☐

Please tell us how we can improve this book:

Thank you for your responses. May we contact you? ☐ Yes ☐ No

When you send comments to IBM, you grant IBM a nonexclusive right to use or distribute your comments in any way it believes appropriate without incurring any obligation to you. IBM or any other organizations will only use the personal information that you supply to contact you about the issues that you state on this form.

Name

Address

Company or Organization

Phone No.

Readers' Comments — We'd Like to Hear from You
SC35-0426-04

IBM®

Cut or Fold
Along Line

Fold and Tape | **Please do not staple** | Fold and Tape

NO POSTAGE
NECESSARY
IF MAILED IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST-CLASS MAIL PERMIT NO. 40 ARMONK, NEW YORK

POSTAGE WILL BE PAID BY ADDRESSEE

International Business Machines Corporation
Department 55JA, Mail Station P384
2455 South Road
Poughkeepsie, NY 12601-5400

Fold and Tape | **Please do not staple** | Fold and Tape

SC35-0426-04

Cut or Fold
Along Line

Program Number: 5694-A01

Printed in USA

SC35-0426-04