

MPC7455 RISC Microprocessor Hardware Specifications Addendum for the XPC74n5RXnnnnSx Series

This document describes part-number-specific changes to recommended operating conditions and revised electrical specifications, as applicable, from those described in the general *MPC7455 RISC Microprocessor Hardware Specifications* (Order No. MPC7455EC). The MPC7455 is a PowerPC™ microprocessor.

Freescale Part Numbers Affected:
XPC7455RX1000SC

Specifications provided in this document supersede those in the *MPC7455 RISC Microprocessor Hardware Specifications*, Rev. 0 or later, for the part numbers listed in [Table A](#) only. Specifications not addressed herein are unchanged. Because this document is frequently updated, refer to <http://www.freescale.com> or contact your Freescale sales office for the latest version.

Note that headings and table numbers in this document are not consecutively numbered. They are intended to correspond to the heading or table affected in the general hardware specification.

The part number addressed in this document is listed in [Table A](#).

Table A. Part Numbers Addressed by This Data Sheet

Freescale Part Number	Operating Conditions			Significant Differences from Hardware Specification
	CPU Frequency (MHz)	V _{DD}	T _j (°C)	
XPC7455RX1000SC	1000	1.85 V ±50 mV	0 to 75	Modified core voltage and temperature specifications to achieve 1 GHz.

Note: The X prefix in a Freescale part number designates a “Pilot Production Prototype” as defined by Freescale SOP 3-13. These are from a limited production volume of prototypes manufactured, tested, and Q.A. inspected on a qualified technology to simulate normal production. These parts have only preliminary reliability and characterization data. Before pilot production prototypes may be shipped, written authorization from the customer must be on file in the applicable sales office acknowledging the qualification status and the fact that product changes may still occur while shipping pilot production prototypes.

1.1 Features

This section summarizes changes to the features of the MPC7455 described in the *MPC7455 RISC Microprocessor Hardware Specifications*.

- Power management
 - 1.85-V processor core

1.4 General Parameters

- Core power supply: 1.85 V ±50 mV DC nominal

1.5.1 DC Electrical Characteristics

[Table 4](#) provides the recommended operating conditions for the MPC7455 part number described herein.

Table 4. Recommended Operating Conditions

Characteristic	Symbol	Recommended Value	Unit
Core supply voltage	V _{DD}	1.85 V ±50 mV	V
PLL supply voltage	AV _{DD}	1.85 V ±50 mV	V
Die-junction temperature	T _j	0 to 75	°C

Note: These are the recommended and tested operating conditions. Proper device operation outside of these conditions is not guaranteed.

Table 7 provides the power consumption for the MPC7455 part number described herein.

Table 7. Power Consumption for MPC7455

	Processor (CPU) Frequency	Unit	Notes
	1000 MHz		
Full-Power Mode			
Typical	35.5	W	1, 3
Maximum	50.0	W	1, 2
Doze Mode			
Typical	—	W	1, 2, 4
Nap Mode			
Typical	3.7	W	1, 2
Sleep Mode			
Typical	1.7	W	1, 2
Deep Sleep Mode (PLL Disabled)			
Typical	1.1	W	1, 3

Notes:

1. These values apply for all valid processor bus and L3 bus ratios. The values do not include I/O supply power (OV_{DD} and GV_{DD}) or PLL supply power (AV_{DD}). OV_{DD} and GV_{DD} power is system dependent, but is typically <20% of V_{DD} power. Worst case power consumption for AV_{DD} < 3 mW.
2. Maximum power is measured at nominal V_{DD} while running an entirely cache-resident, contrived sequence of instructions which keep the execution units, with or without AltiVec™, maximally busy.
3. Typical power is an average value measured at nominal V_{DD} and 65°C in a system while running a typical code sequence.
4. Doze mode is not a user-definable state; it is an intermediate state between full-power and either nap or sleep mode. As a result, power consumption for this mode is not tested.

1.11 Ordering Information

1.11.1 Part Numbers Addressed by This Specification

Table 20 provides the ordering information for the MPC7455 part described in this document.

Table 20. Part Marking Nomenclature


XPC	74n5	RX	nnnn	x	x
Product Code	Part Identifier	Package	Processor Frequency ¹	Application Modifier	Revision Level
XPC ²	7455	RX = CBGA	1000	S: 1.85 V \pm 50 mV 0 to 75°C	C: 2.1; PVR = 8001 0201

Notes:

1. Processor core frequencies supported by parts addressed by this specification only. Parts addressed by other specifications may support other maximum core frequencies.
2. The X prefix in a Freescale part number designates a “Pilot Production Prototype” as defined by Freescale SOP 3-13. These are from a limited production volume of prototypes manufactured, tested, and Q.A. inspected on a qualified technology to simulate normal production. These parts have only preliminary reliability and characterization data. Before pilot production prototypes may be shipped, written authorization from the customer must be on file in the applicable sales office acknowledging the qualification status and the fact that product changes may still occur while shipping pilot production prototypes.

1.11.3 Part Marking

Parts are marked as the example shown in Figure 27.

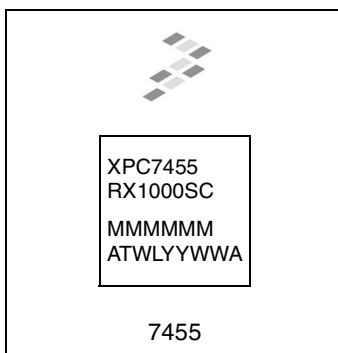

Notes:

- CBGA
- MMMMMM is the 6-digit mask number.
ATWLYYWWA is the traceability code.
CCCCC is the country of assembly. This space is left blank if parts are assembled in the United States.

Figure 27. Freescale Part Marking for CBGA Device

Document Revision History

Table B provides a revision history for this hardware specification addendum.

Table B. Document Revision History

Rev. No.	Date	Editor/Writer	Substantive Change(s)
0.1	07/19/2005	NB	Changed document order number (was MPC7455RXSPNS, Rev. 0). Updated to Freescale template.
0	04/2002	NB/ME	Initial release.



THIS PAGE INTENTIONALLY LEFT BLANK



THIS PAGE INTENTIONALLY LEFT BLANK

How to Reach Us:

Home Page:

www.freescale.com

email:

support@freescale.com

USA/Europe or Locations Not Listed:

Freescale Semiconductor
Technical Information Center, CH370
1300 N. Alma School Road
Chandler, Arizona 85224
(800) 521-6274
480-768-2130
support@freescale.com

Europe, Middle East, and Africa:

Freescale Halbleiter Deutschland GmbH
Technical Information Center
Schatzbogen 7
81829 Muenchen, Germany
+44 1296 380 456 (English)
+46 8 52200080 (English)
+49 89 92103 559 (German)
+33 1 69 35 48 48 (French)
support@freescale.com

Japan:

Freescale Semiconductor Japan Ltd.
Headquarters
ARCO Tower 15F
1-8-1, Shimo-Meguro, Meguro-ku
Tokyo 153-0064, Japan
0120 191014
+81 2666 8080
support.japan@freescale.com

Asia/Pacific:

Freescale Semiconductor Hong Kong Ltd.
Technical Information Center
2 Dai King Street
Tai Po Industrial Estate,
Tai Po, N.T., Hong Kong
+800 2666 8080
support.asia@freescale.com

For Literature Requests Only:

Freescale Semiconductor
Literature Distribution Center
P.O. Box 5405
Denver, Colorado 80217
(800) 441-2447
303-675-2140
Fax: 303-675-2150
LDCForFreescaleSemiconductor
@hibbertgroup.com

Information in this document is provided solely to enable system and software implementers to use Freescale Semiconductor products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

Freescale Semiconductor reserves the right to make changes without further notice to any products herein. Freescale Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Freescale Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Freescale Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Freescale Semiconductor does not convey any license under its patent rights nor the rights of others. Freescale Semiconductor products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Freescale Semiconductor product could create a situation where personal injury or death may occur. Should Buyer purchase or use Freescale Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold Freescale Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Freescale Semiconductor was negligent regarding the design or manufacture of the part.

Freescale™ and the Freescale logo are trademarks of Freescale Semiconductor, Inc. The described product is a PowerPC microprocessor. The PowerPC name is a trademark of IBM Corp. and used under license. All other product or service names are the property of their respective owners.

© Freescale Semiconductor, Inc., 2002, 2005.