

CM SH1-20M

CM SH1-40M

CM SH1-60M

NEW! CM SH1-100M

SCHOTTKY BARRIER RECTIFIER
1.0 AMP, 20 THRU 100 VOLTS

SUPERTM
mini



SMA CASE

CentralTM
Semiconductor Corp.

FEATURES:

- SUPER MINIATURE CASE
- SUPERIOR LOT TO LOT CONSISTENCY
- LOW COST
- "C" BEND CONSTRUCTION PROVIDES STRAIN RELIEF WHEN MOUNTED ON PC BOARD
- HIGH RELIABILITY
- SPECIAL SELECTIONS AVAILABLE

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 1.0 Amp Surface Mount Silicon Schottky Rectifier is a high quality, well constructed, highly reliable component designed for use in all types of commercial, industrial, entertainment, computer, and automotive applications where small size is required. The SMA case occupies 30% less board space than the SMB case. To order devices on 12mm Tape and Reel (5000/13" Reel), add TR13 suffix to part number.


MAXIMUM RATINGS: ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

	SYMBOL	CM SH1 -20M	CM SH1 -40M	CM SH1 -60M	CM SH1 -100M	UNITS
Peak Repetitive Reverse Voltage	V_{RRM}	20	40	60	100	V
DC Blocking Voltage	V_R	20	40	60	100	V
RMS Reverse Voltage	$V_{R(RMS)}$	14	28	42	70	V
Average Forward Current($T_L=75^{\circ}\text{C}$)	I_O	1.0	1.0			A
Average Forward Current($T_L=100^{\circ}\text{C}$)	I_O			1.0	1.0	A
Peak Forward Surge Current (8.3ms)	I_{FSM}	30	30	30	30	A
Operating and Storage						
Junction Temperature	T_J, T_{stg}		-65 to +150			$^{\circ}\text{C}$
Thermal Resistance	Θ_{JL}	30	30	30	30	$^{\circ}\text{C/W}$

ELECTRICAL CHARACTERISTICS: ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
V_F	$I_F=1.0\text{A}$ (CM SH1-20M AND CM SH1-40M)			0.50	V
V_F	$I_F=1.0\text{A}$ (CM SH1-60M)			0.70	V
V_F	$I_F=1.0\text{A}$ (CM SH1-100M)			0.85	V
I_R	$V_R=\text{Rated } V_{RRM}$			0.50	mA
I_R	$V_R=\text{Rated } V_{RRM}, T_A=100^{\circ}\text{C}$			10	mA
C_J	$V_R=4.0\text{V}, f=1.0\text{MHz}$, (CM SH1-20M AND CM SH1-40M)		100		pF
C_J	$V_R=4.0\text{V}, f=1.0\text{MHz}$, (CM SH1-60M)		80		pF
C_J	$V_R=4.0\text{V}, f=1.0\text{MHz}$, (CM SH1-100M)		50		pF

All dimensions in inches (mm).

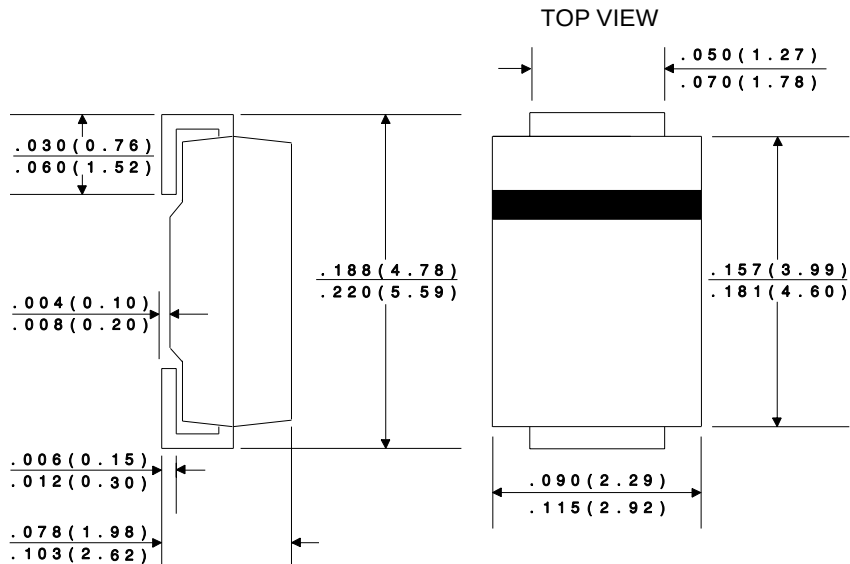

Marking Codes:

DEVICE	MARKING CODE
CMSH1-20M	CS20M
CMSH1-40M	CS40M
CMSH1-60M	CS60M
CMSH1-100M	CS100M