


RSF40 Series

This series of floatswitch offers the user a low cost, compact design with a wide range of options. Available in Acetal, Nylon, Polypropylene or PPS, most commonly used fluids are catered for. The compact design makes this device ideal for size sensitive applications. External mount variants are available in RSF70 or RSF80 series. A drop Float version is available for applications where the pivot needs to remain out of the liquid.

- Compact design
- Available in Acetal, Nylon, Polypropylene or PPS
- WBS approval 
- Reliable Reedswitch contacts
- User configurable switching options
- Alternative thread sizes available
- Many variants are UL recognised components
File Number E171218


CRYDOM

Control over power

TECHNICAL SPECIFICATIONS				
	RSF41	RSF43	RSF44	RSF46
Material	Acetal	Nylon	Polypropylene	Polyphenylene Sulphide (PPS)
Colour	Red	Black	Opaque	Grey
Temp. Range °C	-10 / +60	-20 / +75	-20 / +100	-10 / +120
°F	+14 / +140	-4 / +167	-4 / +212	+14 / +248
Min. Fluid S.G.	0.875	0.85	0.85	0.85

ELECTRICAL SPECIFICATIONS		
	Y	V
Contact Form	A25	C3
VA Rating	25	3
Breakdown Voltage DC	800	150
Switching Voltage AC	240	48
Switching Voltage DC	120	28
Switching Current Max. A	0.6	0.25

All ratings are for resistive load only

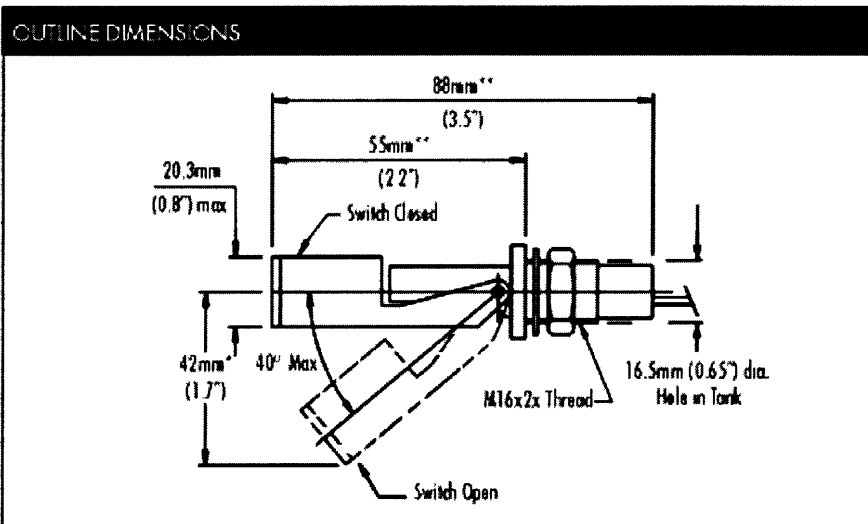

* 49mm RSF46

** Add 10mm to dims, RSF46

Every effort has been made to ensure that the descriptions and specifications quoted are correct, however, no liability can be accepted for any errors or omissions in this data. The detail specifications are subject to change without prior notice.

Crydom Magnetics Ltd
 7 Cobham Road
 Ferndown Industrial Estate
 Wimborne
 Dorset BH21 7PE
 Tel: +44 (0) 1202 897969
 Fax: +44 (0) 1202 891918
 Email: magnetics@crydom.com
 Website: www.crydom.co.uk