


**FEATURES**

. In MiniMELF case especially for automated insertion  
 The zener voltage are graded according to the international E24  
 standed. Smaller voltage tolerances and higher zener voltage  
 on request

**Mini-MELF**

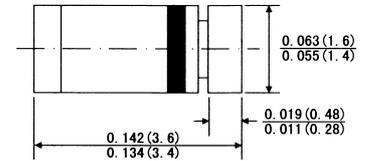

Dimensions in inches and (millimeters)

**MECHANICAL DATA**

. **Case:** Mini-MELF(SOD-80) glass case  
 . **weight:** Approx. 0.05 gram

**ABSOLUTE MAXIMUM RATINGS(LIMITING VALUES)(TA=25°C)**

	Symbols	Value	Units
Zener current see table "Characteristics"			
Power dissipation at TA=25°C	P <sub>tot</sub>	500 <sup>1)</sup>	mW
Junction temperature	T <sub>J</sub>	175	°C
Storage temperature range	T <sub>STG</sub>	-55 to +175	°C

1)Valid provided that a distance of 8mm from case are kept at ambient temperature

**ELECTRCAL CHARACTERISTICS(TA=25°C)**

	Symbols	Min	Typ	Max	Units
Thermal resistance junction to ambient	R <sub>θj\</sub>			300 <sup>1)</sup>	K/W

1) Valid provided that a distance at 8mm from case are kept at ambient temperature


ZMM1 THRU ZMM200 SILICON PLANAR ZENER DIODES

Type	Zener Voltage range <sup>1)</sup>			Dynamic resistance <sup>1)</sup>			Maximum reverse Leakage Current			of zener voltage
	V <sub>znom</sub> <sup>3)</sup>	I <sub>ZT</sub>		r <sub>ZT</sub> and r <sub>ZJK</sub> at I <sub>ZK</sub>			I <sub>R</sub> and I <sub>R</sub> at V <sub>R</sub> <sup>2)</sup>			TK <sub>VZ</sub>
	v	mA	V	Ω	Ω	mA	μ A	μ A	V	%/K
ZMM1 <sup>3)</sup>	0.75		0.7.0.8	<8	<50		--	--	--	-0.26..-0.23
ZMM2.0	2.0		1.9.2.1	<85	<600		<100	<200	1	-0.09..-0.06
ZMM2.4	2.4		2.28.2.56			<50	<100	-0.09..-0.06		
ZMM2.7	2.7		2.5.2.9			<10	<50	-0.09..-0.06		
ZMM3.0	3.0		2.8.3.2			<4	<40	-0.08..-0.05		
ZMM3.3	3.3		3.1.3.5			<2		-0.08..-0.05		
ZMM3.6	3.6		3.4.3.8			<2		-0.08..-0.05		
ZMM3.9	3.9		3.7.4.1			<2		-0.08..-0.05		
ZMM4.3	4.3		4.0.4.6			<75	<1	<20		-0.06..-0.03
ZMM4.7	4.7		4.4.5.0			<60	<0.5	<10		-0.05..+0.05
ZMM5.1	5.1		4.8.5.4			<35	<550			-0.02..+0.02
ZMM5.6	5.6		5.2.6.0	<25	<450		-0.05..+0.05			
ZMM6.2	6.2		5.8.6.6	<10	<200		2	0.03.0.06		
ZMM6.8	6.8		6.4.7.2	<8	<150		3	0.03.0.07		
ZMM7.5	7.5		7.0.7.9	<7	<50		5	0.03.0.08		
ZMM8.2	8.2	5	7.7.8.7	<7		6.2	0.03.0.09			
ZMM9.1	9.1		8.5.9.6	<10		6.8	0.03.0.1			
ZMM10	10		9.4.10.6	<15		<70	7.5	0.03.0.11		
ZMM11	11		10.4.11.6	<20		<70	8.2	0.03.0.11		
ZMM12	12		11.4.12.7	<20		<90	9.1	0.03.0.11		
ZMM13	13		12.4.14.1	<26		<110	10	0.03.0.11		
ZMM15	15		13.8.15.6	<30		<110	11	0.03.0.11		
ZMM16	16		15.3.17.1	<40		<170	12	0.03.0.11		
ZMM18	18		16.8.19.1	<50		<170	13	0.03.0.11		
ZMM20	20		18.8.21.2	<55	<220		15	0.03.0.11		
ZMM22	22		20.8.23.3	<55		16	0.04.0.12			
ZMM24	24		22.8.25.6	<80		18				
ZMM27	27		25.1.28.9			20				
ZMM30	30		28.32			22				
ZMM33	33		31.35			24				
ZMM36	36		34.38			27				
ZMM39	39		37.41			<90		<500	30	
ZMM43	43		40.46			<110		<600	33	
ZMM47	47		44.50			<125		<700	36	
ZMM51	51		48..54		<135	<700		39		
ZMM56	56	2.5	52.60		<150	<1000	43			
ZMM62	62		58.66	<200	<1000	47				
ZMM68	68		64.72	<250	<1500	51				
ZMM75	75		70..79.	<300	<2000	56				
ZMM82	82		77.87	<450	<5000	62				
ZMM91	91		85.96	<600	<5500	68				
ZMM100	100		94.106	<800	<6000	75				
ZMM110	110		104.116	<950	<6500	82				
ZMM120	120		114.127.	<1400	<7000	91				
ZMM130	130	1	124.141	<1700	<8500	100				
ZMM150	150		138.156	<2000	<10000	110				
ZMM160	160		153.171			120				
ZMM180	180		168.191			130				
ZMM200	200		188.212			150				


1) Tested with pluse tp=20ms  
 2) Valid provided that electrodes are kept at ambient temperature  
 3) The ZMM1 is a silicon diode with operation in forward direction. Hence,the index of all parameters should be "F" instead of "Z", Connect the cathode to the negative pole.

**ZMM1.ZMM200 SILICON PLANER ZENER DIODES**

**BREAKDOWN CHARACTERISTICS AT T<sub>J</sub>=CONSTANT (PULSED)**

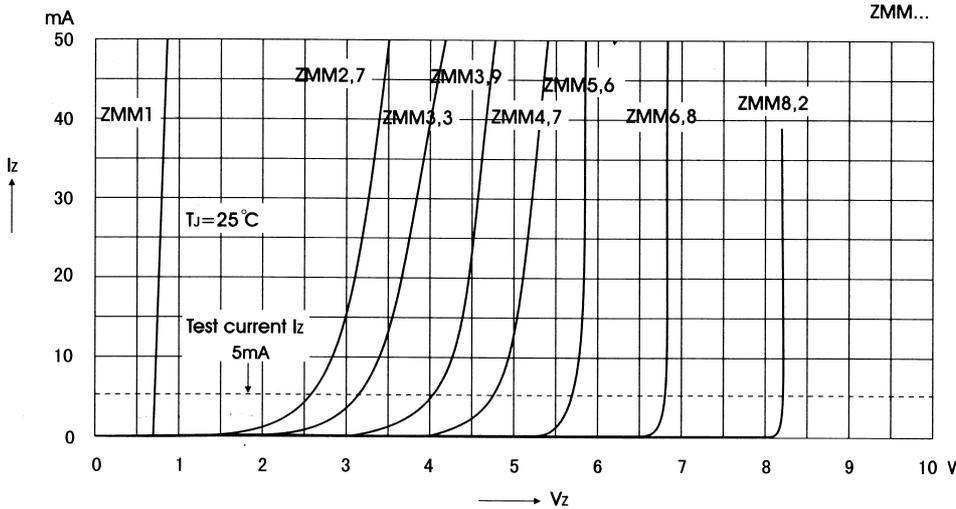


**BREAKDOWN CHARACTERISTICS AT T<sub>J</sub>=CONSTANT (PULSED)**

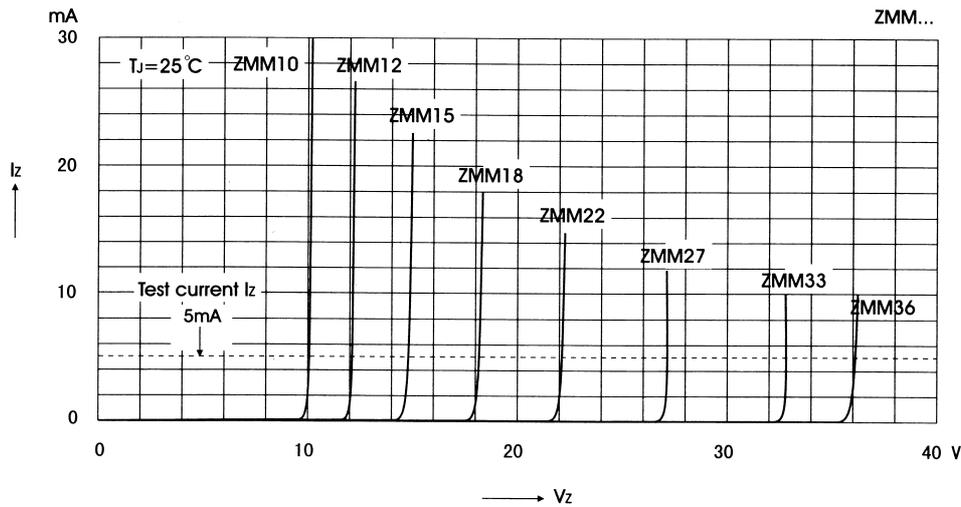


**ZMM1. ZMM200 SILICON PLANER ZENER DIODES**


**BREAKDOWN CHARACTERISTICS AT  $T_J=CONSTANT$  (PULSED)**

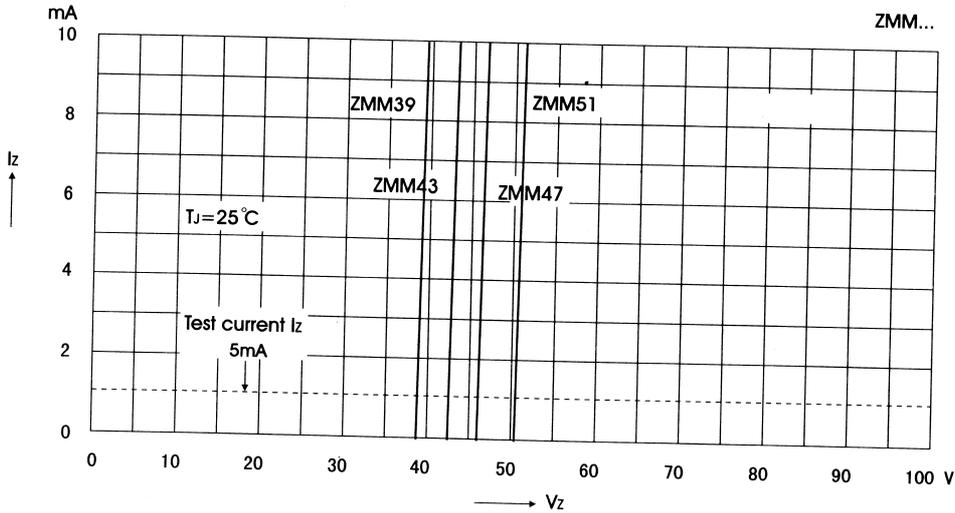

**Forward Characteristics**

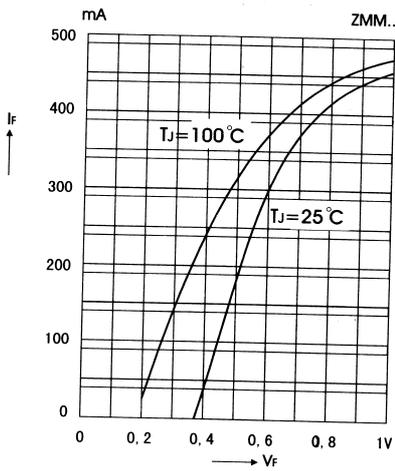


**Admissible power dissipation versus ambient temperature**

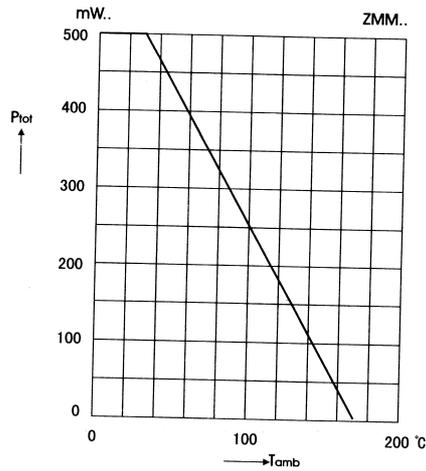


**ZMM1. ZMM200 SILICON PLANER ZENER DIODES**


**Pulse thermal resistance versus pulse duration**

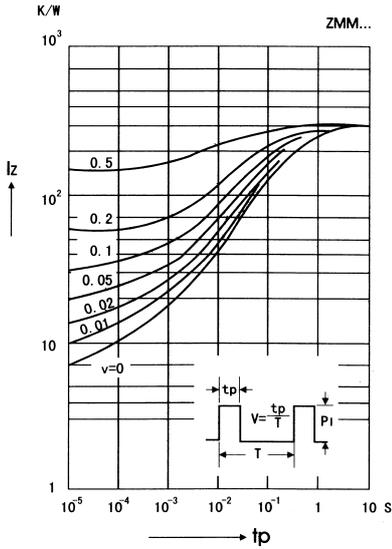


**Dynamic resistance versus Zener current**

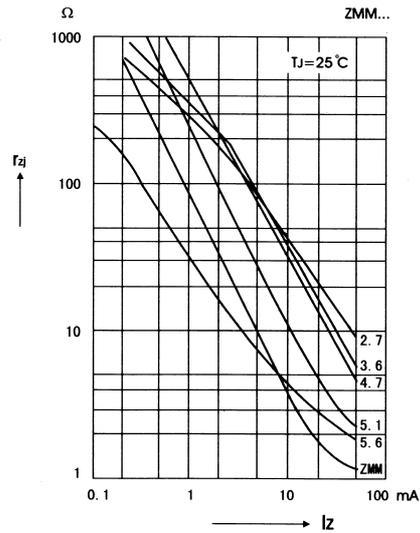

**Capacitance versus Zener voltage**

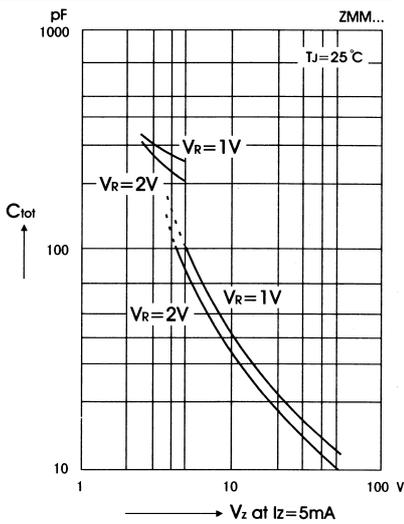


**Dynamic resistance versus Zener current**

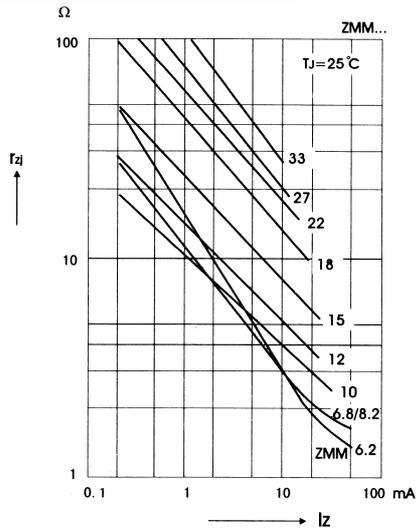


**ZMM1. ZMM200 SILICON PLANER ZENER DIODES**


**Dynamic resistance versus Zener current**

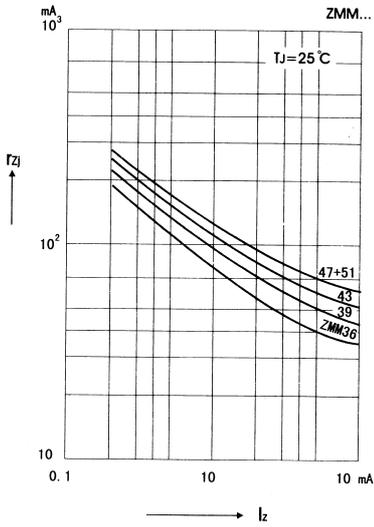


**Thermal differential resistance versus Zener voltage**

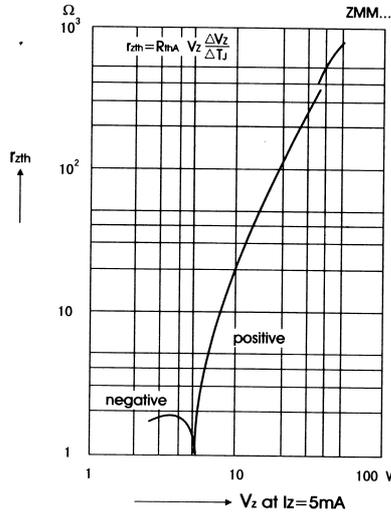

**Dynamic resistance versus Zener voltage**

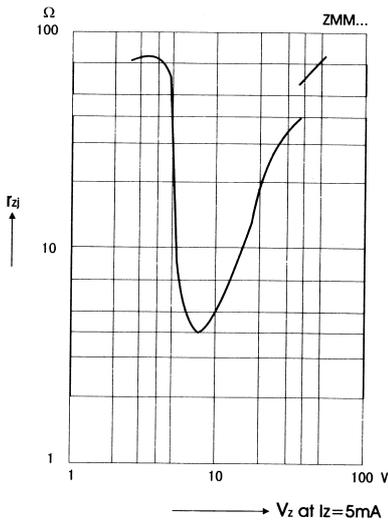


**Temperature dependence of Zener voltage versus voltage**

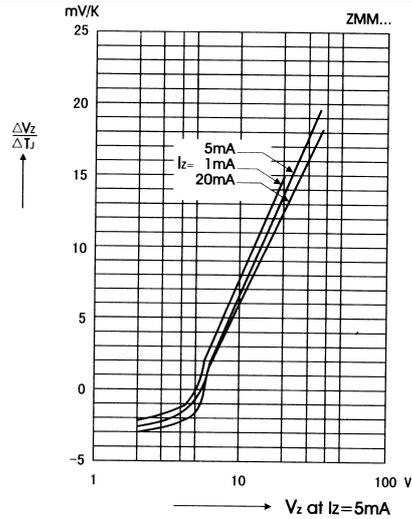


**ZMM1. ZMM200 SILICON PLANER ZENER DIODES**


**Temperature dependence of Zener voltage versus voltage**

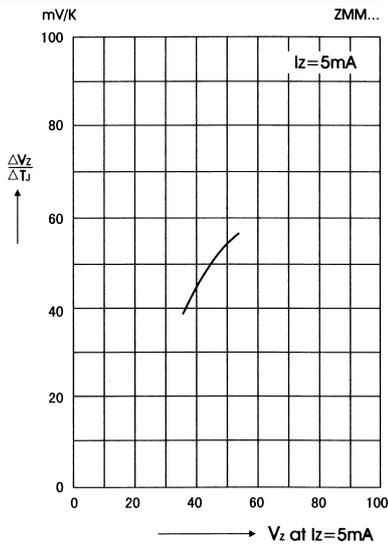


**Thermal differential resistance versus Zener voltage**

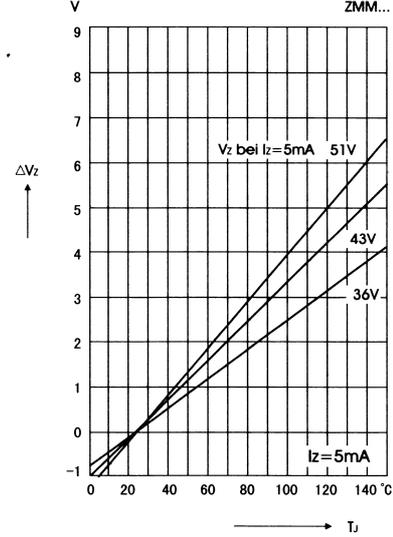

**Dynamic resistance versus Zener voltage**

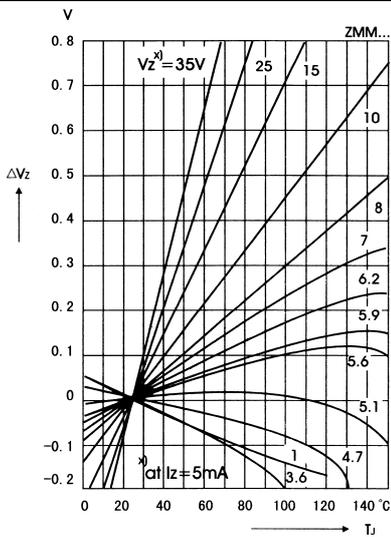


**Temperature dependence of Zener voltage versus voltage**

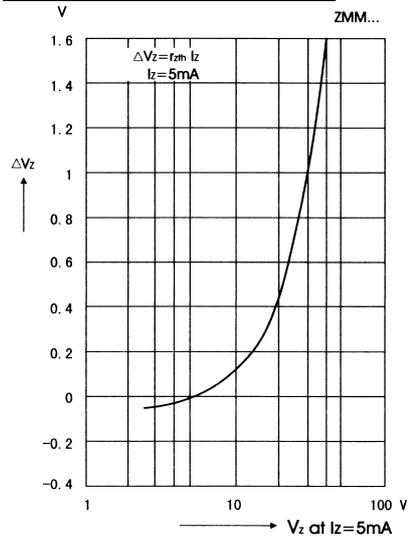

**ZMM1 . ZMM200 SILICON PLANER ZENER DIODES**

**Temperature dependence of  
Zener voltage versus voltage**

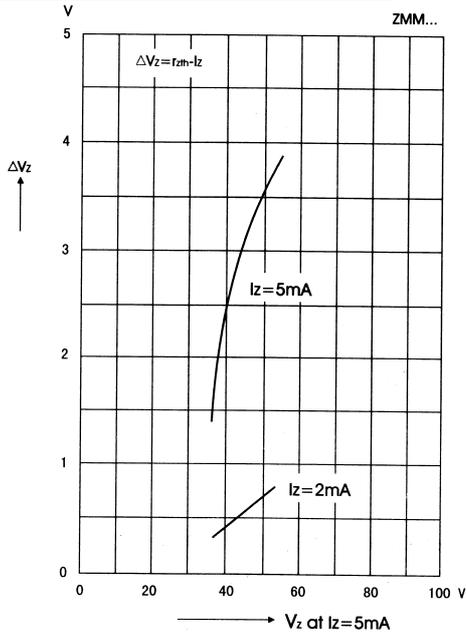

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

[www.AllDataSheet.com](http://www.AllDataSheet.com)

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

[www.AllDataSheet.com](http://www.AllDataSheet.com)