

KM63B97

User Manual

File Version: V21.5.7




Technical Parameters

Technical parameter	Parameter value
Brand	KLHA

Running temperature	-40~80°C
Working humidity	5%RH~90%RH

Product Size

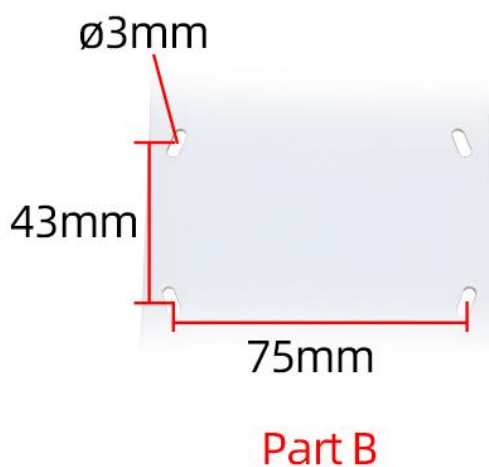





How to




Page3

wiring?

RS485 Wiring

	RD	PWR+
	GN	PWR-
	YE	RS485 A+
	BU	RS485 B-

mA/V Wiring

	RD	PWR+
	BK	PWR-
	BU	mA\V OUT


※Note: When wiring, connect the positive and negative poles of the power supply first, and then connect the signal line

Application solution

■ RS485



■ mA/V

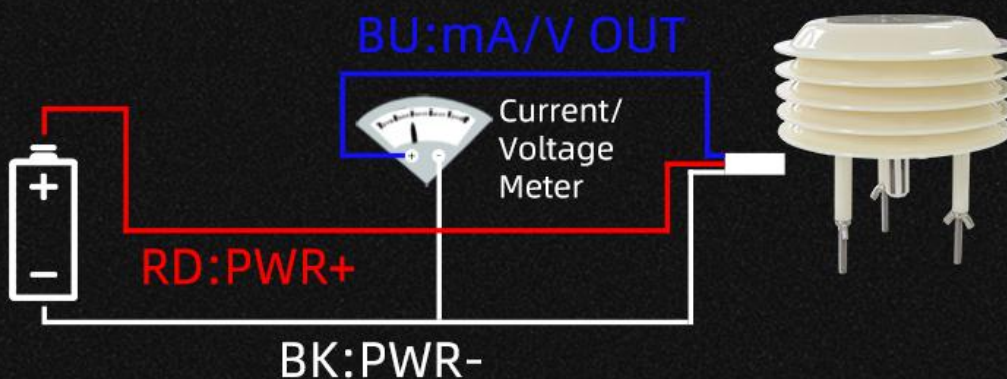

How to use?



Disclaimer

This document provides all information about the product, does not grant any license to intellectual property, does not express or imply, and prohibits any other means of granting any intellectual property rights, such as the statement of sales terms and conditions of this product, other issues. No liability is assumed. Furthermore, our company makes no warranties, express or implied, regarding the sale and use of this product, including the suitability for the specific use of the product, the marketability or the infringement liability for any patent, copyright or other intellectual property rights, etc. Product specifications and product descriptions may be modified at any time without notice.

Contact Us

Company: Shanghai Sonbest Industrial Co., Ltd KLHA Brand Division

Address: Building 8, No. 215 North east road, Baoshan District, Shanghai, China

Web: <http://www.klha.com>

Web: <http://www.klha.com>

SKYPE: soobuu

Email: sale@sonbest.com

Tel: 86-021-51083595 / 66862055 / 66862075 / 66861077