

DynaFlood LED Mono

BCS835/845/855

Mounting instruction 安装说明

IP65

IEC
60598

Mono
单色

Type Number 产品型号	LEDs 颗粒数	Voltage 输入电压	Class 电器等级	Power 最大功率 (W)	Length 长度L (mm)	
BCS835-36×LED-HP/ XX12 24V	36	24V DC	III	42	350	3.7
BCS845-48×LED-HP/ XX12 24V	48	24V DC	III	56	450	4.1
BCS855-60×LED-HP/ XX12 24V	60	24V DC	III	70	550	4.6

A1

A2

A3

B1


B2

B3


Power supply unit to be ordered separately
电源与灯具搭配表

Maximum luminaire loading quantity
最大灯具负载

Luminaire	PS100	PS500
BCS835-36	2 pcs	9 pcs
BCS845-48	1 pcs	7 pcs
BCS855-60	1 pcs	5 pcs

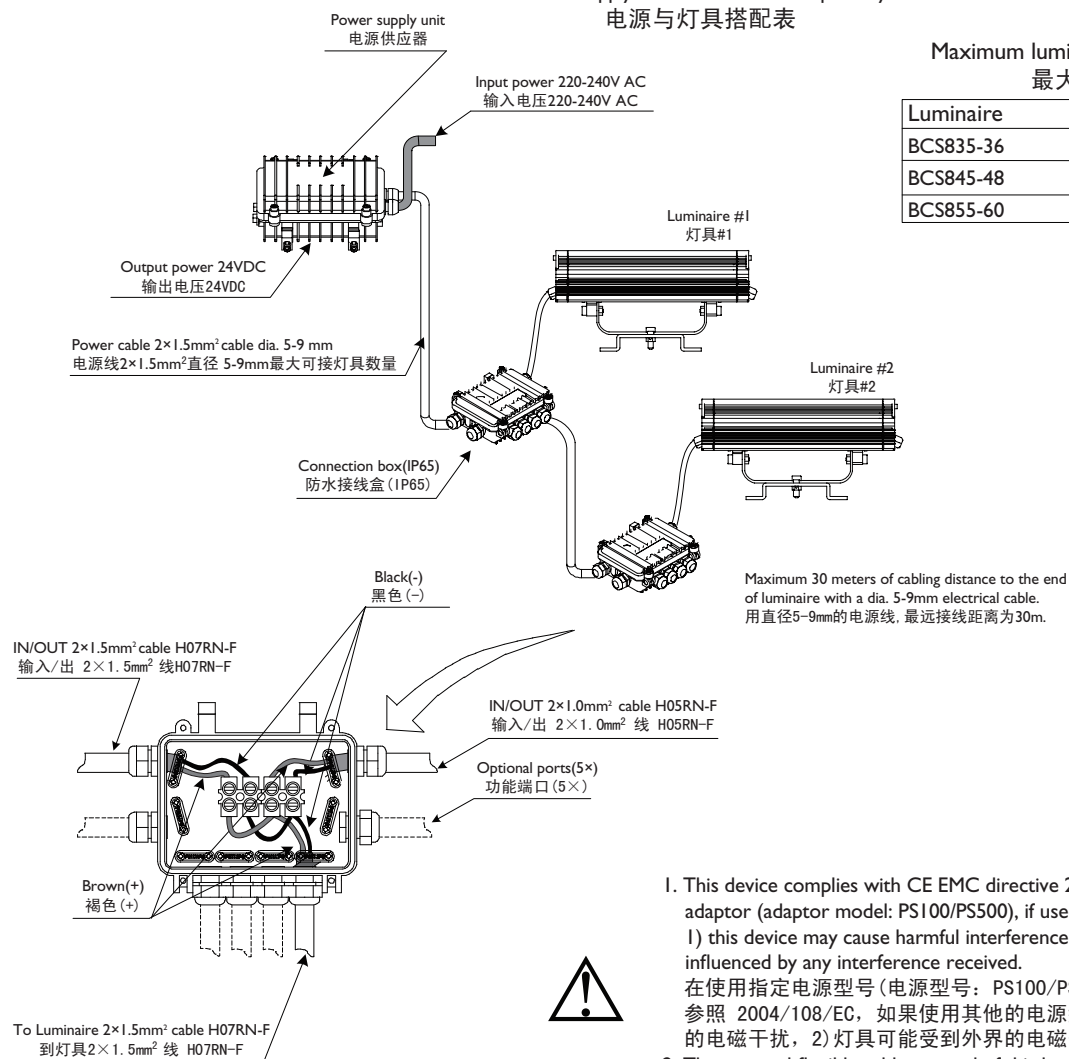

- This device complies with CE EMC directive 2004/108/EC, while using with adaptor (adaptor model: PS100/PS500), if used with improper adaptor, 1) this device may cause harmful interference, and 2) this device may be influenced by any interference received.
在使用指定电源型号(电源型号: PS100/PS500), 灯具已通过CE EMC 参照 2004/108/EC, 如果使用其他的电源型号, 1) 灯具可能产生有害的电磁干扰, 2) 灯具可能受到外界的电磁干扰。
- The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shall be destroyed.
外部电源线不能被直接替换, 如果电线损坏, 灯具会连带损坏。

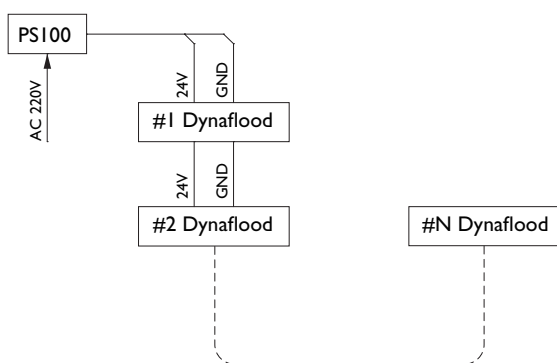

N	PS100
36 LEDs	2
48LEDs	1
60LEDs	1

Note: N-Serial Number for Corresponding Dynaflood per PS100