"FLL V" LED LAMP

Description: **LED Lamp with Wieland connector**



Housing material:	PC Plastic UL94 V0
Type of cover:	transparent
Appliance class:	class II
Electrical connection:	Wieland connector
Operating voltage range:	85-132Va.c.(FLL-120 series);173-265Va.c. (FLL-230 series);85-265Va.c.(FLL-300 series)
Storage temperature:	from -40°C to +85°C
Operating temperature:	from -30°C to +60°C
Protection degree:	IP20
Life:	160,000 h at 25 °C
Switch:	manual ON/OFF or PIR sensor
Angle of radiation PIR:	120°
Auto switch off:	300 s (only PIR version)
Installation:	2 x M5 screws or magnet pots fastening
Certifications:	CE; UL E237844 (UL 508 and CSA C22.2 No. 14)

drawing

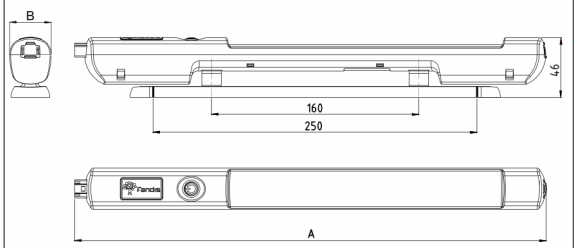

Model	Rated Voltage	Frequency	Watt	Dimensions (mm)		No. of Led	Color Temp.	Lum. Flux	Weight
	(V)	(Hz)	(W)	A	B		K	lm	(kg)
FLL-120565U-IRV	115 V a.c.	50/60	5.0	364	32	40	7,100	315	0,170
FLL-120565U-IRVM	115 V a.c.	50/60	5.0	364	32	40	7,100	315	0,180
FLL-120565U-SV	115 V a.c.	50/60	5.0	364	32	40	7,100	315	0,170
FLL-120565U-SVM	115 V a.c.	50/60	5.0	364	32	40	7,100	315	0,180
FLL-230565U-IRV	230 V a.c.	50/60	5.0	364	32	40	7,100	315	0,170
FLL-230565U-IRVM	230 V a.c.	50/60	5.0	364	32	40	7,100	315	0,180
FLL-230565U-SV	230 V a.c.	50/60	5.0	364	32	40	7,100	315	0,170
FLL-230565U-SVM	230 V a.c.	50/60	5.0	364	32	40	7,100	315	0,180
FLL-300565U-IRV	115-230V a.c.	50/60	5.0	364	32	40	7,100	315	0,170
FLL-300565U-IRVM	115-230V a.c.	50/60	5.0	364	32	40	7,100	315	0,180
FLL-300565U-SV	115-230V a.c.	50/60	5.0	364	32	40	7,100	315	0,170
FLL-300565U-SVM	115-230V a.c.	50/60	5.0	364	32	40	7,100	315	0,180

IR = PIR Sensor, S = ON/OFF Switch, M = Magnet fixing

All specifications, data and drawing are subject to change without notice and are approximate.
Please refer to our terms of sales including our warranty and limited liabilities clauses.

Kontaktdaten für Anfragen und Bestellungen:
MBI GmbH • Ubstadter Pfad 5 • 76694 Forst
Tel. 0049 7251/3020408 • Fax 0049 7251/3020409 • E-Mail: info@mbi-gmbh.de • Web: www.mbi-gmbh.de

Brand: FANDIS