Suspended luminaire IDOO.pendant IPP 7000/VTL/D

113276000-00688848

Waldmann
ENGINEERS OF LIGHT



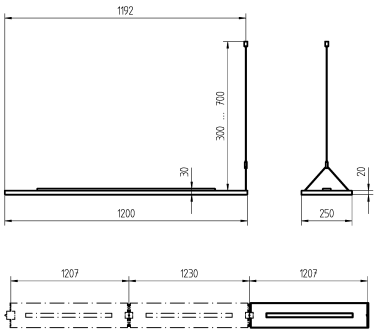

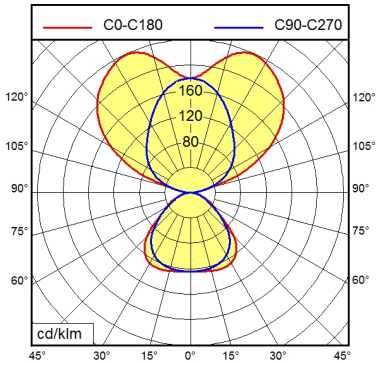

Light source	LED
Work equipment	Electronic ballast
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 65 W
Standby	ca. 0,5 W
Power factor	env. 0,980
Luminous flux	approx. 8.400 lm
Luminous efficiency [1)]	approx. 129 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 2.700 - 6.500 K
Color rendering index	CRI ≥ 80
Light distribution	Direct/indirect; approx. 33 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 2.800 cd/m²
UGR class (4H 8H; EN 12464-1)	≤ 16
System of protection/Class	IP 20
Technology	Continuously dimmable
Operation	External
Housing	White
Light source cover	Acrylic (PMMA); Clear
Mains lead	Connector; End luminaire
Fastening	Steel cable 0.3 - 0.7 m
Energy efficiency class	E
EAN	4013330081768
Weight without/incl. packaging	ca. 7,5 kg; 8,5 kg
Packaging dimensions	ca. 1.355 mm; 300 mm; 90 mm
Special features	Easy-to-install mechanical and electrical connection of further luminaires; End luminaire; Indirect light component with Batwing diffuser for wide-beam light exit; Direct light component with edge light and light-guide technology for homogenous light exit; Control via start luminaire; Luminaire for biodynamic light VTL; Maximum 6 luminaires on one mains connection; LED system: DALI Load 1 (2700 K, 49 W, 6100 lm) , DALI Load 2 (6500 K, 49 W, 6500 lm); Specified values when used with NET module

[1)] For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Errors and technical changes excepted. Images can vary from original.
Photometric and electrical data may vary due to component tolerances.

© 22/06/2025 H.Waldmann GmbH & Co. KG