Presence detector - Professional Line

# IS 3360

DALI-2 APC - surface, sq.
EAN 4007841 010560
Article number 010560



Infrarot-Sensor 360°
Max. 20 m
IP54
2 - 1000 Lux
5 Sek - 15 Min
Manuelle Übersteuerung 4 Std
Ideal 2,5 - 4 m
Teach
Teach mode
Energie sparen
5 years
Herstellergarantie steinel-professional.de/garantie

## Function description

Higher, further, faster. Infrared presence detector IS 3360 for indoors and out, ideal for watching over high spaces and large areas, such as multi-storey and underground car parks, installation height up to 4 m, 360° angle of coverage, reach 20 m max. (tangential), large terminal compartment for easy installation. Available either in round or square surface-mounted and concealed version.

## Technical specifications

| | |
|---|---|
| Dimensions (L x W x H) | 65 x 95 x 95 mm |
| With motion detector | Yes |
| Manufacturer's Warranty | 5 years |
| Settings via | Remote control, Potentiometers, Smart Remote |
| With remote control | No |
| Version | DALI-2 APC - surface, sq. |
| PU1, EAN | 4007841010560 |
| Type | Motion and Presence Detector |
| Application, place | Outdoors, Indoors |
| Application, room | production facilities, recreation room, changing room, function room / ancillary room, sports hall, reception / lobby, stairwell, WC / washroom, multi-storey / underground car park, outdoors, warehouse, Indoors |
| Colour | white |
| Colour, RAL | 9003 |

| | |
|---|---|
| Optimum mounting height | 2,8 m |
| Detection angle | 360 ° |
| Angle of aperture | 180 ° |
| Sneak-by guard | Yes |
| Capability of masking out individual segments | Yes |
| Electronic scalability | No |
| Mechanical scalability | No |
| Reach, radial | Ø 8 m (50 $m^2$) |
| Reach, tangential | Ø 40 m (1257 $m^2$) |
| Reach, presence | Ø 3 m (7 $m^2$) |
| Switching zones | 1416 switching zones |
| Functions | Normal / test mode, Manual ON / ON-OFF, Constant-lighting control ON-OFF |
| Twilight setting | 2 – 1000 lx |
| Time setting | 5 s – 15 Min. |
| Basic light level function | Yes |

Presence detector - Professional Line

# IS 3360

DALI-2 APC - surface, sq.
EAN 4007841 010560
Article number 010560

## Technical specifications

| | |
|---|---|
| Includes corner wall mount | No |
| Installation site | ceiling |
| Installation | Surface wiring, Ceiling |
| IP-rating | IP54 |
| Ambient temperature | -20 – 50 °C |
| Material | Plastic |
| Mains power supply | 220 – 240 V / 50 – 60 Hz |
| Steuerausgang, Dali | Broadcast 1x30 electronic ballasts |
| Technology, sensors | passive infrared, Light sensor |
| Mounting height | 2,50 – 4,00 m |
| Mounting height max. | 4,00 m |

| | |
|---|---|
| Basic light level function time | 1-30 min, all night |
| Main light adjustable | 50 - 100 % |
| Twilight setting TEACH | Yes |
| Constant-lighting control | Yes |
| Interconnection | Yes |
| Type of interconnection | Master/slave |
| Interconnection via | Cable |

## Accessories


| | |
|---|---|
| EAN 4007841 009151 | Remote control Smart Remote |
| EAN 4007841 559410 | Service remote control RC8 |
| EAN 4007841 592806 | User remote control RC5 |
| EAN 4007841 056711 | Black cover for IR-sensors |

Presence detector - Professional Line

# IS 3360


DALI-2 APC - surface, sq.
EAN 4007841 010560
Article number 010560

## Detection Zone

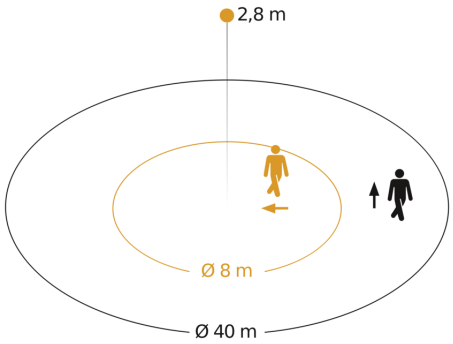



Possible mounting height: 2,50 m – 4,00 m
Orange: radial
Black: tangential

## Dimension Drawing

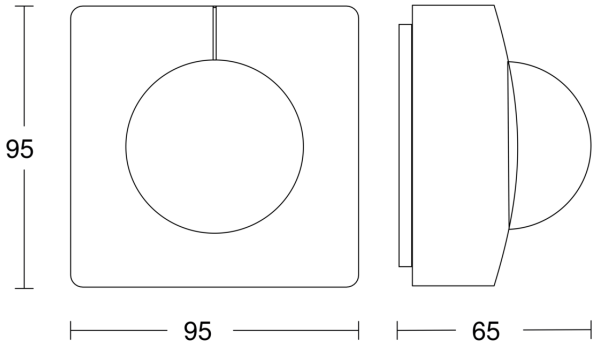


## Master circuit diagram

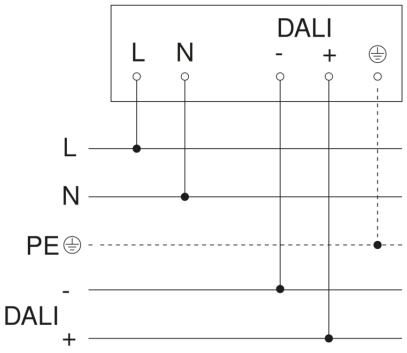


## Circuit diagram for interconnecting DALI-2 APC with DALI-2 IPD

