CONCRETE FINISH EQUIPMENT

MULTIQUIP

Concrete Vibrators

High Cycle Vibrator
MT-75-H

- VA-1A Controller powers one VH-32, 42 or 52 vibrator.



Centrifugal Pumps

ZP303 H 3" Centrifugal Pump
ZP303

- 5.5 HP Honda engine
- 14,700 GPH, 25 ft. max lift, 105 ft. of head
- 3" suction & discharge



Rammers

MT-75HS

- 3,200 Impact, 144.OCC Robin EC-12D/G, oil bath lubrication



Plate Compactors

MVC-88

- 4.8 HP Honda Engine
- Plate size: 19.7" x 20.7"
- Centrifugal force: 3450 lbs.





MVC-82

- 4.8 HP Honda Engine
- Plate size: 17.7" x 22"
- Centrifugal force: 3080 lbs.

FOR SALE OR RENT!

WHITEMAN

Hydrostatic Ride-On Power Trowels

HHXD5

- Patented swing-away upper frame design
- Helical gearboxes



HTX4445

- 8' Hydrostatic 2-in-1 heavy duty gear boxes with shaft driven cooling fans



Ride-On Trowels

HDXD6i NEW!
Reaches a top rotor speed of 160RPM and produces 20% more HP than previous generations models.



HHNG5 NEW!
Equipped with the coolest running gearbox in the industry. Power is supplied by a 34-HP diesel engine that spins twin fiveblade rotors to a top speed of 160 RPM.



Walk-Behind Power Trowels

2' Edging Trowel
C-4-2H

- 2.5 HP
- Honda G100K2QA
- Includes QuickPitch handle



3' Trowel
J336 H55

- 5.5 HP
- Honda GX-160
- 4 blades



B46H90

- 4-Blade
- Honda GX-270
- 60-130RPM



KRAFT TOOL CO.®

Power Troweler Replacement Blades



Stone

Blade	Size	Part #
36" Finish	6"x14"	SK100
36" Comb.	8"x14"	SK101
36" Float	10"x14"	SK102
46" Finish	6"x18"	SK214
46" Comb.	8"x18"	SK215
46" Float	10"x18"	SK105

Wagman

Blade	Size	Part #
60" Flat Finish RC	8"x18"	SK217

ProForm® Heavy Duty Gold

Blade	Size	Part #
36" Finish	6"x14"	SK100G
46-48" Finish	6"x18"	SK214G

Stone

Wagman



ProForm®
Heavy Duty Gold

www.jobsitesupply.com (317) 684-7474 624 S. Missouri St. Indianapolis, IN 46225

CONCRETE FINISH EQUIPMENT

SOMERO® ENTERPRISES, INC

We Are Passionate About Your Success!

Faster.
- Increase daily volume without increasing man-hours.
- Design allows for unlimited pull back distance.
- Screeds up to 5,000 square feet per hour.

Flatter.
- Patented soft-landing feature makes perfect landings.
- Automatic column-block protection.
- Superior Floor Levelness (FL) performance.

Fewer.
- Automated screed process means fewer man-hours per project.
- Screed at a lower cost per square foot vs. other methods.
- Low operating and maintenance costs.

S-840



- Customized for the S-840, the new control system allows faster elevation & SLS response.
- Proportional valves for fast, accurate elevation control.
- Live calibration for consistent unsurpassed performance.

Equipment Specifications

Length	9'7" (2.92m)
Width	43 1/4" (1.1m)
Height	55" (1.4m)
Ground Clearance	11.5" (.3m)
Head Clearance	13.75" (.35m)
Engine	Robin 20.5HP EH65
Start	Electric Start
Propel	4-wheel drive with hydraulic motors
Propel Control	Proportional joystick & valve driving a hydraulic motors
Elevation Control	Dual hydraulic cylinders
Steering Control	Proportional joystick & valve driving a hydraulic cylinder
Laser Controls	Trimble SSR2 Laser Receivers
Machine Weight	1540lbs (699kg) w/ Laser Screed Head attached
Note:	These specs are based on 8' (2.4m) Screed Head. 6' (1.8m) versions are also available.

Mini Screed C

Get superior performance, productivity and flatness.



- Laser-controlled accuracy.
- Screeds to higher tolerances than conventional methods.
- Works well with various slump and mix designs.
- Better concrete consolidation than hand-held vibratory screeds or roller screeds.

CopperHead XD™

3.0



OSCHX030

The CopperHead XD 3.0 is the right machine for contractors who want better performace when you encounter difficult applications such as:
- chaired rebar
- lower slumps
- poor subgrades

POWER TOOL EQUIPMENT

STIHL®

Visit **Jobsite Supply** to find out more!



GS 461 Rock Boss®





TS 500i Cutquik®
- Low emission engine
- Optimal torque throughout the rpm range

14" Cutquik® Saw EWC
TS420-14
- Easy adjustment of water flow while cutting
- Water control remembers last setting used
- Integral water connection
- Cart mount available



Cutquick® Cart
4223007100
- Specially designed for matched cutting performace
- High impact resistant wheels with sealed ball bearings





12" Cutquik® Saw
TS410
- 64CC engine
- 3.6" depth capacity
- Able to be mounted on cart with adapter kit

Blower 25.4 CC Engine
BG55

Power through outdoor clutter with the BG 55 STIHL HomeScaper Series™ handheld blower. Featuring a round nozzle for increased air volume, this gas leaf blower quickly clears leaves and grass clippings from driveways and sidewalks.



42010071041	Depth wheel kit for cart

MS 180 Chain Saw - 16"
MS180EZ-14

Features the Easy2Start™ system, making this chain saw virtually effortless to start. Perfect for cutting firewood or felling trees up to 12 inches in diameter, it is a lightweight practical chain saw with convenient features you can rely on.



MS250C-16	18" Gas Chainsaw

Kombi-System with Accessories

KM55R
Power Head



FCBKM
Curb Lawn Edger



HTKM
Pole Pruner



HLKM
Straight Hedge Trim Attachment



FS-KM
Trimmer



BGKM
Blower



Backpack Blower
BR550



- Powerful and fuel-efficient, low-emission engine with improved durability
- Three-position adjustable blower tube with increased wear area nozzle
- High quality, durable harness with dual adjustments and STIHL logo
- Simplified starting procedure
- Single-handed operation

www.jobsitesupply.com (317) 684-7474 624 S. Missouri St. Indianapolis, IN 46225

POWER TOOL EQUIPMENT

EDCO®

Floor Prepping Equipment

CPM-8-8" Scarifier

- Up to 8" working width
- Up to 1/8" working depth per pass
- power source over drum to eliminate vibration & maximize surface contact





Grind Stripper-Gas

- Round shroud gets tight against walls
- Easy rolling 10" steel-core, rubber wheels
- Lifting eye for easy loading & unloading



New Redesigned Concrete Floor Grinder!

- Grind Level: Using EDCO'S exclusive leveling system you can adjust the machine's height, use a wide range of accessories and truly grind level.
- Velcro Dust Shroud: This new heavy-duty velcro dust shroud makes dust prevention faster and easier.
- Multi-Vac Port: EDCO'S multi-vac-port allows you to use either a 2" or 3" vacuum hose, leading to more dust prevention options.

Quick Change Multi-Accessory Disc





General Purpose Grind Removes General Purpose Epoxy, Mastics, Thinsets, Water-proofing Coatings and More. Double Diamond Dots, Single Diamond Dots & PCD Accessory available.





Vortex 200

- 13 sqare feet surface area Micro Clean Filter
- 9-gallon dust collection capacity
- Standard wtih connector and 2"-25' hose
- Wand kit comes standard with the Vortex 200
- Weight 90lbs
- Horse Power - dual motors, 3.2HP
- Electric

VULCAN

Tools

3" Chisel 1-1/8" Shank
1421040



5" Asphalt Cutter 1-1/8" Shank
1421045



Breaker Moil Point 1-1/8"x6"x14" Shank
1421019



Ground Rod Driver 1-1/8" Shank
1421806



Narrow Chisel 1-1/8"x6"x14" Shank
1421030



Bushing Tool 1-1/8" Shank
142848



Chicago Pneumatic™



CPS 185 JD Portable Compressor



- Engine-John Deere model 4024 TF281 interum tier
- 49HP @ 2750 RPM
- Working pressure: 100psi
- Max unloading pressure: 125psi
- Fuel tank capacity - 25 gallons

Rivet Buster 4181 Puler



- BPM: 720
- Length: 26" (660mm)
- Bore and Stroke: 1 3/16" X 11" (30.2 X 280mm)
- Air Consumption: 50 CFM
- Air Inlet Diameter: 3/8" NPT
- Chuck Size: 11X Jumbo
- Capacity of Rivet Cutting Diameter: 7/8" (22.2mm)

CP 1210 Demolition Tool



- Shank mm - 25 x 108
- Weight kg - 20
- Lenght mm - 540
- Blows bpm - 1400
- Air Cons l/s - 26.5

CP 1230



- Shank mm - 28 x 160
- Weight kg - 29.5
- Lenght mm - 680
- Blows bpm - 1300
- Air Cons l/s - 32

CP 1240



- Shank mm - 28 x 160
- Weight kg - 37.5
- Lenght mm - 735
- Blows bpm - 1200
- Air Cons l/s - 40

CP 4131



- Lightweight
- Ball-type Retainer
- Built-in oiler provides continuous lubrication
- Teasing throttle for precise control
- Cushioned piston for smooth operation, long life

We Carry Rental Packages & All Accessories For Pneumatic Packages:

- **Hoses**
- **Whips**

***Remember best practices: Oil Equipment Daily**

POWER TOOL EQUIPMENT

MULTIVIBE

Screeds

Hummer Screed 2
MVPR100H
- 4-stroke honda engine
- Balanced for Easier Lift
- Longer Life



PR 100 Screed
PR100C
- Use Inside
- No Start Procedure
- No Gas/Oil Maintenance



Hummer Vibrator
- User Friendly - Less Fatigue
- Large Heads for Standard Walls
- Deep Foundations



LB104	4’ Screed Bar
LB110	10’ Screed Bar
LB112	12’ Screed Bar
LB114	14’ Screed Bar

NORTHROCK
NORTHROCK INDUSTRIES, INC.

Concrete Vibrators - Heads & Shafts

Pro 1.5+ 13 Amp Power Unit
70M3
- High strength cast aluminum housing
- Rugged shock absorbing frame



70D1	1”x12” Vibrator Head
70F15	1-1/2”x14” Vibrator Head
70G17	1-3/4”x14” Vibrator Head
70J2	2”x14” Vibrator Head
70B7	7ft. Shaft for Vibrator
70B10	10ft. Shaft for Vibrator
70A21	21ft. Shaft for Vibrator

Ventilation Fans

CP B 36-D

For Sale or Rent!

- 36” Direct Drive
- Rocker switch
- SJT type cord
- 3 conductor - 6’ long
- Spiral wire front and rear guards
- Powder coated 20 gauge steel housing
- 5” rubber wheels
- Meets OSHA stnds




PB36D	36” Fan Direct Drive 2 SPD
PB42D	42” Fan Direct Drive 1 SPD

Husqvarna

K-760 14” Power Cutter
967181002
- 5HP air cooled 2 cycle motor
- 14” blade capacity
- 5” cutting depth

Blade: in (mm) 12/14 (305 / 350) **Cutting depth:** in (mm) 4/5 (100 / 127) **Power:** hp (kW) 5 (3.7) **Displacement:** cu in (cc) 4.5 (74) **Weight:** without fuel and cutting equipment, lbs (kg) 20.7/21.6 (9.4 / 9.8)



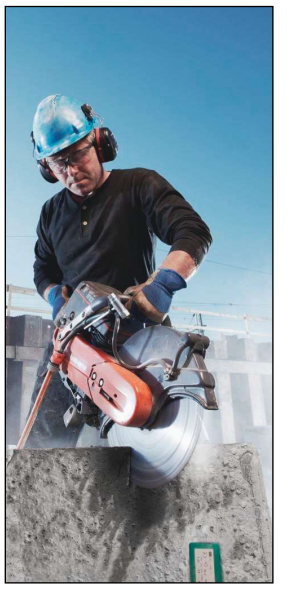

Cut-N-Break Concrete Saw
K750 Gas
967195701
- 5HP, 74cc motor
- Depth of cut per pas 2/5”
- 9” twin blades (included)



968388404	K3000 Electric Model
576778501	Replacement Blades

K3000 14” Electric Power Cutter (Wet Cut)
966799401
- Suitable for general concrete cutting, masonry or landscape work
- 14” blade capacity/5” cut-depth
- Integral water feed
- Blade not included



K3000 14” Electric Power Cutter
966715901
(Dry Cut)
- Vacuum attachment (removable) for clean, dry cutting
- Soft start
- Blade not included



More Husqvarna products on next page...

UNITED ABRASIVES, INC.
SAIT

22021
- 4-1/2” x .045 x 7/8 Thin Cut Off Wheel
- 25/Box



20060
- 4-1/2” x 1/4” x 7/8” Metal Grinding Wheel
- 25/Box



23336	6”X.045X7/8 Thin Cut Off Wheel-25/bx
23423	12”x1/8”x20mm Concrete Blade-10/bx
23455	14”x1/8”x20mm Metal Blade-10/bx
23458	14”x1/8”x20mm Ductile Iron Blade-10/bx
23460	12”x1/8x1” MAC Blade-10/bx
23501	14”x1/8”x1” Abrasive Cut Off Wheel

POWER TOOL EQUIPMENT

Husqvarna



The Green Zone™ is the best guarantee for the prevention of random cracks. Stress will be relieved every time below the cut, exactly where it should. Cutting in the Green Zone™ allows a shallower cut, which achieves greater aggregate interlock for a stronger slab and minimizes the amount of joint filler that might be needed. When cutting, there is little to no airborne dust because the concrete is still hydrating and is not completely set. This is not only good for the operator's health but also for the surrounding environment.



SOFF-CUT ULTRA EARLY ENTRY™



Soft-Cut 4200
X-4200

- Self-propelled saw designed for highway, runway, paving and industrial floor applications where a depth of 1-1/4 to 3" is required
- Several blade widths can be used, allowing different joint widths and crack control



Soft-Cut X-2500
X-2500

- Self-propelled gas saw with positraction drive, hydrostatic transmission and travel speed indicator
- High-strength, lightweight aluminium frame




Soft-Cut 2000
X-2000

- 9 HP Robin engine
- Depth of cut: 1.5"
- Medium to heavy duty use



The Prowler
X150

- 4 1/2 HP Robin engine
- Depth of Cut 1" to 1-3/16"
- Light to medium duty use

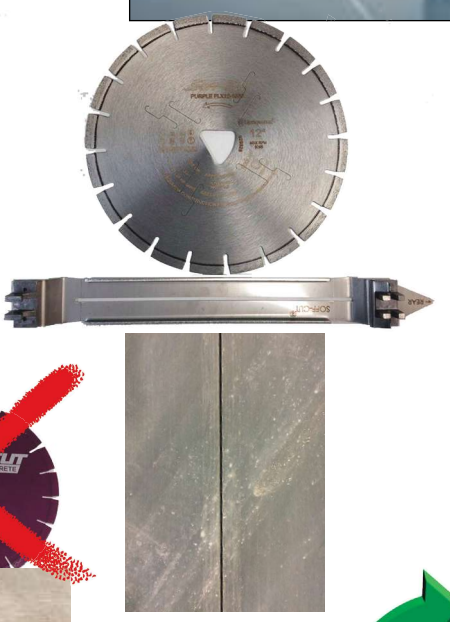




YOU DO NOT WANT RESULTS LIKE THIS...

USE THE FLX BLADE SYSTEM FOR BEST RESULTS!
Plate Included



6" Decorative Concrete Prowler Saw
X150D

- 4 1/2 HP Robin engine
- A preset depth of cut
- 3 different size guide wheels, for 1/8", 1/4" & 1/2" saw joint

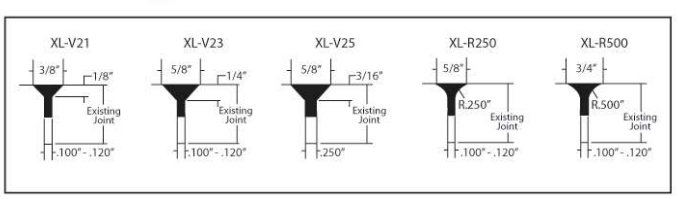

ProEdge beveled blade profiles.

Soff-Cut® Blades



FLX12-1000	12"x.120 Soffcut Blade Purple
FLX14-1000	14"x.120 Soffcut Blade Purple
FLX12-3000	12"x.120 Soffcut Blade
FLX14-3000	14"x.120 Soffcut Blade
XL10-2000	10"x1/8" Green Blade
XL10-3000W	10" Red Blade-14" Skid Plate
XL10-5000	10"x1/8" Yellow Blade
XL12-2000	12"x1/8" Green Blade
XL14-2000	14"x1/8" Green Blade
XL14-3XX3	13-1/2"x1/8" White Blade
XL14-3000	14"x1/8" Red Blade
XL55-3000A	5-1/2"x.095 Red Blade
XL5-R250	5/8" Radius Blade-X-50
XL5-R500	3/4" Radius Blade X-50
XL6-2000 X-150	6" Green Prowler Blade
XL6-3000 X-150	6" Red Prowler Blade
XL8-2000	8"x1/8" Green Blade



Decorative Cuts

After the initial Soff-Cut® joints have been cut and the concrete is cuured, a ProEdge bevel blade may be used to chase the standard joints for a decorative beveled look. The result is a more polished, finished appearance.

www.jobsitesupply.com (317) 684-7474 624 S. Missouri St. Indianapolis, IN 46225

POWER TOOL EQUIPMENT

Screeds

Allen 12 HED Steel Screed
With rotating engine shaft vibrator & manual winches.



Allen Engine Driven Screed
With engine options ranging from 5.5HP to 11HP, there's a steel screed for every floor finishing operation.



Vibrators

Allen Flex Shaft Vibrator
Available in electric or gasoline powered backpack models.



Power Buggies

AR16
- 16 cu. ft. bucket
- Variable speed hydrostatic pump
- (2) Individual hydraulic wheel motors with a 18.7 qt. hydraulic reservoir



AR21
- 21 cu. ft. bucket
- Variable speed hydrostatic pump
- (2) individual hydraulic wheel motors with a 18.7 qt. hydraulic reservoir

HONDA GENERATORS

EB10000



EB4000



EB5000



EB Series - Industrial Generators
- Commercial grade Honda Engines
- 120/240V selection switch for total generator output in 120V
- Full frame protection; Full GFCI protection on all outlets
- Intelligent Auto Voltage Regulation (iAVR); OSHA compliant
- Wheel, handle 7 hanger kit standard

Model	Engine	Wattage	Max AC Output	Rated AC Output	iAVR Output	Noise Level	Fuel Capacity	Run Time @ 50% Load	Dry Weight
EB4000	iGx270 OHV with Oil Alert™	4,000	120/240V 4,000W 33.3/16.7A	3,500 29.2/14.6A	5,000W for 10 sec.	71dB	6.2 gal.	16 hours	185 lbs.
EB5000	iGx390 OHV with Oil Alert™	5,000	120/240V 5,000W 41.7/20.8A	4,500W 37.5/18.8A	7,000W for 10 sec.	72dB	6.2 gal.	11.2 hours	214 lbs.
EB10000 (available special order)	GX6300	1,000	120/240V	9,000 75/37.5A		76dB	8.2 gal.	7.2 hours	403 lbs.

EU Series Super Quiet Generators
- Inverter technology makes these generators extremely lightweight, portable & fuel efficient
- Create "clean" or stable power - ideal for sensitive electronic equipment
- Totally enclosed body, making them incredibly quiet
- 8-20 hours of run time per tank, depending on model

EU1000IAN





EU2000IAN1



EU3000IHAN Handi



EU3000ISAN



EU6500ISAN

Model	Engine	Wattage	Max AC Output	Rated AC Output	Max DC Output	Noise Level @ Rated Load	Fuel Capacity	Run Time @ 25% Load	Dry Weight
EU1000IAN	GXH50 Honda OHV	1,000	120V 1,000W 8.3A	900W 7.5A	12V 96W 8.0A	59dB	0.6 gal.	8.3 hours	29lbs.
EU2000IAN1	GX100 Honda OHC	2,000	120V 2,000W 16.7A	1,600W 13.3 A	N/A	59dB	1.1 gal.	9.6 hours	46.3lbs.
EU3000IHAN	GX160 Hond OHV	3,000	120V 3,000W 25A	2,600 W 21.7A	12V 100W 8.3A	65dB	1.56 gal.	7.7 hours	78lbs.
EU3000ISAN	GX200 Honda OHV	3,000	120V 3,000W 25.0A	2,800W 23.3 A	12V 144W 12A	58dB	3.4 gal.	20 hours	134lbs.
EU6500ISAN	GX390 Honda OHV	6,500	120/240V 6,500W 54.1/27.1A	5,500W 45.8/22.9A	N/A	60dB	4.5gal.	14 hours	253lbs.

HY-FLEX CORP

Spray Buddy

HF15
- Covers 1500 sq. ft./hr at 1/8" thickness
- Variable speed 0-2 gpm
- No seals or packings
- No power surge start-up
- Remote start/stop
- Auto Reversing Technology
- Tool tray





Hy-Flex Slinger
- DC motor for variable speeds
- 30 degree upward application to apply mortar to the under-neath surfaces
- 360 degree application
- Heavy duty electric winch with a 700 lb capacity
- Depths up to 35 ft.

For Sale or Rent! www.jobsitesupply.com

POWER TOOL EQUIPMENT

DIAMOND PRODUCTS™

M1 Complete Anchor Rig with 20amp Core Bore Motor #4245055



- 6" wheels for easy mobility
- Dual switch/outlet control panel with amp meter
- Vacuum pump for quick mounting to flat surface without drilling an anchor hole
- Anchor slot base

Diesel Liquid Cooled Walk Behind Saw CC6566D

- One-hand sawing control and parking brake
- Fits through a 36" wide door frame (when blade guard is removed)
- Interim tier 4 compliant
- Liquid cooled engine allows for a smoother running, longer lasting saw with higher productivity
- Less rear weight for easier maneuvering



Heavy Duty Orange

HOL: serves with M1 Core Rig gives excellent footage & drilling speed. Designed for all types of wet drilling in applications with light to moderate steel.



15525	1-1/2"
00004	2-1/2"
00005	3"
00006	3-1/2"
00007	4"
00009	5"
00010	6"
05183	8"

Heavy Duty Orange Dry Hole Saw

DH: Block & Soft Brick (not for use on concrete)
Very high quality diamond & longer coring life. 5/8 - 11 thread.



00031	3" Dry Hole Saw
00014	3-1/2" Dry Hole Saw
04764	1-1/2" Dry Hole Saw
00011	2" Dry Hole Saw
00012	2-1/2" Dry Hole Saw
04745	4" Dry Hole Saw
04764	6" Dry Hole Saw

07385	7" x 5/8 - 11 Cont Rim Diamond Cup Wheel
07442	7" x 5/8 - 11 Single Row Diamond Cup Wheel
07429	4" x 5/8" - 11 Standard Double Row Cup Grinder
07434	7" x 5/8" - 11 Standard Double Row Cup Grinder
07450	7" x 5/8" - 11 Standard Single Row Cup Grinder
27542	4" "V" Crack Blade 5/8" - 11 Arbor



Hoses & Accessories

PVC Discharge Hose



Designed for open end water discharge service.
Construction: Homogeneous PVC tube & cover, reinforced with 3-ply polyester yarn.
Temp range: 5-130 F
Bulk Coils: 300 ft.
Available in sizes up to 16" I.D.

DP300-50MF	3" Blue/PVC Discharge Hose & Ends
DPG200-50MF	2"x50' Discharge Hose/Screw

White Cloth Discharge Hose



General pupose lay-flat water discharge hose.
Construction: Black SBR rubber tube with white woven cover 100% polyester cover.
Bulk Lengths: 50 & 100 ft. through 3"

DM200-50MF	2x50 White Cloth Discharge Hose



Heavy Duty Solid Brass Ends

CWHO75-50MF	3/4 x 50 Rubber Water Hose
CWHO75-100MF	3/4 x 100 Rubber Water Hose

PVC Suction Hose

Standard duty PVC suction has has a smooth bore allowing full flow.
Construction: All PVC w/ an encapsulated rigid PVC helix for crush reistance & flexibilty.
Temp Range: 0-150 F



SP300MF	3' Green PVC Suction Hose
SP200	2x20" Green Suction Hose

Accessories



*Call for availibility

QCA200	Male 2" ZC End w/ Female Thread
MF200-F	2" Female Thread Suctin Coup
QCF200	Male 2" QC End w/ Male Thread
QCE200	Male 2" QC End w/ Shank
QCA300	Male 3" QC End w/ Female Thread
QCE300	Male 3" QC End w/ Shank
QCB200	Female 2" QC End w/ Male Thread
QCD200	Female 2" QC End w/ Female Thread
QCF300	Male 3" QC End w/ Male Thread
QCC200	Female 2" QC End w/ Shank
MF300-F	3" Female Thread Suction Coupl
QCC300	Female 3" QC End w/ Shank
QCB300	Female 3" QC End w/ Male Thread
QCD300	Female 3" QC End w/ Female Thread

HONDA
Power Equipment

Trash Water Pumps

WT20X

2 inch, 163cc 187 gal per minute Trash Water Pump



WB20X

2 inch, 118cc 152 gal per minute Centrifugal, Self-priming Water Pump



KOSHIN

2" Trash Pump

KTH50X

- 2"NPT Inlet & Outlet
- 5.5HP GX 160 Honda Engine
- 185 GPM - 26' Maximum Lift
- Special order



3/4" Submersible Electric Pump

NSM62511

- ¾" garden hose, or 1" hose
- 15 foot power cable
- Metal motor housing for cool running



www.jobsitesupply.com (317) 684-7474 624 S. Missouri St. Indianapolis, IN 46225

POWER TOOL EQUIPMENT

WACKER NEUSON

Oil-injected Vibratory Rammers
BS 70 2I



Shoe Size:
- 11" x 13" or 13" x 13"

Operating Weight:
- 164 lb

Percussion Weight:
- up to 700 blows/min

Internal Vibrator with Inverter
IRFU 57



Head Diameter
- 2.3 in

Hose Length
- 16.4 ft

Compaction Diameter
- 33.5 in

Centrifugal Trash Pump
PT 2A



Suction & Discharge Diameter
- 2 in

Operating Weight
- 96 lb

Max Discharge
- 210 gpm

Walk Behind Trowel
CT48-8A



Trowel Diameter
- 48"

Speed Range:
- 60-125 rpm

Horse Power
- 8mph

Ride on Trowel
CRT48-35V



Speed range: 25-165 rpm
Max rated power: 35 hp @ 3800 rpm

Submersible Pump 220V/60Hz
PS2-500



Discharge Diameter
- 2 in

Operating Weight
- 21 lb

Max Head
- 39.5 ft

Max Discharge
- 62.4 gal/min

Power
- 2/3 hp



An automatic float switch for single phase, 220 volt submersible pumps.

Mobile Generators



Electric External Vibrator
AR36/6/042



- Standard centrifugal force 391.2 lb.
- Variable vibrations up to 6000 rpm
- Operator-friendly clamping system

Vibratory Plate
6555 H



Operating Weight:
- 1049.4 lbs

Base Plate (W & L):
- 21.7" x 35.4"

Centrifugal Force:
- 14,612.6 lb

Plate Compactor with Wacker Engine
WP 1550

Lightweight, high strength aluminum components including the engine console and beltguard have been combined for reduced weight and easy machine handling.

Straight, center-mounted guide handle offers superior maneuverability and can be lowered within inches of the surface to operate plate under obstacles and form work.



Light Towers



For Sale or Rental!

www.jobsitesupply.com (317) 684-7474 624 S. Missouri St. Indianapolis, IN 46225

POWER TOOL EQUIPMENT

Mi-T-M CORPORATION

Performance Under Pressure.

Cold Water Pressure Washer



WP-3004-4MHB

3000PSI Cold Water Pressure Washer

External bypass system allows more water into the system to protect from heat build-up.

Lansas® PRODUCTS

Test Plugs & Testing Equipment



Lansas Products, manufactured by Vanderlans & Sons, Inc., offers a complete line of Inflatable & Mechanical Pipe Plugs used for testing pipe, blocking and bypassing flow. Our single sized and multi-sized sewer plugs are made from nylon cord re-enforced natural rubber. We also manufacture a complete line of Joint Testers, High Pressure Plugs, Air Testing Equipment (Smart Box and Smart Box JR.) and Manhole Vacuum Testing Equipment.

For Sale or Rental!

Lura ENTERPRISES, INC.









- Most versatile & efficient screed system available
- Offers all key components for success in flatwork concrete pour
- Lightning Strike system enables a variety of applications Including: pervious concrete, sloped, wide and circular pours
- Committed to customer satisfaction

MQ MULTIQUIP

Mortar Mixers



WM70P

7 Cubic Ft Poly Drum

- Capacity: 1-1/2 to 2-1/2 bags
- 8HP Honda engine
- Manual dump action

WM120SHH

12 Cu. Ft. Steel Drum with Coupler

- Capacity: 3-1/2 to 4 bags
- 11HP Honda engine
- Cast iron paddle arms

