Jolimark



TP850

Thermal Printer

High Speed & High Performance Thermal Receipt Printer

Easy Install Paper

中 GB18030-2000

80mm Rolled Paper

automatism cutter




Supermarkets



Restaurants



Lottery

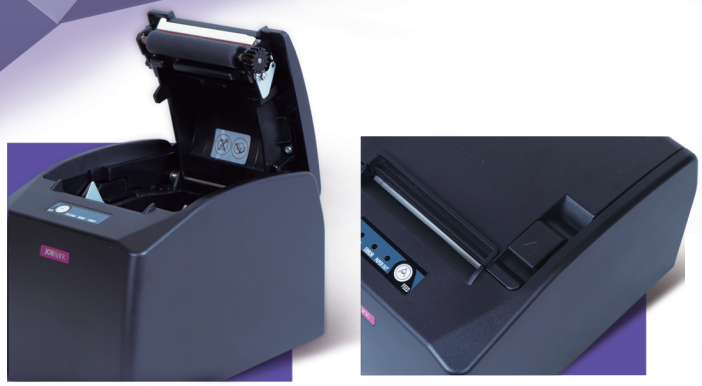

Tp850

High Speed & High Performance Thermal Receipt Printer

Item	Description	
Printing method	Thermal line printing	
Paper feed mode	Unidirectional with friction feed	
Paper eject direction	Eject from top	
Dot density	640 dots/line (203×203 DPI)	
Printing width	Max:80 mm, 640 dots	
Print speed	Max: 300 mm/s	
Paper feed speed	Max: 300 mm/s	
Line spacing	3.75 mm	
Print head life	150 Km, 1X10^8 pulse (Note: The instructions are all under the laboratorial measurements with specified paper.)	
Cutter life	1.5 million cut	
Paper specification	Thermal roll paper model	TF50KS-E (Japan paper co.ltd)
		AF50KS-E (JUJO THERMAL)
	Width: 79.5 ±0.5 mm; 57.5 ± 0.5 mm	
	Weight： 53 ～ 80 g/m2	
	Maximum diameter: Φ83 mm	
	Paper thickness: 0.065 ~ 0.12 mm	
	Note: The inner diameter of paper shaft is **Φ12** mm and the outer diameter of paper shaft is **Φ18** mm.	
Paper thickness	0.065 ~ 0.12 mm	
Character set	ASCII: 13 international character sets	
Interface	This printer can be equipped with the following interfaces: Parallel interface: Centronics USB interface: 2.0 Full-Speed USB interface (2.0 Full-Speed) + Serial interface (RS-232C, DB9) USB interface (2.0 Full-Speed) + Ethernet interface (10/100Base-T) USB interface (2.0 Full-Speed) + Serial interface(RS-232C, DB9) + Ethernet interface (10/100Base-T) Bluetooth interface Wi-Fi (802.11b/g/n) interface Serial+USB+Ethernet interface	
	Note: 1. Only one of the data interfaces is supplied when leaving the factory. 2. Please take the specific interface as standard.	
Cash drawer interface	RJ-11, 24V (DC)/1A	
Special function	Automatic cutter, Online parameter settings, Online software upgrade	
Input buffer	4 MB	
Control command	ESC/POS Emulation	
	Character printing command: Support ANK characters, user-defined characters and enlarge Chinese characters 1~8 times printing, can adjust character line spacing	
	Dot image printing command: Support different densities dot images and downloading image printing, can save NV bitmap without electricity (Can save LOGO for long)	
	Bar code	Linear bar code: UPC-A, UPC-E, EAN-13, EAN-8, CODE39, CODE128, ITF-25, CODABAR
		Two-dimension code: PDF417, QR CODE

Item		Description
Power Supply (AC adapter)	IN	Voltage: 100 ~ 240 V (AC)
		Frequency: 50Hz/60Hz
	OUT	Voltage: 24 V (DC)
		Current: 2.5 A
Power input	Parameters	Input voltage: 24 V (DC)
		Current: 2.5 A
		Warning: Please use the original AC adapter only. Manufacturers have no responsibilities for the problems which are led by using unauthorized AC adapter.
Environmental conditions	Operating environment	Temperature: 5 ~ 35℃
		Humidity: 25 ~ 80%RH (No condensation)
	Storage environment	Temperature: -40 ~ 55℃
		Humidity: ≤93%RH (No condensation)
Weight	Approx.1.45 kg	
Noise	< 38 dB (A) (ISO7779 standard)	
Physical dimensions	148 (width) × 207 (depth) × 135 (height)mm	
Power consumption	① Operating: 40 W; ② Standby: Approximately 3.5 W Note: Only when the product is unconnected with outer power supply, can it achieve zero energy consumption state.	
Code page	77 kinds	
Control panel	1 key and 3 LED indicators	
Paper type	Thermal roll paper	

0459-2003-AE-RGC-RvA DNV ISO14001 环境管理体系认证

ISO 9001:2008 FM53174 BSI ISO9001 质量管理体系认证

OHSAS 18001 职业健康安全管理体系认证

Jolimark

Address: Unit 01, 23A/F, K.Wah Centre, 191 Java Road, North Point, Hong Kong

Tel: (852) 25582457

Fax: (852) 28979610

Email: sales@kongyue.com.hk

Http://www.jolimark.com/en