

Continental
The Future in Motion







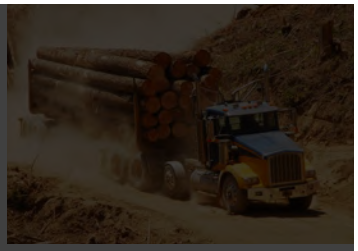

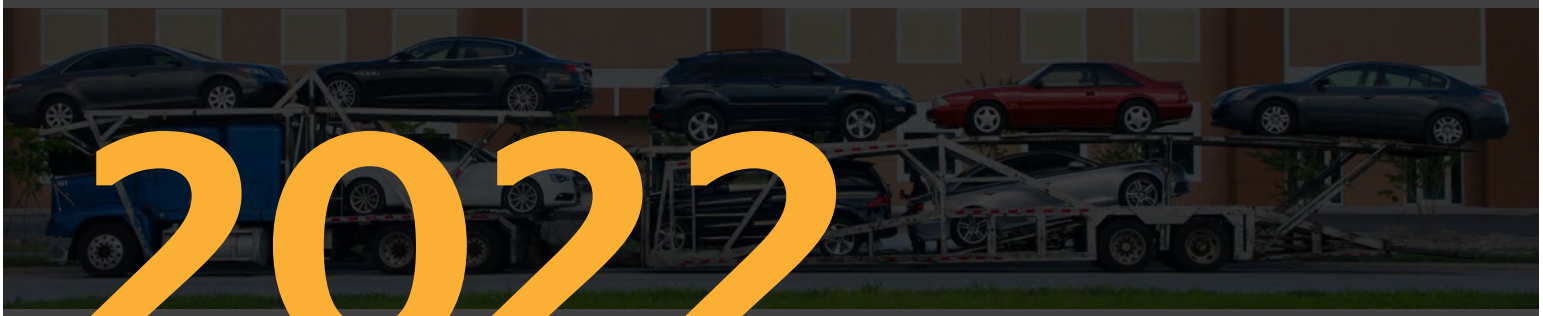

2022

Product Data Guide

Truck & Bus Tires

Innovative Tire Technology
Full Tire Life Cycle / ContiTread™
Digital Tire Monitoring Solutions

ContiLifeCycle™

2022 Product Data Guide

Truck and Bus Tires to fit your needs.

As an international partner to the transport and logistics industry, we know the markets as well as we know the roads around the world. And we also know that ultimately, cost effectiveness is what matters.

But just like roads, no two operations are the same. That's why we developed Continental Truck Tires – the ideal solution to deliver your **Lowest Overall Driving Cost.**

DELIVERING YOUR LOWEST OVERALL DRIVING COST. One of the largest automotive suppliers and tire manufacturers in the world, Continental develops pioneering technologies to make your fleet safer, more efficient, and more connected. With innovative tire technology and digital fleet solutions, Continental optimizes your tire management. Count on Continental to recommend the best tires and solutions for your specific fleet needs.

IMPORTANT NOTE:
Product details are subject to change. If the information you are looking for is not in this data guide, please visit www.continental-truck.com or contact your local sales representative for the most up to date information.

Table of Contents

**Available in ContiTread™*

OVERVIEW

Application Guide 04
Truck Tire Product Overview 06
Truck Tire Availability Chart 11
Truck Tire Comparison Chart 12
Vocation Reference Guide 13
ContiTread™ Product Overview 14
Retread Availability Chart 16
Retread Comparison Chart 19

PRODUCT DATA

LONG HAUL APPLICATION 20
Truck Tire Product Overview 21
Conti EcoPlus HS3+ 22
Conti Coach HA3 23
Conti HSL 3 24
Conti HDL 3 LTL* 25
HDL2+ 26
HDL2 27
HDL2 Eco Plus* 28
HDL2+ Eco Plus 29
HDL2 DL+* 30
HDL2 DL Eco Plus* 31
Conti EcoPlus HT3* 32
Conti HTL 3 33
HTL1* 34
HTL2 Eco Plus 35
ContiTread™ Retread Products 37
REGIONAL APPLICATION 43
Truck Tire Product Overview 44
Conti HSR 3* 46
HSR2 47
HSR2 Eco Plus 48
HSR2 SA 49
Conti LAR 3 50
HTR2* 51
LSR1* 52
HDR2+* 53
HDR2 Eco Plus* 54
Conti Hybrid HD3 55
HDR 56
HDW2* 57
Conti Hybrid HT3* 58
HTR2 (17.5") 59
Conti Hybrid HS3 (19.5") 60
HSR+ (19.5")* 61
Conti Hybrid HD3 (19.5") 62
HDR+ (19.5") 63
Conti Scandinavia HD3 (19.5") 64
Conti Hybrid HT3 (19.5") 65
ContiTread™ Retread Products 66
URBAN APPLICATION 72
Truck Tire Product Overview 73
Conti Urban HA3 74
Conti HAU 3 WT* 75
ContiTread™ Retread Products 76
CONSTRUCTION APPLICATION 78
Truck Tire Product Overview 79
Conti HSC 3* 80
Conti HAC 3 81
Conti HDC 3* 82
HDC1 HT* 83
HTC 84
ContiTread™ Retread Products 85
OFF-ROAD APPLICATION 87
Truck Tire Product Overview 88
HCS* 89
HDO 90
Conti Terra HD3 (19.5") 91
ContiTread™ Retreads 92

DIGITAL SOLUTIONS

ContiConnect® Yard Reader 93
Overview 94
ContiPressureCheck® 96
ContiConnect® Live 97

TABLES/CHARTS

Medium Truck Load/Inflation Tables 99
Load Limits at Various Speeds 103
Reading Tire Information 105
Definitions 108
Low Aspect Ratio Tires 109
Safety Warnings 110
Service Descriptions 113
Load Index Numbers 114
Tread Wear Conversion Table 115
Retread Casing Fitment Guide 116
Warranty Information 117

Conti Highlights

HorsePower Rewards Program 05
Conti 3G Casing 10
ContiLifeCycle™ Retread Stages 18
TrukFix Road Service Program 41
EPA SmartWay 42
Conti360° Fleet Services 77
ContiLink 118
Dealer Marketing Suite Page 119

Application Guide

	L **LONG HAUL** Our most fuel-efficient tires, designed for highway traffic over long distances with even wear. • Lowest fuel consumption • Maximum mileage performance • Comfortable ride	R **REGIONAL** Flexible tires offering good fuel efficiency on the highway, with excellent durability for off-highway driving. • Excellent wear resistance • Optimal traction on diverse roads • All-weather suitability	U **URBAN** Reinforced, durable tires that tackle the challenges of city traffic with ease. • High resistance to curb damage • Very high mileage • Handles rapid changes of city traffic	C **CONSTRUCTION** Take on the tough terrain of job sites and varied road conditions with these durable, high traction tires. • High mileage on the road • Maximum equipment up-times • Resists damage off the road	O **OFF-ROAD** Our most durable, highest traction tires that perform their best in extreme locations. • Maximum durability for toughest conditions • Great traction on the harshest terrain • High carrying capacity for heavy loads
STEER/ALL-POSITION		HSR+ 19.5"	Conti Urban HA3		
	Conti EcoPlus HS3+	HSR2	Conti HAU 3 WT		HCS
	Conti Coach HA3	HSR2 Eco Plus		Conti HSC 3	
		HSR2 SA		Conti HAC 3	
		Conti LAR 3			
		HTR2			
	Conti HSL 3				
		Conti Hybrid HS3 19.5"			
		LSR1			
		Conti HSR 3			
DRIVE POSITION	HDL2	HDR2+		Conti HDC 3	HDO
	HDL2+				
	HDL2 Eco Plus	HDR2 Eco Plus			Conti Terra HD3 19.5"
	HDL2 DL Eco Plus	HDW2		HDC1 HT	
	Conti HDL 3 LTL	HDR			
		HDR+ 19.5"			
	HDL2 DL+				
	Conti Hybrid HD3				
	HDL2+ Eco Plus				
		Conti Hybrid HD3 19.5"			
		Conti Scandinavia HD3 19.5"			
TRAILER POSITION	Conti EcoPlus HT3	HTR2 17.5"		HTC	
	Conti HTL 3				
	HTL1				
	HTL2 Eco Plus				
	Conti Hybrid HT3				
	Conti Hybrid HT3 19.5"				

Tires in the Steering axle position are also suitable for trailing axles on trucks and as all-position fitment where traction is not of paramount importance.

Continental
The Future in Motion

HorsePower UnTamed

Continental's Loyalty Rewards Program

HORSEPOWER untamed

Enroll today! Contact your Continental Representative to learn more!

Need a Representative? Call 1 (800) 450-4028

Some Sweet Rewards For You

Sell tires. Collect points. Earn rewards. Repeat. Choose from an extensive collection of name-brand apparel, cash gift cars and more.

We Value Your Loyalty

Sell a certain number of tiresand you will receive a gift and a recognition plaque. We appreciate your loyaltyand now allow us to return the favor.

Earning Points is Easy

Once enrolled, you'll have 45 days from the end of the month to submit tire sales. Simply login and use the Power Page to upload invoices and submit claims. Points will be instantly deposited into your account upon claim approval.

HorsePower Untamed is available by invitation only to a select group of individual salespeople selling to fleets and users directly. No wholesale or intercompany transfers are permitted in this program. No sales may be aggregated; but must be solely the reporting participant's sales. Any tax liability is the individual's responsibility. A valid individual W-9 tax form including your SSN (not a company tax ID) must be on file with Continental to redeem in the program. As well as TD1 form for Canadian participants. Aggregation of points over groups of salesman and/or tax information that is of a business nature will not be permitted. Owners and dealer principals are not eligible to participate in this program.

Legend:
3G Casing | SmartWay Verified | Intelligent Tire | Retread Available
PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

Steer/All-Position Product Overview


Conti EcoPlus HS3+


Conti Coach HA3


Conti HSL 3


Conti HSR 3


HSR2


HSR2 Eco Plus


HSR2 SA


Conti LAR 3


HTR2


LSR1


Conti Urban HA3


Conti HAU 3 WT


Conti HSC 3


Conti HAC 3


HCS

Legend:

3G Casing	SmartWay Verified	Intelligent Tire	Retread Available

PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

Drive Position Product Overview



Conti HDL 3 LTL



HDL2+



HDL2



HDL2 Eco Plus



HDL2+ Eco Plus



HDL2 DL+



HDL2 DL Eco Plus



HDR2+



HDR2 Eco Plus



Conti Hybrid HD3



HDR



HDW2



Conti HDC 3



HDC1 HT



HDO

Legend:
3G Casing | SmartWay Verified | Intelligent Tire | Retread Available
PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

Trailer Position Product Overview



Conti EcoPlus HT3



Conti HTL 3



HTL1



HTL2 Eco Plus



Conti Hybrid HT3



HTR2 (17.5")



HTC

Legend:

3G Casing	SmartWay Verified	Intelligent Tire	Retread Available

PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

19.5" Tires Product Overview



Conti Hybrid HS3



HSR+



Conti Hybrid HD3



HDR+



Conti Scandinavia HD3



Conti Hybrid HT3



Conti Terra HD3

Continental
The Future in Motion

3Gasing

A Next-Generation Solution for Easier Casing Management and Maximum Retreadability

Increased Belt Cord Angles

Belt features increased stiffness and improved penetration resistance. Innovative belt package designed to reduce heat and increase durability.

Increased Tread Volumes


Wider tread platform allows the casing to better support the tire's given load range. Tread features a wide cavity, with a standard retread width to provide a single platform for greater ease of retreading.

Technologically Advanced Bead Core

Core designed for structural durability and extended product life. Core is made from a tear-resistant compound at steel cord edges.




Heat Dissipating Polymers



Fuel Savings | **Increased Mileage** | **Improved Retreadability** | **Standardized Casing**

These Continental Tires are Built on the Innovative 3G Casing:

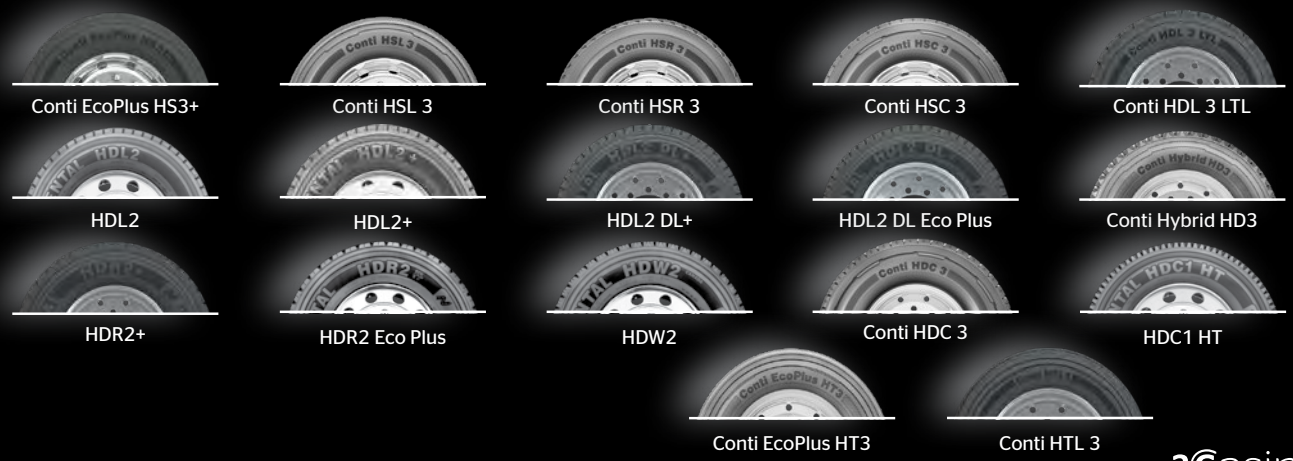

Continental Truck and Bus Tires | www.continental-truck.com

3Gasing

Tire Availability Chart

Medium Radial Truck Tires

TIRES & SIZES Load Range & Tread Depth (32nds)		CONVENTIONAL										LOW PROFILE																SUPER SINGLE			
		LT215/75R16	LT225/75R16	LT235/85R16	LT245/75R16	10R22.5	11R22.5	12R22.5	325/95R24 (tube type)	11R24.5	12R24.5	10R17.5	215/75R17.5	235/75R17.5	245/70R17.5	225/70R19.5	245/70R19.5	265/70R19.5	285/70R19.5	255/70R22.5	275/70R22.5	275/80R22.5	295/60R22.5	295/75R22.5	295/80R22.5	305/70R22.5	315/80R22.5	285/75R24.5	385/65R22.5	425/65R22.5	445/50R22.5	445/65R22.5
STEER/ALL-POSITION	Conti EcoPlus HS3+						G/H-19			H-19														G/H-19				H-19				
	Conti EcoPlus HS3																						J-15									
	Conti Coach HA3																										L-17					
	Conti HSL 3						G/H-20																	G/H-20								
	Conti HSR 3						G/H-23	H-23		H-23														G/H-23				H-23				
	HSR2					G-20	G/H-23	H-23		H-23												H-23						H-23				
	HSR2 Eco Plus																					H-23										
	HSR2 SA																			H-18	J-18						L-19					
	Conti LAR 3	E-14	E-14	E-14	E-14																											
	HTR2																											L-21	L-22			
	LSR1											H-17																				
	Conti Urban HA3																									L-23						
	Conti HAU 3 WT																										L-26					
	Conti HSC 3						H-24	H-24		H-24	H-24																L-24					
	Conti HAC 3																											L-22	L-24		M-23	
	HCS								J-40																						L-27	
DRIVE	Conti HDL 3 LTL						G-24			H-24														G-24								
	HDL2+																							G/H-26								
	HDL2						G/H-26			G-26																						
	HDL2 Eco Plus																														L-27	
	HDL2+ Eco Plus																						J-24									
	HDL2 DL+						G/H-32			H-32														G-32				G-32				
	HDL2 DL Eco Plus						G-32																	G-32								
	HDR2+					G-24	G/H-30	H-30		H-30														G/H-30			L-28	G-30				
	HDR2 Eco Plus						G-30																	G-30								
	Conti Hybrid HD3						G/H-27			H-27											H-22			G-27								
	HDR																			H-26												
	HDW2						H-27			H-27																	L-27					
	Conti HDC 3						H-30			H-30																						
	HDC1 HT						H-32			H-32																						
	HDO						H-32																									
TRAILER	Conti EcoPlus HT3						G/H-13			G/H-13										H-18				G-13				G-13				
	Conti HTL 3						G-13			G-13														G-13								
	HTL1																														L-13	
	HTL2 Eco Plus												J-15	J-13	J-13																	
	Conti Hybrid HT3						G/H-16			G/H-16														G/H-16				G/H-16				
	HTR2 17.5"												H-16	H-16																		
	HTC																				J-21											
19.5" TIRES	Conti Hybrid HS3															G-16	G/H-16	G-17	H-18													
	HSR+															G/H-16																
	Conti Hybrid HD3															G-18	G/H-19	G-20	H-20													
	HDR+															G/H-18																
	Conti Scandinavia HD3															G-19	H-21															
	Conti Hybrid HT3																	H-17	J-18													
	Conti Terra HD3															G-19	H-19															

All tires are tubeless except where noted.

LOAD RANGE	A	B	C	D	E	F	G	H	J	L	M	N
PLY RATING	2	4	6	8	10	12	14	16	18	20	22	24

Truck Tire Comparison Chart

	CONTINENTAL	MICHELIN	BRIDGESTONE	GOODYEAR
STEER/ALL-POSITION	Conti EcoPlus HS3+	X Line Energy Z2	R284 Ecopia	Marathon LHS
	Conti EcoPlus HS3 (295/60R22.5)	X Line Energy Z2	-	Marathon LHS II
	Conti Coach HA3	X Line Energy Z Coach	-	G670 RV MRT
	Conti HSL 3	X Multi Energy Z2	R283S Ecopia	Fuel Max RSA
	Conti HSR 3	XZE2	R250ED	Endurance RSA
	HSR2	XZE2	R250ED	Endurance RSA
	HSR2 Eco Plus	-	R268 Ecopia	G662 RSA Fuel Max
	HSR2 SA	XZE2+, X Multiway XZE	R250 ED	G670 RV MRT
	Conti LAR 3	XPS RIB	Duravis R250	G947 RSS Armor Max
	HTR2	XFE	R244	-
	LSR1	XZA	-	G114 LHT
	Conti Urban HA3	X InCity Z	-	-
	Conti HAU 3 WT	XZUS2	M870	Endurance WHA
	Conti HSC 3	X Works Z	M799	G751 MSA
	Conti HAC 3	XZY3	M864	G296 MSA
	HCS	XZL, XZL+	L315	G278 MSD
DRIVE POSITION	Conti HDL 3 LTL	X Multi Energy D	-	G572 1AD Fuel Max
	HDL2+	X Line Energy D+	M713 Ecopia	Marathon LHD
	HDL2	X Line Energy D+	M713 Ecopia	Marathon LHD
	HDL2 Eco Plus	X-One Line Energy D2	Greatec M835A Ecopia	Fuel Max SSD
	HDL2+ Eco Plus	X Multi D 295	M749	-
	HDL2 DL+	XDA5+	-	-
	HDL2 DL Eco Plus	-	M726 ELA	Endurance LHD
	HDR2+	X Multi D	M770	G182 RSD
	HDR2 Eco Plus	-	-	Fuel Max RTD
	Conti Hybrid HD3	XDN2	M760 Ecopia	UltraGrip RTD
	HDR	XD2	M726	G622 RSD
	HDW2	XDS2	W919	-
	Conti HDC 3	X Works D	L320	Armor Max Pro Grade MSD
	HDC1 HT	X Works Grip D	M775	Workhorse MSD
	HDO	XDY-EX2	L317	G741 MSD
TRAILER	Conti EcoPlus HT3	X Line Energy T2	R123 Ecopia	Fuel Max LHT
	Conti HTL 3	X Line Energy T2	-	G316 LHT
	HTL1	X One Line Energy T	Greatec R197 Ecopia	Fuel Max SST
	HTL2 Eco Plus	XTA2 Energy	R184	G114 LHT
	Conti Hybrid HT3	XTE	R196A, R250F	G619 RST
	HTR2 (17.5")	X Multi T	R184	G114 LHT
	HTC	-	M840	G731 MSA
19.5" TIRES	Conti Hybrid HS3	XZE	R238	Fuel Max RSA ULT
	HSR+	XZE	R250F	G647 RSS
	Conti Hybrid HD3	X Multi D, XDE 2+	M704	Fuel Max RTD ULT
	HDR+	XDS 2	M704	G622 RSD ULT
	Conti Scandinavia HD3	XDS 2	M729F	-
	Conti Hybrid HT3	X Line Energy T	-	G159A
	Conti Terra HD3	-	-	-

Products by Vocation

	SEGMENT / VOCATION		STEER/ALL-POSITION	DRIVE POSITION	TRAILER POSITION
GOODS	Car Carriers	L R	Conti EcoPlus HS3	HDL2+ Eco Plus	Conti Hybrid HT3
	General Freight (Long Haul)	L	Conti EcoPlus HS3+	Conti HDL 3 LTL, HDL2+, HDL2, HDL2 DL+, HDL2 DL Eco Plus, HDL2 Eco Plus	Conti EcoPlus HT3, HTL1, Conti HTL 3
	General Freight (Regional Haul)	R	HSR2, Conti HSR 3, Conti HSL 3	Conti HDL 3 LTL, HDR2+, HDR2 Eco Plus, HDL2 DL+	Conti Hybrid HT3, Conti EcoPlus HT3, Conti HTL 3
	Local Pickup & Delivery Vehicles	R	HSR+, HSR2, Conti HSR 3	HDR+, HDR2+, HDL2 DL+	Conti EcoPlus HT3, Conti Hybrid HT3, Conti HTL 3
	Lease & Rental Vehicles	L R	Conti EcoPlus HS3+, Conti HSL 3, HSR2, Conti HSR 3	HDR2 EcoPlus, HSR2 EcoPlus, HDL2 DL+, HDL2+, HDL2, HDL2 Eco Plus	Conti Hybrid HT3, Conti EcoPlus HT3, HTL1, Conti HTL 3
	Refrigerated Trucks	L R	Conti EcoPlus HS3+, Conti HSL 3, HSR2	HDL2+, HDL2, HDL2 DL+, HDL2 DL Eco Plus, HDL2 Eco Plus	Conti EcoPlus HT3, Conti HTL 3
	Beverage Haulers	R	HSR2, Conti HSR 3, Conti HSL 3	HDR2+, HDR2 Eco Plus, HDL2 DL+	Conti Hybrid HT3
	Household Movers	L R	Conti EcoPlus HS3+, Conti HSL 3, HSR2	HDL2+, HDL2, HDL2 DL+, HDL2 DL Eco Plus	Conti EcoPlus HT3, Conti Hybrid HT3, HTL2 Eco Plus, HTR2, Conti HTL 3
	Tankers / Liquid Bulk Haulers	R	Conti EcoPlus HS3+, Conti HSL 3, Conti HSR 3, HSR2	HDL2+, HDL2, HDL2 Eco Plus, HDL2 DL+	HSR2, Conti HSR 3, Conti EcoPlus HT3, HTL1, Conti HTL 3
	Hazardous Material Haulers	R	Conti EcoPlus HS3+, Conti HSL 3, Conti HSR 3, HSR2	HDL2+, HDL2, HDL2 Eco Plus, HDL2 DL+	HSR2, Conti HSR 3, Conti EcoPlus HT3, HTL1, Conti HTL 3
PEOPLE	Motor Coaches	L R	Conti Coach HA3, HSR2 SA	Conti Coach HA3, HSR2 SA	-
	School Buses	R U	HSR2, Conti HSR 3	HDR2+	-
	City Buses	U R	Conti Urban HA3	Conti Urban HA3	-
	RVs	L R	Conti Coach HA3, HSR2 SA, Conti HSL 3	Conti Coach HA3, HSR2 SA	-
CONSTRUCTION	Construction Material Transport Vehicles	R C	HSR2, Conti HSR 3, Conti HSC 3, Conti HAC 3, HTR2	HDR2+, Conti HDC 3, Conti HSC 3	HSR2, Conti HSR 3, Conti HSC 3
	Utility Vehicles	R C	HSR2, Conti HSR 3, Conti HSC 3, HSR+, Conti HSL 3	HDR2+, Conti HAC 3, HTR2, HDR+	HTR2, HSR2, Conti HSR 3
	Emergency Vehicles	R C	HTR2, Conti HSC 3, HSR2, Conti HSR 3, HSR+, Conti HSL 3, HSR2 SA	HDR2, HDW2	-
	Waste & Sanitation Vehicles	U C	Conti HAU 3 WT, Conti HSC 3	Conti HAU 3 WT, Conti HDC 3, HDR2+	Conti HSC 3
	Agriculture, Feed & Livestock Transport Vehicles	C	HSR2, Conti HSR 3, Conti HSC 3	HDR2+, Conti HDC 3,Conti HSC 3	HSR2, Conti HSR 3, Conti HSC 3
	Forestry & Lumber Vehicles	C	Conti HSC 3, HSR2, Conti HSR 3	HDC1 HT, HDO	Conti HSC 3, HSR2, Conti HSR 3
	Mining / Quarry Vehicles	O	HCS, Conti HSC 3, Conti HAC 3	Conti HDC 3, HDC1 HT,HCS, Conti Terra HD3	Conti HAC 3, Conti HSC 3, HSR2, Conti HSR 3
	Heavy Haul & Special Load Transport Vehicles	C	Conti HSL 3, Conti EcoPlus HS3+, HSR2	HDL2+, HDL2, HDL2 DL, HDR2+	Conti EcoPlus HT3, HTR2
	Cement Vehicles	C	Conti HAC 3, HTR2, Conti HSC 3, HCS	Conti HDC 3, HDC1 HT, HDR2+	HTC, Conti HSC 3

Application Key:


LONG HAUL	REGIONAL	URBAN	CONSTRUCTION	OFF-ROAD

PLEASE NOTE: The tires depicted in this chart are suggested as the primary products for each segment and are subject to change depending on application. Not every product in the Continental portfolio is represented. For more information, please visit www.continental-truck.com or contact your local sales representative for the most up to date information.

Legend:
SmartWay Verified
New Tire Available

ContiTread™ Product Overview


All-Position



HSR 3


HSR - 18/32"



HSR - 16/32"


HSR1


LSR1


HAU 3 WT


HSC 3


HSC - 18/32"


HCS

Drive Position


HDL 3 LTL-R


HDL2 DL


HDL2 DL Eco Plus


HDL


HDL Eco Plus


HDL2 Eco Plus


HDR2


HDR2 Eco Plus


HDR1


HDR1 Eco Plus

Legend:
SmartWay Verified | New Tire Available

ContiTread™ Product Overview

Drive Position (Continued)



Scandinavia HD3




HDW2



HDU 3 WT



HDC 3



HDC1 HT


Trailer Position



EcoPlus HT3



HTL



HTL1



Hybrid HT3



HTR2 SA



HTR2



HTC1

ContiTread™
Retread Availability Chart

	TREAD (MM)	160	170	180	185	188	190	195	200	205	210	215	220	225	230	235	240
ALL-POSITION	HSR 3						20/32"		20/32"		20/32"		20/32"		20/32"		20/32"
	HSR - 18							18/32"				18/32"		18/32"		18/32"	
	HSR - 16			16/32"				16/32"									
	HSR1									16/32"		16/32"		16/32"		16/32"	
	LSR1	15/32"		15/32"		15/32"		15/32"		15/32"							
	HAU 3 WT										26/32"		26/32"		26/32"		26/32"
	HSC 3										24/32"		24/32"		24/32"		24/32"
	HSC											18/32"		18/32"		18/32"	
	HCS											32/32"		32/32"		32/32"	
DRIVE POSITION	HDL 3 LTL-R										22/32"		22/32"		22/32"		22/32"
	HDL2 DL											28/32"		28/32"		28/32"	
	HDL2 DL Eco Plus											28/32"		28/32"		28/32"	
	HDL - 26											26/32"		26/32"		26/32"	
	HDL - 20											20/32"		20/32"		20/32"	
	HDL - 13								13/32"			13/32"		13/32"		13/32"	
	HDL Eco Plus - 26											26/32"		26/32"		26/32"	
	HDL Eco Plus - 20											20/32"		20/32"		20/32"	
	HDL2 Eco Plus																
	HDR2 - 22				22/32"			22/32"									
	HDR2 - 26									26/32"		26/32"		26/32"		26/32"	
	HDR2 Eco Plus											26/32"		26/32"		26/32"	
	HDR1 - 16	16/32"	16/32"	16/32"			16/32"		16/32"			16/32"					
	HDR1 - 20						20/32"		20/32"								
	HDR1 - 22									22/32"		22/32"		22/32"		22/32"	
	HDR1 - 26											26/32"		26/32"		26/32"	
	HDR1 Eco Plus											22/32"		22/32"		22/32"	
	Scandinavia HD3										25/32"		25/32"		25/32"		25/32"
	HDW2											27/32"		27/32"		27/32"	
	HDU 3 WT										32/32"		32/32"		32/32"		32/32"
	HDC 3										28/32"		28/32"		28/32"		28/32"
	HDC1 HT													32/32"		32/32"	
TRAILER POSITION	EcoPlus HT3											13/32"		13/32"		13/32"	
	HTL								13/32"		13/32"		13/32"		13/32"		13/32"
	HTL1																
	Hybrid HT3								16/32"		16/32"		16/32"		16/32"		
	HTR2 SA																16/32"
	HTR2																
	HTC1																

ContiTread™
Retread Availability Chart (Continued)

	TREAD (MM)	245	250	255	260	270	280	290	320	340	350	360	380	390	400	410
ALL-POSITION	HSR 3															
	HSR - 18	18/32"			18/32"											
	HSR - 16															
	HSR1															
	LSR1															
	HAU 3 WT		26/32"		26/32"	26/32"	26/32"									
	HSC 3															
	HSC	18/32"		18/32"												
	HCS	32/32"										32/32"	32/32"			
DRIVE POSITION	HDL 3 LTL-R															
	HDL2 DL	28/32"														
	HDL2 DL Eco Plus	28/32"														
	HDL - 26	26/32"														
	HDL - 20	20/32"														
	HDL - 13															
	HDL Eco Plus - 26	26/32"														
	HDL Eco Plus - 20	20/32"														
	HDL2 Eco Plus													24/32"	24/32"	
	HDR2 - 22															
	HDR2 - 26	26/32"														
	HDR2 Eco Plus	26/32"														
	HDR1 - 16															
	HDR1 - 20															
	HDR1 - 22	22/32"														
	HDR1 - 26	26/32"														
	HDR1 Eco Plus	22/32"														
	Scandinavia HD3															
	HDW2	27/32"			27/32"											
	HDU 3 WT		32/32"		32/32"	32/32"	32/32"									
	HDC 3		28/32"													
	HDC1 HT	32/32"														
TRAILER POSITION	EcoPlus HT3	13/32"														
	HTL															
	HTL1													13/32"	13/32"	13/32"
	Hybrid HT3															
	HTR2 SA		16/32"		16/32"	16/32"										
	HTR2							22/32"	22/32"	22/32"						
	HTC1								24/32"		24/32"		23/32"			

Continental
The Future in Motion

ContiLifeCycle™ Retread Stages

Technology Driven for High-Quality Retreading



1 Inspection & Shearography
Thorough initial casing inspection using state-of-the-art technology.

2 Buffing
Precise buff contours and consistent under-tread thickness by computer controlled buffing.

3 Skiving & Repairs
Professional casing skiving and repairs, conducted by Continental trained operators.

4 Tread Building
Optimum casing fitting, ensured by laser guided tread application.

5 Enveloping
Our modern enveloping technology enables an optimum curing process.

6 Curing
Ideal retread curing with precisely controlled time, temperature, vacuum and pressure.

7 Final Inspection
Detailed final inspection, ending with high pressure testing.


8 Process Control
Constant process and quality optimization by our globally connected retread specialists.

To learn more, contact your Continental representative today!

ContiTread™
Retread Comparison Chart

	ContiTread™	BANDAG	MICHELIN	GOODYEAR
ALL-POSITION	HSR 3	BDV	XZE2	G661 HSA
	HSR - 18	Ultra All Position	XZE	G661 HSA
	HSR - 16	FCR Rib	XZE	G661 HSA
	HSR1	FCR Rib	XZA	G647 RSA
	LSR1	FCR Rib	XZA	G159
	HAU 3 WT	BRM, BRM3	XZUS	G686
	HSC 3	BRM, BRX2	XZY3	G287 MSA
	HSC	BRX	XZY	G287 MSA
	HCS	BDY2	XZL, XZH	G177 Modified
DRIVE POSITION	HDL 3 LTL-R	B760	X Multi Energy D	-
	HDL2 DL	MegaTrek	XDA HT	G328
	HDL2 DL Eco Plus	HT5 FuelTech	XDA2, X Line Energy D	G572 LHD Fuel Max
	HDL - 26	Ultra Drive	XDHT	G362
	HDL - 20	FCR Drive, DR 5.3	XDHT	G362
	HDL - 13	BTT2	XDC LL	G362
	HDL Eco Plus - 26	B710 Fuel Tech	X Line Energy D	G572 LHD Fuel Max
	HDL Eco Plus - 20	FCR Drive	XDA 2 AT	Fuel Max LHD G505D
	HDL2 Eco Plus	B835 FuelTech	X One Line Energy D	G392 SSD Fuel Max
	HDR2 - 22	BDR-AS	MD XDN2	G167
	HDR2 - 26	Ultra Drive, BDR-HT3	XD4, XDN2	G282 MSD
	HDR2 Eco Plus	-	-	G682 RSD Fuel Max
	HDR1 - 16	BDLT	XDE M/S	G622 LT
	HDR1 - 20	BDL	XDE M/S	G622
	HDR1 - 22	BDR-AS	XDE M/S, XDC	G622
	HDR1 - 26	Ultra Drive	XDN2	G338
	HDR1 Eco Plus	BDR-AS	-	G622
	Scandinavia HD3	-	XDS2	-
	HDW2	BDR-W	XDS2	G622 RSD
	HDU 3 WT	BDM3	XDUS	-
	HDC 3	BDX	XDY, XDY-1	G677 MSD
	HDC1 HT	BDY2	XDY-EX	G741 MSD
TRAILER POSITION	Conti EcoPlus HT3	B197 FuelTech, FCR T2	X Line Energy T, XT-1 AT	G316 AT Fuel Max
	HTL	BTL, TR 4.1	XTA-1	G314
	HTL1	B135 FuelTech	X One Line Energy T	G394 SST Fuel Max
	Hybrid HT3	BTL-SA	XTY SA, XTA	G619 RST
	HTR2 SA	BTL-SA, ECL ST	XTE2 Wide Base	G619 RST
	HTR2	-	XZA Wide Base	G296 MSA
	HTC1	BRM-WB	XZY Wide Base	G296 MSA

Continental
The Future in Motion

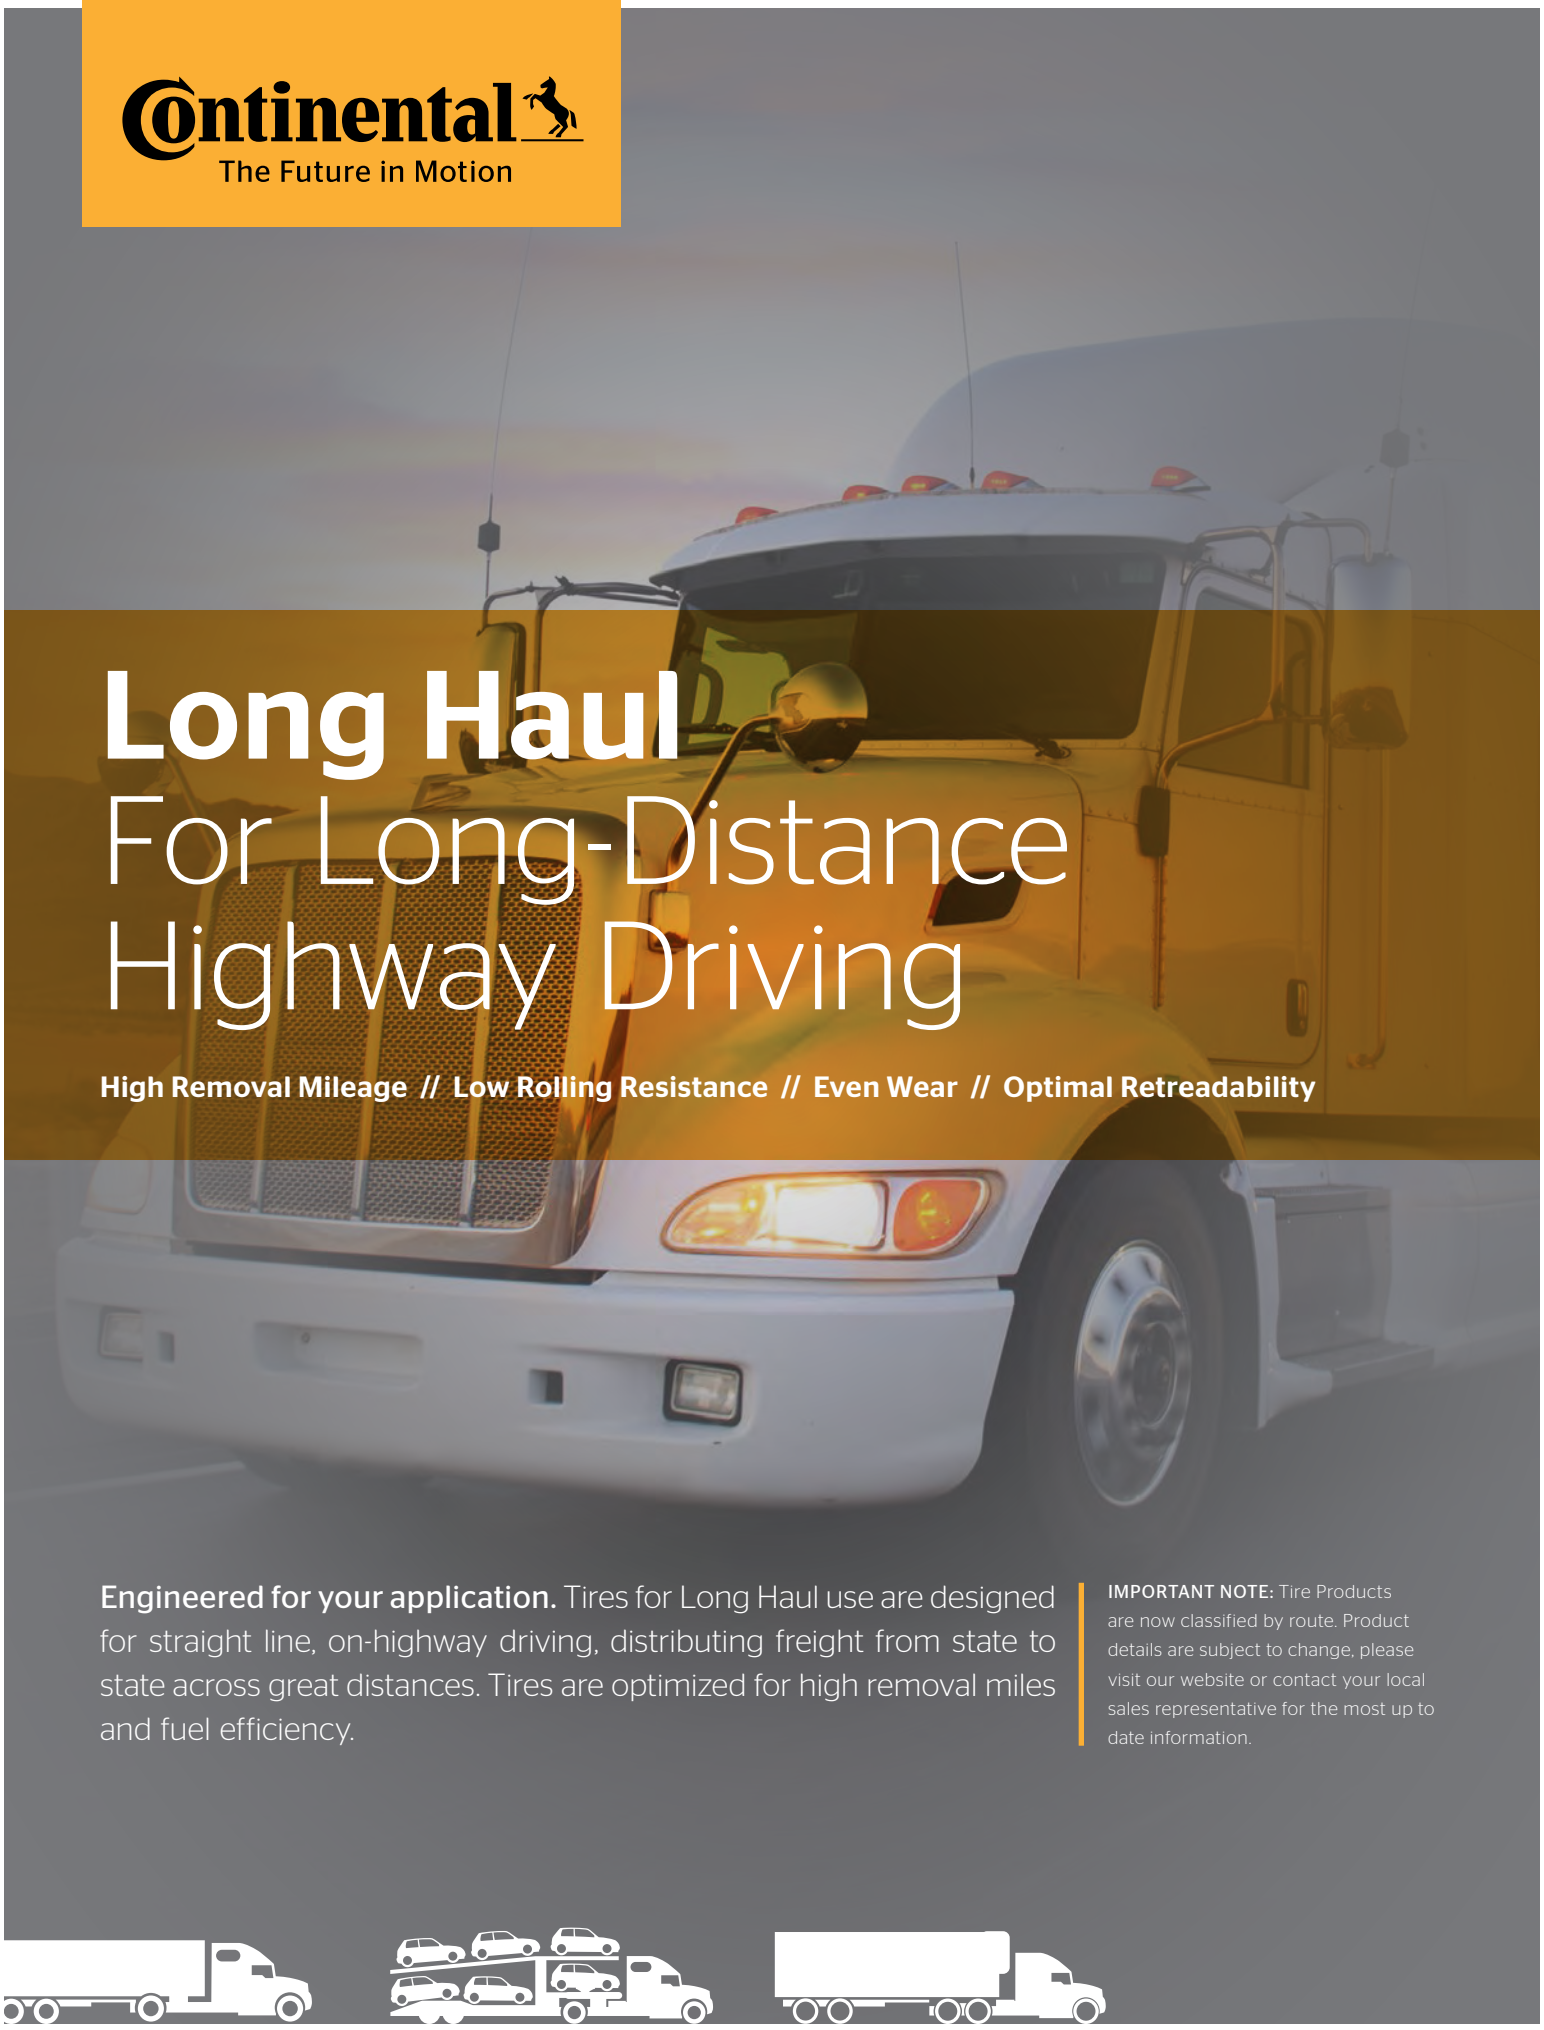

Long Haul
For Long-Distance Highway Driving

High Removal Mileage // Low Rolling Resistance // Even Wear // Optimal Retreadability

Engineered for your application. Tires for Long Haul use are designed for straight line, on-highway driving, distributing freight from state to state across great distances. Tires are optimized for high removal miles and fuel efficiency.

IMPORTANT NOTE: Tire Products are now classified by route. Product details are subject to change, please visit our website or contact your local sales representative for the most up to date information.

Legend:

3G Casing	SmartWay Verified	Intelligent Tire	Retread Available

PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

Long Haul

Truck Tire Product Overview



Conti EcoPlus HS3+



Conti Coach HA3



Conti HSL 3



Conti HDL 3 LTL



HDL2+



HDL2



HDL2 Eco Plus



HDL2+ Eco Plus



HDL2 DL+



HDL2 DL Eco Plus



Conti EcoPlus HT3



Conti HTL 3



HTL1



HTL2 Eco Plus

Legend:
3G Casing | SmartWay Verified | Intelligent Tire | Retread Available
PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

Conti EcoPlus HS3+

Fuel-Efficient, Long Haul Steer

✔ GOODS ● PEOPLE ● CONSTRUCTION








PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
11R22.5	G	05126130000 ⟪05653300000⟫	19	75	19.5	495	41.8	1062	11.7	296	13.1	331	8.25, 7.50	12.5	318	495	308	119	54	6175, 105 (2800, 720)	5840, 105 (2650, 720)
11R22.5	H	05126140000 ⟪05653310000⟫	19	75	19.5	495	41.8	1062	11.7	296	13.1	331	8.25, 7.50	12.5	318	495	308	121	55	6610, 120 (3000, 830)	6005, 120 (2725, 830)
295/60R22.5* (Tread B)	J	05111670000 ⟪05652270000⟫	15	75	17.1	434	37.0	940	11.5	292	12.0	304	9.00, 9.75	12.9	329	574	356	110	50	7390, 130 (3350, 900)	6780, 130 (3075, 900)
295/75R22.5	G	05126150000 ⟪05653320000⟫	19	75	18.7	475	39.9	1013	11.4	290	12.3	312	8.25, 9.00	12.5	318	519	322	114	52	6175, 110 (2800, 760)	5675, 110 (2575, 760)
295/75R22.5	H	05126160000 ⟪05653330000⟫	19	75	18.7	475	39.9	1013	11.4	290	12.3	312	8.25, 9.00	12.5	318	519	322	117	53	7160, 123 (3250, 850)	6610, 123 (3000, 850)
11R24.5	H	05126170000 ⟪05653340000⟫	19	75	20.4	518	43.8	1113	11.7	297	13.1	333	8.25, 7.50	12.5	318	473	294	130	59	7160, 120 (3250, 830)	6610, 120 (3000, 830)
285/75R24.5	H	05126180000 ⟪05653350000⟫	19	75	19.3	490	41.5	1054	11.4	289	12.9	328	8.25	12.5	318	499	310	122	55	6780, 120 (3075, 830)	6175, 120 (2800, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. ⟪ ⟫ = Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. * - ECE Certified. 295/60R22.5 size designated for car carrier application. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.


Features & Benefits

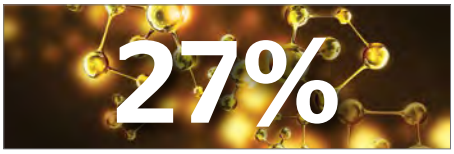


Conti EcoPlus HS3+ has a **27% improvement in removal mileage with even wear** over its predecessor, Conti EcoPlus HS3.



10% improvement in de-coupler durability, an essential benefit for products in the steer/all-position category to extend tire life.

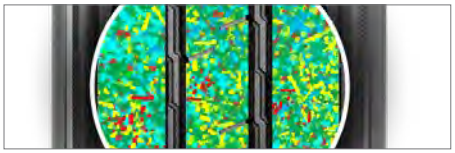

Technologically advanced cap/base compounds provide improved cut and tear resistance for increased mileage.

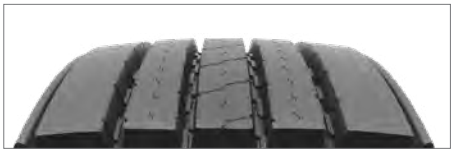

Tread profile reduces sensitivity to road surface, fleet, and vehicle variations allowing for improved performance throughout tire life.



Improved footprint shape delivers significant wear improvements for increased removal miles.



Built on the innovative **Conti 3G Casing** for maximum retreadability.


Applications: Long Haul

Conti Coach HA3

Intelligent All-Position Long Haul Coach

GOODS ✔ PEOPLE CONSTRUCTION



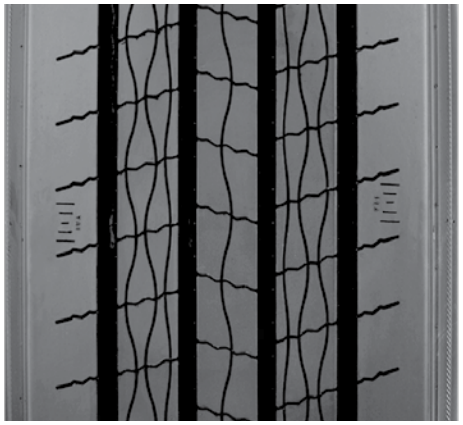

PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
315/80R22.5 *	L	⟪ 05651710000 ⟫	17	75	19.7	501	42.4	1077	12.4	315	13.6	345	9.00, 8.25	13.8	351	488	303	148	67	9090, 130 (4125, 900)	8270, 130 (3750, 900)
TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS																					

Note - Rim listed first is the measuring rim. ⟪ ⟫ = Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. 315/80R22.5 tires used on 8.25" rims are restricted to a maximum of 7610 lbs at 120 psi. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.


Features & Benefits




Extra load-carrying capacity with a specially reinforced **Stable Bead Technology**.



Durable casing for premium retreadability and enhanced mileage.




Noise-Reducing Tread Design for serene and comfortable travel.



A lifetime of all-weather traction with **interlocking 3D sipes**.

sensor CONNECT | Continental's Intelligent Tire



Equipped with TPMS Sensor for accurate, real-time tire pressure and temperature readings • Sensor warrantied for 5 Years to minimize disruptions. • Sensor provides true casing temperature allowing preventive actions that make your tire last longer • Avoids valve damage and air leaks by mounting on the inner liner.

Learn more at www.continental-truck.com to learn more. See warranty policy for details.



Applications: Long haul, over the highway steering and all-position use, for coach and large RV use.


Legend:
3G Casing | SmartWay Verified | Intelligent Tire | Retread Available
PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

Conti HSL 3

Fuel-Efficient, Super Regional Steer

GOODS ● PEOPLE ● CONSTRUCTION



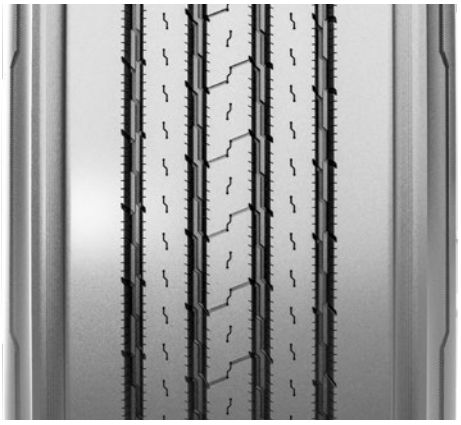

PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
11R22.5	G	05111560000 ◊◊05652650000◊◊	20	75	19.5	495	41.6	1056	11.7	297	13.1	331	8.25, 7.50	12.5	318	498	309	117	53	6175, 105 (2800, 720)	5840, 105 (2650, 720)
11R22.5	H	05111570000 ◊◊05652660000◊◊	20	75	19.5	495	41.6	1056	11.7	297	13.1	331	8.25, 7.50	12.5	318	498	309	120	54	6610, 120 (3000, 830)	6005, 120 (2725, 830)
295/75R22.5	G	05111580000 ◊◊05652670000◊◊	20	75	18.7	474	40.0	1017	11.5	292	12.3	313	8.25, 9.00	12.5	318	517	321	111	50	6175, 110 (2800, 760)	5675, 110 (2575, 760)
295/75R22.5	H	05111590000 ◊◊05652680000◊◊	20	75	18.7	474	40.0	1017	11.5	292	12.3	313	8.25, 9.00	12.5	318	517	321	114	52	7160, 120 (3250, 830)	6610, 120 (3000, 830)


PLEASE NOTE: THIS PRODUCT WAS PREVIOUSLY NAMED CONTI HYBRID HS3.
TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. ◊◊ = Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits



Increased stiffness in the **belt package** promotes smooth, even tread wear.



Advanced tread compounding delivers long removal mileage and low rolling resistance.



Fuel Saving Edge technology designed to increase fuel efficiency and application flexibility.



Built on the **Conti 3G Casing** for maximum retreadability.

Applications: Over the road super regional steer and all position use.

Legend:

3G Casing | SmartWay Verified | Intelligent Tire | Retread Available

PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

Conti HDL 3 LTL

Long Haul, Single Axle Drive

✓ GOODS ● PEOPLE ● CONSTRUCTION





PRODUCT DATA


TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED ((MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	SINGLE LBS, PSI (KG, KPa)	DUAL LBS, PSI (KG, KPa)
11R22.5	G	05211540000))) 05653260000)))	24	75	19.7	500	41.1	1061	11.6	294	12.6	320	8.25, 7.50	12.5	318	495	308	128	58	6175, 105 (2800, 720)	5840, 105 (2650, 720)
295/75R22.5	G	05211550000))) 05653210000)))	24	75	19.4	491	40.4	1025	11.7	297	12.7	322	8.25, 9.00	12.5	318	513	319	119	54	6175, 110 (2800, 760)	5675, 110 (2575, 760)
11R24.5	H	05211560000))) 05653270000)))	24	75	20.6	524	43.8	1112	11.6	295	12.7	322	8.25, 7.50	12.5	318	473	294	139	63	7160, 120 (3250, 830)	6610, 120 (3000, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim.))) = Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits

3-D matrix sipes provide **superior traction and even wear.**

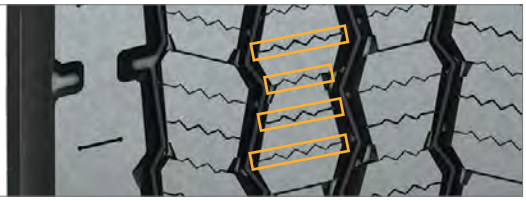



Maximum stone ejection due to superior groove geometry.



Maximum fuel efficiency and high removal miles from advanced tread compounding.

Resists irregular wear caused from high-torque single drive position, including heel-toe wear, thanks to rigid tread blocks that effectively control movement.

Built on the innovative **Conti 3G Casing** for maximum retreadability.



Applications: Single drive axle position for combination, long haul, super-regional and regional LTL carrier service.

This product is 3PMSF Certified.


Legend:
3G Casing | SmartWay Verified | Intelligent Tire | Retread Available
PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

HDL2+

Fuel-Efficient, Long Haul Drive

✓ GOODS ● PEOPLE ● CONSTRUCTION



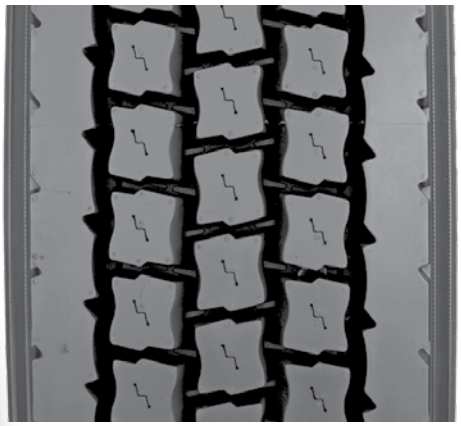


PRODUCT DATA


TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
295/75R22.5	G	05211950000 ⟪05653940000⟫	26	75	18.9	481	40.5	1029	11.5	292	12.9	328	8.25, 9.00	12.5	318	511	318	120	54	6175, 110 (2800, 760)	5675, 110 (2575, 760)
295/75R22.5	H	05211960000 ⟪05653930000⟫	26	75	18.9	481	40.5	1029	11.5	292	12.9	328	8.25, 9.00	12.5	318	511	318	122	55	6610, 120 (3000, 830)	6005, 120 (2725, 830)
TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS																					

Note - Rim listed first is the measuring rim. ⟪ ⟫ = Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. . # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC. reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits

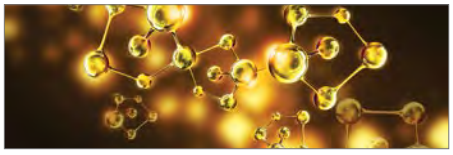

Advanced tread compounding for maximum fuel efficiency,

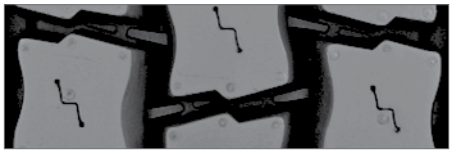

innovative groove geometry minimizes stone retention.



Built on the **Conti 3G Casing** for maximum retreadability.

Applications: Long haul over the road drive positions.

Legend:

3G Casing | SmartWay Verified | Intelligent Tire | Retread Available


PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

HDL2

Fuel-Efficient, Long Haul Drive

✓ GOODS ● PEOPLE ● CONSTRUCTION



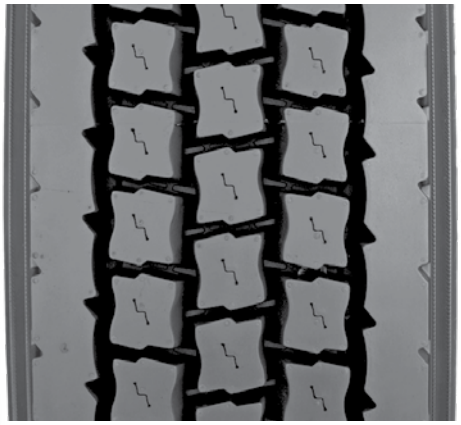


PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
11R22.5	G	05211220000 ⟪05651770000⟫	26	75	19.6	499	42.0	1066	11.7	296	13.1	331	8.25, 7.50	12.5	318	493	306	125	57	6175, 105 (2800, 720)	5840, 105 (2650, 720)
11R22.5	H	05211230000 ⟪05652990000⟫	26	75	19.6	499	42.0	1066	11.7	296	13.1	331	8.25, 7.50	12.5	318	493	306	128	58	6610, 120 (3000, 830)	6005, 120 (2725, 830)
11R24.5	G	05211240000	26	75	20.5	521	44.0	1118	11.7	296	13.1	331	8.25, 7.50	12.5	318	470	292	134	61	6610, 105 (3000, 720)	6005, 105 (2725, 720)


TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. ⟪⟫ = Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC. reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits

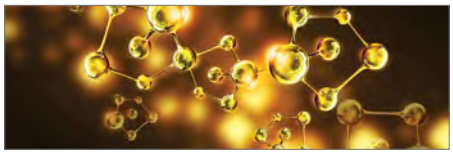

Advanced tread compounding for maximum fuel efficiency.

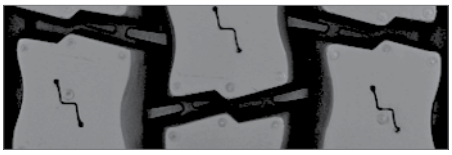

Innovative groove geometry minimizes stone retention.



Built on the **Conti 3G Casing** for maximum retreadability.

Applications: Long haul over the road drive positions.

Legend:
3G Casing | SmartWay Verified | Intelligent Tire | Retread Available
PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

HDL2 Eco Plus

Fuel-Efficient, Super Single Drive

✓ GOODS ● PEOPLE ● CONSTRUCTION






PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	SINGLE LBS, PSI (KG, KPa)	DUAL LBS, PSI (KG, KPa)
445/50R22.5*	L	05210130000 ⟪05652840000⟫	27	75	18.8	478	40.4	1027	17.5	445	19.2	488	14.00	N/A	N/A	512	318	200	91	10200, 120 (4625, 830)	N/A

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. ⟪⟫ = Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits

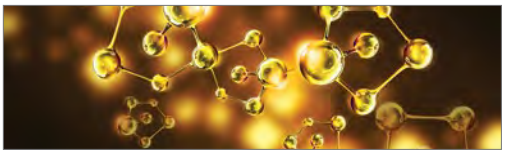

Advanced tread compound with super single weight reduction provides lower rolling resistance.



Features 27/32" tread depth, an **evolving sipe tread design** and closed shoulder.

Groove geometry designed with stress reduction elements to separate forces and reduce premature wear.

3-dimensional center sipes increase groove strength for longevity, while allowing more tread block flexibility.

Applications: Long haul, over the highway drive position.

Legend:

3G Casing | SmartWay Verified | Intelligent Tire | Retread Available

PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

HDL2+ Eco Plus

Fuel-Efficient, Long Haul Drive for Car Carriers

✓ GOODS ● PEOPLE ● CONSTRUCTION




PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
295/60R22.5*	J	05211410000 ⟪05652270000⟫	24	75	17.1	434	37.0	940	11.5	292	11.9	302	9.00, 9.75	12.9	328	559	348	118	54	7390, 130 (3350, 900)	6780, 130 (3075, 900)
TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS																					

Note - Rim listed first is the measuring rim. ⟪⟫ = Intelligent Tire. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits

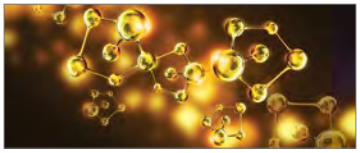

Advanced tread compound provides extended original mileage and improved rolling resistance.



Closed shoulder tread design provides even tread wear while still providing excellent traction.



Patented innovative groove technology leads to minimal stone retention, extending casing life.



Offers large capacity and car carrier trucks the ability to **carry more weight without sacrificing vehicle height.**

Applications: Long haul and over the highway drive, for large capacity trucks or car carriers.

Legend:
3G Casing | SmartWay Verified | Intelligent Tire | Retread Available
PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

HDL2 DL+

Long Haul Drive, Deep Lug

✔ GOODS ● PEOPLE ● CONSTRUCTION






PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	SINGLE LBS, PSI (KG, KPa)	DUAL LBS, PSI (KG, KPa)
11R22.5	G	05211670000))05653440000((	32	75	19.9	504	42.2	1071	11.6	294	13.0	329	8.25, 7.50	12.5	318	491	305	131	59	6175, 105 (2800, 720)	5840, 105 (2650, 720)
11R22.5	H	05211680000))05653450000((	32	75	19.9	504	42.2	1071	11.6	294	13.0	329	8.25, 7.50	12.5	318	491	305	134	61	6610, 120 (3000, 830)	6005, 120 (2725, 830)
295/75R22.5	G	05211690000))05653460000((	32	75	19.1	485	40.8	1036	11.4	290	12.7	323	8.25, 9.00	12.5	318	507	315	126	57	6175, 110 (2800, 760)	5675, 110 (2575, 760)
11R24.5	H	05211720000))05653480000((	32	75	20.7	526	44.2	1122	11.6	295	13.0	330	8.25, 7.50	12.5	318	468	291	143	65	7160, 120 (3250, 830)	6610, 120 (3000, 830)
285/75R24.5	G	05211730000))05653490000((	32	75	19.7	501	42.2	1072	11.4	290	12.6	321	8.25	12.5	318	491	305	131	60	6175, 110 (2800, 760)	5675, 110 (2575, 760)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim.))((= Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits



New tread cap/base compounds provide **improved wear performance** extending original tire life.



32/32" tread depth provides high mileage and low cost per mile.



Patented innovative groove technology leads to minimal stone retention, extending casing life.



Built on the **Conti 3G Casing** for maximum retreadability.

295/75R22.5 SIZE! Now you can spec the same tire size on your steer and drive tires for easy management.

Applications: Long haul, over the highway drive position.

Legend:

3G Casing | SmartWay Verified | Intelligent Tire | Retread Available


PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

HDL2 DL Eco Plus

Fuel-Efficient, Long Haul Drive, Deep Lug

✓ GOODS ● PEOPLE ● CONSTRUCTION



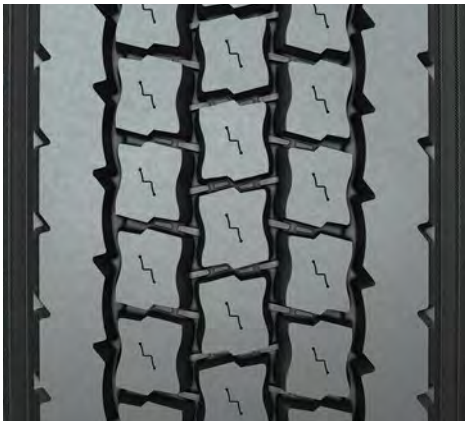


PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
11R22.5*	G	05211100000 ⟪05651850000⟫	32	75	19.7	500	42.2	1071	11.6	294	13.0	329	8.25, 7.50	12.5	318	491	305	132	60	6175, 105 (2800, 720)	5840, 105 (2650, 720)
295/75R22.5*	G	05211520000	32	75	19.1	485	40.8	1036	11.4	289	12.7	323	8.25, 9.00	12.5	318	507	315	126	57	6175, 110 (2800, 760)	5675, 110 (2575, 760)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. ⟪⟫ = Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits



Advanced tread compounding provides this Eco Plus version with 33% less rolling resistance than the original HDL2 DL.



32/32" tread depth provides high mileage and low cost per mile.



Patented innovative groove technology leads to minimal stone retention, extending casing life.



Minimized wear and excellent traction over the life of the tire, through a **wide, closed shoulder tread and numerous tread blocks** with multiple grip edges.



Built on the **Conti 3G Casing** for maximum retreadability.

295/75R22.5 SIZE! Now you can spec the same tire size on your steer and drive tires for easy management.

Applications: Long haul, over the highway drive position.


Legend:
3G Casing | SmartWay Verified | Intelligent Tire | Retread Available
PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

Conti EcoPlus HT3

Fuel-Efficient, Long Haul Trailer

✓ GOODS ● PEOPLE ● CONSTRUCTION



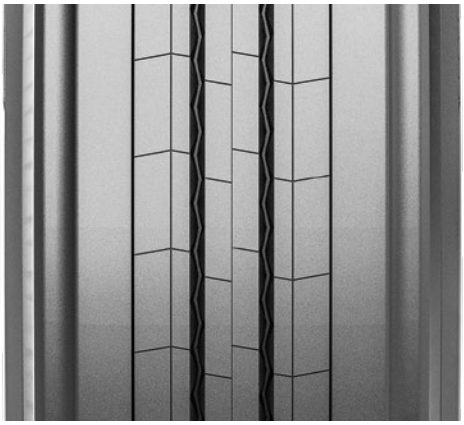


PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	SINGLE LBS, PSI (KG, KPa)	DUAL LBS, PSI (KG, KPa)
11R22.5	G	05310280000 ⟪05650960000⟫	13	75	19.2	488	41.2	1046	11.7	297	13.1	331	8.25, 7.50	12.5	318	502	312	109	49	6175, 105 (2800, 720)	5840, 105 (2650, 720)
11R22.5	H	05310310000 ⟪05652980000⟫	13	75	19.2	488	41.2	1046	11.7	297	13.1	331	8.25, 7.50	12.5	318	502	312	111	50	6610, 120 (3000, 830)	6005, 120 (2725, 830)
255/70R22.5	H	05310340000 ⟪05651230000⟫	18	75	17.1	434	36.6	929	9.9	251	10.8	274	7.50, 8.25	11.3	287	566	352	93	42	5510, 120 (2500, 830)	5070, 120 (2300, 830)
295/75R22.5	G	05310270000 ⟪05650910000⟫	13	75	18.5	470	39.7	1008	11.5	292	12.9	328	8.25, 9.00	12.5	318	522	324	104	47	6175, 110 (2800, 760)	5675, 110 (2575, 760)
11R24.5	G	05310260000 ⟪05651020000⟫	13	75	20.1	511	43.2	1097	11.7	296	13.1	331	8.25, 7.50	12.5	318	479	298	117	53	6610, 105 (3000, 720)	6005, 105 (2725, 720)
11R24.5	H	05310350000	13	75	20.1	511	43.2	1097	11.7	296	13.1	331	8.25, 7.50	12.5	318	479	298	119	54	7160, 120 (3250, 830)	6610, 120 (3000, 830)
285/75R24.5	G	05310250000	13	75	19.1	485	41.1	1044	11.5	292	12.9	329	8.25	12.5	318	504	313	110	50	6175, 110 (2800, 760)	5675, 110 (2575, 760)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. ⟪⟫ = Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits

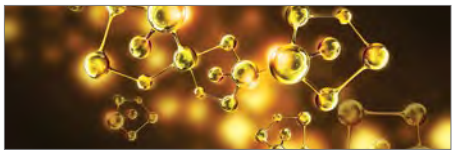

Advanced tread compound and optimized tread design provide exceptional mileage.

Ultra low rolling resistant trailer tire delivers outstanding fuel efficiency in long haul applications.



Built on the **Conti 3G Casing** for maximum retreadability.



Improved sidewall construction for defense against curbing, cuts and abrasions.

Applications: Trailers and free rolling positions.

Legend:

3G Casing | SmartWay Verified | Intelligent Tire | Retread Available


PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

Conti HTL 3

Long Haul Mileage Trailer

✓ GOODS ● PEOPLE ● CONSTRUCTION



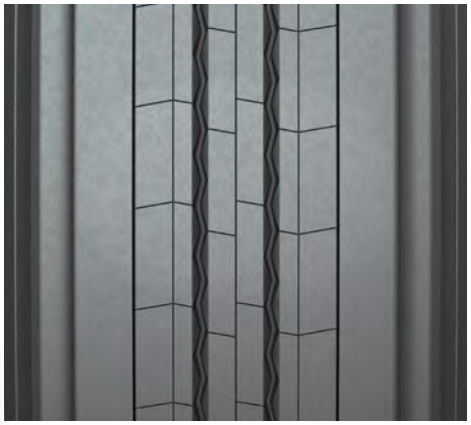


PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	SINGLE LBS, PSI (KG, KPa)	DUAL LBS, PSI (KG, KPa)
11R22.5	G	05310820000 ⟪05653750000⟫	13	75	19.2	488	41.2	1046	11.7	297	13.1	333	8.25, 7.50	12.5	318	502	312	109	49	6175, 105 (2800, 720)	5840, 105 (2650, 720)
295/75R22.5	G	05310830000 ⟪05653760000⟫	13	75	18.5	470	39.7	1008	11.5	292	12.9	328	8.25, 9.00	12.5	318	521	324	104	47	6175, 110 (2800, 760)	5675, 110 (2575, 760)
11R24.5	G	05310840000 ⟪05653770000⟫	13	75	20.1	511	43.2	1097	11.7	297	13.1	333	8.25, 7.50	12.5	318	479	298	117	53	6610, 105 (3000, 720)	6005, 105 (2725, 720)
TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS																					

Note - Rim listed first is the measuring rim. ⟪⟫ = Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits

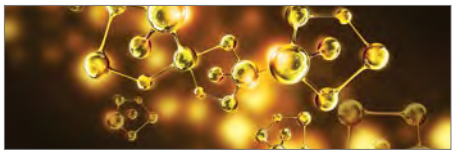

Advanced tread compound and optimized tread design provide exceptional mileage.

Ultra low rolling resistant trailer tire delivers outstanding fuel efficiency in long haul applications.



Built on the **Conti 3G Casing** for maximum retreadability.



Improved sidewall construction for defense against curbing, cuts and abrasions.

Applications: Trailers and free rolling positions.


Legend:
3G Casing | SmartWay Verified | Intelligent Tire | Retread Available
PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

HTL1

Fuel-Efficient, Super Single Trailer

✓ GOODS ● PEOPLE ● CONSTRUCTION



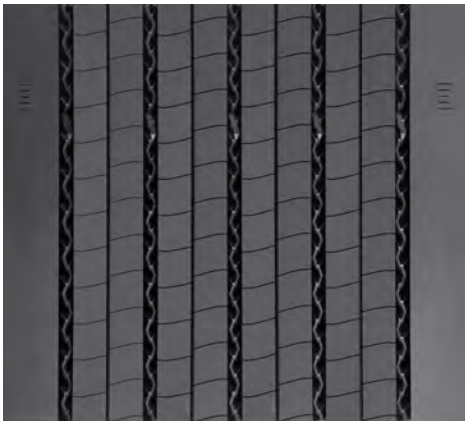


PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
445/50R22.5*	L	05310000000 ⟪05652500000⟫	13	75	18.1	460	39.2	996	17.3	439	19.0	483	14.00	N/A	N/A	528	328	179	81	10200, 120 (4625, 830)	N/A


TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

⟪⟫ = Intelligent Tire Article #. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.


Features & Benefits

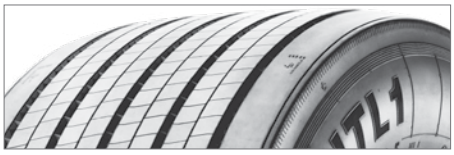

13/32" tread depth minimizes irregular wear.

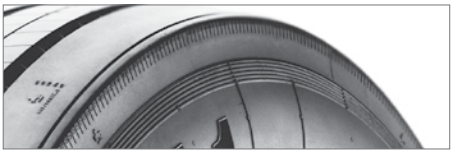

Shoulder defense groove provides protection against rapid shoulder wear.

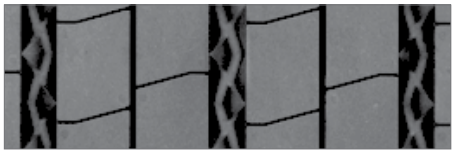

Patented innovative groove technology leads to minimum stone retention, extending casing life.

Applications: Super single fitment for long haul, trailer position in highway service.

Legend:

3G Casing | SmartWay Verified | Intelligent Tire | Retread Available

PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

HTL2 Eco Plus

Fuel-Efficient, Long Haul Trailer

✓ GOODS ● PEOPLE ✓ CONSTRUCTION






PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
215/75R17.5	J	05310170000	15	75	14.1	359	30.4	772	8.5	215	9.1	231	6.00, 6.75	9.5	242	681	423	61	28	4805, 125 (2180, 860)	4540, 125 (2060, 860)
235/75R17.5	J	05310180000))04650170000((	13	75	14.5	369	31.6	802	9.2	234	10.0	254	6.75, 7.50	10.6	269	656	407	65	29	6005, 125 (2725, 860)	5675, 125 (2575, 860)
245/70R17.5	J	05310190000))04650160000((	13	75	14.5	369	31.6	802	9.2	234	10.0	254	6.75, 7.50	10.6	269	656	407	65	29	6005, 125 (2725, 860)	5675, 125 (2575, 860)


TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim.))((= Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits




Low rolling resistance compound provides excellent fuel economy at cool operating temperatures.



Advanced tread design provides long original mileage and low cost per mile.



Heavy ply construction for structural durability in large capacity applications.



Patented groove technology leads to minimum stone retention, extending casing life.

Innovative groove geometry promotes efficient water evacuation, traction and wet braking capabilities throughout tire life.

Applications: Heavy haul and long haul trailer positions.

Continental
The Future in Motion

1ST PLACE WINNER

CONTINENTAL IS YOUR LEADER IN FUEL EFFICIENCY

Continental Tires Outperformed Other Top Brands in Fuel Efficiency Tests

Pumping Out Savings Tractors travel an average of **105,000 miles** every year. With a national average of 5.91 mpg, every tractor burns **over 17,700 gallons of fuel a year**. At $3.89/gallon, **that's over $69,000 in annual fuel costs**! With **Continental's demonstrated 7.35 mpg fuel efficiency** in Long Haul testing, fleets could achieve **an annual costs savings of over $13,500 per truck!***

**Savings calculations based on "NACFE 2018 Annual Fleet Fuel Study" by the North American Council for Fuel Efficiency*

Long Haul Tires Selected for Test



Conti EcoPlus HS3	HDL2	Conti EcoPlus HT3
Long Haul	Long Haul	Long Haul
11R22.5 | G | 19/32"	11R22.5 | G | 26/32"	11R22.5 | G | 13/32"

Long Haul Application Test Results

Tires	Double Coin	Continental	Michelin
Steer Tire	RR680	Conti EcoPlus HS3	X-Line Energy Z
Drive Tire	FD405	HDL2	X-Line Energy D
Trailer Tire	IM 105	Conti EcoPlus HT3	X-Line Energy T
Fuel consumption (L/100 km)	32.54	31.99	32.68
Fuel economy (mpg)	7.23	7.35	7.20
Rank	**2**	**1**	**3**

In Long Haul applications, ***Continental is proven to provide a 2.11% savings*** compared to Michelin X-Line Energy.

About Long Haul Tires

Tires for Long Haul use are designed for straight line, on-highway driving, distributing freight from state to state across great distances. Tires are optimized for high removal miles and fuel efficiency. To put our level of fuel efficiency to the test, Continental tires were used in a study by the PIT Group of FPInnovations.

The Test

The fuel efficiency test procedure was based on TMC Fuel Consumption Test Procedure – Type III, RP 1103A. Each tire brand was tested on three identical 2016 International Prostar tractors powered by Cummins ISX15 engines, pulling 2018 Vanguard 53-foot two-axle cube van semi-trailers, at a cruising speed of 64.6 mph (104 km/h).

CONTINENTAL DELIVERS UP TO 2% FUEL SAVINGS OVER OTHER TOP BRANDS

Contact your Continental Representative to learn more!

Need a Representative? Call 1 (800) 450-3187



Comparative Energy Efficiency Testing of 11R22.5 Tires for Line Haul and Regional Applications
PIT Group Report – 301013129-1

ContiTread™



Long Haul
Retread Product Overview

For Long Distance Highway Driving

Legend:
SmartWay Verified | New Tire Available



HDL 3 LTL-R



HDL2 DL



HDL2 DL Eco Plus




HDL



HDL Eco Plus




HDL2 Eco Plus



EcoPlus HT3



HTL



HTL1

Legend:
3G Casing | SmartWay Verified | Intelligent Tire | Retread Available
PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

ContiTread HDL 3 LTL-R | Long Haul, Single Axle Drive



PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
210	18215140000	22
220	18215150000	22
230	18215160000	22
240	18215170000	22

- Maximum fuel efficiency and high removal miles from advanced tread compounding.
- Resists irregular wear caused from high-torque single drive position, including heel-toe wear, thanks to rigid tread blocks that effectively control movement.
- 3-D matrix sipes provide superior traction and even wear.
- Maximum stone ejection due to superior groove geometry.

ContiTread HDL2 DL | Long Haul Drive, Deep Lug



PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
215	18217680000	28
225	18217690000	28
235	18217700000	28
245	18217710000	28

- Optimized compound with ultra deep tread delivers high mileage.
- Minimized wear and excellent traction over the life of the tire through a wide, closed shoulder tread and numerous tread blocks with multiple grip edges.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

ContiTread HDL2 DL Eco Plus | Fuel-Efficient, Long Haul Drive, Deep Lug



PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
215	18208070000	28
225	18208080000	28
235	18208090000	28
245	18208100000	28

- Advanced, fuel-efficient compound provides long original mileage and rolling resistance.
- Minimized wear and excellent traction over the life of the tire through a wide, closed shoulder tread and numerous tread blocks with multiple grip edges.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

ContiTread HDL | Long Haul Drive



PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
215	18217730000	26
225	18217740000	26
235	18217750000	26
245	18217760000	26
215	18217770000	20
225	18217780000	20
235	18217790000	20
245	18217800000	20
200	18217810000	13
215	18217820000	13
225	18217830000	13
235	18217840000	13

- Cut and tear resistant tread compound for excellent wear.
- Closed shoulder tread design provides even tread wear while still providing excellent traction.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

ContiTread HDL Eco Plus | Fuel-Efficient, Long Haul Drive



PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
215	18204820000	26
225	18204830000	26
235	18204840000	26
245	18204850000	26
215	18204860000	20
225	18204870000	20
235	18204880000	20
245	18204890000	20

- Advanced, fuel-efficient compound provides long original mileage and rolling resistance.
- Closed shoulder tread design provides even tread wear while still providing excellent traction.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

ContiTread HDL2 Eco Plus | Fuel-Efficient, Super Single Drive




PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
390	18209240000	24
400	18206780000	24

- Super single drive tire with advanced compounding for low rolling resistance and high mileage.

ContiTread EcoPlus HT3 | Fuel-Efficient, Long Haul Trailer



PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
215	18208620000	13
225	18208630000	13
235	18208640000	13
245*	18208650000	13

- Ultra low rolling resistant compounding.
- Optimized tread pattern resists irregular wear.
- 13/32nd tread depth for high removal mileage.
- Fuel Saving Edge technology available in 245mm tread width for maximum fuel efficiency.*

Legend:
3G Casing | SmartWay Verified | Intelligent Tire | Retread Available
PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

ContiTread HTL | Long Haul Trailer




PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
200	18208720000	13
210	18205420000	13
220	18205440000	13
230	18205460000	13
240	18206800000	13

- 13/32" tread depth minimizes tread squirm and irregular wear.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

ContiTread HTL1 | Fuel-Efficient, Super Single Trailer



PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
390	18214670000	13
400	18214680000	13
410	18214690000	13

- Optimized compound for regional and long hauling delivers high mileage.
- Proven 13/32" tread design.
- New solid shoulder design for durability.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

Continental
The Future in Motion

TrukFix Program with 360°Smart App

For Emergency Roadside Assistance

About the TrukFix Program

TrukFix is Continental's emergency roadside assistance program. It is available in the U.S. and Canada to qualified National Account customers, Premier Fleet members, and OOIDA members.

Fulfilling Your Fleet Requirements

TrukFix can accommodate your fleet's emergency roadside assistance requirements. Share your preferences in advance via our online form, and TrukFix dispatchers will ensure that your needs are met. Tell us your tire/retread preferences, photo documentation requirements and more at **www.TrukFix.com**.



About the TrukFix Web App

360°Smart for TrukFix is a simple web app that enables the user to submit, process, and track TrukFix emergency roadside assistance requests in real-time.

It ties directly into systems used by TrukFix dispatchers, making information visible to:

- Continental TrukFix Dispatchers
- Fleet Dispatchers
- Drivers
- Fleet Managers
- Service Providers (Dealers)

Compatible with iOS and Android phones and tablets, along with desktop devices. Visit www.TrukFix.com to learn more about its features adn benefits.

877-TRUKFIX - 24/7 EMERGENCY HOTLINE

Better Customer Service

- 24/7 access to professional North American dispatchers
- Verified network of commercial dealers who stock Continental and General Tire products for roadside assistance
- Request full service or simply locate the nearest dealer

Better Communication

- Real-time tracking of the incident until trucks are back on the road
- Follow-up by our dispatchers ensures your repairs are completed
- Service case history reporting, complete with failure photos

Better Pricing

- No enrollment or membership fee – pay for services as they are used
- Regulated, predictable pricing as a published tire and service program
- Simple, convenient billing through our National Account invoicing system

Continental
The Future in Motion

EPA SmartWay®

Reducing Transportation-Related Emissions and Improving Supply Chain Fuel Efficiency

Verified Low-Rolling Resistance Tire Products

The EPA has determined that certain tire product models and technologies can reduce NOx emissions and fuel use by 3 percent or more, relative to the best-selling products for line haul class 8 tractor trailers. These improvements are achieved under the following conditions:

- Tires are used in the correct axle positions.
- Verified low rolling resistance tires are installed on all of the axle positions of the tractor and trailer.
- All tires must be properly inflated according to the manufacturer's specifications.


For more information on SmartWay or to review the list of SmartWay verified low rolling resistance tires and retread technologies, visit www.epa.gov/smartway.

More tires and retreads may currently be verified by SmartWay, always review the SmartWay website for current information.



Fuel Savings **Cleaner Air** **Cost Savings** **Environmentally Friendly**

The following Continental low-rolling resistance tire products are SmartWay verified when used on class 8, line-haul tractor trailers:

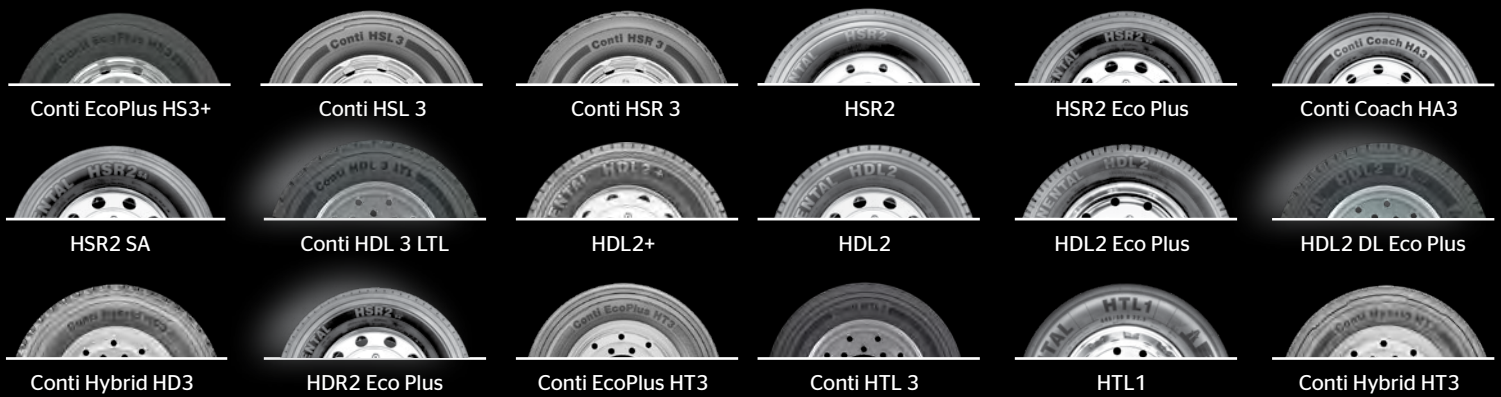


ContiTread™ Retreads: HDL 3 LTL-R, HDL Eco Plus, HDR1 Eco Plus, HDR2 Eco Plus, HDL2 Eco Plus, HDL2 DL Eco Plus, HTL1, EcoPlus HT3

Continental Truck and Bus Tires | www.continental-truck.com

SmartWay℠ Transport Partner
Getting There With Cleaner Air

Continental
The Future in Motion

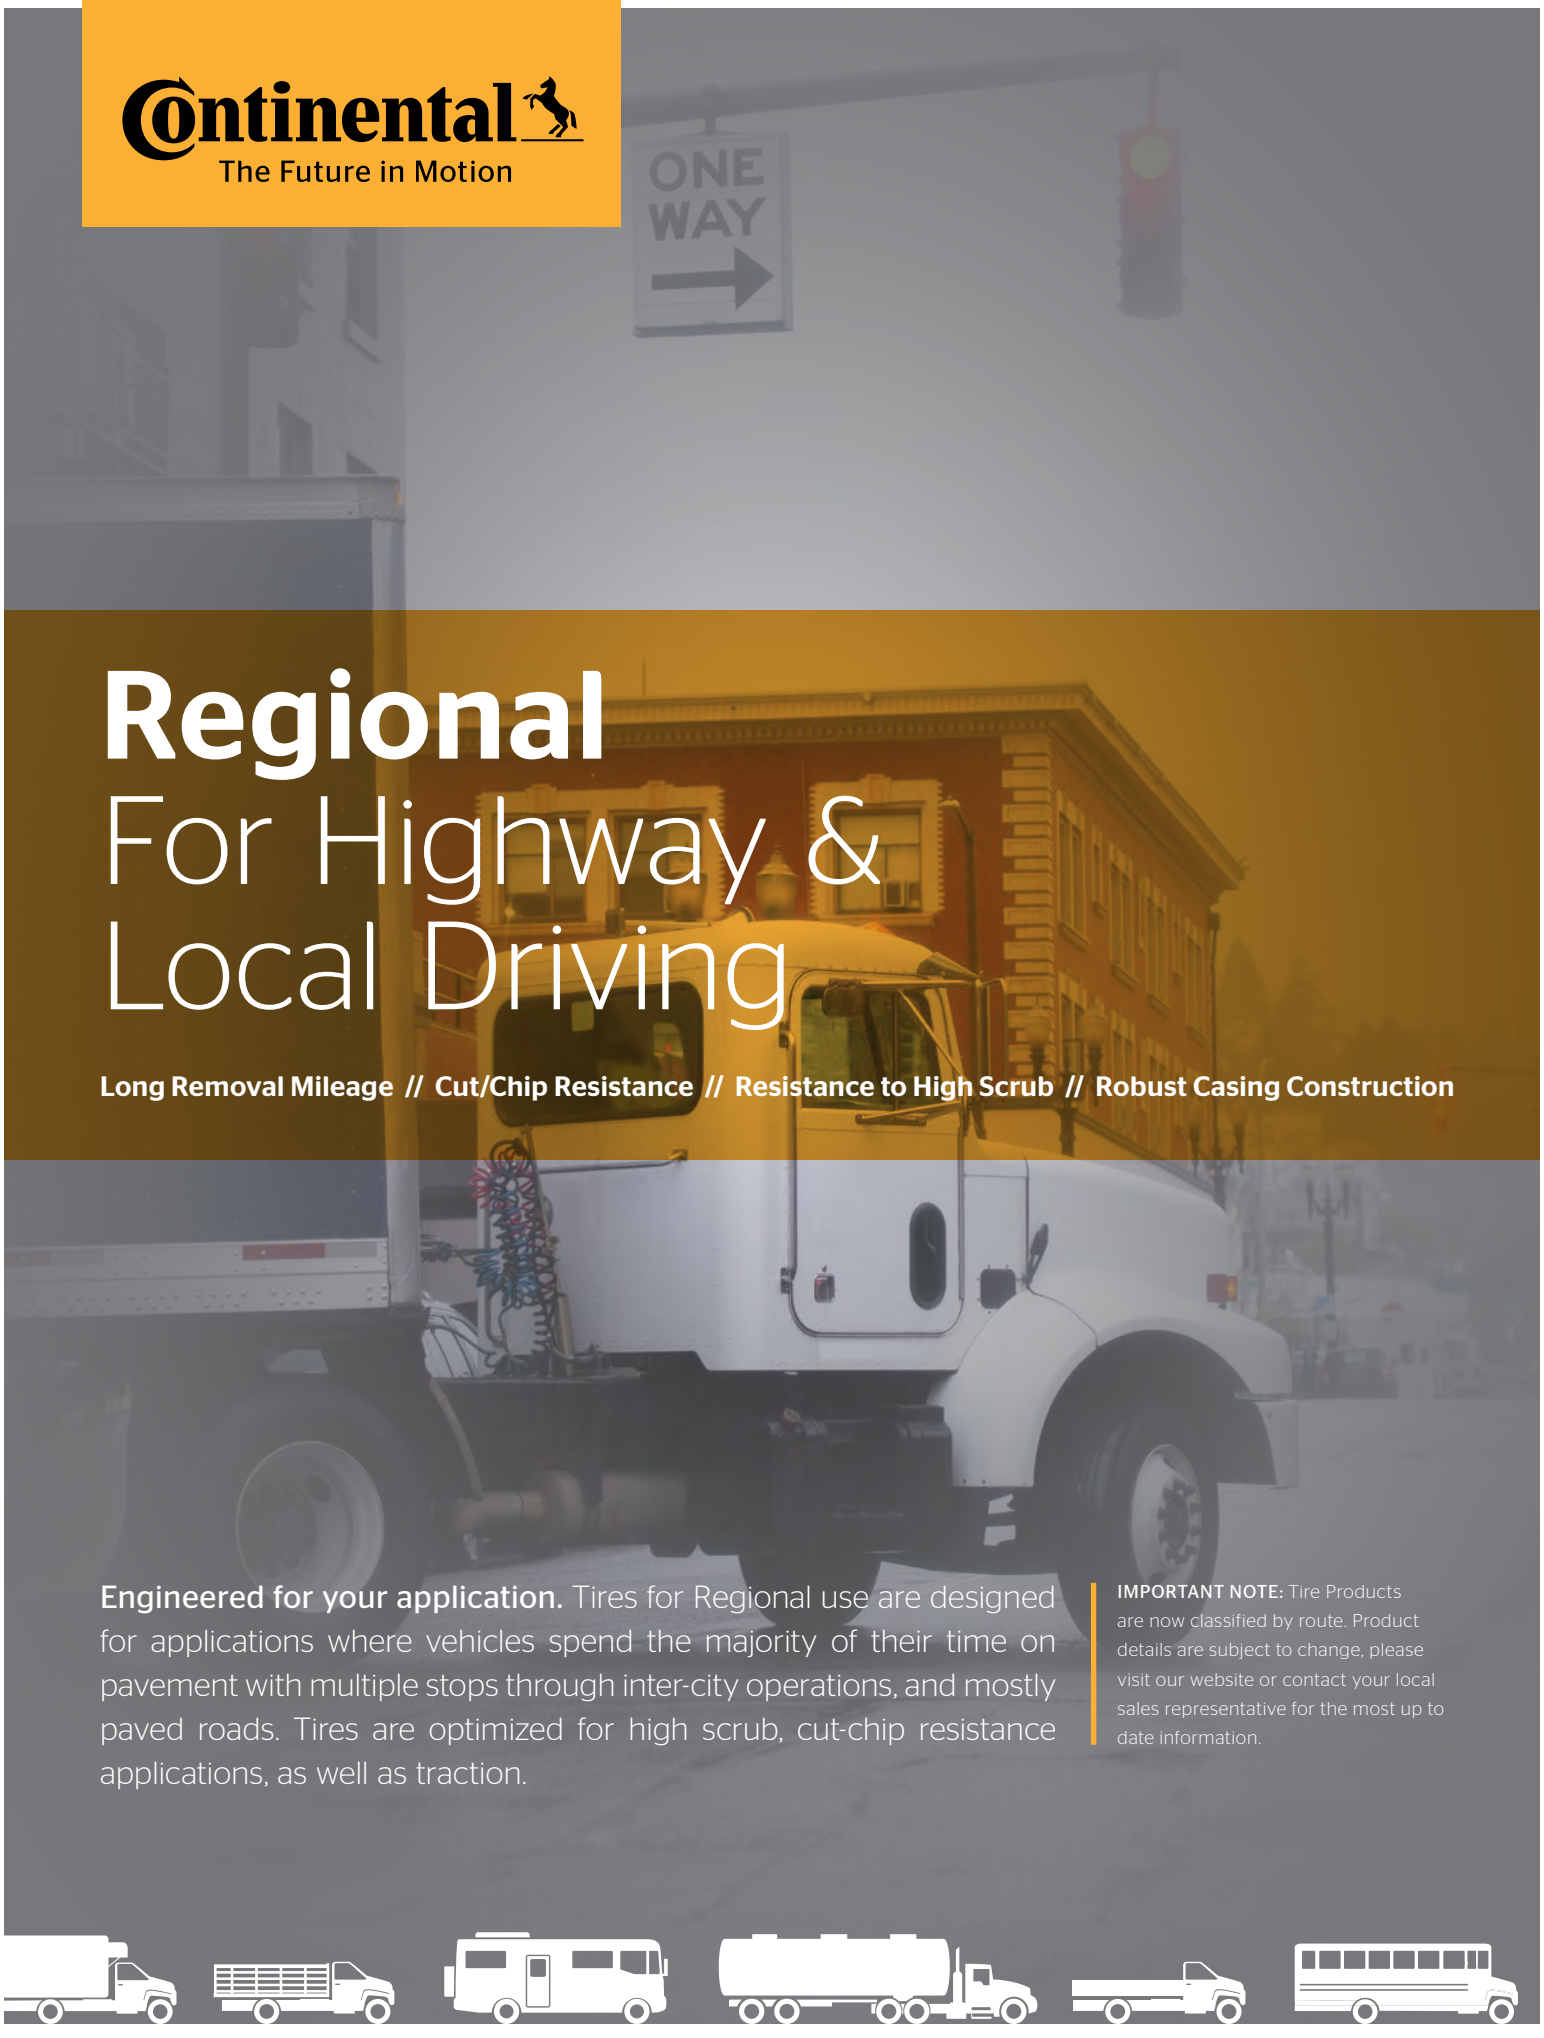

Regional
For Highway & Local Driving

Long Removal Mileage // Cut/Chip Resistance // Resistance to High Scrub // Robust Casing Construction

Engineered for your application. Tires for Regional use are designed for applications where vehicles spend the majority of their time on pavement with multiple stops through inter-city operations, and mostly paved roads. Tires are optimized for high scrub, cut-chip resistance applications, as well as traction.

IMPORTANT NOTE: Tire Products are now classified by route. Product details are subject to change, please visit our website or contact your local sales representative for the most up to date information.

Legend:
3G 3G Casing | SmartWay Verified | Intelligent Tire | Retread Available
PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

Regional
Truck Tire Product Overview



Conti HSR 3
3G



HSR2
3G



HSR2 Eco Plus
3G



HSR2 SA
3G



Conti LAR 3
3G



HTR2
3G



LSR1
3G



HDR2+
3G



HDR2 Eco Plus
3G



Conti Hybrid HD3
3G



HDR
3G



HDW2
3G

Legend:

3G Casing	SmartWay Verified	Intelligent Tire	Retread Available

PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

Regional (Continued)

Truck Tire Product Overview



Conti Hybrid HT3



HTR2 (17.5")



Conti Hybrid HS3 (19.5")



Conti Scandinavia HD3 (19.5")



HSR+ (19.5")



Conti Hybrid HD3 (19.5")



HDR+ (19.5")



Conti Hybrid HT3 (19.5")

Legend:
3G Casing | SmartWay Verified | Intelligent Tire | Retread Available
PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

Conti HSR 3

Regional All-Position

✓ GOODS ✓ PEOPLE ✓ CONSTRUCTION





PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
11R22.5	G	05124370000))) 05652560000)))	23	75	19.5	495	41.9	1064	11.6	295	13.0	330	8.25, 7.50	12.5	318	494	307	131	59	6175, 105 (2800, 720)	5840, 105 (2650, 720)
11R22.5	H	05124380000))) 05652570000)))	23	75	19.5	495	41.9	1064	11.6	295	13.0	330	8.25, 7.50	12.5	318	494	307	133	60	6610, 120 (3000, 830)	6005, 120 (2725, 830)
12R22.5	H	05124390000))) 05652580000)))	23	75	20.2	513	42.8	1086	11.9	302	13.1	333	9.00, 8.25	13.7	348	484	301	147	67	7390, 120 (3350, 830)	6780, 120 (3075, 830)
295/75R22.5	G	05124400000))) 05652590000)))	23	75	18.9	480	40.2	1022	11.8	299	12.9	328	8.25, 9.00	13.4	340	514	320	125	56	6175, 110 (2800, 760)	5675, 110 (2575, 760)
295/75R22.5	H	05124410000))) 05652600000)))	23	75	18.9	480	40.2	1022	11.8	299	12.9	328	8.25, 9.00	13.4	340	514	320	127	58	7160, 120 (3250, 830)	6610, 120 (3000, 830)
11R24.5	H	05124430000))) 05652620000)))	23	75	20.5	521	43.8	1113	11.6	295	13.0	330	8.25, 7.50	12.5	318	473	294	143	65	7160, 120 (3250, 830)	6610, 120 (3000, 830)
285/75R24.5	H	05124450000))) 05652640000)))	23	75	19.5	496	41.6	1057	11.8	300	12.9	328	8.25	12.5	318	498	309	133	60	6780, 120 (3075, 830)	6175, 120 (2800, 830)

PLEASE NOTE: THIS PRODUCT WAS PREVIOUSLY NAMED CONTI CROSSTRAC HA3.
TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim.))) = Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits



Rigid belt package with full width top belt and extra sidewall protection for increased durability.



Zigzag center groove geometry increases the number of biting edges for increased traction.



Pyramidal stone ejection system for maximum casing protection.



Built on the innovative **Conti 3G Casing** for maximum retreadability.

Mileage Improvement vs. HSR2 *Based on projected calculations.

Applications: Regional hauling and on/off road, all-position.

Legend:

3G Casing | SmartWay Verified | Intelligent Tire | Retread Available


PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

HSR2

Regional All-Position

GOODS PEOPLE CONSTRUCTION



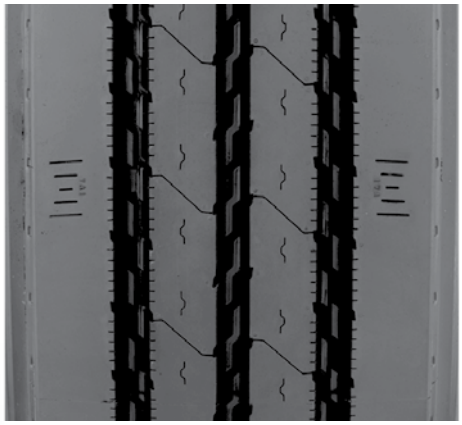


PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
10R22.5	G	05686570000	20	75	18.8	478	40.0	1016	10.0	254	10.8	274	7.50, 6.75, 8.25	11.4	290	518	322	100	45	5675, 115 (2575, 790)	5355, 115 (2430, 790)
11R22.5	G	05686300000 **05651060000**	23	75	19.4	493	41.6	1057	11.1	282	12.0	305	8.25	12.5	318	498	309	119	54	6175, 105 (2800, 720)	5840, 105 (2650, 720)
11R22.5	H	05686310000 **05650880000**	23	75	19.4	493	41.6	1057	11.1	282	12.0	305	8.25	12.5	318	498	309	121	55	6610, 120 (3000, 830)	6005, 120 (2725, 830)
12R22.5	H	05120880000 **05651750000**	23	75	20.1	510	42.8	1088	11.7	297	12.9	327	9.00, 8.25	13.5	343	483	300	135	61	7390, 120 (3350, 830)	6780, 120 (3075, 830)
275/80R22.5	H	05686350000 **05651080000**	23	75	18.7	475	40.0	1016	11.1	282	12.6	320	8.25	12.5	318	518	322	115	52	7160, 120 (3250, 830)	6610, 120 (3000, 830)
11R24.5	H	05686330000 **05651110000**	23	75	20.4	518	43.5	1105	11.1	282	12.0	305	8.25	12.5	318	476	296	130	59	7160, 120 (3250, 830)	6610, 120 (3000, 830)
285/75R24.5	H	05687020000 **05652200000**	23	75	19.4	493	41.3	1049	10.7	272	12.1	307	8.25	12.5	318	501	311	120	55	6780, 120 (3075, 830)	6175, 120 (2800, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. = Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.


Features & Benefits

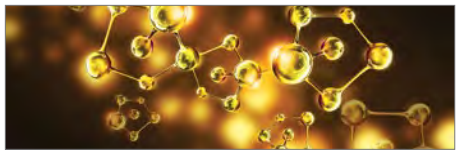

23/32" deep **improved cut and chip resistant tread compound** for optimal performance.



Protective curb rib for high scrub applications.

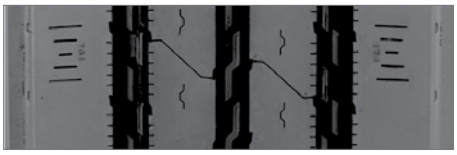

Patented innovative groove technology leads to minimum stone retention, extending casing life.

Patented groove geometry for better resistance to cracking and tearing.

Applications: Regional hauling and on/off road, all-position.

Legend:
3G Casing | SmartWay Verified | Intelligent Tire | Retread Available
PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

HSR2 Eco Plus

Fuel-Efficient, Regional Steer

GOODS PEOPLE CONSTRUCTION






PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
275/80R22.5*	H	05120850000	23	75	18.7	475	40.0	1016	11.1	282	12.6	320	8.25, 7.50	12.5	318	518	322	115	52	7160, 120 (3250, 830)	6610, 120 (3000, 830)
TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS																					

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. 315/80R22.5 tires used on 8.25" rims are restricted to a maximum of 7610 lbs at 120 psi. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits

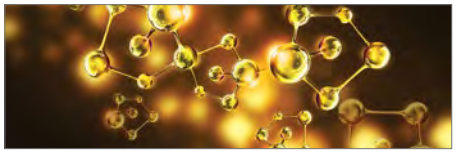


Advanced tread compounding provides this Eco Plus version with **20% less rolling resistance** than the original HSR2.

23/32" deep **rolling resistant tread compound** for long tread life on highway and regional road combined applications.



Sidewall with curb rib reduces damage from curbing, cuts and abrasions.

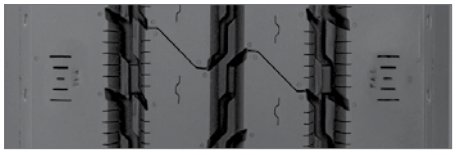

Patented innovative groove technology leads to minimum stone retention, extending casing life.

Large radial grooves for improved resistance to groove cracking.

Applications: On highway and regional hauling, all-position.

Legend:

3G Casing | SmartWay Verified | Intelligent Tire | Retread Available

PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

HSR2 SA

Regional All-Position

✓ GOODS ✓ PEOPLE ✓ CONSTRUCTION





PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
255/70R22.5*	H	05122460000 ⟪ 05652210000 ⟫	18	75	17.1	434	36.6	930	10.0	255	10.8	274	8.25, 7.50	11.3	287	565	351	88	40	5510, 120 (2500, 830)	5070, 120 (2300, 830)
275/70R22.5*	J	05121290000 ⟪ 05651640000 ⟫	18	75	17.8	451	37.9	962	10.7	272	11.6	295	8.25	12.4	315	547	340	107	49	6940, 130 (3150, 900)	6395, 130 (2900, 900)
315/80R22.5 *	L	05120980000 ⟪ 05651720000 ⟫	19	75	19.8	503	42.5	1080	12.5	317	12.5	316	9.00, 8.25	13.8	351	487	303	143	65	9090, 130 (4125, 900)	8270, 130 (3750, 900)


TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. ⟪ ⟫ = Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. 315/80R22.5 tires used on 8.25" rims are restricted to a maximum of 7610 lbs at 120 psi. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits



Maximum tire life expectancy and wet traction capabilities through **customized tread geometry**.

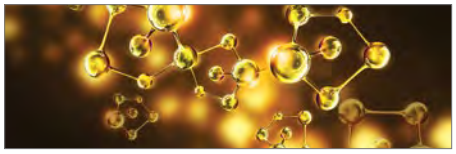

Superb wet traction capabilities with minimum wear through innovative tread compound.



Ideal for buses and larger recreational vehicles.

Applications: Steer or all-position regional/long haul, for bus or large RV traffic.


Legend:
3G Casing | SmartWay Verified | Intelligent Tire | Retread Available
PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

Conti LAR 3

16" Regional All-Position with Steel Casing

✓ GOODS ✓ PEOPLE ✓ CONSTRUCTION



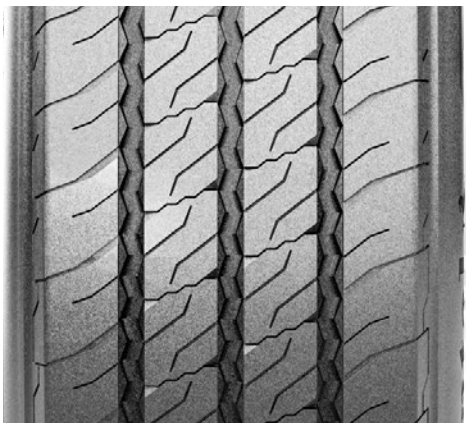

PRODUCT DATA


TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
LT215/85R16	E	04120940000	14	93	14.3	364	30.6	776	8.9	226	9.6	244	6.00	10.1	258	678	421	53	24	2680, 80 (1215, 550)	2470, 80 (1120, 550)
LT225/75R16	E	04120950000 ⟪04650140000⟫	14	93	13.9	352	29.7	754	8.9	225	9.5	242	6.00	10.0	254	697	433	52	24	2680, 80 (1215, 550)	2470, 80 (1120, 550)
LT235/85R16	E	04120960000	14	93	14.4	366	30.9	786	9.9	251	10.6	270	7.00	11.0	279	669	416	56	25	3085, 80 (1400, 550)	2755, 80 (1250, 550)
LT245/75R16	E	04120970000	14	93	14.4	366	30.9	786	9.9	251	10.6	270	7.00	11.0	279	669	416	56	25	3085, 80 (1400, 550)	2755, 80 (1250, 550)
TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS																					

Note - Rim listed first is the measuring rim. ⟪ ⟫ = Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits



All steel radial designed for outstanding durability and maximum retreadability.

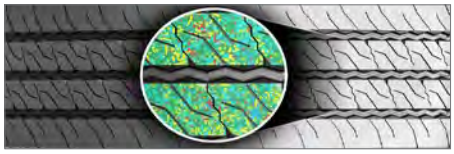

Specialized compounding delivers outstanding mileage while still providing excellent fuel efficiency.



10 ply light truck all steel casing provides increased load carrying capacity, durability and puncture resistance.

Applications: Regional haul, all-position.

Legend:

3G Casing | SmartWay Verified | Intelligent Tire | Retread Available

PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

HTR2

Regional All-Position

✓ GOODS ● PEOPLE ✓ CONSTRUCTION






PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
385/65R22.5	L	05320080000 ⟪05651250000⟫	21	68	19.5	495	42.0	1067	14.8	376	16.3	414	11.75, 12.25	N/A	N/A	493	306	165	75	9920, 130 (4500, 900)	N/A
425/65R22.5	L	05320260000 ⟪05651620000⟫	22	68	20.3	515	44.3	1126	16.6	422	18.0	457	13.00, 14.00, 12.15	N/A	N/A	467	290	185	84	11,400, 120 (5150, 830)	N/A

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. ⟪⟫ = Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits

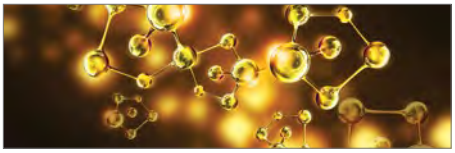


High mileage achieved through precise balance of compound and tread geometry.



Tread pattern designed for increased stability and reduced noise.

Increased fuel efficiency due to optimized tread pattern and reduced tire weight.

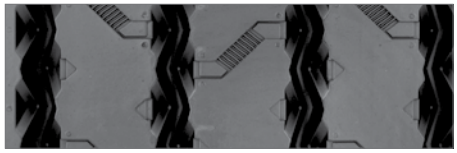

Patented innovative groove technology leads to minimum stone retention, extending casing life.

Applications: Local and long haul, all-position service.

Legend:
3G Casing | SmartWay Verified | Intelligent Tire | Retread Available
PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

LSR1

17.5" Regional All-Position

GOODS PEOPLE CONSTRUCTION





PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
10R17.5*	H	04120910000	17	75	15.7	398	33.8	858	10.0	254	10.3	262	7.50, 6.75	11.3	286	613	381	70	32	4675, 115 (2120, 790)	4410, 115 (2000, 790)


TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.


Features & Benefits



Multi-rib tread design features excellent wet traction, lateral stability and reduced noise.

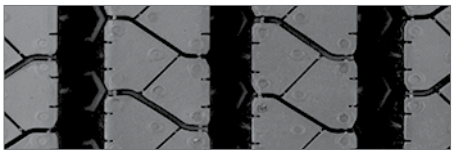

Patented innovative groove technology leads to minimum stone retention, extending casing life.

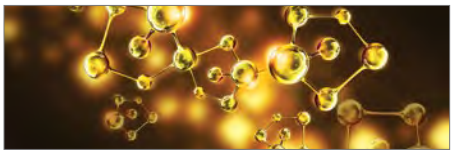

Advanced tread compound provides long original mileage in regional applications.

Applications: Regional and urban all-position use.

Legend:

3G Casing | SmartWay Verified | Intelligent Tire | Retread Available

PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

HDR2+

Regional Drive

GOODS PEOPLE CONSTRUCTION








PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
10R22.5	G	05224330000 ⟪05653430000⟫	24	75	19.0	483	40.4	1026	10.0	254	11.0	278	7.50, 6.75, 8.25	11.4	290	513	318	103	47	5675, 115 (2575, 790)	5355, 115 (2430, 790)
11R22.5	G	05224340000 ⟪05653360000⟫	30	75	19.8	502	42.2	1071	11.6	295	13.0	330	8.25, 7.50	12.5	318	491	305	129	59	6175, 105 (2800, 720)	5840, 105 (2650, 720)
11R22.5	H	05224350000 ⟪05653370000⟫	30	75	19.8	502	42.2	1071	11.6	295	13.0	330	8.25, 7.50	12.5	318	491	305	132	60	6610, 120 (3000, 830)	6005, 120 (2725, 830)
12R22.5	H	05224360000 ⟪05653420000⟫	30	75	20.3	515	43.2	1098	11.9	301	13.2	335	9.00, 8.25	13.5	343	479	297	149	68	7390, 120 (3350, 830)	6780, 120 (3075, 830)
295/75R22.5	G	05224370000 ⟪05653390000⟫	30	75	19.0	483	40.7	1034	11.5	292	12.9	328	8.25, 9.00	12.5	318	509	316	124	56	6175, 110 (2800, 760)	5675, 110 (2575, 760)
295/75R22.5	H	05224380000 ⟪05653400000⟫	30	75	19.0	483	40.7	1034	11.5	292	12.9	328	8.25, 9.00	12.5	318	509	316	126	57	6610, 120 (3000, 830)	6005, 120 (2725, 830)
11R24.5	H	05224390000 ⟪05653380000⟫	30	75	20.6	524	44.2	1123	11.6	295	13.0	330	8.25, 7.50	12.5	318	468	291	141	64	7160, 120 (3250, 830)	6610, 120 (3000, 830)
285/75R24.5	G	05224400000 ⟪05653410000⟫	30	75	19.6	498	42.1	1069	11.5	292	12.9	328	8.25	12.5	318	492	306	130	59	6175, 110 (2800, 760)	5675, 110 (2575, 760)
315/80R22.5* (Tread B)	L	05223660000	28	75	20.1	510	43.1	1096	12.3	312	13.5	342	9.00, 9.75	13.8	351	491	305	161	73	9090, 130 (4125, 900)	8270, 130 (3750, 900)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. ⟪⟫ = Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. 315/80R22.5 tires used on 8.25" rims are restricted to a maximum of 7610 lbs at 120 psi. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits



Improved cap/base tread compounds for improved wear performance, wet traction and cut/chip/chunk performance.



Optimized contour and **balanced footprint distribution** for extended tread life and product performance.



Chamfered tread block geometry to withstand higher drive axle torque with reduced drive tire wear conditions such as tearing and cracking.



Built on the **Conti 3G Casing** for maximum retreadability.

Applications: Regional haul drive positions. On/Off-highway service.


Legend:
3G Casing | SmartWay Verified | Intelligent Tire | Retread Available
PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

HDR2 Eco Plus

Fuel-Efficient, Regional Drive

✓ GOODS ✓ PEOPLE ● CONSTRUCTION



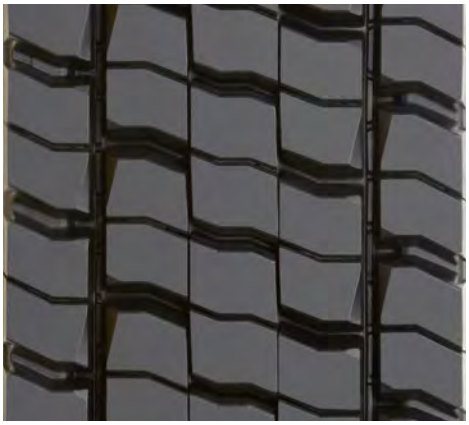


PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
11R22.5	G	05221540000	30	75	19.8	502	42.2	1071	11.6	295	13.0	330	8.25, 7.50	12.5	318	491	305	130	59	6175, 105 (2800, 720)	5840, 105 (2650, 720)
295/75R22.5	G	05220650000	30	75	19.0	482	40.7	1034	11.5	292	12.9	328	8.25, 9.00	12.5	318	509	316	125	56	6175, 110 (2800, 760)	5675, 110 (2575, 760)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. 315/80R22.5 tires used on 8.25" rims are restricted to a maximum of 7610 lbs at 120 psi. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.


Features & Benefits



Advanced tread compounding provides this Eco Plus version with **20% less rolling resistance** than the HDR2.



30/32" tread is compounded for low rolling resistance with long tread life used on highway and regional roads.



Open shoulder tread design provides excellent wet/dry traction while resisting irregular wear.



Built on the **Conti 3G Casing** for maximum retreadability.

Applications: Drive position, regional hauling on highway service.

Legend:

3G Casing | SmartWay Verified | Intelligent Tire | Retread Available


PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.


Conti Hybrid HD3

Super Regional Drive

✓ GOODS ● PEOPLE ● CONSTRUCTION



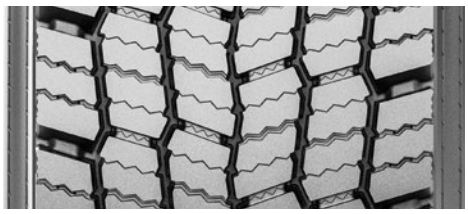

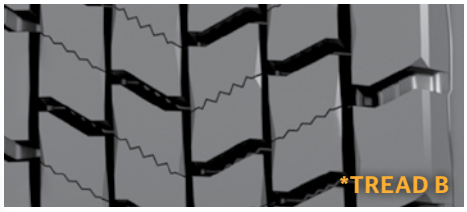


PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	SINGLE LBS, PSI (KG, KPa)	DUAL LBS, PSI (KG, KPa)
11R22.5	G	05210150000))) 05651760000)))	27	75	19.7	500	42.0	1067	11.7	296	13.1	331	8.25, 7.50	12.5	318	493	306	130	59	6175, 105 (2800, 720)	5840, 105 (2650, 720)
11R22.5	H	05210160000	27	75	19.7	500	42.0	1067	11.7	296	13.1	331	8.25, 7.50	12.5	318	493	306	132	60	6610, 120 (3000, 830	6005, 120 (2725, 830)
295/75R22.5	G	05210170000))) 05652540000)))	27	75	19.1	484	40.6	1031	11.7	296	12.7	323	8.25, 9.00	12.5	318	510	317	123	56	6175, 110 (2800, 760)	5675, 110 (2575, 760)
11R24.5	H	05210560000	27	75	20.6	522	43.9	1114	11.6	294	13.0	330	8.25, 7.50	12.5	318	472	293	142	64	7160, 120 (3250, 830)	6610, 120 (3000, 830
275/70R22.5* (Tread B)	H	05210920000	22	81	17.6	447	38.3	974	10.9	276	11.3	287	8.25, 7.50	12.1	307	551	342	115	52	6940, 130 (3150, 900)	6395, 130 (2900, 900)


TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim.))) = Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits



Fuel-efficient tread compound delivers exceptional rolling resistance balanced with mileage.



Directional tread design with regenerating sipe technologies deliver outstanding traction in tandem axle fitment.



Optimized contour and **balanced footprint distribution** provide extended tread life and premium wear performance.



Built on the **Conti 3G Casing** for maximum retreadability.

Applications: Combined long haul highway and regional tandem drive position.

Legend:
3G Casing | SmartWay Verified | Intelligent Tire | Retread Available
PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

HDR
Regional Drive




GOODS PEOPLE CONSTRUCTION

PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
255/70R22.5*	H	05223330000	26	81	17.3	439	37.0	940	10.0	255	10.8	274	8.25, 7.50	11.3	287	559	347	96	44	5510, 120 (2500, 830)	5070, 120 (2300, 830)
TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS																					

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits

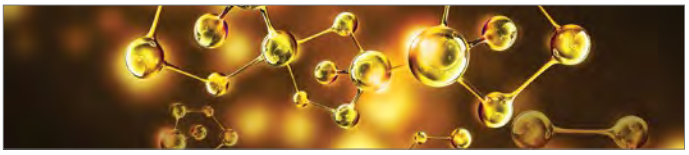

Multi-service tread compound for local and long haul service.



Offset center tread blocks provide excellent all weather traction.

Tapered tread grooves reduce stone retention for long casing life and multiple retreads.

Applications: Drive position, short and long haul. On/off highway service.

Legend:

3G Casing | SmartWay Verified | Intelligent Tire | Retread Available

PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

HDW2

Regional Drive for Extreme Weather Conditions

✓ GOODS ✓ PEOPLE ● CONSTRUCTION





PRODUCT DATA


TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
11R22.5*	H	05230120000))05650680000((	27	75	19.6	497	41.9	1063	11.6	294	13.0	329	8.25	12.5	318	495	307	131	59	6940, 120 (3150, 830)	6395, 120 (2900, 830)
11R24.5*	H	05230130000))05652910000((	27	75	20.6	522	43.9	1114	11.6	294	13.0	329	8.25	12.5	318	472	293	140	63	7160, 120 (3250, 830)	6610, 120 (3000, 830)
315/80R22.5*	L	05230490000))05652690000((	27	75	19.7	500	42.4	1076	12.3	312	12.5	318	9.00, 8.25	13.8	351	491	305	163	74	9090, 130 (4125, 900)	8270, 130 (3750, 900)
TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS																					

Note - Rim listed first is the measuring rim.))((= Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer. 315/80R22.5 tires used on 8.25" rims are restricted to a maximum of 7610 lbs.

Features & Benefits




All season tires ensures optimum performance in a variety of winter conditions from ice to deep snow.



Directional tread design with more than 1000 sipes provides excellent traction and lateral stability.

Siping engineered with Continental's **3D-Technology**.



More grip on snow and ice thanks to new **special winter compound**.



39% more tread volume compared to HDW by utilizing the all new Conti 3G Casing.

Applications: Drive axle tire for extreme weather conditions.


Legend:
3G Casing | SmartWay Verified | Intelligent Tire | Retread Available
PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

Conti Hybrid HT3

Durable Fuel-Efficient Trailer for Spread-Axles

✓ GOODS ● PEOPLE ✓ CONSTRUCTION



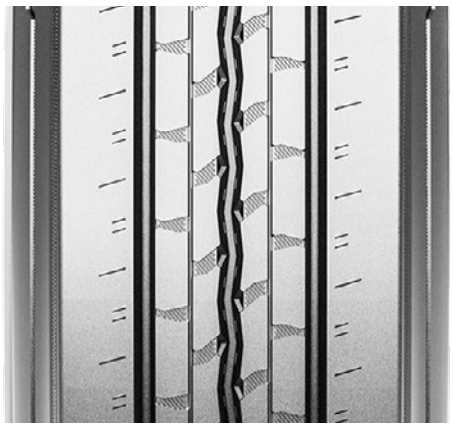


PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
11R22.5	G	05321060000 ⟪05651000000⟫	16	75	19.2	488	41.2	1046	11.1	282	12.0	305	8.25	12.5	318	502	312	111	50	6175, 105 (2800, 720)	5840, 105 (2650, 720)
11R22.5	H	05321250000 ⟪05651040000⟫	16	75	19.2	488	41.2	1046	11.1	282	12.0	305	8.25	12.5	318	502	312	113	51	6610, 120 (3000, 830)	6005, 120 (2725, 830)
295/75R22.5	G	05321040000 ⟪05651650000⟫	16	75	18.5	470	39.6	1006	11.1	282	12.6	320	8.25	12.5	318	523	325	107	49	6175, 110 (2800, 760)	5675, 110 (2575, 760)
295/75R22.5	H	05321270000 ⟪05651200000⟫	16	75	18.5	470	39.6	1006	11.1	282	12.6	320	8.25	12.5	318	523	325	109	50	7160, 120 (3250, 830)	6610, 120 (3000, 830)
11R24.5	G	05321070000 ⟪05651050000⟫	16	75	20.2	513	43.1	1095	11.1	282	12.0	305	8.25	12.5	318	480	298	119	54	6610, 105 (3000, 720)	6005, 105 (2725, 720)
11R24.5	H	05321260000 ⟪05651190000⟫	16	75	20.2	513	43.1	1095	11.1	282	12.0	305	8.25	12.5	318	480	298	122	55	7160, 120 (3250, 830)	6610, 120 (3000, 830)
285/75R24.5	G	05321050000 ⟪05651220000⟫	16	75	19.2	488	40.9	1039	10.7	272	12.1	307	8.25	12.5	318	506	314	112	51	6175, 110 (2800, 760)	5675, 110 (2575, 760)
285/75R24.5	H	05321280000 ⟪05651210000⟫	16	75	19.2	488	40.9	1039	10.7	272	12.1	307	8.25	12.5	318	506	314	114	52	6780, 120 (3075, 830)	6175, 120 (2800, 830)


TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. ⟪⟫ = Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.


Features & Benefits

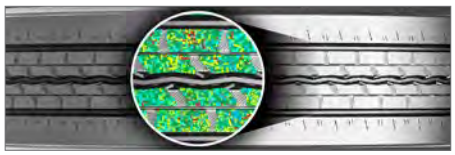

Advanced tread compound to achieve performance in high scrub application and still maintain low rolling resistance.

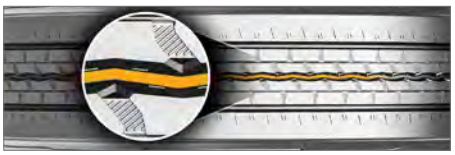

Patented groove technology for minimal stone retention, extending casing life.

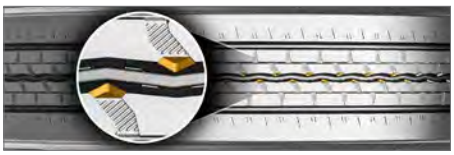

Pyramidal stone ejection system integrated into the center groove for added casing protection.

Superior Performance in Spread-axle Trailer Applications vs. HSR2 *Based on projected calculations.

Applications: Spread-axle trailer. Long haul and regional use.

Legend:

3G Casing | SmartWay Verified | Intelligent Tire | Retread Available


PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

HTR2

17.5" Regional Trailer

✓ GOODS ● PEOPLE ✓ CONSTRUCTION



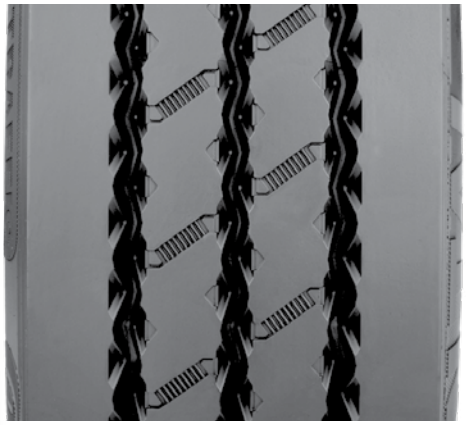


PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
215/75R17.5*	H	04920420000	16	68	14.1	359	30.2	767	8.3	211	8.6	218	6.00, 6.75	9.4	239	688	427	60	27	4805, 125 (2180, 860)	4540, 125 (2060, 860)
235/75R17.5*	H	04920110000 ⟪04650020000⟫	16	68	14.7	373	31.4	797	9.2	233	9.5	242	6.75, 7.50	10.3	262	662	412	72	33	6005, 125 (2725, 860)	5675, 125 (2575, 860)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. ⟪⟫ = Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits

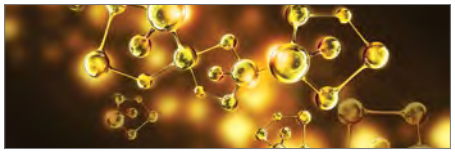

Robust tread compound engineered to protect against cutting and chipping.



Innovative groove geometry designed to prevent stone retention and drilling.



Wide tread and shoulder ribs for improved wear and increased scuff resistance.

Applications: Trailer and pusher positions.


Legend:
3G Casing | SmartWay Verified | Intelligent Tire | Retread Available
PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

Conti Hybrid HS3

19.5" Regional All-Position

✓ GOODS ✓ PEOPLE ● CONSTRUCTION



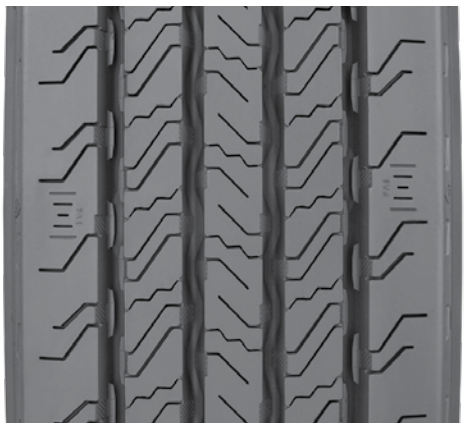

PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
225/70R19.5	G	05125850000	16	87	14.9	378	31.9	810	8.6	218	9.4	239	6.00, 6.75	10.0	254	649	403	62	28	3970, 110 (1800, 760)	3750, 110 (1700, 760)
245/70R19.5	G	05122970000	16	81	15.2	386	32.8	833	9.5	241	10.3	262	6.75, 7.50	11.0	279	631	392	78	35	4540, 110 (2060, 760)	4300, 110 (1950, 760)
245/70R19.5	H	05124830000	16	81	15.2	386	32.8	833	9.5	241	10.3	262	6.75, 7.50	11.0	279	631	392	78	35	4940, 120 (2240, 830)	4675, 120 (2120, 830)
265/70R19.5	G	05124840000	17	81	15.8	401	34.7	881	10.3	262	10.7	272	7.50, 6.75, 8.25	11.2	286	613	380	82	37	5510, 115 (2500, 790)	5205, 115 (2360, 790)
285/70R19.5	H	05124810000	18	81	16.2	412	35.9	911	11.1	283	11.6	294	8.25, 7.50, 9.00	12.5	318	590	366	93	42	6610, 125 (3000, 860)	6175, 125 (2800, 860)


TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits



Two-layer tread construction combines high mileage performance in the cap compound with significant rolling resistance improvements in the base compound.

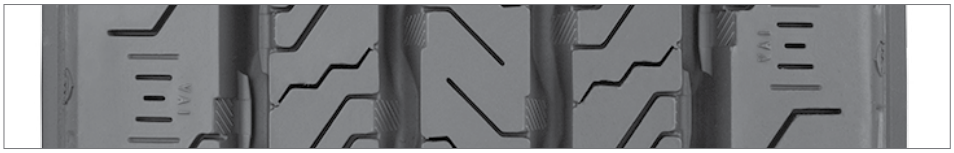

Narrowed groove widths result in increased pattern volume which improves wear resistance to guarantee high mileage performance.

Pocket sipe technology with full-depth sipes to enhance water displacement and improve wet performance over the life of the tire.

Applications: Long haul/Regional over the highway all-position use.

Legend:

3G Casing | SmartWay Verified | Intelligent Tire | Retread Available

PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

HSR+

19.5" Regional All-Position

GOODS PEOPLE CONSTRUCTION






PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
225/70R19.5*	G	05125520000))) 05652850000 (((	16	87	15.1	382	32.1	816	8.7	221	9.3	237	6.00, 6.75	10.0	254	644	400	63	29	3970, 110 (1800, 760)	3750, 110 (1700, 760)
225/70R19.5*	H	05125530000))) 05652860000 (((	16	87	15.1	384	32.1	815	8.7	221	9.3	237	**6.75**	10.0	254	645	401	65	29	4190, 120 (1900, 830)	3970, 120 (1800, 830)
TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS																					

Note - Rim listed first is the measuring rim.))) = Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits



Improved cap/base tread compound for increased removal miles and resistance to tears.



Aggressive tread design provides excellent lateral stability to minimize squirm, and improve handling.



Closed shoulder tread pattern provides even wear and reduced noise.



Scuff rib to protect against curbing, cuts and abrasions.

Mileage Improvement vs. HSR HSR+ delivers 13% improvement in removal miles vs. HSR.

Applications: Regional hauling and on/off road, all-position.


Legend:
3G Casing | SmartWay Verified | Intelligent Tire | Retread Available
PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.


Conti Hybrid HD3

19.5" Regional Drive

✓ GOODS ✓ PEOPLE ● CONSTRUCTION



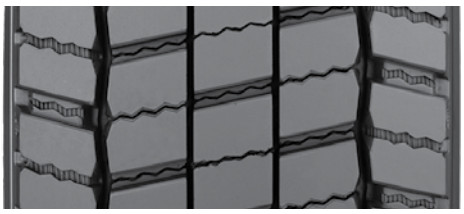

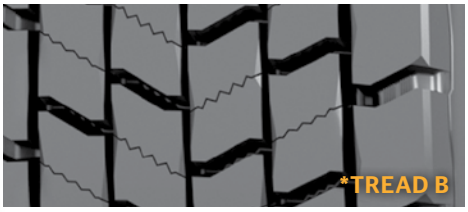


REGIONAL R

PRODUCT DATA


TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
225/70R19.5	G	05224060000	18	87	15.0	381	32.0	813	8.6	218	9.3	237	6.00, 6.75	10.0	254	647	402	63	29	3970, 110 (1800, 760)	3750, 110 (1700, 760)
245/70R19.5	G	05222240000	19	81	15.5	393	33.2	843	9.7	246	10.3	263	7.50, 6.75	11.0	279	623	387	82	37	4540, 110 (2060, 760)	4300, 110 (1950, 760)
245/70R19.5	H	05210830000	19	81	15.5	393	33.2	843	9.7	246	10.3	263	7.50, 6.75	11.0	279	623	387	82	37	4940, 120 (2240, 830)	4675, 120 (2120, 830)
265/70R19.5 (Tread B)	G	05225540000 ⟪ 05653840000 ⟫	20	81	15.8	401	34.7	881	10.3	262	10.7	272	7.50, 6.75, 8.25	11.2	286	613	381	86	39	5510, 115 (2500, 790)	5205, 115 (2360, 790)
285/70R19.5 (Tread B)	H	05220880000	20	81	16.2	412	35.9	911	11.1	283	11.6	294	8.25, 7.50, 9.00	12.5	318	590	366	97	44	6610, 125 (3000, 860)	6175, 125 (2800, 860)
TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS																					

Note - Rim listed first is the measuring rim. ⟪ ⟫ = Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits

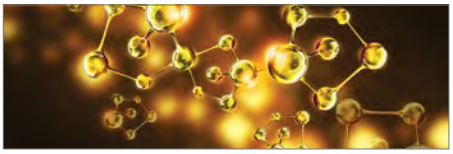

Advanced application-optimized **Hybrid tread compound** adds up to significant improvements in rolling resistance and mileage.

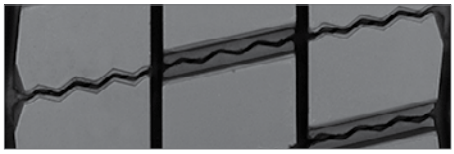

Narrowed groove widths result in increased pattern volume which improves wear resistance to guarantee high mileage performance.



Chamfered Edge reduces deformation amplitude in sidewall and bead area which results in improved rolling resistance and helps lower fuel consumption.

Applications: Long haul/Regional over the highway drive use.

Legend:

3G Casing | SmartWay Verified | Intelligent Tire | Retread Available

PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

HDR+

19.5" Regional Drive

GOODS PEOPLE CONSTRUCTION






PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
225/70R19.5*	G	05224030000))) 05652870000)))	18	87	15.1	384	32.2	819	8.7	221	9.4	238	6.00, 6.75	10.0	254	642	399	63	29	3970, 110 (1800, 760)	3750, 110 (1700, 760)
225/70R19.5*	H	05224040000))) 05652880000)))	18	87	15.2	385	32.2	818	8.7	221	9.4	239	**6.75**	10.0	254	643	399	65	29	4190, 120 (1900, 830)	3970, 120 (1800, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim.))) = Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits




Improved cap/base tread compound for increased removal miles and resistance to tears.



18/32" tread pattern provides excellent traction and long mileage in regional and local service.



Aggressive tread design provides excellent lateral stability to minimize squirm and improve handling.



Open shoulder tread pattern with tie-bar provides even tread wear along with reduced noise and improved traction.

Mileage Improvement vs. HDR HDR+ delivers 13% improvement in removal miles vs. HDR.

Applications: Regional hauling and on/off road, drive position.

Legend:
3G Casing | SmartWay Verified | Intelligent Tire | Retread Available
PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

Conti Scandinavia HD3

19.5" Regional Drive for Extreme Weather Conditions

✓ GOODS ✓ PEOPLE ● CONSTRUCTION





PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
225/70R19.5*	G	05230340000	19	87	15.1	383	32.0	813	8.6	218	9.3	236	6.00, 6.75	10.0	254	647	402	65	30	3970, 110 (1800, 760)	3750, 110 (1700, 760)
245/70R19.5*	H	05230360000	21	81	15.5	394	33.3	846	9.5	241	10.4	264	7.50, 6.75	11.0	279	622	386	80	36	4940, 120 (2240, 830)	4675, 120 (2120, 830)


TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits



Deep tread and low void design ensures long removal miles.




Heavy siping provides **numerous gripping edges** for excellent traction on wet roads.



Open shoulder tread design for increased traction in snow.

Increased footprint contact area delivers superior traction and stability.



All season compound to deliver excellent traction in all weather conditions without sacrificing removal miles.

Applications: Drive axle tire for extreme weather conditions.

Conti Hybrid HT3

19.5" Regional Trailer

✓ GOODS ✓ PEOPLE ✓ CONSTRUCTION






PRODUCT DATA


TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
265/70R19.5	H	05322000000	17	68	15.8	401	34.7	881	10.3	262	10.7	272	7.50, 6.75, 8.25	11.6	295	609	378	80	36	6005, 125 (2725, 860)	5675, 125 (2575, 860)
285/70R19.5	J	05321680000	18	68	16.2	412	35.9	911	11.1	283	11.6	294	8.25, 7.50, 9.00	12.5	318	590	366	93	42	7390, 130 (3350, 900)	6940, 130 (3150, 900)
TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS																					

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits

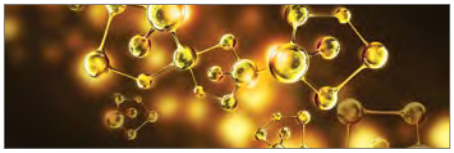

Advanced application-optimized compound adds up to significant improvements in rolling resistance and mileage.

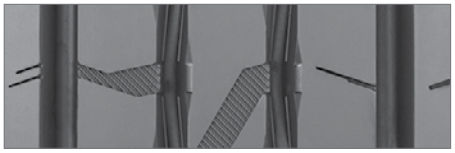

Narrowed groove widths result in increased pattern volume which improves wear resistance to provide high mileage performance.



Low rolling resistance sidewall compound used to reduce heat through friction elimination.

Applications: Long haul/Regional over the highway trailer use.

ContiTread™




Regional
Retread Product Overview

For Highway & Local Driving

Legend:
SmartWay Verified | New Tire Available



HSR 3




HSR - 18/32"



HSR - 16/32"



HSR1



LSR1



HDR2



HDR2 Eco Plus



HDR1



HDR1 Eco Plus



Scandinavia HD3



HDW2



Hybrid HT3



HTR2 SA



HTR2

ContiTread HSR 3 | Regional All-Position




PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
190	18217850000	20
200	18217860000	20
210	18217870000	20
220	18217880000	20
230	18217890000	20
240	18217900000	20

- Zigzag center groove geometry increases the number of biting edges for increased traction.
- Pyramidal stone ejectors in all tread grooves to stop stone retention for long casing life.
- Durable compounding for mileage.

ContiTread HSR - 18/32" | Regional All-Position



PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
195	18207940000	18
215	18204780000	18
225	18204790000	18
235	18204800000	18
245	18204810000	18
260	18310610000	18

- Cut and chip resistant tread for long tread life.
- Pyramidal stone ejectors in all tread grooves to stop stone retention for long casing life.
- Robust shoulder rib for long tread life.

ContiTread HSR - 16/32" | 19.5" Regional All-Position



PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
180	18310030000	16
195	18310460000	16

- 16/32" cut and chip resistant tread for long tread life.
- Aggressive tread design provides excellent lateral stability to minimize squirm, and improve wet handling performance.
- Closed shoulder to protect against curbing, cuts and abrasions.

ContiTread HSR1 | Regional All-Position




PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
205	18211270000	16
215	18310020000	16
225	18207900000	16
235	18207910000	16

- Tread compound designed to provide long life in regional applications.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.
- Tread pattern designed for excellent wet traction and reduced noise.

Legend:
SmartWay Verified | New Tire Available

ContiTread LSR1 | 17.5" Regional All-Position




PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
160	18206070000	15
180	18206080000	15
188	18206090000	15
195	18206100000	15
205	18207890000	15

- Advanced tread compound provides high mileage in regional applications.
- Multi-rib tread design features excellent wet traction, lateral stability and reduced noise.
- Unique pyramid shaped stone ejection system in all tread grooves reduce stone retention and casing penetrations.

ContiTread HDR2 | Regional Drive



PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
185	18215760000	22
195	18215770000	22
205	18215780000	26
215	18215790000	26
225	18215800000	26
235	18215810000	26
245	18215820000	26

- Cut and tear resistant tread compound for excellent wear in regional and light On/Off applications.
- Optimal performance on various road conditions, through an innovative tread compound.
- Unidirectional, arrow shaped tread pattern minimizes typical drive tire wear effects.

ContiTread HDR2 Eco Plus | Fuel-Efficient, Regional Drive



PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
215	18208110000	26
225	18208120000	26
235	18208130000	26
245	18208140000	26

- Advanced, fuel-efficient compound provides long original mileage and rolling resistance.
- Optimal performance on various road conditions, through an innovative tread compound.
- Arrow shaped tread pattern minimizes typical drive tire wear effects.

ContiTread HDR1 | Regional Drive



PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
160	18215600000	16
170	18215610000	16
180	18215620000	16
190	18215630000	16
200	18215640000	16
215	18215650000	16
190	18215660000	20
200	18215670000	20
205	18218070000	22
215	18215680000	22
225	18215690000	22
235	18215700000	22
245	18215710000	22
215	18215720000	26
225	18215730000	26
235	18215740000	26
245	18215750000	26

- Cut and tear resistant tread compound for excellent wear in regional and light On/Off applications.
- Open shoulder tread design provides excellent wet/dry traction, resists irregular wear and reduces stone retention.
- Innovative lug angle provides outstanding traction throughout the life of the tread.

ContiTread HDR1 Eco Plus | Fuel-Efficient, Regional Drive



PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
215	18207700000	22
225	18207710000	22
235	18207720000	22
245	18207730000	22

- Advanced, fuel-efficient compound provides long original mileage and rolling resistance.
- Open shoulder tread design provides excellent wet/dry traction, resists irregular wear and reduces stone retention.
- Innovative lug angle provides outstanding traction throughout the life of the tread.

ContiTread Scandinavia HD3

Regional Drive for Extreme Weather Conditions



PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
210	18211340000	25
220	18211350000	25
230	18211360000	25
240	18211370000	25

- Directional* tread pattern for improved traction.
- Full sipes located on center ribs in center grooves at 22/32" for improved snow evacuation.
- Pocket sipes featured throughout the tread pattern at 13/32"
- Optimized groove geometry for stone trapping resistance.
- Tie bars included to improve wear mileage near end of life.

Legend:
SmartWay Verified | New Tire Available

ContiTread HDW2 | Regional Drive for Extreme Weather Conditions



Tread B

PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
215	18209370000	27
225	18209380000	27
235	18209390000	27
245 (Tread B)	18209400000	27
260 (Tread B)	18209410000	27

- High-mileage compound
- All season tread ensures optimum performance in a variety of winter conditions from ice to snow.
- Directional* tread design with more than 1,000 sipes provides excellent traction and lateral stability in 245 and 260 mm sizes.

ContiTread Hybrid HT3 | Regional Trailer for Spread-Axle



PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
200	18214620000	16
210	18214630000	16
220	18214640000	16
230	18214650000	16

- New and improved winged tread for use in high scrub applications, particularly spread-axle and multi-axle.
- Durable high mileage compounding.
- Pyramidal stone ejection system integrated into the center groove for added casing protection.

ContiTread HTR2 SA | Regional Trailer for Spread-Axle



PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
240	18207560000	16
250	18207570000	16
260	18207580000	16
270	18207590000	16
290	18207600000	16

- Winged tread for use in high scrub applications, particularly spread-axle and multi-axle.
- High mileage achieved through precise balance of tread compound and geometry.

ContiTread HTR2 | Regional Trailer



PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
290	18206730000	22
320	18206740000	22
340	18206750000	22

- High mileage achieved through precise balance of tread compound and geometry.
- Tread pattern designed for increased stability and reduced noise.
- Patented innovative groove technology leads to minimum stone retention.

Continental
The Future in Motion

1ST PLACE WINNER

CONTINENTAL IS YOUR LEADER IN FUEL EFFICIENCY

Continental Tires Outperformed Other Top Brands in Fuel Efficiency Tests

Pumping Out Savings Tractors travel an average of **105,000 miles** every year. With a national average of 5.91 mpg, every tractor burns **over 17,700 gallons of fuel a year**. At $3.89/gallon, **that's over $69,000 in annual fuel costs**! With **Continental's demonstrated 7.26 mpg fuel efficiency** in Regional testing, fleets could achieve **an annual costs savings of over $12,800 per truck!***

**Savings calculations based on "NACFE 2018 Annual Fleet Fuel Study" by the North American Council for Fuel Efficiency*

Regional Tires Selected for Test



Conti HSL 3
(Rename of Conti Hybrid HS3)
Regional Haul
11R22.5 | G | 16/32"

HDR2 Eco Plus
Regional Haul
11R22.5 | G | 30/32"

Conti Hybrid HT3
Regional Haul
11R22.5 | G | 16/32"

Regional Haul Application Test Results

Tires	Double Coin	Continental	Michelin
Steer Tire	RT606+	Conti HSL 3 (Conti Hybrid HS3)	XZE2
Drive Tire	RLB1	HDR2 Eco Plus	XDN2
Trailer Tire	RR150	Conti Hybrid HT3	XZE2
Fuel consumption (L/100 km)	34.29	32.41	34.58
Fuel economy (mpg)	6.86	7.26	6.80
Rank	**2**	**1**	**3**

In Regional applications, ***Continental is proven to provide a 6.27% savings*** compared to Michelin.

About Regional Tires

Tires for Regional use are designed for applications where vehicles spend the majority of their time on pavement with multiple stops through inter-city operations, and mostly paved roads. Tires are optimized for high scrub, cut-chip resistance applications as well s traction. To put our level of fuel efficiency to the test, Continental tires were used in a study by the PIT Group of FPInnovations. .

The Test

The fuel efficiency test procedure was based on TMC Fuel Consumption Test Procedure – Type III, RP 1103A. Each tire brand was tested on three identical 2016 International Prostar tractors powered by Cummins ISX15 engines, pulling 2018 Vanguard 53-foot two-axle cube van semi-trailers, at a cruising speed of 64.6 mph (104 km/h).

CONTINENTAL DELIVERS UP TO 6% FUEL SAVINGS OVER OTHER TOP BRANDS

Contact your Continental Representative to learn more!

Need a Representative? Call 1 (800) 450-3187



Comparative Energy Efficiency Testing of 11R22.5 Tires for Line Haul and Regional Applications
PIT Group Report – 301013129-1

Continental
The Future in Motion

Urban
For Inner City Traffic & Short Distances

Hours of Service // Superior Mileage // Durable Cut/Chip Compounding // Casing Durability

Engineered for your application. Urban tires are designed for inner city traffic applications where traction, hours of service and mileage are priority. Tires operating within this application normally operate through short distances experiencing heavy scrub. Tires are designed to withstand heat generation as well as heavy loads where safety is essential. Extra sidewall protection is required to protect the casing from curbing, cuts and abrasions. Casing durability is the key aspect for segment satisfaction.

IMPORTANT NOTE: Tire Products are now classified by route. Product details are subject to change, please visit our website or contact your local sales representative for the most up to date information.



Legend:

3G Casing	SmartWay Verified	Intelligent Tire	Retread Available

PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

Urban

Truck Tire Product Overview



Conti Urban HA3



Conti HAU 3 WT

Legend:
3G Casing | SmartWay Verified | Intelligent Tire | Retread Available
PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

Conti Urban HA3

Urban All-Position

GOODS ✓ PEOPLE CONSTRUCTION



PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
305/70R22.5*	L	05140860000 ◊05652900000◊	23	68	18.6	473	39.9	1014	11.6	294	12.6	320	9.00, 8.25	13.5	343	519	322	130	59	7830, 130 (3550, 900)	6940, 130 (3150, 900)
TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS																					


Note - Rim listed first is the measuring rim. ◊◊ = Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits



Increased sidewall gauge for improved resistance against curbing, cuts and abrasions.

Sidewall wear indicator for visual cue to trigger rotation.



New urban tread compound for prolonged mileage performance with excellent driving characteristics.



Comfortable ride for driver and passengers through extremely quiet running tread.



Durable casing for premium retreadability and enhanced mileage.

Applications: Urban steer/all-position, city bus use.

Legend:

3G Casing | SmartWay Verified | Intelligent Tire | Retread Available


PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

Conti HAU 3 WT

Urban All-Position for Waste Transport

✓ GOODS ● PEOPLE ✓ CONSTRUCTION



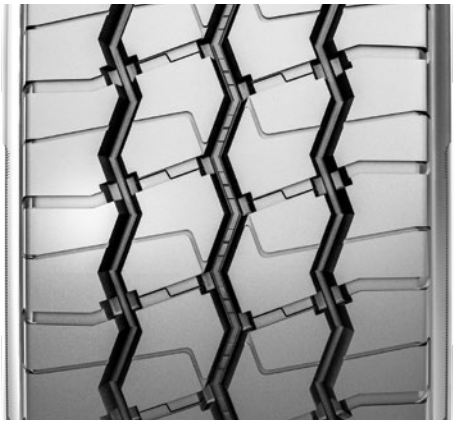

PRODUCT DATA


TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	SINGLE LBS, PSI (KG, KPa)	DUAL LBS, PSI (KG, KPa)
315/80R22.5*	L	05141090000))) 05652550000)))	26	68	20.0	507	43.1	1095	12.4	314	13.8	349	9.00, 8.25	13.8	351	480	298	167	76	10200, 130 (4540, 900)	9090, 130 (4125, 900)

PLEASE NOTE: THIS PRODUCT WAS PREVIOUSLY NAMED CONTI CITYSERVICE HA3.


TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim.))) = Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. 315/80R22.5 tires used on 8.25" rims are restricted to a maximum of 7610 lbs at 120 psi. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits



Four rib tread pattern with zigzag groove geometry for resistance to high scrub applications.



Innovative tread compound for outstanding mileage and heat reduction.



Improved bead design for increased durability and resistance to brake heat.



Extra sidewall protection for better resistance to curbs, cuts, and other sidewall abrasions.

Applications: Waste transportation and other high scrub, urban applications.

ContiTread™




Urban
Retread Product Overview

For Inner City Traffic & Short Distances

Legend:
SmartWay Verified | New Tire Available

ContiTread HAU 3 WT | Urban All-Position for Waste Transport




PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
210	18217910000	26
220	18217920000	26
230	18217930000	26
240	18217940000	26
250	18217950000	26
260	18217960000	26
270	18217970000	26
280	18217980000	26

- Optimized tread compound for long removal mileage and chip and chunk resistance.
- Robust four rib tread design for increased durability in high scrub applications.
- Zig-zag groove geometry engineered specifically for use in waste transportation.

ContiTread HDU 3 WT | Urban Drive for Waste Transport



PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
210	18217990000	32
220	18218000000	32
230	18218010000	32
240	18218020000	32
250	18218030000	32
260	18218040000	32
270	18218050000	32
280	18218060000	32

- Deep 32/32" tread depth and open shoulder tread design for excellent traction.
- Shoulder notches included in design to prevent heat build-up.
- Chip and chunk resistant compounding for endurance in waste and other high scrub applications.
- Tie bars included to improve wear mileage near end of life.

Continental
The Future in Motion

Conti360°

Continental's Fleet Services Web Portal

Accounting

Easily print or save your Continental invoices for commercial tires in PDF format. You also have the ability to download an Excel version of the list of all invoices and credits in a date range. Financial Statements are accessible for printing or saving, and you have the option of viewing your last month's statement or a real time statement. Also now includes "Dispute Invoice" functionality and dealer Proof of Service Images.

Accessibility

View the Dealer Locator to find your nearest servicing dealer. Log into your ContiConnect® tire monitoring portal if you utilize Continental's digital tire monitoring solutions, such as the ContiConnect Yard Reader. Access business intelligence and tools to keep your fleet at maximum efficiency.



Reporting

With Conti360°, you can gain insight into so many aspects of your fleet. From breakdown analysis to purchases to product performance, our reporting feature is designed to keep you in the know.

Learn more about reporting below.

Ordering

Order Continental's Digital Solutions, including replacement parts, additional tire sensors, and more, directly from the Conti360° Fleet Portal.

Training

Fleets can access the ENGAGE360° virtual training center to learn about Continental products and solutions, including opportunities to increase uptime and improve tire performance.

www.Conti360Fleet.com - YOUR 24/7 BUSINESS SOLUTION

Conti360° Reporting is designed to keep fleets in the know:

TrukFix

If your fleet participates in Continental's TrukFix roadside breakdown assistance program, you will be able to generate a detailed report of breakdowns, causes, downtime, and more.

ContiTrack2

ContiTrack2 digital tire inspections are performed by your Continental sales representative or dealer. Detailed reports on tire wear, tread depth, and recommendations to improve performance are available for viewing and printing.

CLC-Soft

Fleets who use our ContiLifeCycle partners to retread their casings have the ability to track the progress of the retread. Different types of reports are available for a 360° view.

Sales & Service

Within a specified time period, you have the ability to view product and digital solution purchases, as well as run reports of which services your dealer performed.

Continental
The Future in Motion

Construction
For Durability On & Off-Road

Superior Mileage // Durable Cut/Chip Compounding // Resistance to Stone Drilling // Optimal Retreadability

Engineered for your application. Tires for Construction and On/Off Road use are designed for vocational applications such as utility trucks, concrete mixers, and dump trucks, etc., where they spend some time on the pavement but are also likely to encounter curbs, stones, debris, and tight turns. Tires are optimized for durability and traction, as well as minimal stone retention and cut-and-tear resistance.

IMPORTANT NOTE: Tire Products are now classified by route. Product details are subject to change, please visit our website or contact your local sales representative for the most up to date information.



Legend:

3G Casing	SmartWay Verified	Intelligent Tire	Retread Available

PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

Construction

Truck Tire Product Overview



Conti HSC 3



Conti HAC 3



Conti HDC 3



HDC1 HT



HTC

Legend:
3G Casing | SmartWay Verified | Intelligent Tire | Retread Available
PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

Conti HSC 3

Intelligent Construction Steer/All-Position

GOODS PEOPLE CONSTRUCTION





PRODUCT DATA


TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
11R22.5	H	05652440000	24	68	19.6	498	41.7	1060	11.7	297	12.7	322	8.25, 7.50	12.5	318	496	308	135	61	6610, 120 (3000, 830)	6005, 120 (2725, 830)
12R22.5	H	05652460000	24	68	20.1	512	42.9	1090	11.8	301	13.0	329	9.00, 8.25	13.5	343	482	300	150	68	7390, 120 (3350, 830)	6780, 120 (3075, 830)
315/80R22.5	L	05652480000	24	68	19.8	502	42.9	1089	12.5	318	13.8	351	9.00, 8.25	13.8	351	483	300	162	74	10200, 130 (4625, 900)	9090, 130 (4125, 900)
11R24.5	H	05652450000	24	68	20.6	523	43.9	1115	11.7	297	12.7	322	8.25, 7.50	12.5	318	472	293	144	65	7160, 120 (3250, 830)	6610, 120 (3000, 830)
12R24.5	H	05652470000	24	68	21.1	537	44.9	1141	12.0	305	14.5	368	9.00, 8.25	13.7	348	461	286	163	74	7830, 120 (3550, 830)	7160, 120 (3250, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. 05 = Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. 315/80R22.5 tires used on 8.25" rims are restricted to a maximum of 7160 lbs at 120 psi. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits


Applications: Construction, coal haulers, logging and other all-position service.



Aggressive on/off-road tread design with enhanced cap/base compounds for **improved mileage and traction**.



Built on the innovative Conti 3G Casing with **premium off-road belt package** for maximum retreadability and increased casing life.




Self-cleaning tread design and groove geometry reduces stone retention for enhanced retreadability.



Maximum sidewall protection for improved resistance against curbing, cuts and abrasions.

sensorCONNECT | Continental's Intelligent Tire



Equipped with TPMS Sensor for accurate, real-time tire pressure and temperature readings • Sensor warrantied for 5 Years to minimize disruptions. • Sensor provides true casing temperature allowing preventive actions that make your tire last longer • Avoids valve damage and air leaks by mounting on the inner liner.

Learn more at www.continental-truck.com to learn more. See warranty policy for details.



Legend:

3G Casing | SmartWay Verified | Intelligent Tire | Retread Available

PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

Conti HAC 3

Intelligent Construction All-Position

✓ GOODS ● PEOPLE ✓ CONSTRUCTION




PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
385/65R22.5	L	⟪ 05652000000 ⟫	22	68	19.6	498	42.0	1067	14.8	376	15.9	404	11.75, 12.25	N/A	N/A	493	306	171	78	9920, 130 (4500, 900)	N/A
425/65R22.5	L	⟪ 05652010000 ⟫	24	68	20.8	529	44.8	1138	16.6	421	17.9	454	13.00, 12.25, 14.00	N/A	N/A	462	287	190	86	11400, 120 (5150, 830)	N/A
445/65R22.5	M	⟪ 05652020000 ⟫	23	68	20.9	531	45.2	1148	17.4	442	18.6	472	13.00, 14.00	N/A	N/A	458	285	210	95	12800, 130 (5800, 900)	N/A
TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS																					

Note - Rim listed first is the measuring rim. ⟪ ⟫ = Intelligent Tire Article #. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.


Features & Benefits



Aggressive on/off-road tread design combined with enhanced cap/base compounds for **improved mileage and traction**.



Rugged 4-belt tread package resists impacts, bruises and penetrations for improved casing durability.




Minimal stone retention due to **self-cleaning tread pattern** and groove geometry for enhanced retreadability.



Increased sidewall gauge for improved resistance against curbing, cuts and abrasions.

Applications: Wide base, all-position fitment for on/off-road, mixed service applications such as cement mixers.

sensor CONNECT | Continental's Intelligent Tire



Equipped with TPMS Sensor for accurate, real-time tire pressure and temperature readings • Sensor warrantied for 5 Years to minimize disruptions. • Sensor provides true casing temperature allowing preventive actions that make your tire last longer • Avoids valve damage and air leaks by mounting on the inner liner.

Learn more at www.continental-truck.com to learn more. See warranty policy for details.



Legend:
3G Casing | SmartWay Verified | Intelligent Tire | Retread Available
PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

Conti HDC 3

Intelligent Construction Drive

GOODS PEOPLE CONSTRUCTION




PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
11R22.5	H	⟪05652410000⟫	30	68	19.9	504	42.1	1069	11.7	298	12.7	322	8.25, 7.50	12.5	318	492	306	143	65	6610, 120 (3000, 830)	6005, 120 (2725, 830)
11R24.5	H	⟪05652430000⟫	30	68	20.7	526	44.1	1120	11.7	298	12.8	324	8.25, 7.50	12.5	318	469	292	153	69	7160, 120 (3250, 830)	6610, 120 (3000, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. ⟪⟫ = Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits



Wide, aggressive open shoulder tread design with enhanced cap/base compounds for **improved mileage and traction**.



Diamond shaped lugs and optimal void volume for excellent traction.



Self-cleaning tread design and miniature stone bumpers reduce stone retention for enhanced retreadability.




Maximum sidewall protection for improved resistance against curbing, cuts and abrasions.

Applications: Construction, coal haulers, logging, waste haulers and other on/off-road service.

CONSTRUCTION

sensor CONNECT | Continental's Intelligent Tire



Equipped with TPMS Sensor for accurate, real-time tire pressure and temperature readings • Sensor warrantied for 5 Years to minimize disruptions. • Sensor provides true casing temperature allowing preventive actions that make your tire last longer • Avoids valve damage and air leaks by mounting on the inner liner.

Learn more at www.continental-truck.com to learn more. See warranty policy for details.



Legend:

3G Casing | SmartWay Verified | Intelligent Tire | Retread Available

PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

HDC1 HT

Construction Drive for High Traction

GOODS PEOPLE CONSTRUCTION





PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
11R22.5	H	05250950000	32	68	19.9	505	42.2	1072	11.6	295	13.0	330	8.25	12.5	318	491	305	136	62	6610, 120 (3000, 830)	6005, 120 (2725, 830)
11R24.5	H	05250810000	32	68	20.7	526	44.2	1123	11.6	295	12.5	318	8.25	12.5	318	468	291	146	66	7160, 120 (3250, 830)	6610, 120 (3000, 830)


TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.


Features & Benefits



Rigid belt package with full width top belt and extra sidewall protection for increased durability.



Diamond shaped tread lug design and shoulder notches are optimal for chaining.



Alternating groove geometry and stone bumper system for maximum stone ejection.



Built on the innovative **Conti 3G Casing** for maximum retreadability.

Applications: Severe Service On/Off Road Drive Position.

Legend:
3G Casing | SmartWay Verified | Intelligent Tire | Retread Available
PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

HTC
Construction Trailer

GOODS PEOPLE CONSTRUCTION



PRODUCT DATA


TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
275/70R22.5*	J	0 5350480000))) 05652930000 (((	21	62	17.6	447	38.3	974	10.8	275	11.3	287	8.25, 7.50	12.2	311	551	342	108	49	6940, 125 (3150, 860)	6395, 125 (2900, 860)
TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS																					

Note - Rim listed first is the measuring rim.))) = Intelligent Tire Article #. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits



Aggressive multi-service, **all-position tread pattern** provides excellent traction in on/off road service.

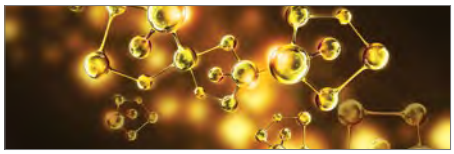

Cut and tear resistant tread compound for long tread life in on/off road conditions.



Thick undertread resists casing penetration and damage for multiple retreads.

Applications: All-position fitment in on/off highway service.

ContiTread™



Construction
Retread Product Overview

For Durability On & Off-Road

Legend:
SmartWay Verified | New Tire Available



HSC 3



HSC - 18/32"



HDC 3



HTC1

Legend:
3G Casing | SmartWay Verified | Intelligent Tire | Retread Available
PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

ContiTread HSC 3 | Construction Steer/All-Position



PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
210	18215050000	24
220	18215060000	24
230	18215070000	24
240	18215080000	24

- Enhanced compound for improved mileage and chip and chunk resistance.
- Groove geometry reduces stone retention for enhanced retreadability.
- Rounded closed shoulder design to improve wear and optimize durability in multi-axle positions.

ContiTread HSC | Construction All-Position




PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
215	18205480000	18
225	18205490000	18
235	18205500000	18
245	18205820000	18
255	18205830000	18

- On/Off-road compound increases resistance to cuts, chips and chunks. Also, reduces the number and depth of any cuts and tears.
- Patented innovative groove technology leads to minimum stone retention, extending casing life.

ContiTread HDC 3 | Construction Drive



PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
210	18215090000	28
220	18215100000	28
230	18215110000	28
240	18215120000	28
250	18215130000	28

- Diamond shaped lugs and optimal void volume for excellent traction.
- Open shoulder tread design for use in mud, gravel and dirt.
- Enhanced compound for improved mileage and chip and chunk resistance.
- Self-cleaning tread pattern and miniature stone bumpers reduce stone retention for enhanced retreadability.

ContiTread HTC1 | Construction Trailer



PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
320	18206760000	24
350	18206770000	24
380	18219490000	23

- Aggressive multi-surface, all-position tread pattern provides excellent traction.
- Outstanding self-cleaning properties ensure a long service life.

Continental
The Future in Motion

Off-Road
For Severe Service & Maximum Durability

Excellent Traction // Hours of Service // Cut/Tear Resistant // Casing Durability

Engineered for your application. Tires for Off-Road and Severe Service use are designed to support construction, mining, logging, and other applications where vehicles travel across challenging surfaces strewn with rocks, nails, and debris. Tires are optimized for durability and high removal mileage, as well as cut-and-tear resistance and traction.

IMPORTANT NOTE: Tire Products are now classified by route. Product details are subject to change, please visit our website or contact your local sales representative for the most up to date information.



Legend:
3G Casing | SmartWay Verified | Intelligent Tire | Retread Available
PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

Off-Road

Truck Tire Product Overview



HCS



HDO



Conti Terra HD3 (19.5")

Legend:

3G Casing	SmartWay Verified	Intelligent Tire	Retread Available

PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

HCS

Severe Service All-Position

GOODS PEOPLE CONSTRUCTION






PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
445/65R22.5*	L	05160660000 ⟪ 05653580000 ⟫	27	68	20.9	532	45.5	1156	17.7	449	19.0	482	13.00, 14.00	N/A	N/A	462	287	207	94	12800, 130 (5800, 900)	N/A
325/95R24 (NHS)	J	05160340000	40	50	22.4	568	49.3	1252	12.8	325	13.1	332	8.50, 9.00	14.2	360	430	267	204	92	9370, 120 (4250, 830)	8540, 120 (3875, 830)
TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS																					

Note - Rim listed first is the measuring rim. ⟪ ⟫ = Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. NHS - Not for Highway Use Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits

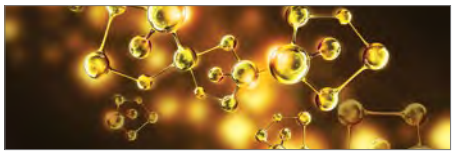

High operational safety, long lasting service and **outstanding resistance to damage through compounds** with extreme resistance to cuts and tears.



Outstanding traction, even in harshest terrain, thanks to **tread pattern structure and geometry**.



Most durable casing design for maximum service life in demanding off-road use, also involving heavy-duty vehicles.

Applications: All-Position service for on/off road, mining and heavy mix axles.

Legend:
3G Casing | SmartWay Verified | Intelligent Tire | Retread Available
PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

HDO
Off-Road Drive

GOODS PEOPLE CONSTRUCTION





PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
11R22.5 *	H	05391190000	32	68	19.7	500	42.2	1072	11.0	280	12.0	306	8.25, 7.50	12.5	318	490	305	122	55	6610, 120 (3000, 830)	6005, 120 (2725, 830)
TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS																					

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits



Deep 32/32" tread with cut/chip resistant tread provides excellent traction in off-road conditions.



Patented innovative groove technology leads to minimum stone retention, extending casing life.



Sidewall profile with curb rib reduces damage from curbing, cuts and abrasions.

Applications: Logging, mining, construction and other aggressive, off-road traction needs.

Legend:

3G Casing	SmartWay Verified	Intelligent Tire	Retread Available

PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

Conti Terra HD3

19.5" Off-Road Drive

GOODS PEOPLE CONSTRUCTION





PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
																				SINGLE	DUAL
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
225/70R19.5*	G	05260080000	19	75	15.4	390	32.3	821	8.6	218	9.4	239	6.00, 6.75	10.0	254	640	398	67	30	3970, 110 (1800, 760)	3750, 110 (1700, 760)
245/70R19.5*	H	05260070000	19	75	15.6	395	33.3	845	9.7	245	10.3	262	7.50, 6.75	11.0	279	622	387	82	37	4940, 120 (2240, 830)	4675, 120 (2120, 830)


TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits



Aggressive 19/32" open shoulder tread design provides outstanding traction in off road conditions.



Technologically **advanced cut/ tear resistant tread compound** to provide long removal miles.



Circumferential protection rib engineered to withstand severe off road terrain.



Scuff rib to protect against curbing, cuts and abrasions.

Applications: Off-road severe service drive position.

ContiTread™



Off-Road
Retread Product Overview

For Severe Service & Maximum Durability

Legend:
SmartWay Verified | New Tire Available

ContiTread HCS | Severe Service All-Position




PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
215	18213510000	32
225	18213520000	32
235	18213530000	32
245	18213540000	32
360	18213550000	32
380	18213560000	32

- Cut and tear resistant tread compound for long tread life in On/Off road conditions.
- Outstanding self-cleaning properties ensure a long service life.
- Aggressive tread pattern provides excellent traction.

ContiTread HDC1 HT | Construction Drive for High Traction



PRODUCT DATA

WIDTH (MM)	ARTICLE NUMBER	TREAD DEPTH (32nds)
225	18211140000	32
235	18211150000	32
245	18211160000	32

- Diamond shaped tread lug design and shoulder notches are optimal for chaining.
- Alternating groove geometry and stone bumper system for maximum stone ejection.
- Aggressive cut and chip resistant compounding to resist the most severe of applications.

CONSTRUCTION EQUIPMENT TOP 100 NEW PRODUCTS

ContiConnect® Yard Reader

Digital Tire Monitoring with Web Portal



Increased Mileage | **Longer Tread Life** | **Longer Casing Life** | **Reduced Roadside Breakdowns**

ContiConnect® Yard Reader is Continental's digital tire monitoring platform for commercial fleets, displaying tire pressure and temperature data for every vehicle in the fleet in a single web portal. It is ideal for fleets whose trucks or buses return to the terminal daily or multiple times per week. Fleets benefit from increased uptime, extended tire life, and fewer tire-related breakdowns.

How does it work? Tire-mounted sensors transmit tire pressure and temperature data to a yard reader station mounted in the fleet yard. The data is displayed in a mobile-friendly web portal. ContiConnect® fleets can also receive customizable text and email alerts to address tire issues as soon as they are detected.



Continental
The Future in Motion

Digital Tire Monitoring Solutions

Increasing Uptime, Decreasing Costs



Why invest in tire pressure & temperature monitoring?

Improve Tire Runout
Minimize irregular wear, one of the primary reasons for early tire removal.

Save Fuel
How much do you spend per month on fuel? What would 1% savings mean to your bottom line?

Save Labor and Tire Maintenance Costs
Reduce time spent on manual tire pressure checks and repairing tire issues caused by underinflation.

Reduce Roadside Breakdowns
Avoid downtime, late deliveries, and cost of approximately $800 per incident.

Improve Safety
Help protect your drivers and other road users.

Properly inflated tires can reduce total tire-related costs by $600 to $800 annually per vehicle.

Actual results may vary. According to the Technology & Maintenance Council (TMC) S.2 Tire & Wheel Study Group, improper tire inflation, defined as little as 10 psi low, reduces fuel economy by about one percent, increases total tire-related costs by approximately $600 to $800 annually per tractor-trailer combination, and changes the tire contact patch which affects stopping and acceleration traction and vehicle handling thereby impacting vehicle safety.

sensor CONNECT

Benefits of the Intelligent Tire | Equipped with TPMS Sensor

- **Accurate, real-time tire pressure and temperature** to prevent tire damage and breakdowns
- **Sensor warrantied for 5 years*** to minimize disruptions to your tire program
- **Provides true tire casing temperature,** allowing preventive actions that make your tire last longer.
- **Avoids valve damage and air leaks** by mounting on the inner liner of the tire

**See Warranty Policy for details.*



Intelligent Tires are ready to pair with the following solutions:



ContiConnect® Yard Reader
Digital Tire Monitoring with Web Portal

- **Mounted in the fleet termina**l and reads sensors in a 65-foot radius*
- **Mobile-friendly web portal** displays tire data for all vehicles
- **Text & email notifications** can alert fleet personnel of detected issues
- **Ideal for vehicles that return to the fleet yard** at least once per week

**Operating radius may be affected by various factors including obstructions.*



ContiPressureCheck® | On-Vehicle TPMS

- **Informs the driver in real-time** via a convenient in-cab display
- **Supports multiple trailer configurations:** married and drop-and-hook
- **Ideal for long-haul and over-the-road vehicles** that don't return to the yard frequently



ContiConnect® Live | Real-time Monitoring

- **Ideal for real-time monitoring** of multiple vehicles in any location
- **Actionable data** even when vehicles are out on the road
- **Instantaneous alerts** at fleet, dispatch, and driver level
- **Seamless monitoring** of drop-and-hook as well as married tractor-trailers



ContiPressureCheck® Integrated | Remote Tire Monitoring

- **Alerts back-office personnel in real-time** to tire issues on the road
- **Potential for driver alerts** via an optional in-cab display
- **Available with the following telematics providers:**

ROAD READY by Trucklite · PEOPLENET A TRIMBLE COMPANY · ZONAR · GEOTAB management by measurement

100,000 VEHICLES EQUIPPED WORLDWIDE

ContiPressureCheck®

On-Vehicle Tire Pressure Monitoring System



Increased Mileage | **Longer Tread Life** | **Longer Casing Life** | **Reduced Roadside Breakdowns**



ContiPressureCheck® monitors a single vehicle in real-time, alerting the driver to tire pressure and temperature issues via an in-cab display. It is ideal for fleets whose trucks or buses are away from the terminal for long periods of time, and for owner-operators. Fleets benefit from extended tire and casing life, as well as increasing fuel economy and improving safety over the road.

How does it work? Tire-mounted sensors transmit tire pressure and temperature data. The data is displayed in real-time to the driver via a display screen mounted in the cab of the vehicle.

Extend the functionality of your ContiPressureCheck® system

With Telematics Integration, display tire data remotely via any of our existing telematics partners: Zonar, PeopleNet, Geotab, and Road Ready. To learn more about our integration capabilities, visit **www.continental-truck.com.**





Increased Mileage | Real-Time Monitoring | Longer Tire Life | Reduced Roadside Breakdowns

ContiConnect® Live via Driver App

Digital Tire Monitoring. Anytime. Anywhere.

- Ideal for real-time monitoring of multiple vehicles in any location
- Actionable data even when vehicles are out on the road
- Instantaneous alerts at fleet, dispatch, and driver level
- Seamless monitoring of drop-and-hook as well as married tractor-trailers

Address Tire Issues in Real-Time

Properly inflated tires can reduce total tire-related costs by $600 to $800 annually per vehicle.



Actual results may vary. According to the Technology & Maintenance Council (TMC) S.2 Tire & Wheel Study Group, improper tire inflation, defined as little as 10 psi low, reduces fuel economy by about one percent, increases total tire-related costs by approximately $600 to $800 annually per tractor-trailer combination, and changes the tire contact patch which affects stopping and acceleration traction and vehicle handling thereby impacting vehicle safety.

Continental Truck and Bus Tires | www.continental-truck.com

sensor CONNECT

Tables & Charts
& Tire Information

Medium Truck Load/ Inflation Tables

Safety Warning

Serious Injury May Result From:

- Explosion of tire/rim assembly due to improper mounting. Use safety cage and clip-on extension air hose. Only specially trained persons should mount tires.
- Tire failure due to misapplication/improper inflation/overloading.

Follow tire manufacturer's instructions.
Check inflation pressure frequently with calibrated gauge.

Truck and Bus Tires

Normal and Wide-Base Sizes on 5 Degree or Flat-Based Rims - Radial Ply

Tire Loads Limits at Various Cold Inflation Pressures

24"			kPa	480	520	550	590	620	660	690	720	760	790	830
			psi	70	75	80	85	90	95	100	105	110	115	120
325/95R24	*	dual	kg	2780	2860	3020	3140	3250	3350	3450	3550	3650	3760	**3875 (J)**
			lbs	6120	6390	6650	6910	7160	7390	7610	7830	8050	8300	**8540 (J)**
		single	kg	2870	3020	3170	3300	3440	3650	3770	3890	4000	4130	**4250 (J)**
			lbs	6330	6660	6980	7280	7580	8050	8310	8570	8820	9100	**9370 (J)**

Conventional Sizes on 15 Degree Drop-Center Rims - Radial Ply

22.5"			kPa	480	520	550	590	620	660	690	720	760	790	825/830***
			psi	70	75	80	85	90	95	100	105	110	115	120
10R22.5	*	dual	kg	1750	1830	1910	2000	2080	2160	2240	2300	2360	**2430 (G)**	--
			lbs	3860	4045	4230	4410	4585	4760	4940	5075	5210	**5355 (G)**	--
		single	kg	1850	1940	2030	2120	2200	2280	2360	2430	2500	**2575 (G)**	--
			lbs	4080	4280	4480	4675	4850	5025	5205	5360	5515	**5675 (G)**	--
11R22.5	*	dual	kg	1990	2080	2160	2250	2360	2460	2560	**2650 (G)**	2680	2710	**2725 (H)**
			lbs	4380	4580	4760	4950	5205	5415	5625	**5840 (G)**	5895	5950	**6005 (H)**
		single	kg	2050	2160	2260	2370	2500	2600	2700	**2800 (G)**	2870	2940	**3000 (H)**
			lbs	4530	4770	4990	5220	5510	5730	5950	**6175 (G)**	6320	6465	**6610 (H)**
12R22.5	*	dual	kg	2170	2260	2350	2440	2575	2630	2680	**2725 (G)**	2840	2960	**3075 (H)**
			lbs	4780	4990	5190	5390	5675	5785	5895	**6005 (G)**	6265	6525	**6780 (H)**
		single	kg	2240	2360	2470	2580	2725	2820	2910	**3000 (G)**	3120	3240	**3350 (H)**
			lbs	4940	5200	5450	5690	6005	6205	6405	**6610 (G)**	6870	7130	**7390 (H)**

24.5"			kPa	480	520	550	590	620	660	690	720	760	790	830
			psi	70	75	80	85	90	95	100	105	110	115	120
11R24.5	*	dual	kg	2110	2210	2300	2390	2500	2580	2660	**2725 (G)**	2820	2910	**3000 (H)**
			lbs	4660	4870	5070	5260	5510	5675	5840	**6005 (G)**	6205	6405	**6610 (H)**
		single	kg	2190	2300	2410	2520	2650	2770	2890	**3000 (G)**	3080	3160	**3250 (H)**
			lbs	4820	5070	5310	5550	5840	6095	6350	**6610 (G)**	6790	6970	**7160 (H)**
12R24.5	*	dual	kg	2300	2400	2500	2600	2650	2770	2890	**3000 (G)**	3080	3160	**3250 (H)**
			lbs	5080	5300	5520	5730	5840	6095	6350	**6610 (G)**	6790	6970	**7160 (H)**
		single	kg	2380	2500	2630	2740	2900	3020	3140	**3250 (G)**	3350	3450	**3550 (H)**
			lbs	5240	5520	5790	6040	6395	6650	6910	**7160 (G)**	7380	7600	**7830 (H)**

CAUTION: Always use approved tire and rim combinations for diameters and contours.
NOTE: All values are for 65 mph unless otherwise noted, for tire load and inflation at various speeds, see next pages.

* Based on TRA | ** Based On ETRTO
*** Tire & Rim Association has adopted an official equivalency of kPa to psi values. 825 replaces the previous 830.
NOTE: Letters in parentheses denote load range for which boldface loads are maximum.

Truck and Bus Tires

Metric and Wide-Base Sizes on 15 Degree Drop-Center Rims - Radial Ply

Tire Loads Limits at Various Cold Inflation Pressures

16"			kPa	240	280	310	340	380	410	450	480	520	550	650
			psi	35	40	45	50	55	60	65	70	75	80	95
LT225/75R16	**	Dual	kg	635	675	725	800 (C)	845	885	975 (D)	1000	1040	**1120 (E)**	1250 (F)
			lbs	1365	1500	1630	1765 (C)	1875	1995	2150 (D)	2220	2330	**2470 (E)**	2755 (F)
		Single	kg	680	745	795	880 (C)	930	970	1060 (D)	1100	1140	**1215 (E)**	1360 (F)
			lbs	1500	1650	1790	1940 (C)	2060	2190	2335 (D)	2440	2560	**2680 (E)**	3000 (F)
LT235/85R16	**	Dual	kg	720	770	835	910 (C)	960	1025	1080 (D)	1140	1200	**1260 (E)**	1400 (F)
			lbs	1545	1700	1845	2006 (C)	2125	2260	2381 (D)	2515	2645	**2778 (E)**	3085 (F)
		Single	kg	770	845	920	1000 (C)	1055	1125	1190 (D)	1250	1315	**1380 (E)**	1550 (F)
			lbs	1700	1870	2030	2205 (C)	2335	2485	2623 (D)	2765	2905	**3042 (E)**	3415 (F)
LT245/75R16	**	Dual	kg	720	770	835	910 (C)	960	1020	1080 (D)	1140	1195	**1260 (E)**	1400 (F)
			lbs	1545	1700	1845	2006 (C)	2125	2255	2381 (D)	2515	2640	**2778 (E)**	3085 (F)
		Single	kg	770	845	920	1000 (C)	1055	1125	1190 (D)	1250	1315	**1380 (F)**	1550 (F)
			lbs	1700	1870	2030	2205 (C)	2335	2480	2623 (D)	2765	2900	**3042 (F)**	3415 (F)

17.5"			kPa	480	520	550	590	620	660	690	720	760	790	830	860
			psi	70	75	80	85	90	95	100	105	110	115	120	125
215/75R17.5	**	Dual	kg	--	--	1450	1520	1590	1650	1720	1790	1860	1925	1990	**2060 (J)**
			lbs	--	--	3195	3500	3500	3645	3795	3945	4095	4245	4390	**4545 (J)**
		Single	kg	--	--	1530	1610	1680	1750	1820	1900	1960	2040	2110	**2180 (J)**
			lbs	--	--	3375	3540	3695	3860	4010	4180	4330	4495	4650	**4805 (J)**
235/75R17.5	**	Dual	kg	--	--	--	--	--	2020	2140	2200	2325	2380	2440	**2575 (J)**
			lbs	--	--	--	--	--	4450	4720	4855	5120	5250	5380	**5675 (J)**
		Single	kg	--	--	--	--	--	2080	2205	2270	2395	2455	2515	**2725 (J)**
			lbs	--	--	--	--	--	4580	4860	5000	5275	5410	5545	**6005 (J)**
245/70R17.5	**	Dual	kg	--	--	--	--	--	2020	2140	2200	2325	2380	2440	**2575 (J)**
			lbs	--	--	--	--	--	4450	4720	4855	5120	5250	5380	**5675 (J)**
		Single	kg	--	--	--	--	--	2080	2205	2270	2395	2455	2515	**2725 (J)**
			lbs	--	--	--	--	--	4580	4860	5000	5275	5410	5545	**6005 (J)**

19.5"			kPa	480	520	550	590	620	660	690	720	760	790	830	860	900
			psi	70	75	80	85	90	95	100	105	110	115	120	125	130
225/70R19.5	*	Dual	kg	1230	1300	1360	1410	1470	1550	1580	1640	**1700 (G)**	1750	**1800 (H)**	1850	1900 (J)
			lbs	2720	2860	3000	3115	3245	3415	3490	3615	**3750 (G)**	3855	**3970 (H)**	4085	4190 (J)
		Single	kg	1310	1380	1450	1500	1570	1650	1690	1740	**1800 (G)**	1860	**1900 (H)**	1970	2000 (J)
			lbs	2895	3040	3195	3315	3450	3640	3715	3845	**3970 (G)**	4100	**4190 (H)**	4245	4410 (J)
245/70R19.5	*	Dual	kg	--	--	1550	1590	1660	1750	1790	1850	**1950 (G)**	--	--	--	--
			lbs	--	--	3415	3515	3655	3860	3940	4075	**4410 (G)**	--	--	--	--
		Single	kg	--	--	1650	1700	1770	1850	1900	1970	**2060 (G)**	--	--	--	--
			lbs	--	--	3640	3740	3890	4080	4190	4335	**4540 (G)**	--	--	--	--
245/70R19.5 (LRH Only)	*	Dual	kg	--	--	1550	1590	1660	1750	1790	1850	1950	1970	**2060 (H)**	--	--
			lbs	--	--	3415	3515	3655	3860	3940	4075	4300	4345	**4540 (H)**	--	--
		Single	kg	--	--	1650	1700	1770	1850	1900	1970	2060	2095	**2180 (H)**	--	--
			lbs	--	--	3640	3740	3890	4080	4190	4335	4540	4620	**4805 (H)**	--	--
265/70R19.5 @81 mph	**	Dual	kg	1560	1640	1700	1780	1860	1950	2000	2000	2120	**2360 (H)**	--	--	--
			lbs	3430	3600	3750	3930	4095	4300	4405	4415	4675	**5205 (H)**	--	--	--
		Single	kg	1660	1740	1800	1900	1970	2060	2130	2200	2300	**2500 (H)**		--	--
			lbs	3650	3830	3970	4180	4355	4540	4685	4850	5070	**5510 (H)**	--	--	--
285/70R19.5 LRH @ 81 mph	**	Dual	kg	--	1870	1970	2065	2160	2260	2355	2450	2540	2630	**2725 (H)**	--	--
			lbs	--	4125	4340	4555	4770	4980	5190	5395	5600	5805	**6005 (H)**	--	--
		Single	kg	--	1990	2100	2200	2305	2405	2505	2605	2705	2805	**2900 (H)**	--	--
			lbs	--	4390	4625	4855	5080	5305	5525	5745	5965	6180	**6395 (H)**	--	--
285/70R19.5 LRJ @ 68 mph	**	Dual	kg	--	--	--	2240	2345	2450	2550	2650	2750	2850	2950	3050	**3150 (J)**
			lbs	--	--	--	4940	5170	5400	5625	5850	6070	6290	6510	6730	**6940 (J)**
		Single	kg	--	--	--	2385	2495	2610	2715	2825	2930	3040	3145	3250	**3350 (J)**
			lbs	--	--	--	5260	5505	5750	5990	6230	6465	6700	6930	7160	**7390 (J)**
305/70R19.5	*	Dual	kg	--	--	2060	2120	2200	2300	2370	2450	2575	2620	2725	**2900 (J)**	--
			lbs	--	--	4540	4670	4860	5070	5230	5410	5675	5770	6005	**6395 (J)**	--
		Single	kg	--	--	2240	2330	2420	2500	2610	2700	2800	2870	3000	**3150 (J)**	--
			lbs	--	--	4940	5130	5340	5510	5745	5945	6175	6340	6610	**6940 (J)**	--

22.5"			kPa	480	520	550	590	620	660	690	720	760	790	825/830***	860	900
			psi	70	75	80	85	90	95	100	105	110	115	120	125	130
255/70R22.5	*	Dual	kg	--	--	1800	1860	1940	2000	2020	2090	2120	2230	**2300 (H)**	--	--
			lbs	--	--	3970	4110	4275	4410	4455	4610	4675	4915	**5070 (H)**	--	--
		Single	kg	--	--	1900	1980	2060	2120	2220	2300	2360	2450	**2500 (H)**	--	--
			lbs	--	--	4190	4370	4550	4675	4895	5065	5205	5400	**5510 (H)**	--	--
275/70R22.5	**	Dual	kg	--	--	--	2070	2155	2265	2345	2424	2535	2615	2720	2795	**2900 (J)**
			lbs	--	--	--	4565	4750	4995	5170	5345	5590	5765	5995	6160	**6395 (J)**
		Single	kg	--	--	--	2250	2340	2460	2550	2635	2750	2840	2955	3040	**3150 (J)**
			lbs	--	--	--	4960	5160	5420	5620	5810	6060	6260	6510	6700	**6940 (J)**
275/80R22.5	**	Dual	kg	1860	1950	2060	2130	2220	2300	2390	2470	**2575 (G)**	2630	**2800 (H)**	--	--
			lbs	4095	4300	4540	4690	4885	5070	5260	5440	**5675 (G)**	5795	**6175 (H)**	--	--
		Single	kg	2040	2140	2240	2340	2440	2500	2620	2710	**2800 (G)**	2890	**3150 (H)**	--	--
			lbs	4500	4725	4940	5155	5370	5510	5780	5980	**6175 (G)**	6370	**6940 (H)**	--	--
295/60R22.5 9.00" wheel @ 65mph	**	Dual	kg	-	-	-	2187	2290	2392	2492	2592	2690	2787	2885	2970	**3075 (J)**
			lbs	-	-	-	4825	5050	5275	5495	5715	5930	6145	6360	6570	**6780 (J)**
		Single	kg	-	-	-	2385	2495	2610	2715	2825	2930	3040	3145	3230	**3350 (J)**
			lbs	-	-	-	5260	5505	5750	5990	6230	6465	6700	6930	7160	**7390 (J)**
295/60R22.5 9.00" wheel @75mph	**	Dual	kg	-	-	-	-	2187	2290	2392	2492	2592	2690	2787	2885	**2970 (J)**
			lbs	-	-	-	-	4825	5050	5275	5495	5715	5930	6145	6360	**6570 (J)**
		Single	kg	-	-	-	-	2385	2495	2610	2715	2825	2930	3040	3145	**3230 (J)**
			lbs	-	-	-	-	5260	5505	5750	5990	6230	6465	6700	6930	**7160 (J)**
295/75R22.5	*	Dual	kg	1860	1950	2060	2130	2220	2300	2390	2470	**2575 (G)**	2630	**2725 (H)**	--	--
			lbs	4095	4300	4540	4690	4885	5070	5260	5440	**5675 (G)**	5795	**6005 (H)**	--	--
		Single	kg	2040	2140	2240	2340	2440	2500	2620	2710	**2800 (G)**	2890	**3000 (H)**	--	--
			lbs	4500	4725	4940	5155	5370	5510	5780	5980	**6175 (G)**	6370	**6610 (H)**	--	--
295/80R22.5	**	Dual	kg	2050	2160	2260	2370	2500	2600	2700	2800	2910	3030	**3150 (H)**	--	--
			lbs	4530	4770	4990	5220	5510	5730	5950	6175	6415	6670	**6945 (H)**	--	--
		Single	kg	2380	2500	2630	2740	2900	3020	3140	3250	3350	3450	**3550 (H)**	--	--
			lbs	5240	5520	5790	6040	6395	6650	6910	7160	7380	7600	**7830 (H)**	--	--
305/70R22.5	**	Dual	kg	1915	2020	2130	2235	2340	2445	2545	2645	2745	2845	2945	**3150 (L)**	--
			lbs	4220	4450	4700	4930	5160	5390	5610	5830	6050	6270	6490	**6940 (L)**	--
		Single	kg	2155	2280	2400	2520	2635	2755	2870	2985	3095	3210	3320	3430	**3550 (L)**
			lbs	4750	5030	5290	5560	5810	6070	6330	6580	6820	7080	7320	7560	**7830 (L)**
315/80R22.5	*	Dual	kg	--	--	2575	2650	2750	2900	2970	3070	3150	3270	3450	3600	**3750 (L)**
			lbs	--	--	5675	5840	6070	6395	6545	6770	6940	7210	7610	7940	**8270 (L)**
		Single	kg	--	--	2800	2910	3030	3150	3260	3370	3450	3590	3750	3960	**4125 (L)**
			lbs	--	--	6175	6415	6670	6940	7190	7440	7610	7920	8270	8600	**9090 (L)**
315/80R22.5** speed restricted LRL		Dual	kg	--	--	2800	2910	3030	3150	3260	3370	3450	3590	3750	3940	**4125 (L)**
			lbs	--	--	6175	6415	6670	6940	7190	7440	7610	7920	8270	8680	**9090 (L)**
		Single	kg	--	--	3050	3170	3300	3430	3550	3670	3760	3910	4125	4330	**4540 (L)**
			lbs	--	--	6725	6990	7275	7560	7825	8090	8290	8620	9090	9545	**10000 (L)**
385/65R22.5	**	Dual	kg	--	--	--	--	--	--	--	--	--	--	--	--	--
			lbs	--	--	--	--	--	--	--	--	--	--	--	--	--
		Single	kg	2880	3060	3150	3350	3470	3650	3740	3850	4000	4100	4250	4360	**4500 (L)**
			lbs	6380	6720	6940	7350	7650	8050	8230	8510	8820	9050	9370	9610	**9920 (L)**
425/65R22.5	**	Dual	kg	--	--	--	--	--	--	--	--	--	--	--	--	--
			lbs	--	--	--	--	--	--	--	--	--	--	--	--	--
		Single	kg	3430	3640	3750	3980	4130	4250	4440	4580	4750	4880	**5150 (L)**	--	--
			lbs	7590	7990	8270	8740	9100	9370	9790	10100	10500	10700	**11400 (L)**	--	--
445/50R22.5	*	Dual	kg	--	--	--	--	--	--	--	--	--	--	--	--	--
			lbs	--	--	--	--	--	--	--	--	--	--	--	--	--
		Single	kg	--	3150	3320	3480	3640	3810	3970	4120	4250	4430	**4625 (L)**	--	--
			lbs	--	6940	7310	7680	8030	8390	8740	9090	9370	9780	**10200 (L)**	--	--
445/65R22.5	*	Dual	kg	--	--	--	--	--	--	--	--	--	--	--	--	--
			lbs	--	--	--	--	--	--	--	--	--	--	--	--	--
		Single	kg	3720	3950	4125	4320	4470	4625	4820	4960	5150	5290	**5600 (L)**	--	**5800 (M)**
			lbs	8230	8660	9090	9480	9870	10200	10600	11000	11400	11700	**12300 (L)**	--	**12800 (M)**

24.5"			kPa	480	520	550	590	620	660	690	720	760	790	830
			psi	70	75	80	85	90	95	100	105	110	115	120
285/75R24.5	*	Dual	kg	1870	1970	2060	2150	2240	2360	2410	2490	**2575 (G)**	2660	**2800 (H)**
			lbs	4135	4340	4540	4740	4930	5205	5310	5495	**5675 (G)**	5860	**6175 (H)**
		Single	kg	2060	2160	2240	2360	2460	2575	2650	2740	**2800 (G)**	2920	**3075 (H)**
			lbs	4545	4770	4940	5210	5420	5675	5835	6040	**6175 (G)**	6440	**6780 (H)**

CAUTION: Always use approved tire and rim combinations for diameters and contours.

NOTE: All values are for 65 mph unless otherwise noted, for tire load and inflation at various speeds, see next pages.

* Based on TRA | ** Based On ETRTO

*** Tire & Rim Association has adopted an official equivalency of kPa to psi values. 825 replaces the previous 830.

NOTE: Letters in parentheses denote load range for which boldfaceloads are maximum.

Load Limits At Various Speeds

For Radial Ply Truck Tires Used On Improved Surfaces

(These Tables apply to tires only. Consult rim/wheel manufacturer for rim/wheel load and inflation capacities.)

Tire And Rim Association Standard

FOR METRIC AND WIDE BASE TIRES
The service load and minimum (cold) inflation must comply with the following limitations unless a speed restriction is indicated on the tire or the manufacturer rates the tire at 75 mph or above.

SPEED RANGE (MPH)	RADIAL PLY TIRES	
	INFL. PRESSURE CHANGE	% LOAD CHANGE
71 thru 75	+5 psi	-12%
66 thru 70	+5 psi	-4%
51 thru 65	No Increase	None
41 thru 50	No Increase	+7%
31 thru 40	No Increase	+9%
21 thru 30	+10 psi	+12%
11 thru 20	+15 psi	+17%
6 thru 10	+20 psi	+25%
2.6 thru 5	+20 psi	+45%
Creep thru 2.5	+20 psi	+55%
Creep (2)	+30 psi	+75%
Stationary	+30 psi	+105%

FOR CONVENTIONAL TIRES
The service load and minimum (cold) inflation must comply with the following limitations unless a speed restriction is indicated on the tire or the manufacturer rates the tire at 75 mph or above.

SPEED RANGE (MPH)	RADIAL PLY TIRES	
	INFL. PRESSURE CHANGE	% LOAD CHANGE
71 thru 75	+5 psi	-12%
66 thru 70	+5 psi	-4%
51 thru 65	No Increase	None
41 thru 50	No Increase	+9%
31 thru 40	No Increase	+16%
21 thru 30	+10 psi	+24%
11 thru 20	+15 psi	+32%
6 thru 10 (1)	+30 psi	+60%
2.6 thru 5 (1)	+30 psi	+85%
Creep thru 2.5 (1)	+30 psi	+115%
Creep (1) (2)	+40 psi	+140%
Stationary (1)	+40 psi	+185%

NOTES

1. Apply these increases to Dual Loads and Inflation Pressures.
2. Creep – Motion for not over 200 feet in a 30-minutes period.

Note 1: The inflation pressures shown in the minimum cold pressures for the various loads listed.
Higher pressures should be used as follows:

A. When required by the above speed/load table.
B. When higher pressures are desirable to obtain improved operating performance. For speeds above 20 mph, the combined increases of A and B should not exceed 20 psi above the inflation specified for the maximum load of the tire.

Note 2: Load limits at various speed for:
Tires used in highway service at Restricted Speed.
Mining and Logging Tires used in Intermittent Highway Service.

THE MAXIMUM LOAD AND INFLATION CAPACITY OF THE RIM MUST NOT BE EXCEEDED.

Load Limits At Various Speeds

Tires Rated At 75 MPH And Radial Ply Truck Tires Used On Improved Surfaces

(These tables apply to tires only. Consult rim/wheel manufacturer for rim/wheel load and inflation capacities.)

Tire And Rim Association Standard

FOR METRIC AND WIDE BASE TIRES		
SPEED RANGE (MPH)	RADIAL PLY TIRES	
	INFL. PRESSURE CHANGE	% LOAD CHANGE
71 thru 75	No Increase	None
66 thru 70	No Increase	None
51 thru 65	No Increase	None
41 thru 50	No Increase	+7%
31 thru 40	No Increase	+9%
21 thru 30	+10 psi	+12%
11 thru 20	+15 psi	+17%
6 thru 10	+20 psi	+25%
2.6 thru 5	+20 psi	+45%
Creep thru 2.5	+20 psi	+55%
Creep (2)	+30 psi	+75%
Stationary	+30 psi	+105%

FOR CONVENTIONAL TIRES		
SPEED RANGE (MPH)	RADIAL PLY TIRES	
	INFL. PRESSURE CHANGE	% LOAD CHANGE
71 thru 75	No Increase	None
66 thru 70	No Increase	None
51 thru 65	No Increase	None
41 thru 50	No Increase	+9%
31 thru 40	No Increase	+16%
21 thru 30	+10 psi	+24%
11 thru 20	+15 psi	+32%
6 thru 10 (1)	+30 psi	+60%
2.6 thru 5 (1)	+30 psi	+85%
Creep thru 2.5 (1)	+30 psi	+115%
Creep (1) (2)	+40 psi	+140%
Stationary (1)	+40 psi	+185%

NOTES

1. Apply these increases to Dual Loads and Inflation Pressures.
2. Creep – Motion for not over 200 feet in a 30-minutes period.


Note 1: The inflation pressures shown in the minimum cold pressures for the various loads listed.
Higher pressures should be used as follows:

A. When required by the above speed/load table.
B. When higher pressures are desirable to obtain improved operating performance. For speeds above 20 mph, the combined increases of A and B should not exceed 20 psi above the inflation specified for the maximum load of the tire.

THE MAXIMUM LOAD AND INFLATION CAPACITY OF THE RIM MUST NOT BE EXCEEDED.

Reading Tire Information

Tire Sidewall

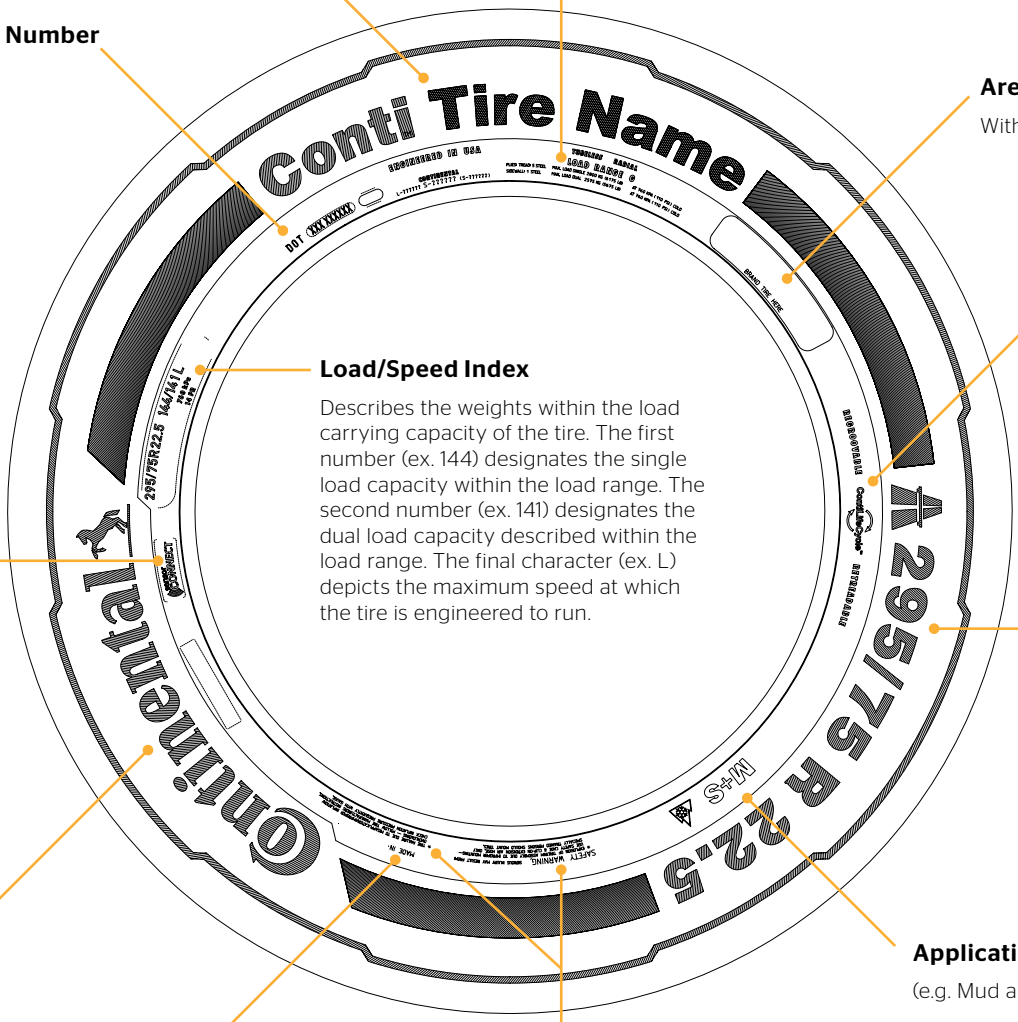

Product Name
Ex. Conti HSR 3

Load Ratings & Construction Information

D.O.T. Number

Area for Branding
With your inventory number

Regroovable & Retreadable
Sufficient rubber thickness under grooves to permit regrooving.

Load/Speed Index
Describes the weights within the load carrying capacity of the tire. The first number (ex. 144) designates the single load capacity within the load range. The second number (ex. 141) designates the dual load capacity described within the load range. The final character (ex. L) depicts the maximum speed at which the tire is engineered to run.

Intelligent Tire Mark
Equipped with TPMS Sensor

Tire Size

Manufacturer

Application Information
(e.g. Mud and Snow)

Country of Manufacture

Safety Warning

SAFETY WARNING, SERIOUS INJURY MAY RESULT FROM:
* EXPLOSION OF TIRE/RIM ASSEMBLY DUE TO IMPROPER MOUNTING— USE SAFETY CAGE & CLIP-ON EXTENSION AIR HOSE. ONLY SPECIALLY TRAINED PERSONS SHOULD MOUNT TIRES.

* TIRE FAILURE DUE TO MISAPPLICATION/IMPROPER INFLATION/ OVERLOADING — FOLLOW TIRE MANUFACTURERS INSTRUCTIONS. CHECK INFLATION PRESSURE FREQUENTLY WITH GAUGE.

Reading Tire Information
DOT Code

Manufacturing Codes

Characters 1 & 2 = Manufacturer and Plant

Characters 3 & 4 = Tire Size Code

Characters 5/6/7 = Tire Type or Model

New Tire - D.O.T. Number



Department of Transportation

ALL TIRES USED IN U.S.A. MUST DISPLAY A D.O.T. NUMBER.

Date of Manufacturing

Characters 1 & 2 = Week of Manufacture (01 - 53)

Characters 3 & 4 = Year of Manufacture (Last 2 Digits)

Retreaded Tire - D.O.T. Number



Manufacturing Retread Facility

Characters 1 - 3 = Retread Facility

Date of Manufacturing

Characters 4 & 5 = Week of Manufacture (01 - 53)

Characters 6 & 7 = Year of Manufacture (Last 2 Digits)

Reading Tire Information

New Generation Product Naming

1 | Global Prefix — **3** | Generation Number

Conti HAU 3 WT

2 | Technical Area — **4** | Optional Descriptor

Step 1 Global Prefix

Moving forward, every new tire will begin with Conti (or ContiTread for retread), regardless of segment, region, or application. This universal prefix will help unify our diverse product line.

Step 2 Technical Area

This area provides essential information to help ensure the right tire goes on the right vehicle.

HAU*

Vehicle Classification
- **H**eavy
- **L**ight

Axle Configuration
- **S**teer
- **A**ll-Position
- **D**rive
- **T**railer

Tire Applications
- **L**ong Haul
- **R**egional
- **U**rban
- **C**onstruction (On/Off-Road)
- **O**ff-Road
- **W**inter

**Heavy All-Position Urban*

Step 3 Generation Number (1st, 2nd, 3rd, etc.)

Step 4 Optional Descriptor

Although it may be left blank, this space covers additional information about a tire's specialized characteristics to help our customers find the optimal tire.

EP Eco Plus | **DL** Deep Lug | **WT** Waste Transport | **& more...**

PLEASE NOTE: If these two characters are included, they are part of the tire name and essential to its identification. For example, a **Conti HSL 3** and a **Conti HSL 3 EP** could both exist, and would be two entirely different tires with different tread patterns, article numbers, and benefits.



Example 1: Conti HSL 3

Heavy Vehicle / **S**teer Axle / **L**ong **H**aul Application (3rd Generation)





Example 2: Conti HSR 3

Heavy Vehicle / **S**teer Axle / **R**egional Application (3rd Generation)

Definitions

New Tire Dimensions

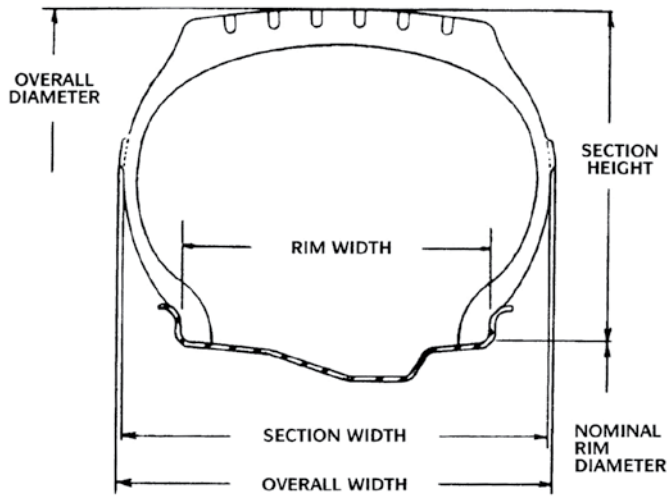

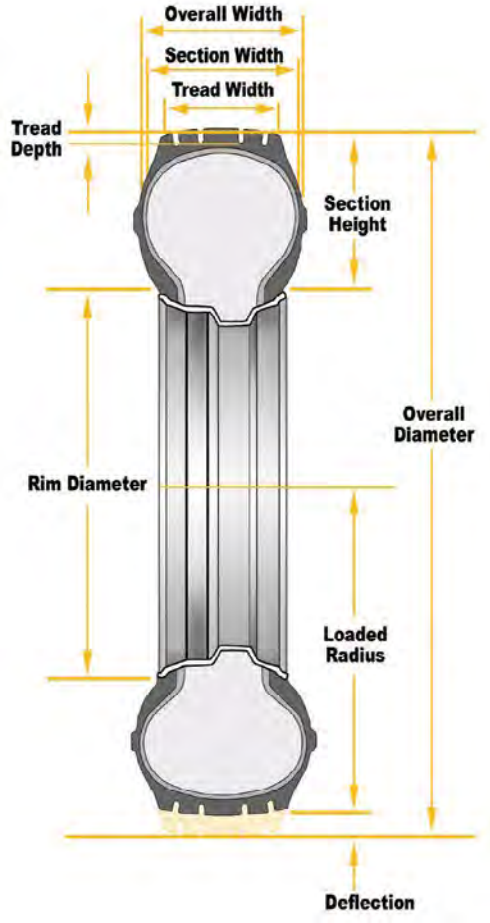


Aspect Ratio	Section Height | Section Width
Rim Width	Linear distance between the flanges of the rim.
Static Loaded Radius	Distance from wheel axle centerline to supporting tread surface at a given load and pressure in a static condition.
Tire (Overall) Width	The width of a new tire, including 24-hour inflation growth, and including protective side ribs, bars and decorations.
Section Height	Half the difference between the overall diameter and the nominal rim diameter.
Overall Diameter	The diameter of an inflated tire at the outermost surface of the tread, including 24-hour inflation growth.
Revolutions Per Mile	Measured number of revolutions for a tire traveling one mile. This can vary with speed, load, and inflation.
Tread Width	Distance across tread from shoulder to shoulder.
Width Loaded	Tire width (overall) under rated load conditions.
Minimum Dual Spacing	Minimum dual tire centerline to centerline measurement.
Section Width	Linear distance between outside of sidewalls of inflated tire (exclusive of markings, etc.).

Low Aspect Ratio Tires

24.5 Inch Highway Size

(USING TYPICAL DESIGN DIMENSIONS)

Match Tire For Speed And Axle Weights

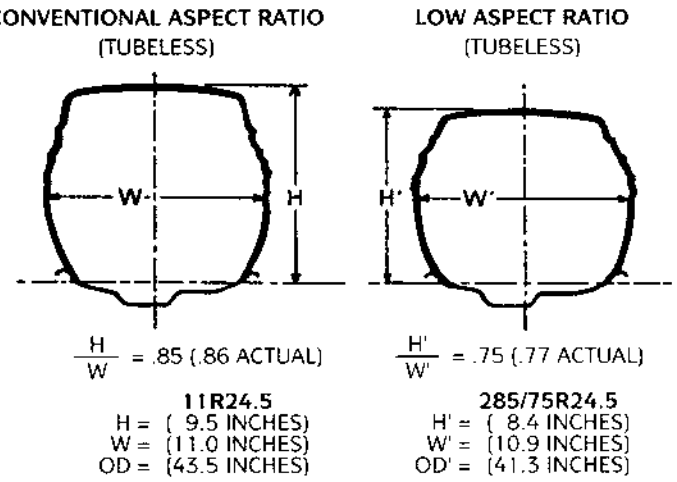

In a tire selection process, it is mandatory that consideration be given to selecting a tire size and load range which at least equals the maximum load requirements by axle position (steer, drive or trail). All highway truck tires have load limits established for tires used in normal highway service. Therefore, when selecting a tire for service, both the carrying capacity and speed implications must be considered.

TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES

THE PRESSURE IS MINIMUM FOR LOAD

MAXIMUM SPEED OF 65 (MPH)										**Example for LRG**
SIZE			**70**	**75**	**80**	**85**	**90**	**95**	**100**	**105**
			(480)	**(520)**	**(550)**	**(590)**	**(620)**	**(660)**	**(690)**	**(720)**
11R22.5	Dual	kg	1990	2080	2160	2250	2360	2460	2560	**2650 (G)**
		lbs	4380	4580	4760	4950	5205	5415	5625	**5840 (G)**
	Single	kg	2050	2160	2260	2370	2500	2600	2700	**2800 (G)**
		lbs	4530	4770	4990	5220	5510	5730	5950	**6175 (G)**
11R24.5	Dual	kg	2110	2210	2300	2390	2500	2580	2660	**2725 (G)**
		lbs	4660	4870	5070	5260	5510	5675	5840	**6005 (G)**
	Single	kg	2190	2300	2410	2520	2650	2770	2890	**3000 (G)**
		lbs	4820	5070	5310	5550	5840	6095	6350	**6610 (G)**

For example, when selecting tires for a tractor and trailer combination with a gross combination weight (GCW) of 80,000 lbs. and an axle weight distribution of 12,000 lbs. on the steer, 34,000 lbs. on the tandem drive and 34,000 lbs. on the tandem trailer axles, the most common conventional tire sizes used are 11R22.5 Load Range G and 11R24.5 Load Range G. The load and inflation schedule according to the Tire and Rim Association tables for these sizes is shown above.

Safety Warnings

Tire Demounting And Mounting Safety Precautions

SAFETY WARNING

SERIOUS INJURY OR DEATH MAY RESULT FROM:



EXPLOSION OF TIRE RIM ASSEMBLY DUE TO IMPROPER MOUNTING - USE SAFETY CAGE & CLIP-ON EXTENSION AIR HOSE. ONLY SPECIALLY TRAINED PERSONS SHOULD MOUNT TIRES.

WARNING

Tire and wheel servicing can be dangerous, and should be done by trained personnel using proper tool and procedures and safety precautions in the RMA's "Demounting and Mounting Procedures for Trucks/Bus Tires" and "Inspection procedures for identification of potential zipper ruptures in steel cord radial medium and light truck tires" charts and service bulletins.

Failure to comply with these procedures may result in faulty positioning of the tire and/or rim parts, and cause the assembly to burst with explosive force, sufficient to cause serious injury or death. Never mount or use damaged tires or rims.

MISAPPLICATION/IMPROPER INFLATION/OVERLOADING SAFETY WARNINGS

WARNING

There is danger of serious injury or death if a tire of one bead diameter is installed on a rim or wheel of a different rim diameter.


Re-assembly and inflation of mismatched parts can result in serious injury or death. Just because parts come in together does not mean they belong together. Check for proper matching of all rim parts before putting any parts together.

Always replace a tire of exactly the same bead diameter designation and suffix letters.

For example: A 16" tire goes on a 16" rim. Never mount a 16" tire on a 16.1" or 16.5" rim. A 16.1" tire goes on a 16.1" Never mount a 16.1" tire on a 16" or 16.5" rim. A 16.5" tire goes on 16.5 " rim. Never mount a 16.5" tire on a 16" or 16.1" rim.

While it is possible to pass a 16" diameter tire over the lip or flange of a 16.1" or 16.5" size diameter rim, it cannot be inflated enough to position itself against the rim flange. If an attempt is made to seat the tire bead by inflating, the tire bead will break with explosive force and could cause serious injury or death.

Rims of different diameters and tapers cannot be interchanged. The following diagram illustrates the difference between rims of two different tapers and diameters.

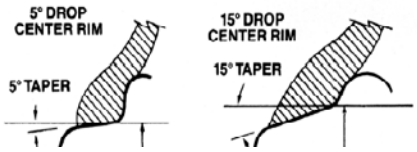

The following diagram shows how beads of a 16" tire will not seat on a 16.5" rim. The beads cannot be forced out against the rim flanges by using more air pressure because this will break the beads and the tire will explode with force sufficient to cause serious injury or death.



Never assemble a tire and rim unless you have positively identified and correctly matched the parts.

Safety Warnings

Tire Demounting And Mounting Safety Precautions


⚠ WARNING

NEVER inflate beyond 40 pounds pressure to seat beads.
NEVER stand, lean or reach over the assembly during inflation.
Inspect both sides of the tire to be sure that the beads are evenly seated. If tire is mounted on a machine that does not have a positive lock-down device to hold the wheel, inflation should be done on a safety cage. If both beads are not properly seated when pressure reaches 40 pounds air pressure, completely deflate the assembly, reposition the tire and/or tube on the rim, re-lubricate and reinflate. Inflating beyond 40 pounds air pressure when trying to seat the beads is a DANGEROUS PRACTICE that may break a tire bead (or even the rim) with explosive force, possibly resulting in serious injury or death. After the beads are fully seated, pressure may be increased above 40 psi to operating pressures, not to exceed the maximum labeled on the tire sidewall.

⚠ WARNING

Permanent tire damage due to under inflation and/or overloading cannot always be detected. Any tire known or suspected to have been run at 80% or less of normal operating inflation pressure and/or overloaded, could possibly have permanent structural damage (steel cord fatigue). Ply cords weakened by under inflation and/or overloading may break one after another, until a rupture occurs in the upper sidewall with accompanying instantaneous air loss and explosive force. This can result in serious injury or death.

Any tire of having been operated and under inflated and/or overloaded must be approached with caution. Completely deflate the tire by removing the valve core before removing the tire/rim/wheel assembly from the vehicle. After removing from the vehicle, clearly identify the tire so it will not be reinflated **until carefully inspected by a trained technician** to determine the cause of under inflation, as well as any tire damage resulting from under inflation and/or overloading.

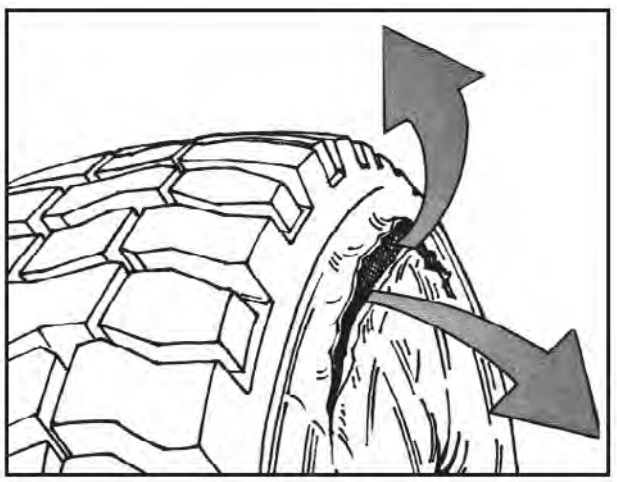

⚠ WARNING

The use of any flammable material during tire servicing is absolutely prohibited. Use of starting fluid ether, gasoline, or any other flammable material to lubricate, seal or seat the beads of a tubeless tire can cause the tire to explode or can cause the explosive separation of the tire/rim assembly resulting in serious injury or death.

This practice may also result in undetected damage to the tire or rim that could result in failure of the tire in service.

Safety Warnings





FIGURE 1

STAY OUT OF THE TRAJECTORY AS INDICATED BY SHADED AREA
Note: Under some circumstances, the trajectory may deviate from its expected path.

Always deflate tires before handling. Inflate only in safety cage.



TRAJECTORY FIGURE 2

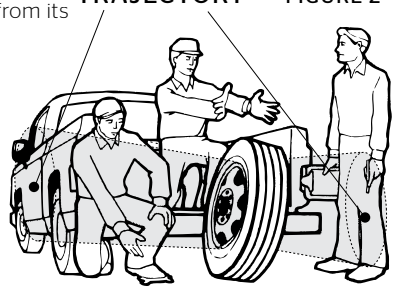


FIGURE 3

The air pressure contained in a tire is dangerous. The sudden release of this pressure by a tire blow-out or side ring separation can cause serious injury or death. Stay out of the trajectory as indicated by shaded area. When installing the tire/rim assembly on the vehicle, it will be impossible to stay out of the trajectory; however, at all other time you and all others must stay out of the trajectory.

⚠ WARNING

Tire explosions can cause death or personal injury or property damage.

Excessive speed in a free-running, unloaded tire can cause it to "explode"from extreme centrifugal force.

⚠ WARNING

When mounting dual disc wheels on a vehicle, be sure to carefully check and retighten or re-torque inner cap nuts before mounting the outer wheel. In demounting the outer wheel, there is a possibility that the inner cap nuts may have been loosened accidentally.

NEVER rework, weld, heat, or braze the tire/wheel/rim. Heating the rim of tire/wheel/rim. Heating the rim of tire/wheel/rim assembly can cause a tire to explode, causing serious injury or death,

NEVER hammer, strike or pry any type of tire/rim assembly while the tire contains inflation pressure. Do not attempt to seat any part while the tire contains any inflation pressure. This could result in serious injury.

Regrooving
Continental, General Tire, AmeriSteel, and Euzkadi brand truck tires that have "REGROOVABLE" molded on the sidewall may be regrooved. After regrooving, it is required that 3/32" of under tread remains to cover the top ply. It is the responsibility of the regroover to assure that all Federal Regulations are met. For further clarification, see Code of Federal Regulations: Title 49, Transportation; Parts 569 and 393.75.

Service Descriptions

Continental Tire the Americas, LLC provides a service description onto the sidewall of all premium products.

This service description, which consists of one or more load indices and speed symbols, is located close to the tire size designation on the sidewall of the tire.

The load index relates to the maximum load carrying capacities allowed at the speed indicated by the speed symbol.

The speed symbol relates to the maximum speed allowed for the load carrying capacities associated with the load index.

The following is an example of a load index / speed symbol associated with a medium radial truck tire:

144/141

Load Indices
(Single/Dual)

L

Speed Symbol

The attached chart shows the comparison of load index to load and speed symbol to maximum speed for radial truck tire products.

Consult your local Continental Tire representative for confirmation of the suitability of the tire/wheel assembly for the intended service.

Truck-Bus Metric Tires

International Load Index Numbers

LOAD INDEX	Kg	Lbs.
119	1360	3000
120	1400	3085
121	1450	3195
122	1500	3305
123	1550	3415
124	1600	3525
125	1650	3640
126	1700	3750
127	1750	3860
128	1800	3970
129	1850	4080
130	1900	4190
131	1950	4300
132	2000	4410
133	2060	4540
134	2120	4675
135	2180	4805
136	2240	4940
137	2300	5070
138	2360	5205
139	2430	5355
140	2500	5510
141	2575	5675
142	2650	5840
143	2725	6005
144	2800	6175

LOAD INDEX	Kg	Lbs.
145	2900	6395
146	3000	6610
147	3075	6780
148	3150	6940
149	3250	7160
150	3350	7390
151	3450	7610
152	3550	7830
153	2650	8050
154	3750	8270
155	3875	8540
156	4000	8820
157	4125	9090
158	4250	9370
159	4375	9650
160	4500	9920
161	4625	10200
162	4750	10500
163	4875	10700
164	5000	11000
165	5150	11400
166	5300	11700
167	5450	12000
168	5600	12300
169	5800	12800
170	6000	13200

SPEED SYMBOL	SPEED (kmh)	SPEED (mph)
F	80	50
G	90	56
J	100	62
K	110	68
L	120	75
M	130	81
N	140	87
P	150	93
Q	160	99
R	170	106
S	180	112
T	190	118

Truck Tire Tread Depth

Conversion Table to Percent Of Wear:

Original Tire Tread Depths in 32nds →

Tread Remaining ↓

32nd	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	32	37	38	39	40	41	32nd
2/32	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	2/32
3/32	90	91	92	92	93	93	94	94	94	95	95	95	95	96	96	96	96	96	96	97	97	97	97	97	97	3/32
4/32	80	82	83	85	86	87	88	88	89	89	90	90	91	91	92	92	92	93	93	93	94	94	95	95	95	4/32
5/32	70	73	75	77	79	80	81	82	83	84	85	86	86	87	88	88	88	89	89	90	91	92	92	92	92	5/32
6/32	60	64	67	69	71	73	75	76	78	79	80	81	82	83	83	84	85	85	86	87	89	89	89	89	90	6/32
7/32	50	55	58	62	64	67	69	71	72	74	75	76	77	78	79	80	81	81	82	83	86	86	86	87	87	7/32
8/32	40	45	50	54	57	60	63	65	67	68	70	71	73	74	75	76	77	78	79	80	83	83	84	84	85	8/32
9/32	30	36	42	46	50	53	56	59	61	63	65	67	68	70	71	72	73	74	75	77	80	81	81	82	82	9/32
10/32	20	27	33	38	43	47	50	53	56	58	60	62	64	65	67	68	69	70	71	73	77	78	78	79	79	10/32
11/32	10	18	25	31	36	40	44	47	50	53	55	57	59	61	63	64	65	67	68	70	74	75	76	76	77	11/32
12/32	0	9	17	23	29	33	38	41	44	47	50	52	54	57	58	60	62	63	64	67	71	72	73	74	74	12/32
13/32		0	8	15	21	27	33	35	39	42	45	45	50	52	54	56	58	59	61	63	69	69	70	71	72	13/32
14/32			0	8	14	20	25	29	33	37	40	43	45	48	50	52	54	56	57	60	66	67	68	68	69	14/32
15/32				0	7	13	19	24	28	32	35	38	41	43	46	48	50	52	54	57	63	64	65	66	67	15/32
16/32					0	6	13	18	22	26	30	33	36	39	42	44	46	48	50	53	60	61	62	63	64	16/32
17/32						0	6	12	17	21	25	29	32	35	38	40	42	44	46	50	57	58	59	61	62	17/32
18/32							0	6	11	16	20	24	27	30	33	36	39	41	43	47	54	56	57	58	59	18/32
19/32								0	6	11	15	19	23	26	29	32	35	37	39	43	51	53	54	55	56	19/32
20/32									0	5	10	14	18	22	25	28	31	33	36	40	49	50	51	53	54	20/32
21/32										0	5	10	14	17	21	24	27	30	32	37	46	47	49	50	51	21/32
22/32											0	5	5	13	17	20	23	26	29	33	43	44	46	47	49	22/32
23/32												0	9	9	13	16	19	22	25	30	40	42	43	45	46	23/32
24/32													0	4	8	12	15	19	21	27	37	39	41	42	44	24/32
25/32														0	4	8	12	15	18	23	34	36	38	39	41	25/32
26/32															0	4	8	11	14	21	31	33	35	37	38	26/32
27/32																0	4	7	11	17	29	31	32	34	36	27/32
28/32																	0	4	7	13	26	28	30	32	33	28/32
29/32																		0	4	10	23	25	27	29	31	29/32
30/32																			0	7	20	22	24	26	28	30/32
31/32																				3	17	19	22	24	26	31/32
32/32																				0	14	17	19	21	23	32/32
33/32																					11	14	16	18	21	33/32
34/32																					9	11	14	16	18	34/32
35/32																					6	8	11	13	15	35/32
36/32																					3	6	8	11	13	36/32
37/32																					0	3	5	8	10	37/32
38/32																						0	3	5	8	38/32
39/32																							0	3	5	39/32
40/32																								0	3	40/32
41/32																									0	41/32

Tread Remaining ↓

SAFETY WARNING

SERIOUS INJURY MAY RESULT FROM:

Explosion of tire/rim assembly due to improper mounting - use safety cage and clip on extension air hose. Only specially trained persons should mount tires.

Tire failure due to misapplication/improper inflation/ overloading - follow tire manufacturer's instructions. Check inflation pressure frequently with gauge.

A tire must always match the diameter requirements of the rim to which it is being mounted. For example, a 16 inch tire must always be mounted on a 16 inch rim. Also, when replacing the truck type radial tires, use only wheels approved for radial tires.

Retread Casing Fitment Guide

Tread Width Followed By Tire Sizes

150
9R22.5
215/85R16
160
215/85R16
225/75R16
235/85R16
215/75R17.5
235/75R17.5
10R17.5
9R22.5
170
215/85R16
225/75R16
235/85R16
215/75R17.5
235/75R17.5
225/70R19.5
10R17.5
9R22.5
10R22.5
180
215/85R16
225/75R16
235/85R16
245/75R16
215/75R17.5
235/75R17.5
225/70R19.5
245/70R19.5
255/70R22.5
10R17.5
9R22.5
10R22.5
185
215/85R16
225/75R16
235/85R16
245/75R16
215/75R17.5
235/75R17.5
245/70R19.5
265/70R19.5

185 *(continued)*
245/70R19.5
265/70R19.5
255/70R22.5
10R17.5
9R22.5
10R22.5
195
215/85R16
225/75R16
235/85R16
245/75R16
215/75R17.5
235/75R17.5
225/70R19.5
245/70R19.5
265/70R19.5
255/70R22.5
10R17.5
9R22.5
10R22.5
200
225/75R16
235/85R16
245/75R16
215/75R17.5
235/75R17.5
245/70R17.5
225/70R19.5
245/70R19.5
265/70R19.5
255/70R22.5
10R17.5
10R22.5
12.00R24
205
10R22.5
11R22.5
11R24.5
12.00R24
12R22.5
12R24.5

205 *(continued)*
225/70R19.5
225/75R16
235/75R17.5
235/85R16
245/70R17.5
245/70R19.5
245/75R16
255/70R22.5
265/70R19.5
275/70R22.5
275/80R22.5
285/70R19.5
285/75R24.5
295/75R22.5
245/75R22.5
265/75R22.5
210
225/75R16
235/85R16
245/75R16
235/75R17.5
245/70R17.5
225/70R19.5
245/70R19.5
265/70R19.5
285/70R19.5
255/70R22.5
275/70R22.5
275/80R22.5
295/75R22.5
285/75R24.5
10R22.5
11R22.5
12R22.5
12.00R24
11R24.5
12R24.5
215
235/85R16
235/75R17.5
245/70R17.5

215 *(continued)*
225/70R19.5
245/70R19.5
265/70R19.5
285/70R19.5
255/70R22.5
275/70R22.5
275/80R22.5
295/75R22.5
285/75R24.5
10R22.5
11R22.5
12R22.5
12.00R24
11R24.5
12R24.5
220
235/75R17.5
245/70R17.5
245/70R19.5
265/70R19.5
285/70R19.5
255/70R22.5
275/70R22.5
275/80R22.5
295/75R22.5
295/80R22.5
285/75R24.5
10R22.5
11R22.5
12R22.5
12.00R24
11R24.5
12R24.5
225
285/70R19.5
275/80R22.5
295/75R22.5
295/80R22.5
285/75R24.5
11R22.5
12R22.5

225 *(continued)*
12.00R24
11R24.5
12R24.5
230
275/80R22.5
295/75R22.5
285/75R24.5
11R22.5
12R22.5
12.00R24
11R24.5
12R24.5
235
275/80R22.5
295/75R22.5
285/75R24.5
11R22.5
12R22.5
12.00R24
11R24.5
12R24.5
240
275/80R22.5
295/75R22.5
295/80R22.5
305/70R22.5
315/80R22.5
285/75R24.5
11R22.5
12R22.5
12.00R24
11R24.5
12R24.5
245
295/75R22.5
275/80R22.5
285/75R24.5
295/80R22.5
365/80R20
305/70R22.5
315/80R22.5

245 *(continued)*
12.00R24
11R22.5
11R24.5
250
365/80R20
305/70R22.5
315/80R22.5
12.00R24
260
315/80R22.5
305/75R24.5
270
315/80R22.5
305/75R24.5
280
315/80R22.5
290
365/80R20
385/65R22.5
320
365/80R20
385/65R22.5
425/65R22.5
340
18R19.5
18R22.5
445/65R22.5
445/65R19.5
445/50R22.5
425/65R22.5
350
18R19.5
18R22.5
445/65R22.5
445/65R19.5
445/50R22.5
425/65R22.5
360
445/65R22.5
380
445/65R22.5

390
445/50R22.5
455/55R22.5
400
445/50R22.5
455/55R22.5
410
445/50R22.5
455/55R22.5

***Not a technical recommendation or guide.** For use as sales information only. Please consult your local authorized ContiLifeCycle dealer for technical specifications.*

WARRANTY INFORMATION

For Commercial Vehicle Tires Only

One of the largest automotive suppliers and tire manufacturers in the world, Continental develops pioneering technologies to make fleets safer, more efficient, and more connected. With innovative tire technology and digital fleet solutions, Continental optimizes tire lifecycle management to deliver the lowest overall driving cost.

For the most up-to-date warranty information, please visit:

Visit www.continental-truck.com/truck/warranty

Continental
The Future in Motion



Limited Warranty
& Adjustment Policy

Continental ContiTread™
GENERAL TIRE GT AMERI★STEEL
TECNOTREAD

Continental Truck and Bus Tires
www.continental-truck.com

Continental
The Future in Motion

ContiLink

Your Connection to Dealer Support & Resources

Order Tracking

Whether you need to check product availability, place an order, track shipping or monitor backorder reports, ContiLink has your needs covered.

Marketing Needs

As a Continental dealer, you can purchase sales literature and point-of-sale material for your showroom anytime, or download digital copies in PDF format. Simply log into ContiLink and click on the Marketing Suite banner.

Standard Claims Processing

If you can name it, you can claim it... pricing, shipping, sales tax, advertising and waste fee claims are just a few that have the ability to process through ContiLink.

National Accounts & Government Claims

Through the National Accounts and Government Claims section of ContiLink, you can submit delivery receipts, review customer requirements, submit government claims and more.

Training Center

Gain access to Engage360° Training, our online training center that covers everything from product information to tire basics to sales scenarios much more!

Financial

Through ContiLink's Financial feature, you have the ability to view real-time debits/credits on open items and print, email or save copies of invoices, statements and credit memos.

Emergency Road Service Tracking

With detailed reporting from Continental's TrukFix emergency road service program, you can see at a glance your acceptance rates for calls and opportunities to increase service revenue with Continental.

LOG ON TO WWW.CONTILINK.COM TODAY!

Administration

ContiLink gives Dealers the flexibility to update their profiles. Keep your dealer location information up to date, and edit users and user information as needed.

Digital Downloads

Need instant access to Continental resources? Visit the Marketing section of the ContiLink site and download digital copies of the literature you need, including your Dealer Marketing Program book.

Live Chat

Chat with a Truck Tires Inside Sales representative or a National Account specialist to check your orders or if you have a question about a delivery receipt. Get the information you need when you need it.

Continental
The Future in Motion

Dealer Marketing Suite

A one-stop shop for all your marketing needs.

Continental | ContiTread™ | GENERAL TIRE GT™ | AMERI★STEEL | TECNOTREAD

Marketing Suite Features:

- Latest literature for all brands
- Point-of-sale and promotional items
- Custom flyers for your event
- All forms including D-9 and Warranty


THE DEALER MARKETING SUITE OFFERS FREE AND PAID SERVICES:

- Download PDF documents for free
- Order printed literature, forms, and promo items with a credit card

HOW TO ACCESS:

1. Log into ContiLink (**www.contilink.com**)
2. Scroll down until you see the "**Dealer Marketing Suite**"
3. Click on "**Read More**"
4. The Dealer Marketing Suite will open and allow you to browse items!






First Time Login:


1. Log into ContiLink (www.contilink.com)
2. Scroll down until you see the "Dealer Marketing Suite"
3. Click on "Read More"
4. You will receive a message that your Dealer Marketing Suite account has been requested. The account will be created within a few hours.

Don't forget! The ContiTireDrive app gives you access to PDF literature for all brands on your mobile device.

Continental

Available for iOS and Android

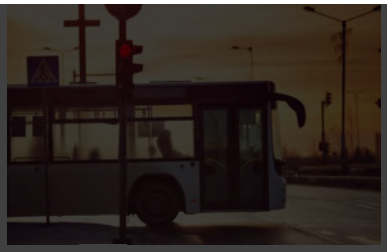

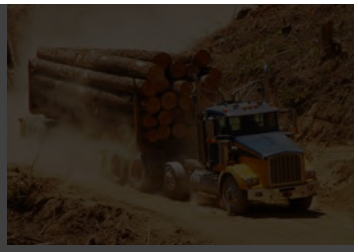

CONTINENTAL

SINCE 1871

Continental Tire the Americas, LLC
1830 MacMillan Park Drive
Fort Mill, SC 29707
Phone: 704-583-3900

INSIDE SALES / U.S.
800-450-4028 East
800-450-3187 West

Original Equipment Sales
800-776-2022

Commercial Specialty Tires
877-235-0102

Technical Customer Services & Warranty
3000 Continental Parkway
Clinton, MS 39056
TI_CQ_SM_help.trucktires@continental.com

06/2022 © Continental Tire the Americas, LLC TT-CO-BK-DATA