

LED CORN LAMPS

GKS09-02



27W



36W




45W




54W




S09-27W-02




S09-36W-02



S09-45W-02



S09-54W-02

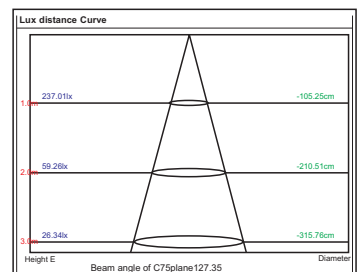



Specifications

Power	Ied Qty	PF	CRI	Voltage	CCT	Lumen	Size mm (x 0.039=inch)	Operation tep (°C/°F)	Weight (lbs=kg/2.2)	Certificate	Equal to
27W	90 leds SMD5630 SAMSUNG	≥0.9	≥85	85-265VAC	2700-6500K	3200±200lm	E27 Φ93*198	minus 29~60°C	NW 0.65kg	CE ROHS TUV PSE ERP	75w HPS MHL
							E40 Φ93*214	minus 20~140°F	GW 0.75kg		
36W	117 leds SMD5630 SAMSUNG	≥0.9	≥85	85-265VAC	2700-6500K	4200±200lm	E27 Φ93*228	minus 29~60°C	NW 0.75kg	CE ROHS TUV PSE ERP	125w HPS MHL
							E40 Φ93*244	minus 20~140°F	GW 0.86kg		
45W	144 leds SMD5630 SAMSUNG	≥0.9	≥85	85-265VAC	2700-6500K	5300±200lm	E27 Φ93*258	minus 29~60°C	NW 0.83kg	CE ROHS TUV PSE ERP	175w HPS MHL
							E40 Φ93*274	minus 20~140°F	GW 0.97kg		
54W	180 leds SMD5630 SAMSUNG	≥0.9	≥85	85-265VAC	2700-6500K	6300±200lm	E27 Φ93*258	minus 29~60°C	NW 0.88kg	CE ROHS TUV PSE ERP	200w HPS MHL
							E40 Φ93*274	minus 20~140°F	GW 1.00kg		


Features




Advantages

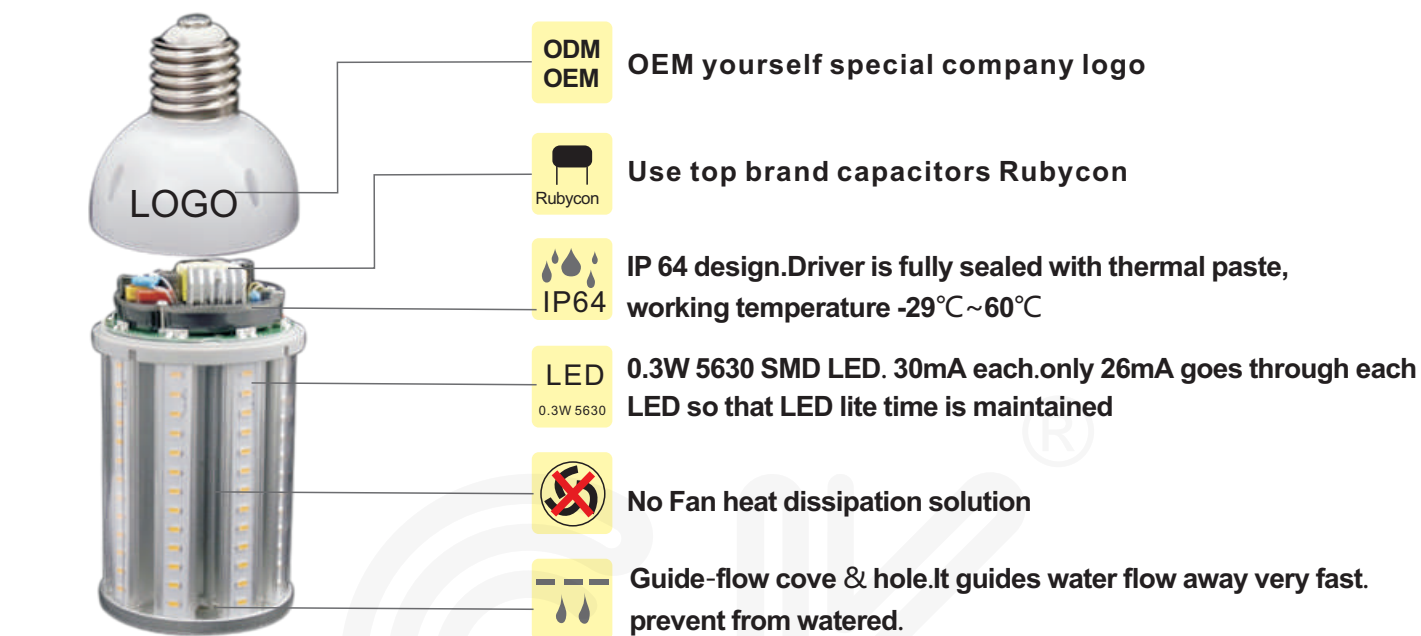

No wire aluminum board design (no wires mix together), in case of circuit shortcut patent design.



Easy replacement with slide connector from lamp body to driver.




High quality driver components: Rubycon capacitor (Japan); FIRST MOS (USA); MPS IC Chip (USA); Galaxy Diodes (biggest in China)



Driver with heat sink silicone for waterproof, dust proof and anti-mosquitoes



Application



Tunnel light



Low bay



Parking lot



Square light



High bay



Lawn



Area light



Pendant




Before



After



Installation

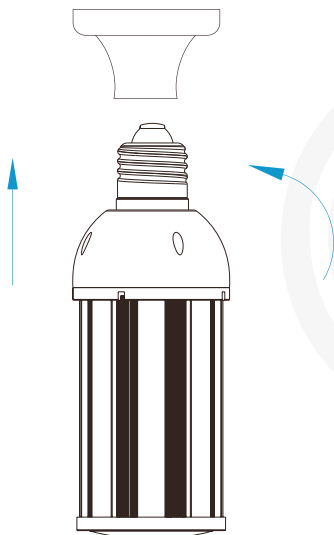

Step:1



Shown as Figure 1
Remove old ballast or disconnect from existing lamp holder. Remove and dispose of ballast in correct manner.
(European AC85-265V)

Step:2

Shown as Figure 2
Reconnect directly to the existing lamp holder.
(European AC85-265V)


Step:3

Shown as Figure 3
Install new LED replacement lamp. Please make sure the old fitting is correctly earth.
(European AC85-265V)

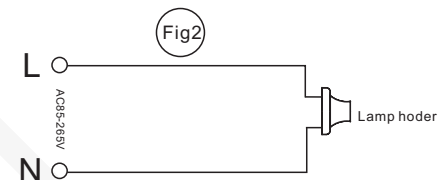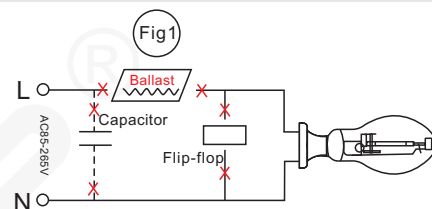

Packing

Wattage	Inner box size	N.W per lamp	G.W per box (lbs=KG/2.2)	G.W per carton (lbs=KG/2.2)	Carton Size	Quantity per Carton
27W	126x126x234mm	0.65kg	0.75kg	12.55kg	546x415x277mm	12PCS
36W	126x126x262mm	0.75kg	0.86kg	13.87kg	546x415x306mm	
45W	126x126x293mm	0.83kg	0.97kg	15.18kg	546x415x335mm	
54W	126x126x293mm	0.88kg	1.00kg	15.18kg	546x415x335mm	

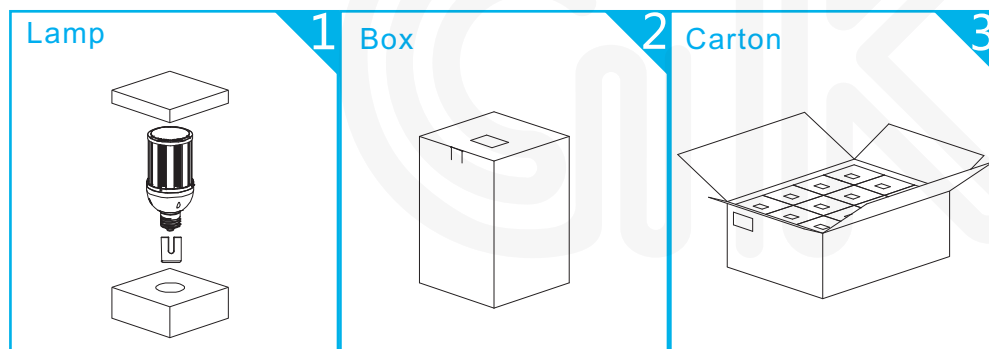

Pack Quantity:
12PCS

⚠ CAUTIONS

- Risk of electric shock. Do not use where directly exposed to water.
- Do not use with dimmers, timers, or other control devices.
- 27w, 36w, 45w suitable for use in totally enclosed fixtures, 54w not.
- Don't take apart the lamps without our permit.
- Please read carefully manual before installation.

