
SG 8960

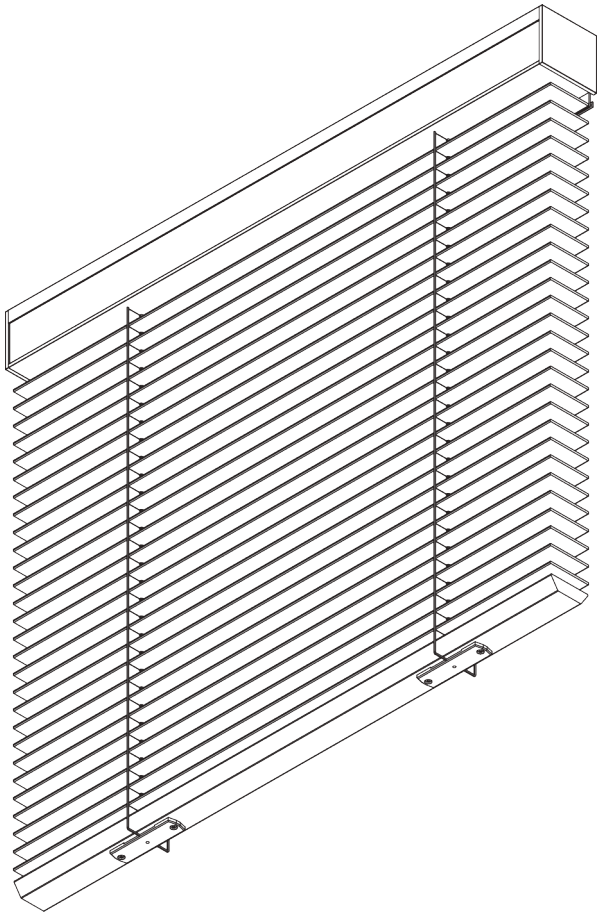

PRODUCT INFORMATION

- ***Operation:*** *motorised*
- ***Range:*** *L*
- ***Fitting:*** *ceiling, wall*
- ***Colours:*** *refer to Silent Gliss slat collection*

Features:

- *Optimised light control*
- *Various control options*
- *Wood, aluminium and leather slats*
- *Slat width: 50 mm*
- *Headrail slat cover*
- *Choice of ladder cord or decorative slat tape*

07/2024/V1


SilentGliss

SYSTEM SPECIFICATIONS


A. SYSTEM DIMENSIONS



Wood / Leather: 2.4 m
Aluminium: 3.6 m



65 cm



Wood / Leather: 2.75 m
Aluminium: 3.6 m




Wood / Leather. 4.6 m²
Aluminium: 10 m²

Slat stack heights

Note: stack size will be larger when tapes are used


Wooden



mm		max.							
		60	90	120	150	180	210	240	275
50 mm	X	12	15	17	20	22	25	27	30

(cm)


Leather



mm		max.							
		60	90	120	150	180	210	240	275
50 mm	X	16	18	20	22	24	26	28	30

(cm)

Aluminium




mm		max.			
		100	200	300	360
50 mm	X	10	13	17	20


(cm)

B. PROFILE

Profile information




SG 8935
Profile



SG 8936
Profile

C. HOW TO MEASURE

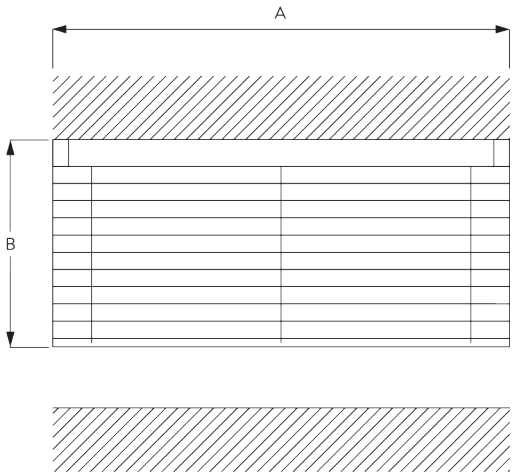

A: System width
B: System height

D. SPECIFICATION TEXT


Silent Gliss SG 8960 Electrically Operated Venetian Blind System. *Supplied made to measure and complete comprising aluminium headrail SG 8935 and cover SG 8936 incorporating matching colour slat. System fixed with clamps SG 3033 to ceiling or wall at 450mm intervals plus one at 100mm from each end. Supplied with motor SG 11095 with operation by 5 position switch SG 0613 which permits raising, lowering and tilting of the slats / operation by third party control system subject to suitable interface by others. Optional motor SG 11096 with integrated receiver for use with radio control system SG Control L (hand, wall mounted transmitters and SG Move app). Can be switched by SG Control R radio control system by external receiver. All wireless controls at extra cost. Slat colours to be chosen from Silent Gliss 50mm aluminium / wood / leather range.*

FITTING

A. FITTING INFORMATION


For detailed fitting information, visit the Silent Gliss website.


Fixing points



B. CEILING FITTING

Clamp SG 3003

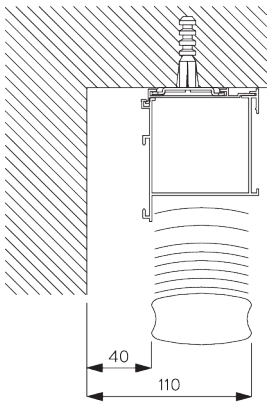




SG 3003


Clamp

C. WALL FITTING

Clamp SG 3003

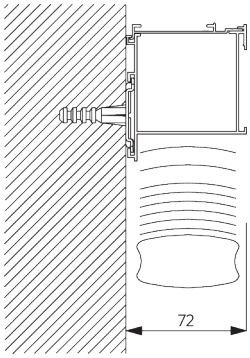


.




SG 3003

Clamp


D. FITTING WITH SIDE GUIDE OPTION






SG 8235

Side guide wire base short




SG 8236

Side guide wire base long




SG 8237

Side guide wire holder



SG 8249

Side guide device




SG 10120

Side guide wire ø 0.9 mm


SYSTEM OPTIONS

A. HEADRAIL SLAT COVER



- *A slat is inserted into the headrail for perfect matching of colours and materials to avoid the need to fit a cumbersome valance.*
- *For leather slat blinds there is the option of a leather covered headrail at an additional cost.*
- *Leather covered slats cannot be specified with decorative (external) slat tapes. The blind hardware is supplied matching the slat colour.*

B. SIDE GUIDES

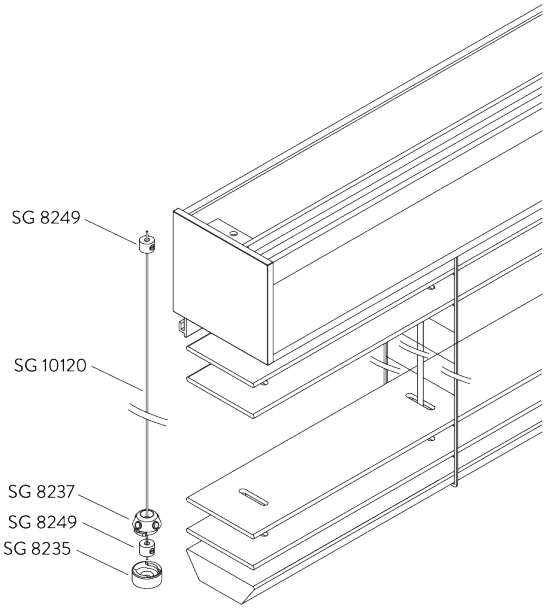

Additional parts:

- *2x SG 8235 Side guide wire base short*
- *2x SG 8237 Side guide wire holder*
- *4x SG 8249 Side guide device*
- *2x SG 10120 Side guide wire ø 0.9 mm*

Note:

- *Up to 15° from vertical*

MOTOR & CONTROLS

A. MOTOR FEATURES

Motors	SG 11095	SG 11096	SG 11328
Motor Features			
Soft start / stop	●	●	
Built-in receiver		●	
Electronic end-stop	●	●	
Electronic revolution counter (unlimited revolution)	●	●	
Mechanical end-stop			●
Mechanical revolution counter (limited revolution)			●
Intermediate positions possible		●	
Noiseless stop	●	●	●
IP class	IP 54	IP 54	IP 44
Control Features			
Mains power control	●		●
SG Control L (built-in receiver)		●	
SG Control L (external receiver required)			●
SG Control R (external receiver required)	●		
Suitable for most major home automation systems (with suitable interface)	●	●	●

B. MOTOR SPECIFICATIONS

Motors	Voltage	Current	Frequency	Speed	Frequency receiver
SG 11095	230 V AC	0.5 A	50 Hz	35 rpm	n/a
SG 11096	230 V AC	0.5 A	50 Hz	35 rpm	868 MHz
SG 11328	120 V AC	1.3 A	60 Hz	30 rpm	n/a

C. OPERATING METHODS

See catalogue "controls" for details.

Wall Switch



System can be operated by fixed wall switch.

SG Control L



Various radio hand-held and wall transmitters available.



Silent Gliss Move App.

SG Control R



Various radio hand-held and wall transmitters available. An external receiver is required.


D. WIRING DIAGRAMS



Refer to Silent Gliss website.


PARTS

A. STANDARD PARTS



SG 3003

Clamp




SG 8935

Profile




SG 8936

Profile



SG 9917

Hirschmann portable socket-outlet STAK 3 N



SG 11095

Motor 230V AC, JA 04/35 comfort

B. OPTIONAL PARTS




SG 8235

Side guide wire base short




SG 8236

Side guide wire base long




SG 8237

Side guide wire holder



SG 8249

Side guide device




SG 9916

Hirschmann plug set



SG 10120

Side guide wire ø 0.9 mm




SG 10300

Radio hand held 1 channel




SG 10302

Radio hand held 5+1 channel




SG 10303

Radio hand held 10+2+1 channel




SG 10804

Radio hand held 15+5+1 channel



SG 11096

Motor 230V AC, JA 04/35 comfort, radio receiver



SG 11328

Motor 120V AC, JA 08/30 soft, UL



SG 11480

Radio wall transmitter 1 channel



SG 11490

Radio wall transmitter 5+1 channel



SG 20336

Hand held transmitter 8 channel




SG 20913

Wall switch single channel




SG 20914

Wall switch 8 channel



SG 20917

Pattress box



SG 20919

Control module motor type R