
Product Specifications - Preliminary

FlashLink® Certified
Vaccine USB PDF Data Logger

Sensor Measurement Range	-40ºF to 104ºF (-40ºC to 40ºC)
Operating Range	-40ºF to 77ºF (-40ºC to 25ºC)
Temperature Resolution	0.1°F/°C
Accuracy within Normal Operating Range	±1.0°F from -40°F to 77°F (±0.5°C from -40°C to 25°C)
Data Capacity	32,496 data points
Data Download Time	5 seconds typical for 3823 points
Multiple Alarm Levels	High & low levels and extreme high and low levels displayed on LCD
Battery	Two AAA lithium batteries, LCD % remaining power indicator
Dimensions/Body	1.575 in x 3.66 in x 0.94 in (40 mm x 93 mm x 24 mm)
Casing	ABS plastic
External Sensor	Thermistor in 5 mL PETG* Sterile Bottle - 21CFR compliance information available, 2 meter cable with quick disconnect
Glycol Buffer	Propylene glycol (GRAS** classified)
Weight	3.2 oz. (90.7 grams)
Certification	1 year ISO 17025 calibration certificate, CE Mark, NIST traceable, Manufacturer's Certificate of Compliance, RoHS compliant
Display	LCD, Red LED Alarm
Waterproof Rating	IP64 (with silicone cap)
Storage conditions	-4°F to 122°F (-20°C to 50°C) 0% to 95% RH w/o condensation
Shelf Life	2 years
System Requirements	Windows PC with current operating system, Adobe Reader
Programming	FlashPDF Program Manager software
Download Requirements	Direct USB connection to PC
*Polyethylene terephthalate copolymer, **Generally Recognized As Safe	

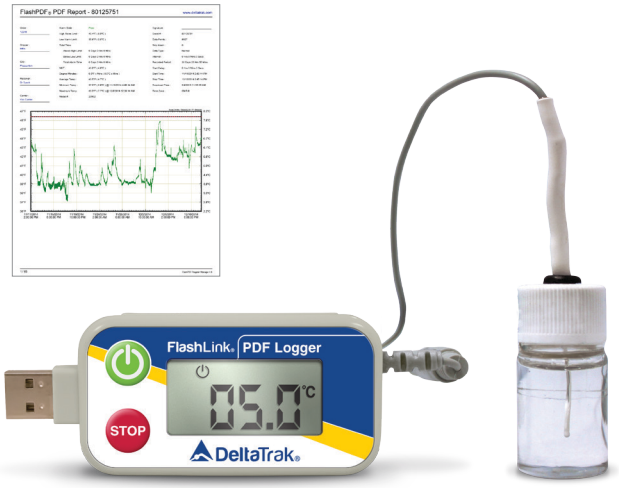

Model 40528

Includes ISO 17025 Calibration Certificate from A2LA accredited lab, valid for 1 years

- Compatible with FDA and CDC guidelines
- 21 CFR Part 11 compliant
- Single channel, external sensor in glycol bottle
- Automatically generates PDF report and CSV file
- Glycol buffered sensor emulates products and prevents false alarms
- Ideal for monitoring vaccines and liquid pharmaceuticals during storage
- Low battery indicator on LCD
- Quick disconnect cable to download logger
- User programmable: manual or auto start, logging intervals, hi/low alarms
- Scroll through recorded data on LCD

DeltaTrak manufactures products under an ISO 9001:2008 registered quality management system

SS 40528 16I1

DeltaTrak®

P.O. Box 398 Pleasanton, CA 94566 USA | p (925) 249-2250 | (800) 962-6776 | f (925) 249-2251 | www.deltatrak.com