

Getac S410-G4

Self-Maintenance Manual

Content

Handle (P/N 344876800018)
Side door (P/N 340876800006)
Rear door (P/N 340876800007)
Main SSD canister (P/N 581191770002)
Keyboard (P/N 531091770001)

Copyright © 2018 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.

Handle (P/N 344876800018)

1. Remove the four screws (342830700019), then remove the cover.



2. Remove the Handle.

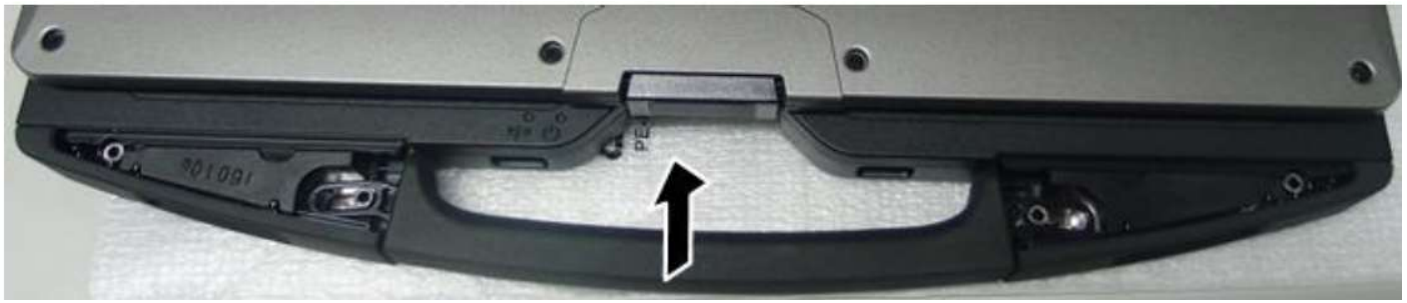

To install:

Reverse the removal procedure to install the new part.

Copyright © 2018 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.

Side door (P/N 340876800006)

1. Remove the four screws (371102010066) that secure the door to S410G4.



2. Detach the door from S410G4.

To install:

Reverse the removal procedure to install the new part.

Copyright © 2018 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.

Rear Door (P/N 340876800007)

1. Remove the three screws (371102010066) that secure the door to S410G4.



2. Detach the door from S410G4.

To install:

Reverse the removal procedure to install the new part.

Copyright © 2018 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.

Main SSD canister (P/N 581191770002)

1. Remove one screw (370102010421), and then remove the SSD canister.





2. Remove one screw (371102010432), and then remove the cover., you can find below parts.



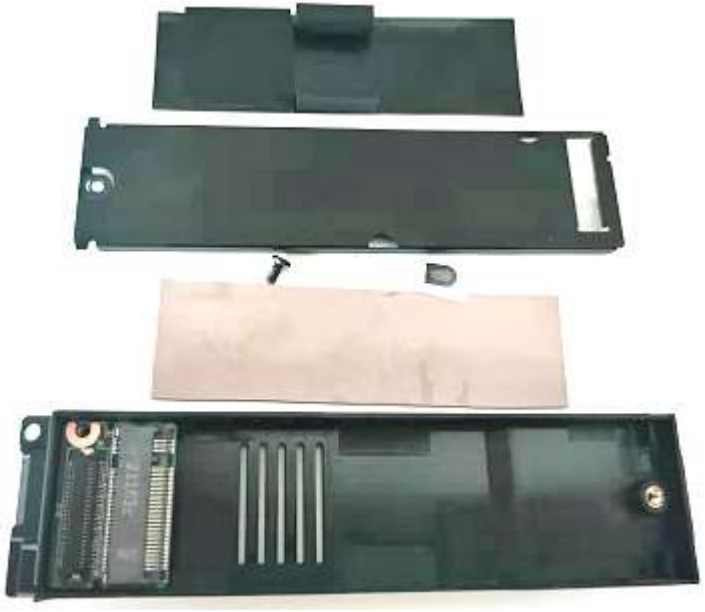

Copyright © 2018 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.

Main SSD canister (P/N 5811917700002)

3. Paste the Mylar onto the new SSD.



4. Paste the thermal pad onto the other side of the SSD.



Copyright © 2018 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.

Main SSD canister (P/N 5811917700002)

5. Insert the SSD into the connector.



6. Assemble the SSD cover and fix the cover using the one screw (371102010432).

Attention: The hook needs to be clamped tightly.





Copyright © 2018 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.

Main SSD canister (P/N 5811917700002)

7. Paste the Mylar onto the SSD canister.

Attention：You can choose if you want to paste this Mylar or not.

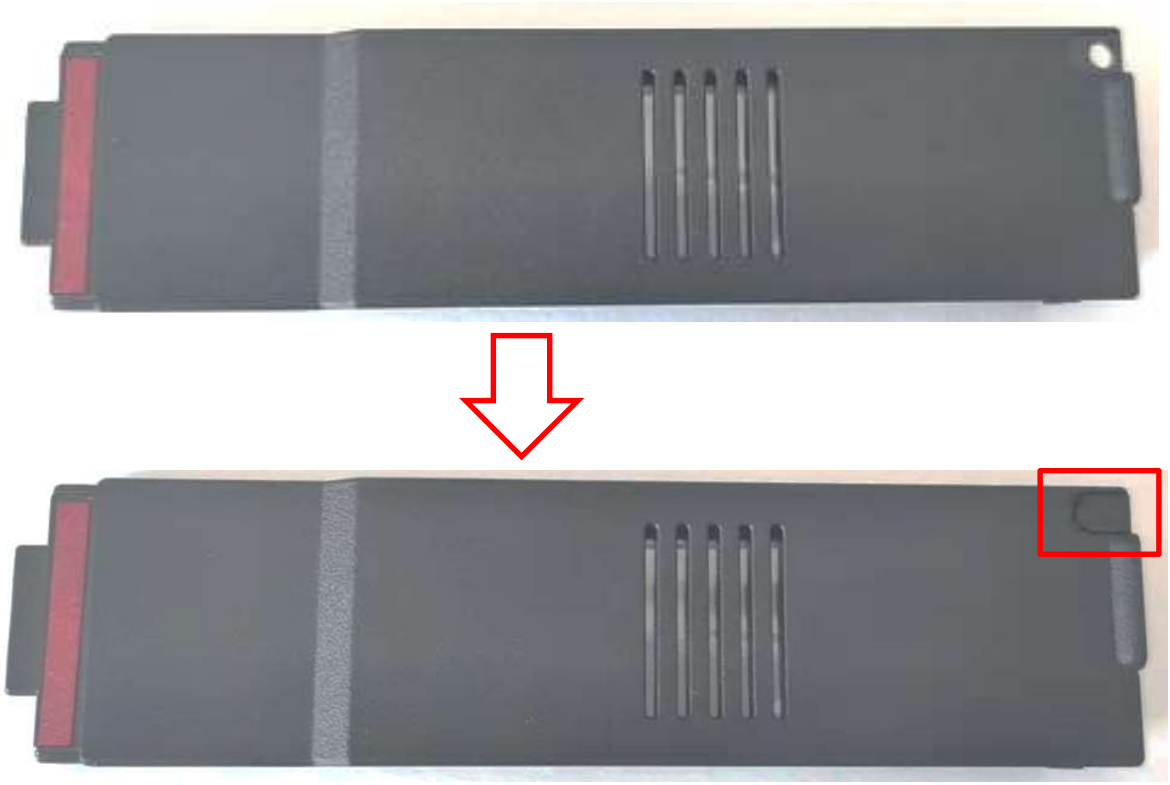

Copyright © 2018 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.

Keyboard (P/N 531091770001)

1. Remove two screws (371102010432) lock the keyboard cover.



2. Remove seven screws (371102010432) lock the keyboard cover and hinge cover. Then remove the keyboard cover and hinge cover.



Copyright © 2018 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.

Keyboard (P/N 531091770001)

3. Remove two screws (371102010432) lock the keyboard cover.



4. Remove four screws (370102010416) lock the keyboard bracket cover, then remove the keyboard bracket cover.



Copyright © 2018 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.

Keyboard (P/N 531091770001)

5. Disconnect the keyboard FPC, then remove the keyboard.

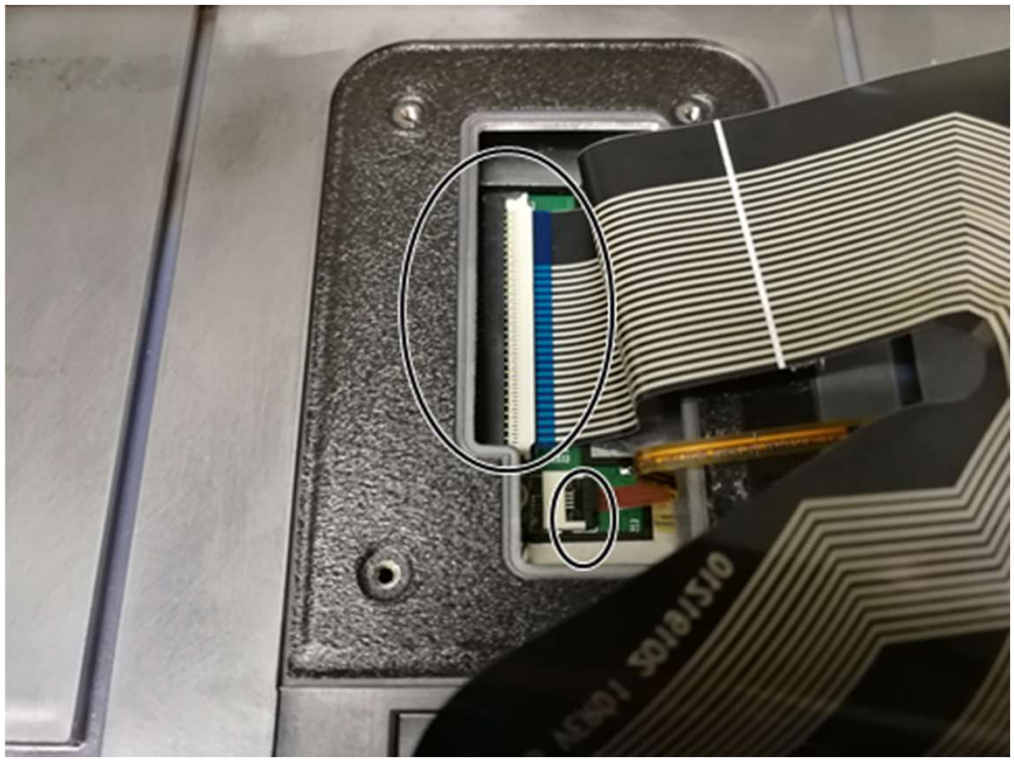

To install:

Reverse the removal procedure to install the new part.

Copyright © 2018 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.



Copyright © 2018 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.