
Instruction Manual

601 Alfa® FULTRA-i (interior)

diffusion-tight window sealing tape

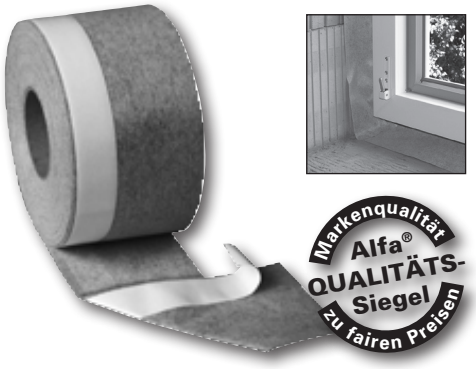

- ideal for new construction and renovation
- vapor diffusion-tight
- for interior use
- one sided adhesive strip
- can be painted & platered over
- balances building movements
- thus durable tight
- fire class E

Sealing of connection joints at windows/doors according to RAL and DIN 4108-7

601 Alfa FULTRA-i window sealing tape is a red, vapor diffusion tight sealing tape with a self-adhesive strip for the fast and professional sealing of interior connection joints at doors and windows.
Due to the provided self-adhesive strip, the sealing tape can easily be applied to window or door frames. Remove the release paper carefully from the adheisve strip and fix the product to the window or door frame. Keep on removing the release paper and press on the **601 Alfa FULTRA-i** window sealing tape securely and without blisters to the surface (best to use a rubber roller). At corners make sure to overlap the bondings. The fixation on masonry is made with **Alfa DS 100** adhesive compound. Backfill the cavities between frame and wall with insulating material (e.g. **542 Alfa Joint Sealing Tape BG1**).

Alfa DS 100 adhesive compound is applied in stripes of approx. 8 mm wide beads onto the subsoil. Mount **601 Alfa FULTRA-i** window sealing tape with relief loop, without tension and press on lightly to **Alfa DS 100** (avoid grouting).
Do not strain on tension during the drying process. Strong mechanical influences should be avoided. **Alfa DS 100** adhesive compound will stay elastically and does not embrittle afterwards.

Processing temperature: +5°C up to +35°C.
With the duration of the adhesion the final strength will rise.

Shelf life: 12 months in original carton. Protect from frost.
Always lay the single roll onto the supplied release paper.

Packaging: 601 Alfa FULTRA-i (interior)

Item-No.	Width x Length	Ro/Pack	Ro/Carton
601 2570	70mm x 25m	10	40
601 2510	100mm x 25m	8	32
601 2515	150mm x 25m	4	16

We guarantee the high quality of our products within the scope of our general terms and conditions. Due to the wide variety of materials, surfaces and external influences, users are advised to locally confirm the suitability by their own tests.

The warranty is excluded, if...
...different processing or use exists as given in the instruction manual. ...chemical or mechanical influences act on the product. ...no plasticizer-resistant materials are bonded. ...the product is exposed to standing water or used at sauna or swimming pool construction. ...layer seperation occurs at the bonded materials. ...the work has not being done to the general rules of the trade.

This instruction manual corresponds to the latest standard of our knowledge. All preceding versions will loose their validity with appearance of this new version. Amendments and additions due to new knowledge and research might follow to any time and without advance notice.

Alfa GmbH 03.2010

HOTLINE:
Tel: +49 (0) 7363-95 44 60

Alfa GmbH
Dr. Rudolf-Schieber-Str. 11-15 • 73463 Westhausen/Germany
Tel: +49 (0)7363-95 44 60 • Fax: +49 (0)7363-95 44 625