
Recessed luminaire IDOO.fit
IFE 5000/VTL/D

113875000-00753731

Waldmann
ENGINEERS OF LIGHT



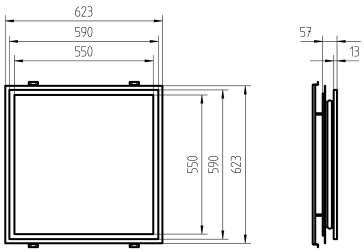

Light source	LED
Work equipment	Electronic ballast DALI
Connected load	220 - 240 V; 50 Hz; 60 Hz
Power consumption	ca. 59 W
Standby	ca. 0,3 W
Power factor	env. 0,970
Luminous flux	approx. 6.700 lm
Light type/-color	adjustable light colors
Colour temperatur	approx. 2.700 - 6.500 K
Color rendering index	CRI ≥ 80
Light distribution	Direct/indirect
Direct ratio	approx. 86 %
Glare control	Prism aperture
UGR class (4H 8H; EN 12464-1)	≤ 22
System of protection	IP 20
Class of protection	I
Technology	Switchable
Operation	External
Housing	Sheet metal; White
Mains lead	Connector
Design	Integrated version
Installation dimensions	ca. 575 mm; 575 mm
EAN	4013330106614
Weight incl. packaging	ca. 11,2 kg
Packaging dimensions	ca. 757; 647; 125
Special features	Direct and indirect light; Direct light component with edge light and light-guide technology for homogenous light exit; Indirect light component with specially designed lens to brighten the ceiling; Grid size 575 x 575mm~; Specified values when used with NET module; LED system: DALI Load 1 (2700 K, 45 W, 4700 lm) , DALI Load 2 (6500 K, 45 W, 5000 lm)

Errors and technical changes excepted. Images can vary from original.
Photometric and electrical data may vary due to component tolerances.

www.waldmann.com
© 13/05/2024 H.Waldmann GmbH & Co. KG