
Free-standing luminaire LAVIGO DPS 12000/840/R/G2


121785000-00741857

Waldmann
ENGINEERS OF LIGHT



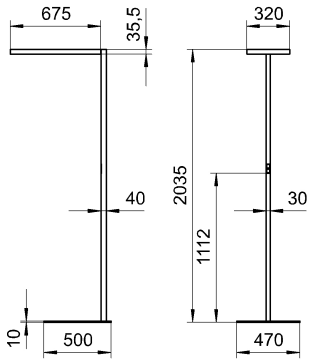

CEE 7/VII

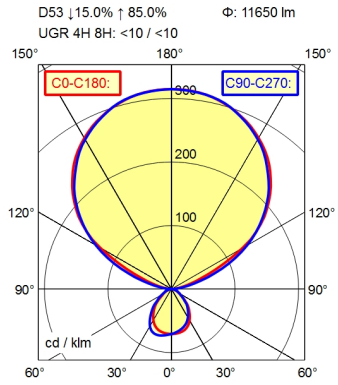

Light source	LED
Work equipment	Electronic ballast
Connected load	220 - 240 V; AC; 50 Hz; 60 Hz
Power consumption	ca. 77 W
Power factor	env. 0,93
Luminous flux	approx. 11.650 lm
Luminous efficiency [1]	approx. 151 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct/indirect
Direct ratio	approx. 15 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.000 cd/m²
UGR class (4H 8H; EN 12464-1)	≤ 16
System of protection	IP 20
Class of protection	I
Technology	Presence and daylight sensor control (PIR); DALI
Operation	Multi-function switch
Emergency lighting	none
Housing	Steel/plastic; Painted; White
Light source cover	Acrylic (PMMA); Satine
Arm	Steel tube; Painted; Tubular section upright; White
Luminaire base	C-form flat
Mains lead	ca. 3 m; Mains plug; CEE 7/VII
Fastening	Floor standing base
Decorative contrast side parts	Flint grey
Life expectancy LED	L80B50 60.000h
EAN	4013330103392
Weight (net)	ca. 19,7 kg
Dimensions	2.035 mm
Special features	Integrated light and presence sensor PIR; Separated, direct and indirect light individually adjustable; Retrofittable with TALK module; Flicker-free; Cradle to Cradle Certified TM; Direct light component with edge light and light-guide technology for homogenous light exit; Luminaire head detachable

[1] For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Errors and technical changes excepted. Images can vary from original.
Photometric and electrical data may vary due to component tolerances.

© 04/03/2024 H.Waldmann GmbH & Co. KG