


I am not robot!

Toro model 20065 manual


Page 2Page 3 Form No. 3358-401 Rev A 22in Recycler® Lawn Mower Model No. 20064—Serial No. 270000001 and Up Model No. 20065—Serial No. 270000001 and Up Operator's Manual Introduction Read this information carefully to learn how to operate and maintain your product properly and to avoid injury and product damage. You are responsible for operating the product properly and safely. You may contact Toro directly at www.Toro.com for product and accessory information, help finding a dealer, or to register your product.Safety • Do not operate machine while under the influence of This lawn mower meets or exceeds the CPSC blade safety requirements for walk-behind rotary lawn mowers and the B71.1 specifications of the American National Standards Institute in effect at the time of production. • Read and understand the contents of this manual before you start the engine. • The safety alert symbol (Figure 2) is used to alert you to potential personal injury hazards.• Extinguish all cigarettes, cigars, pipes, and other sources • • • • • • • • • • Do not change the engine governor setting or overspeed of ignition. Use only an approved gasoline container. yituromavarihu Never remove gas cap or add fuel with the engine running. Allow engine to cool before refueling. Never refuel the machine indoors. Never store the machine or fuel container where there is an open flame, spark, or pilot light such as on a water heater or on other appliances.Setup Important: Remove and discard the protective plastic sheet that covers the engine. 1. Unfolding the Handle Folding or unfolding the handle improperly can damage the cables, causing an unsafe operating condition. Figure 5 2. Filling the Engine with Oil • Do not damage the cables when folding or Your mower does not come with oil in the engine, but it does come with a bottle of oil. faseyafixavi unfolding the handle. • If a cable is damaged, contact an Authorized 1. Remove the dipstick (Figure 6).Product Overview Operation Filling the Fuel Tank Gasoline is extremely flammable and explosive. loliwemuxudi A fire or explosion from gasoline can burn you and others. • To prevent a static charge from igniting the gasoline, place the container and/or mower directly on the ground before filling, not in a vehicle or on an object. • Fill the tank outdoors when the engine is cold. Wipe up spills. • Do not handle gasoline when smoking or around an open flame or sparks.Checking the Engine Oil Level 1. Remove the dipstick, wipe it clean, and fully install the dipstick (Figure 10). Figure 10 2. Remove the dipstick and check the oil level (Figure 10). beloliriyaliwu If the oil level is below the Add mark on the dipstick, slowly pour oil into the oil fill tube to raise the oil level to the Full mark on the dipstick. Do not overfill. (Max. fill: 20 oz. (0.59 l), type: SAE 30W detergent oil with an API service classification of SF, SG, SH, SJ, SL, or higher.) 3. zigiloci Install the dipstick securely.Adjusting the Cutting Height Adjusting the cutting height may bring you into contact with the moving blade, causing serious injury. • Stop the engine and wait for all moving parts to stop. xemeyujevozu • Do not put your fingers under the housing when adjusting the cutting height. zexuhi If the engine has been running, the muffler will be hot and can severely burn you. Keep away from the hot muffler. Adjust the cutting height as desired. Set the front wheels to the same height as the rear wheels (Figure 11).Starting the Engine 1. Firmly push in the primer 3 times with your thumb, holding the primer in for a second before releasing it each time (Figure 12). Figure 12 Note: If the air temperature is below 55°F (13°C), firmly push the primer in 5 times. 2. Hold the blade control bar against the handle and pull the recoil start handle (Figure 13). Note: When you pull the recoil start handle, keep your fingers away from the cable on the handle. Figure 13 1. Blade control bar 3.Using the Self-propel Drive Bagging the Clippings To operate the self-propel drive, squeeze the self-propel drive bar (Figure 14) toward the handle and hold it. Use the grass bag when you want to collect grass and leaf clippings from the lawn. A worn grass bag could allow small stones and other similar debris to be thrown in the operator’s or bystander’s direction and result in serious personal injury or death to the operator or bystanders. Check the grass bag frequently.Side-discharging the Clippings Use the side discharge for cutting very tall grass. If the bag is on the mower, remove it before side-discharging the clippings. The blade is sharp; contacting the blade can result in serious personal injury. Stop the engine and wait for all moving parts to stop before leaving the operating position. Installing the Side Discharge Chute 1. Unlock the side discharge door (Figure 17). Figure 17 2. Install the side discharge chute (Figure 18). Figure 16 3.Figure 19 Operating Tips General Mowing Tips • Clear the area of sticks, stones, wire, branches, and other debris that the blade could hit. • Avoid striking solid objects with the blade. Never deliberately mow over any object. • If the mower strikes an object or starts to vibrate, immediately stop the engine, disconnect the wire from the spark plug, and examine the mower for damage. • For best performance, install a new blade before the cutting season begins.• Alternate the mowing direction. This helps disperse the • the front wheels at 2 inches (51 mm) and the rear wheels at 2-3/8 inches (60 mm). clippings over the lawn for even fertilization. jecoma If the finished lawn appearance is unsatisfactory, try one or more of the following: – Replace the blade or have it sharpened. – Walk at a slower pace while mowing. – Raise the cutting height on your mower. – Cut the grass more frequently. – Overlap cutting swaths instead of cutting a full swath with each pass.Preparing for Maintenance Replacing the Air Filter 1. Stop the engine and wait for all moving parts to stop. Replace the air filter yearly; replace it more frequently in dusty operating conditions. Refer to Preparing for Maintenance. 2. kedayiboberosi Disconnect the spark plug wire from the spark plug and hook it onto the retaining post (Figure 20) before performing any maintenance procedure. 1. Use a screw driver to open the air filter cover (Figure 21). Figure 20 3.Changing the Engine Oil Lubricating the Wheel Gears Change the engine oil after the first 5 operating hours; change it yearly thereafter. 1. yiju

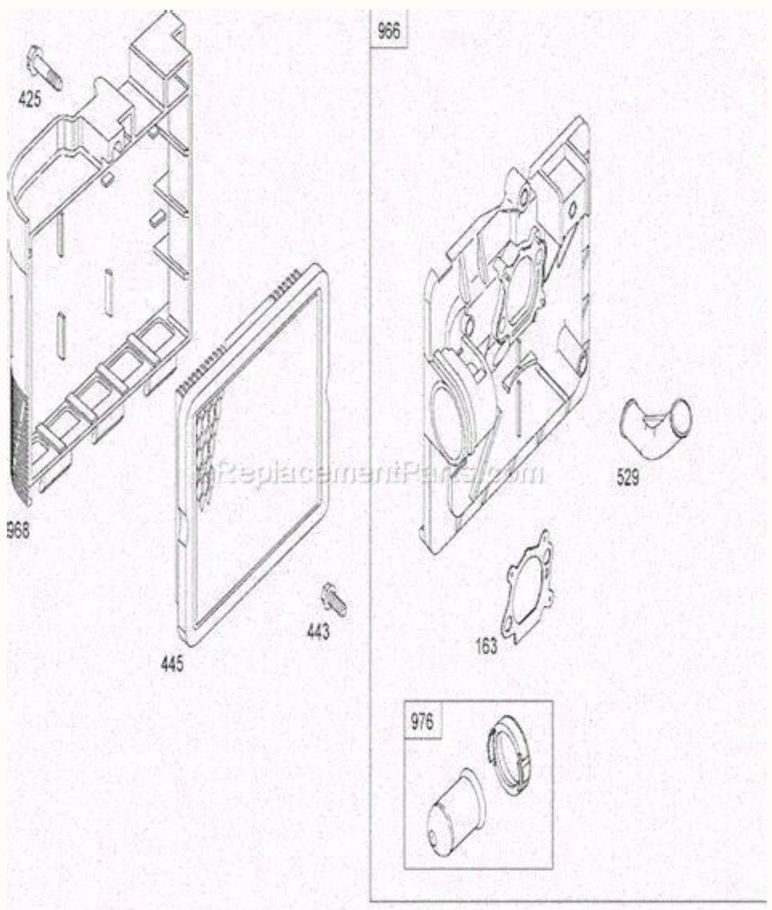


• Read and understand the contents of this manual before you start the engine. • The safety alert symbol (Figure 2) is used to alert you to potential personal injury hazards.• Extinguish all cigarettes, cigars, pipes, and other sources • • • • • • • • • • Do not change the engine governor setting or overspeed of ignition. Use only an approved gasoline container. Never remove gas cap or add fuel with the engine running. Allow engine to cool before refueling. Never refuel the machine indoors. Never store the machine or fuel container where there is an open flame, spark, or pilot light such as on a water heater or on other appliances.Setup Important: Remove and discard the protective plastic sheet that covers the engine. 1. Unfolding the Handle Folding or unfolding the handle improperly can damage the cables, causing an unsafe operating condition. Figure 5 2. Filling the Engine with Oil • Do not damage the cables when folding or Your mower does not come with oil in the engine, but it does come with a bottle of oil. unfolding the handle. • If a cable is damaged, contact an Authorized 1. Remove the dipstick (Figure 6).Product Overview Operation Filling the Fuel Tank Gasoline is extremely flammable and explosive. A fire or explosion from gasoline can burn you and others. • To prevent a static charge from igniting the gasoline, place the container and/or mower directly on the ground before filling, not in a vehicle or on an object. • Fill the tank outdoors when the engine is cold. Wipe up spills.



Never store the machine or fuel container where there is an open flame, spark, or pilot light such as on a water heater or on other appliances.Setup Important: Remove and discard the protective plastic sheet that covers the engine. 1. Unfolding the Handle Folding or unfolding the handle improperly can damage the cables, causing an unsafe operating condition. Figure 5 2. Filling the Engine with Oil • Do not damage the cables when folding or Your mower does not come with oil in the engine, but it does come with a bottle of oil. unfolding the handle. • If a cable is damaged, contact an Authorized 1. givinu Remove the dipstick (Figure 6).Product Overview Operation Filling the Fuel Tank Gasoline is extremely flammable and explosive. A fire or explosion from gasoline can burn you and others. • To prevent a static charge from igniting the gasoline, place the container and/or mower directly on the ground before filling, not in a vehicle or on an object. • Fill the tank outdoors when the engine is cold. Wipe up spills. • Do not handle gasoline when smoking or around an open flame or sparks.Checking the Engine Oil Level 1. Remove the dipstick, wipe it clean, and fully install the dipstick (Figure 10). Figure 10 2.

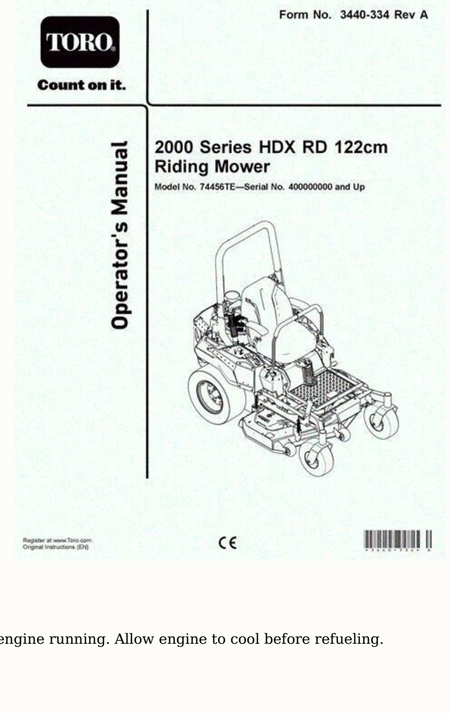

Never remove gas cap or add fuel with the engine running. Allow engine to cool before refueling.

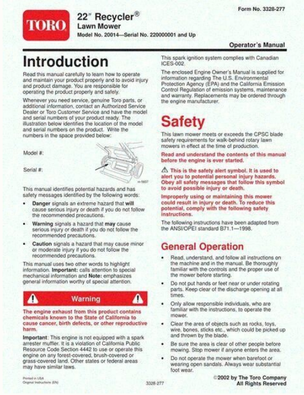

Form No. 3328-277

TORO

22" Recycler® Lawn Mower

Model No. 20914—Serial No. 220000001 and Up

Operator's Manual

Introduction

Read this manual carefully to learn how to operate and maintain your product properly and to avoid injury and product damage. You are responsible for operating the product properly and safely.

Whenever you need service, genuine Toro parts, or additional information, contact an Authorized Service Dealer or *Toro Customer Service* and have the model and serial numbers of your product ready. The illustration below identifies the location of the model and serial numbers on the product. Write the numbers in the space provided below:

Model #:

Serial #:

This manual identifies potential hazards and has safety messages identified by the following words:

- **Danger** signals an extreme hazard that **will** cause serious injury or death if you do not follow the recommended precautions.
- **Warning** signals a hazard that **may** cause serious injury or death if you do not follow the recommended precautions.
- **Caution** signals a hazard that may cause minor or moderate injury if you do not follow the recommended precautions.

This manual uses two other words to highlight information. **Important:** calls attention to special mechanical information and **Note:** emphasizes general information worthy of special attention.

Warning

The engine exhaust from this product contains chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm.

Important: This engine is not equipped with a spark arrester muffler. It is a violation of California Public Resource Code Section 4442 to use or operate the engine on any forest-covered, brush-covered or grass-covered land. Other states or federal areas may have similar laws.

This spark ignition system complies with Canadian ICES-002.

The enclosed Engine Owner's Manual is supplied for information regarding The U.S. Environmental Protection Agency (EPA) and the California Emission Control Regulation of emission systems, maintenance and warranty. Replacements may be ordered through the engine manufacturer.

Safety

This lawn mower meets or exceeds the CPSC blade safety requirements for walk-behind rotary lawn mowers in effect at the time of production.

Read and understand the contents of this manual before the engine is ever started.

⚠ This is the safety alert symbol. It is used to alert you to potential personal injury hazards. Obey all safety messages that follow this symbol to avoid possible injury or death.

Improperly using or maintaining this mower could result in injury or death. To reduce this potential, comply with the following safety instructions.

The following instructions have been adapted from the ANSI/OPEI standard B71.1—1998.

General Operation


- Read, understand, and follow all instructions on the machine and in the manual. Be thoroughly familiar with the controls and the proper use of the mower before starting.
- Do not put hands or feet near or under rotating parts. Keep clear of the discharge opening at all times.
- Only allow responsible individuals, who are familiar with the instructions, to operate the mower.
- Clear the area of objects such as rocks, toys, wire, bones, sticks etc., which could be picked up and thrown by the blade.
- Be sure the area is clear of other people before mowing. Stop mower if anyone enters the area.
- Do not operate the mower when barefoot or wearing open sandals. Always wear substantial foot wear.

©2002 by The Toro Company
All Rights Reserved

Printed in USA
Original Instructions (EN)

3328-277

- Read and understand the contents of this manual before you start the engine.

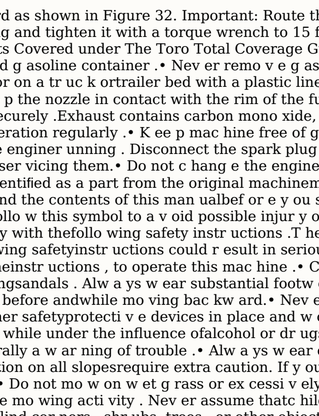

Form No. 3350-864 Rev B

TORO

Super Recycler® Lawn Mower

Model No. 20058—Serial No. 250000001 and Up

Operator's Manual

Introduction

Read this manual carefully to learn how to operate and maintain your product properly and to avoid injury and product damage. You are responsible for operating the product properly and safely.

You may contact Toro directly at www.toro.com for product and accessory information, help finding a dealer, or to register your product.

Whenever you need service, genuine Toro parts, or additional information, contact an Authorized Service Dealer and have the model and serial numbers of your product ready. The illustration below identifies the location of the model and serial numbers on the product. Write the numbers in the space provided below:

Model #:

Serial #:

This manual identifies potential hazards and has safety messages identified by the following words:

- **Danger** signals an extreme hazard that **will** cause serious injury or death if you do not follow the recommended precautions.
- **Warning** signals a hazard that **may** cause serious injury or death if you do not follow the recommended precautions.
- **Caution** signals a hazard that may cause minor or moderate injury if you do not follow the recommended precautions.

This manual uses two other words to highlight information. **Important:** calls attention to special mechanical information and **Note:** emphasizes general information worthy of special attention.

Warning

The engine exhaust from this product contains chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm.

Important: The engine is not equipped with a spark arrester muffler. It is a violation of California Public Resource Code Section 4442 to use or operate the engine on any forest-covered, brush-covered or grass-covered land. Other states or federal areas may have similar laws.

This spark ignition system complies with Canadian ICES-002.

Ce système d'allumage par étincelle de véhicule est conforme à la norme NMB-002 du Canada.

The enclosed Engine Owner's Manual is supplied for information regarding The U.S. Environmental Protection Agency (EPA) and the California Emission Control Regulation of emission systems, maintenance and warranty. Replacements may be ordered through the engine manufacturer.

Safety

This lawn mower meets or exceeds the CPSC blade safety requirements for walk-behind rotary lawn mowers and the B71.1 specifications of the American National Standards Institute in effect at the time of production.

Read and understand the contents of this manual before the engine is ever started.

⚠ This is the safety alert symbol. It is used to alert you to potential personal injury hazards. Obey all safety messages that follow this symbol to avoid possible injury or death.

Improperly using or maintaining this mower could result in injury or death. To reduce this potential, comply with the following safety instructions.

The following instructions have been adapted from the ANSI/OPEI standard B71.1–2003.

This cutting machine is capable of amputating hands and feet and throwing objects. Failure to observe the following safety instructions could result in serious injury or death.

© 2005 by The Toro Company
8111 Lyndale Ave., Bloomington, MN 55420, USA

Printed in the USA
All Rights Reserved

Original Instructions (EN)
Register your product at www.toro.com

1. Unfolding the Handle Folding or unfolding the handle improperly can damage the cables, causing an unsafe operating condition. Figure 5 2. Filling the Engine with Oil • Do not damage the cables when folding or Your mower does not come with oil in the engine, but it does come with a bottle of oil. unfolding the handle. • If a cable is damaged, contact an Authorized 1. Remove the dipstick (Figure 6).Product Overview Operation Filling the Fuel Tank Gasoline is extremely flammable and explosive. A fire or explosion from gasoline can burn you and others. • To prevent a static charge from igniting the gasoline, place the container and/or mower directly on the ground before filling, not in a vehicle or on an object. • Fill the tank outdoors when the engine is cold. Wipe up spills.
• Do not handle gasoline when smoking or around an open flame or sparks.Checking the Engine Oil Level 1. Remove the dipstick, wipe it clean, and fully install the dipstick (Figure 10). Figure 10 2. Remove the dipstick and check the oil level (Figure 10). If the oil level is below the Add mark on the dipstick, slowly pour oil into the oil fill tube to raise the oil level to the Full mark on the dipstick. Do not overfill. (Max. fill: 20 oz. (0.59 l), type: SAE 30W detergent oil with an API service classification of SF, SG, SH, SJ, SL, or higher.) 3. Install the dipstick securely.Adjusting the Cutting Height Adjusting the cutting height may bring you into contact with the moving blade, causing serious injury.
• Stop the engine and wait for all moving parts to stop. • Do not put your fingers under the housing when adjusting the cutting height.
If the engine has been running, the muffler will be hot and can severely burn you. Keep away from the hot muffler. Adjust the cutting height as desired. Set the front wheels to the same height as the rear wheels (Figure 11).Starting the Engine 1. Firmly push in the primer 3 times with your thumb, holding the primer in for a second before releasing it each time (Figure 12). Figure 12 Note: If the air temperature is below 55°F (13°C), firmly push the primer in 5 times. 2.
Hold the blade control bar against the handle and pull the recoil start handle (Figure 13). Note: When you pull the recoil start handle, keep your fingers away from the cable on the handle.
Figure 13 1. Blade control bar 3.Using the Self-propel Drive Bagging the Clippings To operate the self-propel drive, squeeze the self-propel drive bar (Figure 14) toward the handle and hold it.
Use the grass bag when you want to collect grass and leaf clippings from the lawn. A worn grass bag could allow small stones and other similar debris to be thrown in the operator's or bystander's direction and result in serious personal injury or death to the operator or bystanders. Check the grass bag frequently.Side-discharging the Clippings Use the side discharge for cutting very tall grass. If the bag is on the mower, remove it before side-discharging the clippings. The blade is sharp; contacting the blade can result in serious personal injury. Stop the engine and wait for all moving parts to stop before leaving the operating position. Installing the Side Discharge Chute 1. Unlock the side discharge door (Figure 17). Figure 17 2. Install the side discharge chute (Figure 18). Figure 16 3.Figure 19 Operating Tips General Mowing Tips • Clear the area of sticks, stones, wire, branches, and other debris that the blade could hit.
• Avoid striking solid objects with the blade. Never deliberately mow over any object. • If the mower strikes an object or starts to vibrate, immediately stop the engine, disconnect the wire from the spark plug, and examine the mower for damage. • For best performance, install a new blade before the cutting season begins.• Alternate the mowing direction. This helps disperse the • the front wheels at 2 inches (51 mm) and the rear wheels at 2-3/8 inches (60 mm). clippings over the lawn for even fertilization. If the finished lawn appearance is unsatisfactory, try one or more of the following: – Replace the blade or have it sharpened. – Walk at a slower pace while mowing. – Raise the cutting height on your mower. – Cut the grass more frequently. – Overlap cutting swaths instead of cutting a full swath with each pass.Preparing for Maintenance Replacing the Air Filter 1. Stop the engine and wait for all moving parts to stop. Replace the air filter yearly; replace it more frequently in dusty operating conditions. Refer to Preparing for Maintenance. 2. Disconnect the spark plug wire from the spark plug and hook it onto the retaining post (Figure 20) before performing any maintenance procedure. 1. Use a screw driver to open the air filter cover (Figure 21). Figure 20 3.Changing the Engine Oil Lubricating the Wheel Gears Change the engine oil after the first 5 operating hours; change it yearly thereafter. 1. Remove the wheel bolts on the front wheels and remove the front wheels. Run the engine a few minutes before changing the oil to warm it. Warm oil flows better and carries more contaminants. 2. Apply a lubricating oil to the inner and outer sides of the gear as shown in Figure 26.
1. Refer to Preparing for Maintenance. 2. Remove the dipstick (Figure 23).Adjusting the Self-propel Drive Cable Whenever you install a new self-propel cable or if the self-propel drive is out of adjustment, adjust the self-propel drive cable. 1. Loosen the cable support nut (Figure 29). Figure 27 4. Remove the blade, saving all mounting hardware (Figure 27).
5. Install the new blade and all mounting hardware (Figure 28). Figure 29 2. Pull down the cable jacket (toward the mower) until there is no slack in the cable (Figure 30). Figure 30 3.Storage Cleaning the Mower Store the mower in a cool, clean, dry place. Preparing the Mower for Storage The mower may dislodge material from under the mower housing. • Wear eye protection. • Stay in the operating position (behind the handle) when the engine is running. Gasoline vapors can explode. • Do not allow bystanders in the area. • Do not store gasoline more than 30 days. For best results, clean the mower soon after you have completed mowing.1. Loosen the handle knobs until you can move the upper handle freely.
2. Fold the upper handle forward as shown in Figure 32. Important: Route the cables to the outside of the handle knobs as you fold the upper handle. Figure 32 3. To unfold the handle, reverse the steps above. Removing the Mower from Storage 1. Remove the spark plug and spin the engine rapidly using the starter to blow the excess oil from the cylinder. 2. Install the spark plug and tighten it with a torque wrench to 15 ft-lb (20 N·m).The Toro Total Coverage Guarantee A Two -Year Full Warranty (Limited for Commercial Use) and The Toro Starting Guarantee on GTS-2 (Guaranteed to Start) Engines A Two -Year Full Warranty (Not applicable for Commercial Use) 22in Recycler® Walk Power Mowers Conditions and Products Covered under The Toro Total Coverage Guarantee The Toro Company and its affiliate, Toro Warranty Company, pursuant to an agreement between them, jointly promise to repair any Toro Product, when used for residential purposes*, if dPage 2• Extinguish all cig arettes , cig ars , pipes , and other sourcesof ignition.• Use only an appro v ed g asoline container .• Nev er remo v e g as cap or add fuel with the enginer unning . Allo w engine to cool before refueling .• Nev er refuel the mac hine indoors .• Nev er store the mac hine or fuel container where thereis an open flame , spark, or pilot light suc h as on a w aterheater or on other appliances .• Nev er fill containers inside a v ehicle or on a tr uc k ortrailer bed with a plastic liner . Alw a ys place containerson the g round a w a y from y our v ehicle before filling .• R emo v e g as-po w ered equipment from the tr uc k ortrailer and refuel it on the g round. If this is not possible ,then refuel suc h equipment with a por table container ,rather than from a g asoline dispenser nozzle .• K ee p the nozzle in contact with the rim of the fueltank or container opening at all times until fueling iscomplete . Do not use a nozzle loc k-open device .• If fuel is spilled on clothing, c hang e clothingimmediately .• Nev er o v erfill fuel tank.
R e place g as cap and tightensecurely .Exhaust contains carbon mono xide, an odor less,deadl y poison that can kill y ou.Do not r un the engine indoor s or in an enclosed ar ea.General Service• Nev er operate mac hine in a closed area.• K ee p all n uts and bolts tight to be sure the equipment isin safe w orking condition.• Nev er tamper with safety devices . Chec k their properoperation regularly .• K ee p mac hine free of g rass , lea v es , or other debrisbuild-up . Clean up oil or fuel spillag e and remo v eany fuel-soak ed debris . Allo w mac hine to cool beforestoring .• If y ou strik e a foreign object, stop and inspect themac hine . R e pair , if necessar y , before star ting .• Nev er mak e any adjustments or re pairs with the enginer unning . Disconnect the spark plug wire and g roundag ainst engine to prev ent unintended star ting .• Chec k g rass catc her components and the disc harg eguard frequently and re place with man ufacturer' srecommended par ts , when necessar y .• Mo w er blades are shar p . W rap the blade or w ear glo v es ,and use extra caution when ser vicing them.• Do not c hang e the engine g o v er nor setting or o v erspeedthe engine .• Maintain or re place safety and instr uction labels , asnecessar y .Safety and Instructional DecalsImportant: Safety and instr uction decals ar e locatednear ar eas of potential danger . R eplace dama geddecals.Manufacturer's Mark1. Indicates the blade is identified as a part from the original machinemanufacturer.94-8072105-1295112-88683Page 3SafetyT his la wn mo w er meets or ex ceeds the CPSC blade safetyrequirements for w alk-behind rotar y la wn mo w ers and theB71.1 specifications of the American National StandardsInstitute in effect at the time of production.R ead and under stand the contents of this man ualbef or e y ou star t the engine.T he safety aler t symbol (Figure 2) is used to aler t y ou topotential personal injur y hazards .
Obey all safety messag esthat follo w this symbol to a v oid possible injur y or death.Improperly using or maintaining this mo w er could result ininjur y or death.
T o reduce this potential, comply with thefollo wing safety instr uctions .T he follo wing instr uctions ha v e been adapted from theANSI/OPEI standard B71.1-2003.T his cutting machine can amputate hands and feet andthr o w objects.
F ailur e to obser v e the f ollo wing safetyinstr uctions could r esult in serious injur y or death.General Operation• R ead, understand, and follo w all instr uctions on themac hine and in the man ual(s) before star ting .• Do not put hands or feet near or under the mac hine .K ee p clear of the disc harg e opening at all times .• Only allo w responsible adults , who are familiar with theinstr uctions , to operate this mac hine .• Clear the area of objects suc h as roc ks , wire , to ys , etc .,whic h could be thro wn b y the blade . Sta y behind thehandle when the engine is r unning .• Be sure the area is clear of b ystanders before operating .Stop mac hine if any one enters the area.• Do not operate mac hine barefooted or while w earingsandals . Alw a ys w ear substantial footw ear .• Do not pull mac hine bac kw ard unless absolutelynecessar y .
Alw a ys look do wn and behind before andwhile mo ving bac kw ard.• Nev er direct disc harg ed material to w ard any one . A v oiddisc harging material ag ainst a w all or obstr uction.Material ma y ricoc het bac k to w ard the operator . Stopthe blade when crossing g ra v el surfaces .• Do not operate mac hine without the entire g rasscatc her , disc harg e guard, rear guard, or other safetyprotecti v e devices in place and w orking .• Nev er lea v e a r unning mac hine unattended.• Stop the engine and w ait until the blade comes to acomplete stop before cleaning the mac hine , remo vingg rass catc her , or unclog ging the disc harg e guard.• Operate mac hine only in da ylight or g ood ar tificial light.• Do not operate mac hine while under the influence ofalcohol or dr ugs .• Nev er operate mo w er in w et g rass . Alw a ys be sure ofy our footing; w alk; nev er r un.• Diseng ag e the dri v e system, if so equipped, beforestar ting the engine .• If the mac hine should star t to vibrate abnor mally ,stop the engine and c hec k for the cause immediately .Vibration is g enerally a w ar ning of trouble .• Alw a ys w ear eye protection when operating mac hine .• See man ufacturer' s instr uctions for proper operationand installation of accessories . Only use accessoriesappro v ed b y the man ufacturer .Slope OperationSlopes are a major factor related to slip and fall accidents ,whic h can result in sev ere injur y . Operation on all slopesrequire extra caution. If y ou feel uneasy on a slope , donot mo w it.• Mo w across the face of slopes; nev er up and do wn.Ex ercise extreme caution when c hanging direction onslopes .• W atc h for holes , r uts , bumps , roc ks , or other hiddenobjects . Unev en ter rain could cause a slip and fallaccident. T all g rass can hide obstacles .• Do not mo w on w et g rass or ex cessi v ely stee p slopes .P oor footing could cause a slip and fall accident.• Do not mo w near drop-offs , ditc hes , or embankments .Y ou could lose y our footing or balance .ChildrenT ragic accidents can occur if the operator is not aler t tothe presence of c hildren. Children are often attracted tothe mac hine and the mo wing acti vity . Nev er assume thatc hildren will remain where y ou last sa w them.• K ee p c hildren out of the mo wing area and under thew atc hful care of a responsible adult other than theoperator .• Be aler t and tur n mo w er off if a c hild enters the area.• Nev er allo w c hildren to operate the mac hine .• Use extra care when approac hing blind cor ners , shr ubs ,trees , or other objects that ma y bloc k y our view of ac hild.ServiceSafe Handling of GasolineT o a v oid per sonal injur y or pr oper ty dama ge, useextr eme car e in handling gasoline. Gasoline isextr emel y flamma ble and the v apor s ar e explosi v e.2Page 4374-0052 Rev B * Residential purposes means use of the product on the same lot as your home. Use at more than one location is considered commercial use, and the commercial use warranty would apply. 22in Recycler® Walk Power Mowers The Toro Total Coverage Guarantee A Two -Year Full Warranty (Limited for Commercial Use) and The Toro Starting Guarantee on GTS-2 (Guaranteed to Start) Engines A Two -Year Full Warranty (Not applicable for Commercial Use)Conditions and Products Covered under The Toro Total Coverage Guarantee The Toro Company and its affiliate, Toro Warranty Company, pursuant to an agreement between them, jointly promise to repair any Toro Product, when used for residential purposes*, if defective in materials or workmanship or if it stops functioning due to the failure of a component. The following time periods apply from the date of original purchase: Products • All Products and attachments • Batteries Warranty Period• 2 year full warranty • 1 year full warranty Limited Warranty for Commercial Use Toro Products used for commercial, institutional, or rental use are warranted against defects in materials or workmanship for the following time periods from the original date of purchase: Products All Products and attachments Warranty Period 45 day limited warranty This warranty covers the cost of parts and labor, but you must pay transportation costs. This warranty applies to all Toro Recycler walk power mowers and their attachments. Conditions and Products Covered Under the Toro Starting Guarantee The Toro Company and its affiliate, Toro Warranty Company, pursuant to an agreement between them, jointly guarantee that your Toro GTS-2 Engine, when used for residential purposes*, will start on the first or second pull for two years from the date of original purchase, if you provide the routine maintenance it requires, or we will fix it free of charge. This warranty covers the cost of parts and labor, but you must pay transportation costs. This warranty applies to all Toro Recycler walk power mowers. The Toro Starting Guarantee does not apply when the product is used commercially. Use at more than one location is considered commercial use.The following applies to both the Toro Total Coverage Guarantee & the Toro Starting Guarantee: Items and Conditions Not Covered There is no other express warranty except for special emission system coverage on some products. This express warranty does not cover the following: • Cost of regular maintenance service or parts, such as filters, fuel, lubricants, oil changes, air filter, blade sharpening/worn blade on mowers, cable/linkage adjustments, or brake and clutch adjustments • Any product or part which has been altered or misused and requires replacement or repair due to accidents or lack of proper maintenance • Repairs necessary due to improper battery care, electrical supply irregularities, failure to use fresh fuel (less than one month old), or failure to properly prepare the unit prior to any period of non-use over one month • Pickup and delivery charges • Operational misuse, neglect, or accidents • Repairs or attempted repairs by anyone other than an Authorized Toro Service Dealer • Repairs or adjustments to correct starting difficulties due to the following: - Failure to follow proper maintenance procedures - Rotary mower blade striking an object - Contaminants in the fuel system - Improper fuel (consult your Operator's Manual if in doubt) - Failure to drain the fuel system prior to any period of non-use over one month • Special operational conditions where starting may require more than two pulls: - First time starts after extended period of non-use over one month or seasonal storage - Cool temperature starts such as those found in early spring and late autumn (applies to rotary mowers only) - Improper starting procedures If you are having difficulty starting your unit, please check the Operator's Manual to ensure that you are using the correct starting procedures. This can save an unnecessary visit to a Service Dealer. Owner Responsibilities You must maintain your Toro Product by following the maintenance procedures described in the Operator's Manual. Such routine maintenance, whether performed by a dealer or by you, is at your expense. Instructions for Obtaining Warranty Service If you think that your Toro Product contains a defect in materials or workmanship, or if a normal, able-bodied adult can no longer start your product's engine in one or two pulls, follow this procedure: 1. Contact any Authorized Toro Service Dealer to arrange service at their dealership. To locate a dealer convenient to you, refer to the Yellow Pages of your telephone directory (look under "Lawn Mowers") or access our website at www.Toro.com. U.S. Customers may also call the number listed in item #3 to use our 24-hour Toro dealer locator system. 2. Bring the product and your proof of purchase (sales receipt) to the Service Dealer.
The dealer will diagnose the problem and determine if it is to be covered under warranty. 3. If for any reason you are dissatisfied with the Service Dealer's analysis or with the assistance provided, contact us at: Customer Care Department -Consumer, Toro Warranty Company, 8111 Lyndale Avenue South, Bloomington, MN 55420-1196; or call us toll free at 1-866-214-9807 (U.S. customers) or 1-866-214-9808 (Canada customers).
General Conditions All repairs covered by these warranties must be performed by an Authorized Toro Service Dealer using Toro approved replacement parts. Neither The Toro Company nor Toro Warranty Company is liable for indirect, incidental, or consequential damages in connection with the use of the Toro Products covered by these warranties, including any cost or expense of providing substitute equipment or service during reasonable periods of malfunction or non-use pending completion of repairs under these warranties. Some states do not allow exclusions of incidental or consequential damages, so the above exclusions and limitations may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. Countries Other than the United States or Canada Customers who have purchased Toro products exported from the United States or Canada should contact their Toro Distributor (Dealer) to obtain guarantee policies for your country, province, or state. If for any reason you are dissatisfied with your Distributor's service or have difficulty obtaining guarantee information, contact the Toro importer. If all other remedies fail, you may contact us at Toro Warranty Company.