

LINDY 42321 2 Port Type C Dual HDMI 4K60 KVM Switch User Manual

LINDY
CONNECTION PERFECTION

2 Port Type C, Dual HDMI 4K60
KVM Switch
User Manual



Contents

1 Introduction
2 Package Contents
3 Features
4 Specification
5 Installation
6 Operation
7 Recycling Information
8 Documents / Resources
8.1 References

Introduction

Thank you for purchasing the 2 Port Type C, Dual HDMI 4K60 KVM Switch. This product has been designed to provide trouble free, reliable operation. It benefits from both a LINDY 2-year warranty and free lifetime technical support. To ensure correct use, please read this manual carefully and retain it for future reference.
The Lindy 2 Port Type C, Dual HDMI 4K60 KVM Switch is a compact desktop solution for providing access and control over two Type C devices such as laptops, tablets or smartphones from a single keyboard, mouse and monitor.
One Type C Power Delivery input port can provide up to 100W on the device connected to Type C port number 2 (power supply is not included) and two HDMI outputs with MST and SST support allow the connection of two displays supporting extended desktop or mirror mode.
Please note that Type C port with support for DisplayPort Alternate Mode is required for video functionality.

Package Contents

- 2 Port Type C, Dual HDMI 4K60 KVM Switch
- 2 x Type C Cable, 0.5m
- Lindy manual

Features

- Simple switching of Type C devices via push button
- Supports resolutions up to 3840×2160@60Hz 4:4:4 8bit connecting one monitor, and up to 3840×2160@30Hz 4:4:4 8bit with both monitors connected
- Dual HDMI output ports supporting MST (only for Windows) and SST
- USB 2.0 ports to connect USB devices

Specification

- Console Interfaces: 2 x HDMI (Female), 2 x USB 2.0 Type A (Female)
- Inputs: 2 x Type C 3.2 Gen 2 (Female)
- Power interface: Type C Power Delivery 3.0 up to 100w (optional)
- HDMI: 2.0
- HDCP: 2.2
- Supported Bandwidth: 18Gbps
- Power consumption: 7.5W

- Dark grey metal housing with bottom rubber pad
- Operating Temperature: 5°C – 40°C (41°F – 104°F)
- Storage Temperature: -15°C – 60°C (5°F – 140°F)
- Humidity: 5 – 85% RH (non-condensing)

Installation

Front

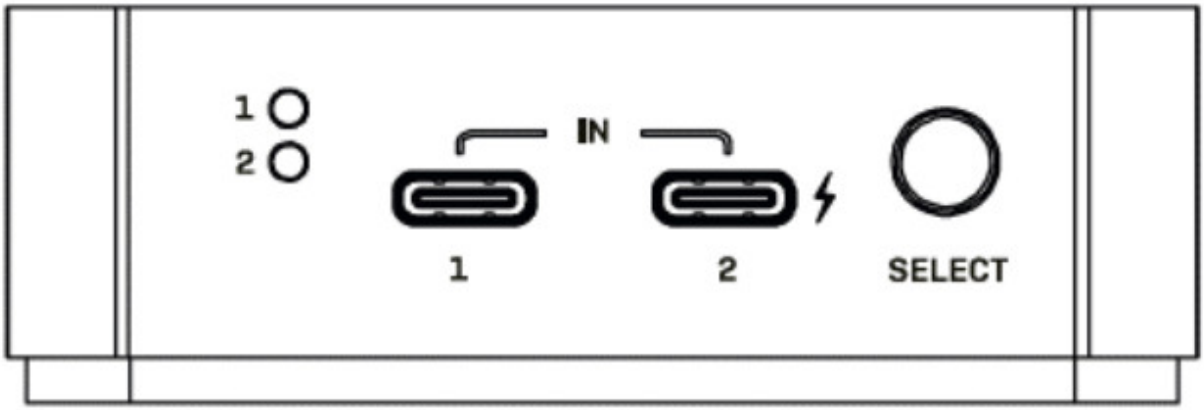

- Port status LEDs: the selected input port will illuminate
- USB Type C Input port 1-2: connect the Type C devices using two Type C Male to Male USB 3.2 Gen 2 cables (included), PD up to 100W is supported only on port 2
- SELECT button: push to change input

Rear & Side

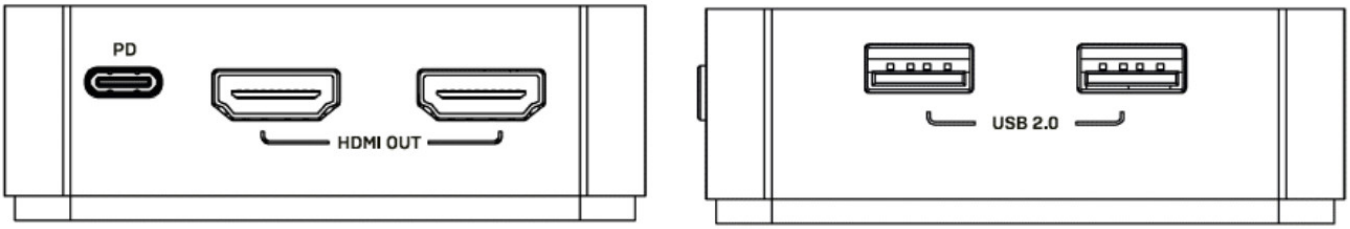

- USB Type C PD port: connect a compatible Type C power supply (not included) if required
- HDMI OUT ports: connect up to two HDMI monitors using HDMI Male to Male cables (not included)
- USB 2.0 Type A ports: connect USB devices such as mouse, keyboard or mass storage device

Operation

Computer port selection can be made using the push button on the front panel or via auto switching, if there is only one active source connected, the unit switches automatically to that port.
We suggest using the included USB Type C 3.2 Gen 2×2 E-marked 0.5m cables and HDMI cables not longer than 3m (not included). Please reduce HDMI cable length if the video signal is not stable.
Please Note
For device charging, a Limited Power Source (LPS) certified USB Type C PD Power Adapter over 65Watt is recommended (not included).
The switch supports Laptops and mobile Type C sources such as Apple iPad Pro, smartphones with Samsung

DeX and Huawei desktop mode. Other mobile devices with DP Alt Mode support can only display a mirror image. The USB Fast Role Swap feature is not supported, devices may reconnect when removing or adding a USB PD connection.

Recycling Information

WEEE (Waste of Electrical and Electronic Equipment), Recycling of Electronic Products

Europe, United Kingdom



In 2006 the European Union introduced regulations (WEEE) for the collection and recycling of all waste electrical and electronic equipment. It is no longer allowable to simply throw away electrical and electronic equipment. Instead, these products must enter the recycling process. Each individual EU member state, as well as the UK, has implemented the WEEE regulations into national law in slightly different ways. Please follow your national law when you want to dispose of any electrical or electronic products. More details can be obtained from your national WEEE recycling agency.

CE/FCC Statement

CE Certification

LINDY declares that this equipment complies with relevant European CE requirements.

FCC Certification

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

You are cautioned that changes or modification not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

Hersteller / Manufacturer (EU):	**Manufacturer (UK):**
LINDY-Elektronik GmbH Markircher Str. 20 68229 Mannheim Germany Email: info@lindy.com , T: +49 (0)621 470050	LINDY Electronics Ltd Sadler Forster Way Stockton-on-Tees, TS17 9JY England sales@lindy.co.uk , T: +44 (0)1642 754000

CONNECTION PERFECTION

Tested to comply with
FCC standards.
For home and office use.

No. 42321
1 st Edition, October 2022

lindy.com

Documents / Resources

	LINDY 42321 2 Port Type C Dual HDMI 4K60 KVM Switch [pdf] User Manual 42321 2 Port Type C Dual HDMI 4K60 KVM Switch, 42321, 2 Port Type C Dual HDMI 4K60 KVM Switch, Type C Dual HDMI 4K60 KVM Switch, Dual HDMI 4K60 KVM Switch, HDMI 4K60 KVM Switch, 4K60 KVM Switch, KVM Switch

References

- User Manual

Manuals+, Privacy Policy