


#13013

Micro OSD v2

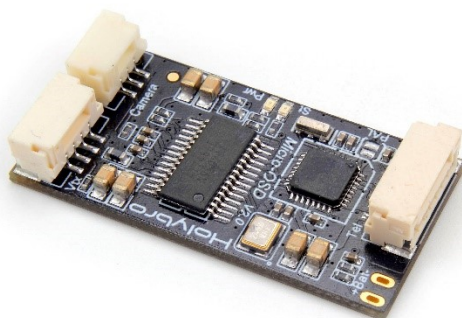

Specifications:


ATmega328P with Arduino bootloader
 AT7456 monochrome on-screen display
 Standard 6-pin ISP header
 Solder jumper for PAL video option
 Exposed test points for HSYNC and LOS
 Dimensions: 17.5*35mm
 Weight: 3g

Note: BAT+ is directly connected with VTx and Camera (Pay attention to the max with stand voltage of your equipment)


Included:

Micro OSD * 1
 GH 6P cable * 1
 GH 4P cable * 1
 GH 3P cable * 1

PINMAP

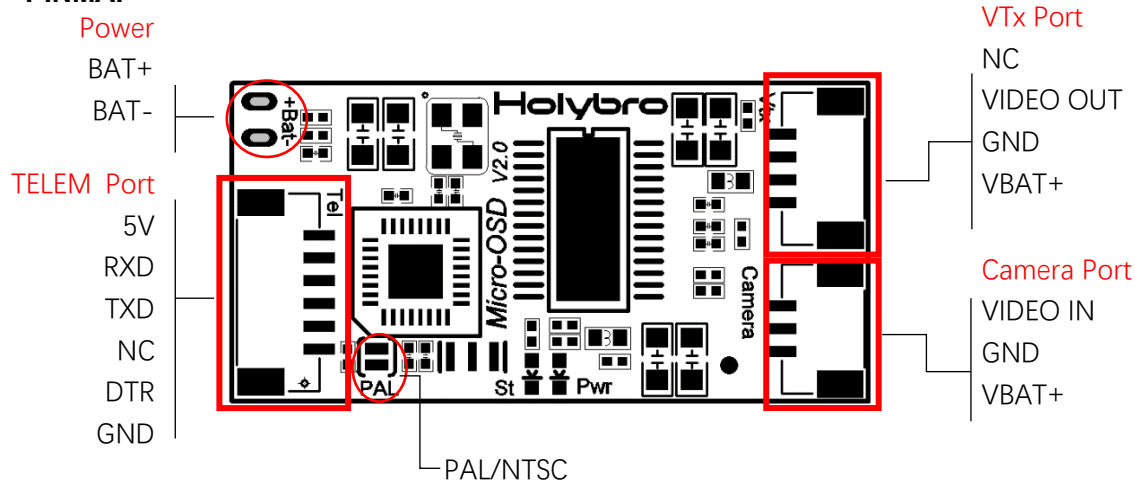

Connection

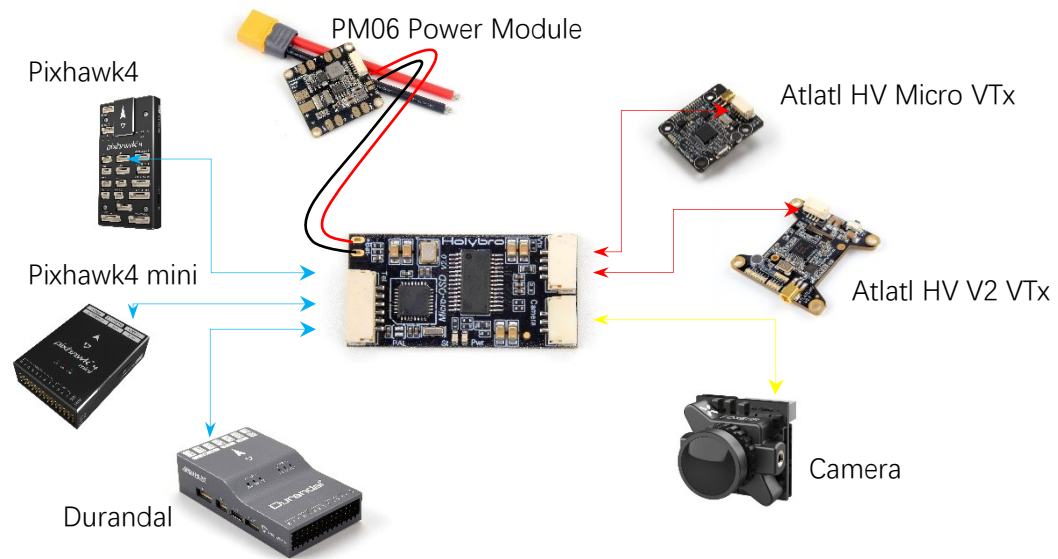

Holybro is a registered trademark of Holybro, registered in the U.S. and other countries.

©Copyright 2018 Holybro. All Rights Reserved.