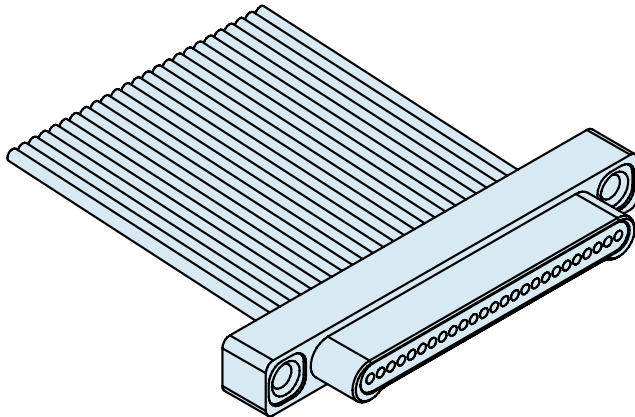


890-001 and 890-002 Single Row Nano Connector with Insulated Wire







Glenair Insulated Wire Nano Connectors feature gold alloy TwistPin contacts. Contacts are precision-crimped to insulated, stranded wire. These nanominiature connectors offer premium performance and reliability for demanding applications. Contact spacing is .025 inches. 1 amp current rating, DWV rating 250 volts AC. Wire gages #30 and #32 AWG.

TwistPin Contact System assures premium performance in demanding environments. The gold/platinum alloy contacts will stand up to years of exposure without corrosion.

Typical Applications include UAV's, satellites, missile systems and geophysical instruments.

How To Order Nano Connectors with Insulated Wire

Sample Part Number	890-002	-9S	A1	-0	A	1	-12	J
Series	890-001 – Plug, Pin Contacts, Single Row, Nanominiature 890-002 – Receptacle, Socket Contacts, Single Row, Nanominiature							
Insert Arrangement/ Contact Type	Plugs (890-001): 5P, 9P, 15P, 21P, 25P, 31P, 37P, 51P Receptacles (890-002): 5P, 9P, 15S, 21S, 25S, 31S, 37S, 51S							
Shell Material and Finish	A1 - Aluminum Shell, Cadmium Plating T - Titanium Shell, Unplated A2 - Aluminum Shell, Electroless Nickel S - Stainless Steel Shell, Passivated Plating							
Wire Gage	0 #30 AWG 2 #32 AWG							
Wire Type	A - Ultralightweight XLETFE Insulation, Silver-Coated Ultrahigh-Strength Copper (Not available for #32 AWG) B - Extruded PTFE Insulation, NEMA HP3-ETX (MIL-W-16878/6) C - Cross-Linked Modified ETFE Insulation, MIL-W-22759/33 (Not available for #32 AWG)							
Wire Color Code	1 - White 2 - Yellow 7 - 10 Color Repeating (wire type A is striped, types B and C are solid colors)							
Wire Length Inches	12 - Wire Length In Inches. "12" Specifies 12 Inches.							
Hardware	J - Jackscrew, #0-80 T - Female Thread, #0-80 Female threads are available on plug connectors only if the shell material is titanium or stainless steel.							

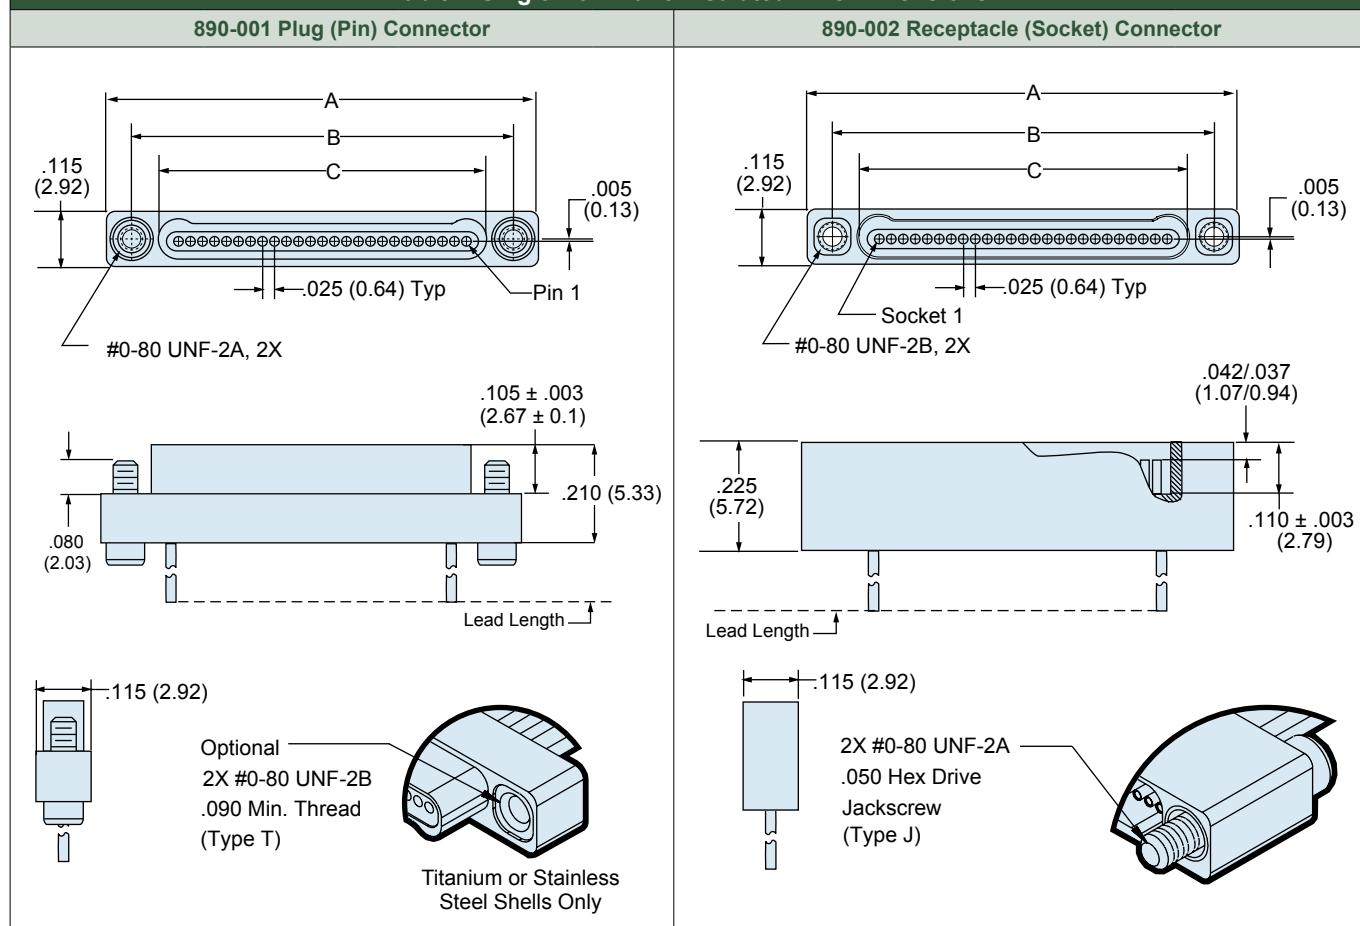
Plug (Pin) Connector	Receptacle (Socket) Connector
 "J" Jackscrew Option	 "J" Jackscrew Option
 "T" Female Thread Option Titanium or Stainless Steel Shells Only	 "T" Female Thread Option

Dimensions in inches (millimeters) and are subject to change without notice.



890-001 and 890-002 Single Row Nano Connector with Insulated Wire

Table I: Single Row Nano Insulated Wire Dimensions



Layout	A		B BSC.		C BSC.	
	In. ± .005	mm. ± 0.13	In.	mm.	In.	mm.
5P	.400	10.16	.295	7.49	.184	4.67
5S	.400	10.16	.295	7.49	.185	4.70
9P	.500	12.70	.395	10.03	.284	7.21
9S	.500	12.70	.395	10.03	.285	7.24
15P	.650	16.51	.545	13.84	.434	11.02
15S	.650	16.51	.545	13.84	.435	11.05
21P	.800	20.32	.695	17.65	.584	14.83
21S	.800	20.32	.695	17.65	.585	14.86
25P	.900	22.86	.795	20.19	.684	17.37
25S	.900	22.86	.795	20.19	.685	17.40
31P	1.050	26.67	.945	24.00	.834	21.18
31S	1.050	26.67	.945	24.00	.835	21.21
37P	1.200	30.48	1.095	27.81	.984	24.99
37S	1.200	30.48	1.095	27.81	.985	24.02
51P	1.550	39.37	1.445	36.70	1.334	33.88
51S	1.550	39.37	1.445	36.70	1.335	33.91

Dimensions in inches (millimeters) and are subject to change without notice.

© 2013 Glenair, Inc.

Series 89 Nano Catalog

U.S. CAGE Code 06324/0CA77

Printed in U.S.A.