DISTRIBUTED BY
Best MATERIALS®.com

For more information
Or to buy this product
Click here

**DA.13** | PRODUCT DETAIL | INSTALLATION DETAIL / Cross Section

## "T" MOLDING

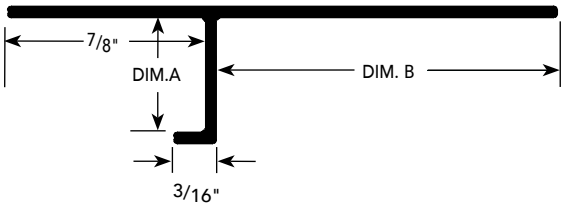


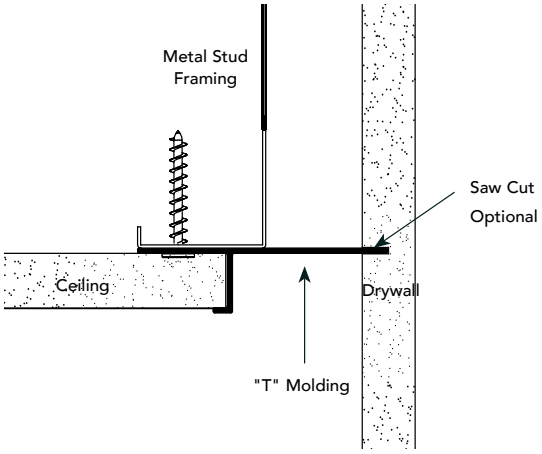


### USAGE

Fry Reglet "T" Molding creates a reveal at wall/ceiling intersection, provides a clean edge for ceiling and finishes ceiling edge with no need for taping and spackling. Available vented where air flow into ceiling plenum is desired.

### GUIDE SPECIFICATION

Where indicated on drawings, Fry Reglet "T" Molding, as manufactured by Fry Reglet Corporation, shall be installed. Aluminum shall be extruded alloy 6063 T5, with chemical conversion coating, clear anodized or other specified finish. Refer to finish section.

INSTALLATION DETAIL / ISO View

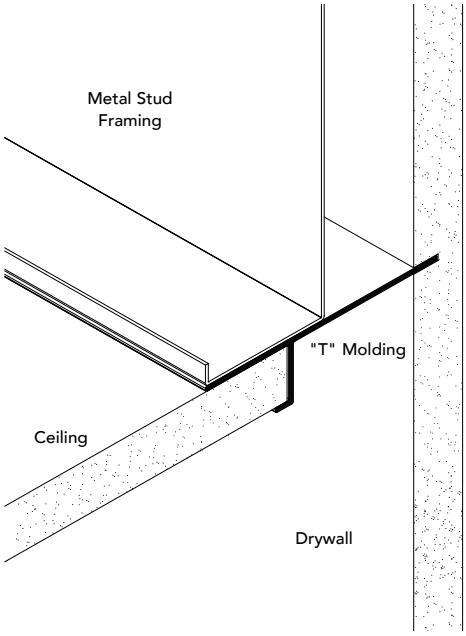

Distributed by Best Materials® LLC



## SIZES

## DA.13

**"T" MOLDING**

| DIM. A REVEAL DEPTH | DIM. B REVEAL WIDTH | NUMBER | |
|---|---|---|---|
| | | NON-VENTED | VENTED |
| 1/2" | 1/2" | TDM-50-50 | TDM-50-V-50 |
| 1/2" | 3/4" | TDM-50-75 | TDM-50-V-75 |
| 1/2" | 1 1/8" | TDM-50-1125 | TDM-50-V-1125 |
| 1/2" | 1 1/2" | TDM-50-150 | TDM-50-V-150 |
| 5/8" | 1/2" | TDM-625-50 | TDM-625-V-50 |
| 5/8" | 3/4" | TDM-625-75 | TDM-625-V-75 |
| 5/8" | 1 1/8" | TDM-625-1125 | TDM-625-V-1125 |