Hubbell SystemOne

Metal and Non-Metallic Floor Boxes
Fire-Rated Poke-Throughs









Nobody delivers like Hubbell Commercial Solutions

Wiring Systems

ScrubShield™ Complies with UL514

The Hubbell SystemOne Floor Box Family

Cast Iron



S1CFB

- Corrosion resistant for on-grade applications
- Oversized 1½" N.P.T. threaded conduit access holes for low voltage
- 1" N.P.T. threaded conduit access holes for power

Steel



S1SFB

- Stamped steel construction
- Economical and light weight for above-grade applications
- Concentric knockouts permit various conduit sizes for both power and data services

Steel AV



S1SFBAV

- Accommodates high-capacity multimedia applications in a 3½" minimum depth of pour
- Oversized 1½" N.P.T. threaded data hub
- ¾", 1" concentric knockouts for power services

Features

c UL us LISTED

- Easily installed, aesthetic and configurable floor box solution, for open floor plans that require both power and data services
- The Hubbell SystemOne™ Universal Cover mounts directly to the floor box riser, eliminating the need for an additional adapter collar
- The Hubbell SystemOne Universal Cover features ScrubShield™ technology that exceeds UL514 scrub water exclusion requirements
- Convenient cubic inch capacity (cm^3) markings on interior of box
- Leveling feet provide before pour adjustability
- Non-metallic riser allows a simple saw cut for adjustment after pour
- Supplied with concrete cover and closure plugs (where applicable)
- Designed to accommodate multi-service applications with the wide offering of Hubbell SystemOne sub-plates
- Hubbell SystemOne Metal Floor Boxes are approved for use in the City of Chicago

Non-Metallic



S1PFB

- Non-corrosive plastic construction
- Oversized 1½" data conduit hub for increased cable capacity and bend radius
- Parallel conduit hubs reduce labor and material cost, facilitating easier wire pull

Features

c UL us LISTED

- Economical, easy to install, in-floor delivery system for open plan spaces
- The Hubbell SystemOne Universal Cover mounts directly to the floor box riser, eliminating the need for an additional adapter collar
- Concrete cover, conduit reducers and conduit hub plugs included

Hubbell SystemOne Universal Covers

Universal Flange and Cover Assembly

Carpet Tile



- Hinged doors open 180 degrees flush to the carpet flange or tile
- Locking studs allow each door to be secured independently
- The universal carpet or tile flange can be used for Hubbell SystemOne Floor Boxes and Fire-Rated Poke-Throughs
- Finishes and colors available:

Aluminum Finish | Brass Finish | Black | Gray | Ivory



Features

- Durable cast aluminum construction available in black, gray, brass, aluminum and ivory powder coat finishes
- Features ScrubShield™ technology that exceeds UL514 scrub water exclusion requirements
- Provides consistent look and maximum functionality throughout the installed life

Hubbell SystemOne Sub-Plates

Sub-Plates

Hubbell's modular sub-plate design allows users to economically upgrade Hubbell SystemOne FRPT and Floor Boxes to accommodate future moves, adds and changes. See page 5 for complete offering.



4x4 Sub-Plate



Datacom and Power Sub-Plate



Extron® APP/MAPP and Power Sub-Plate



Dual Style Line® Decorator Sub-Plate



Twist-Lock® Sub-Plate



Furniture Feed Cover, Carpet

Features

- Durable cast aluminum construction, powder coat finish
- Hubbell 4X4: four 20A, 125V receptacles, four keystone openings for voice/data jacks and flush multimedia connectors
- Hubbell X-END™ and iSTATION™ modular connectivity
- Accommodates Extron® Electronics Architectural Series audio/video system integration products
- Accommodates GFCI, surge and standard Style Line® Decorator receptacles
- Twist-Lock® receptacle with two flush keystone openings
- Large capacity and multi-service furniture feed applications
- Open system sub-plates permit maximum data flexibility

Hubbell Power Devices and Connectivity

Power Devices and Connectivity



Hubbell-Pro™ Receptacles



Hubbell iSTATION™



Hubbell X-END™



Features

- Choose from Hubbell's industry leading selection of wiring devices for power services
- Hubbell iSTATION™ connectivity modules integrate with SystemOne to provide comprehensive multi-media solutions
- Hubbell X-END™ application cables and tails allow for more connectivity in a smaller footprint

Extron® is a registered trademark of Extron Electronics. Siemon™ is a trademark of The Siemon Company. Panduit® is a registered trademark of Panduit Corp. SYSTIMAX® is a registered trademark of CommScope, Inc. Ortronics® is a registered trademark of Ortronics/Legrand.

ScrubShield Complies with UL514

Hubbell SystemOne Metal and Non-Metallic Floor Boxes

Dimensions Inches (mm)	Cast Iron	Steel	Steel A/V	Non-Metallic
 Metal  Non-Metallic	 **S1CFB***	 **S1SFB***	 **S1SFBAV***	 **S1PFB**
Min. Depth of Pour	3.50" (88.9)	3.50" (88.9)	3.50" (88.9)	3.00" (76.2)
Adjustability	Fully	Fully	Fully	Fully
Cubic Inch Capacity (cm^3)	156.0 cu. in. (2556.4)	175.7 cu. in. (2879.2)	177.5 cu. in. (2909.7)	100 cu. in. (1638.7)
Dimensions – A	3.00” (76.2)	3.00” (76.2)	3.00” (76.2)	6.00” (152.4)
Dimensions – B (Inside Diameter)	5.00” (127.0)	5.00” (127.0)	5.00” (127.0)	5.00" (127.0)
Dimensions – C	7.45” (189.2)	7.38” (187.4)	7.38” (187.4)	—
Dimensions – D	7.26” (184.4)	7.50” (190.5)	7.50” (190.5)	—
Power Entries	1" N.P.T. Access Holes	¾", 1" Concentric K.O.	¾", 1" Concentric K.O.	1" Conduit Hub
Data Entries	1½" N.P.T. Access Holes	¾", 1", 1 ¼" Concentric K.O.	1½" Threaded Hub (included)	1½" Conduit Hub
Concrete Cover Included	✓	✓	✓	✓
Closure Plugs Included	✓	—	✓	✓
Reducers	—	—	—	✓
Accepts Hubbell SystemOne Universal Cover	✓	✓	✓	✓
Cover Mounting Clips Included	✓	✓	✓	✓
Non-Metallic Low Voltage Divider **(S1DIV1)** Included	✓	✓	✓	✓

- UL File Number E92074.
- CSA File Number LR18416.

*S1CFB, S1SFB, S1SFBAV are approved for use in the City of Chicago.

Hubbell SystemOne Universal Cover

- Cast aluminum construction
- Durable powder coat finish




Color	Carpet	Tile
Aluminum Finish	**S1CFCAL**	**S1TFCAL**
Brass Finish	**S1CFCBRS**	**S1TFCBRS**
Black	**S1CFCBL**	**S1TFCBL**
Gray	**S1CFCGY**	**S1TFCGY**
Ivory	**S1CFCI**	**S1TFCI**

Aluminum Finish | Brass Finish | Black | Gray | Ivory



Floor Box Accessories

Description	Catalog Number
Abandonment Plates Used to cover abandoned SystemOne Fire-Rated Poke-Throughs or Floor Boxes.	
Black	**S1AP4BL**
Gray	**S1AP4GY**
Replacement Side by Side Divider Used to isolate compartments in **S1SP, S1SPFFx, S1SPFFTx, S1SPDU, S1SPDUSL, S1SPDU2IM** and **S1SPSL2IM** sub-plates. Included with all SystemOne Floor Boxes.	 **S1DIV1**
1½" Threaded Hub For use with **S1SFBAV** ONLY. Permits feed-through applications. **S1SFBAV** floor box includes one (1) threaded hub.	 **S1AVHUB15**
Replacement Universal Cover Mounting Clips Used to mount SystemOne Universal Cover to SystemOne metal and non-metallic floor boxes **(S1CFB, S1SFB, S1SFBAV, S1PFB)**. Includes clips and ground leads for (5) floor boxes. All SystemOne Floor Boxes include mounting clips.	 **S1FBCLIP5PK**

Hubbell SystemOne Sub-Plates

Description	Catalog Number
Style Line® Decorator/GFCI (2) Style Line® Decorator openings for power and/or datacom applications. 3 Non-Metallic 3.5 Metal	 **S1SP**
Hubbell 4 X 4 (4) 20A, 125V receptacles. (4) Keystone openings for Hubbell jacks or flush A/V connectors. Power can be wired as single or two circuit with isolated ground capability. 4 Provided with 15 ft. wire leads Provided with 30 ft. wire leads	 **S1SP4X4** **S1SP4X415** **S1SP4X430**
Single Receptacle + Data Opening for 20 or 30A Twist-Lock® receptacle (1.56" OD) and (2) Keystone openings for Hubbell jacks or flush A/V connectors. 4	 **S1SPTL**
Hubbell DataCom + Style Line® Decorator (1) Style Line® Decorator opening, (2) flush Keystone openings and 1.5 unit recessed iSTATION™ opening for data, voice and A/V applications. 5	 **S1SPSL2IM**
Extron® or FSR + Power (1) 20A, 125V receptacle. Recessed opening for (3) single Extron® MAAP series adapter plates or FSR IPS plates. 4	 **S1SPEXT1**
Extron® AAP + Power (1) 20A, 125V receptacle. (2) flush Keystone and recessed opening for (2) single Extron® AAP Series adapter plates. 4	 **S1SPEXT4**
Panduit Mini Com® 4 X 4 (4) 20A, 125V receptacles. (4) Openings for Panduit Mini-Com Connectivity. 4	 **S1SP4X4PA**

Description	Catalog Number
Duplex/Duplex (2) Duplex openings for power and/or datacom applications. 3 Non-Metallic 3.5 Metal	 **S1SPDU**
Carpet Furniture Feed Cover/Flange* (1) ¾" and (1) 1½" N.P.T. access holes for power and/or datacom applications. Universal Cover not required. Includes carpet flange. 3 Non-Metallic 3.5 Metal Aluminum Fin. Brass Fin. Black Gray	 **S1SPFFAL** **S1SPFFBRS** **S1SPFFBL** **S1SPFFGY**
Hubbell DataCom + Power (1) 20A, 125V receptacle and 3 unit recessed iSTATION™ opening for data, voice, and A/V applications. 5	 **S1SP3IM**
Hubbell DataCom 1 unit flush iSTATION™ opening and 3 unit recessed iSTATION™ opening for data, voice, and A/V applications. 3.5	 **S1SP4IM**
Extron® or FSR + Power (1) 20A, 125V receptacle. Recessed opening for (1) single Extron® MAAP and (2) single AAP series adapter plates or FSR IPS plates. 4	 **S1SPEXT2**
Ortronics Series II® + Power (1) 20A, 125V receptacle. Recessed opening for (3) 1 unit Ortronics Series II® modules. 5	 **S1SPORT**
SYSTIMAX® 4 X 4 (4) 20A, 125V receptacles. (4) Openings for SYSTIMAX® Connectivity. 4	 **S1SP4X4SYS**

Description	Catalog Number
Duplex/Style Line® Decorator (1) Duplex and (1) Style Line® Decorator opening for power and/or datacom applications. 3 Non-Metallic 3.5 Metal	 **S1SPDUSL**
Tile Furniture Feed Cover/Flange* (1) ¾" and (1) 1½" N.P.T. access holes for power and/or datacom applications. Universal Cover not required. Includes tile flange. 3 Non-Metallic 3.5 Metal Aluminum Fin. Brass Fin. Black Gray	 **S1SPFFTAL** **S1SPFFTBRS** **S1SPFFTBL** **S1SPFFTGY**
Hubbell DataCom + Duplex (1) Duplex opening, (2) flush Keystone openings and 1.5 unit recessed iSTATION™ opening for data, voice and A/V applications. 5	 **S1SPDU2IM**
Active Multimedia + Power Single 20A, 125V receptacle; (2) flush Keystone openings; (1) rectangular Style Line® Decorator opening to accommodate active multimedia modules or low voltage outlet frames. 5	 **S1SPAMM20**
Extron® or FSR Single-Service Recessed opening for (2) single Extron® MAAP and (2) single AAP series adapter plates or FSR IPS plates. 4.5	 **S1SPEXT3**
Ortronics TracJack® + Power (1) 20A, 125V receptacle. Recessed bezel for (6) Ortronics TracJack® modules. 5	 **S1SPTRAC**
Siemon MAX® + Power (1) 20A, 125V receptacle. Recessed bezel for (6) Siemon MAX® modules. 5	 **S1SPMAX**

Signifies minimum depth of concrete pour in inches for Metal Floor Boxes (**S1CFB**, **S1SFB** and **S1SFBAV**) and Non-Metallic Floor Box (**S1PFB**).
*Furnished with two screw-in flexible metal conduit connectors.

Sub-Plate Accessories

Description	Catalog Number
Replacement Threaded Conduit Plugs Used with **S1SPFFx** and **S1SPFFTx** ONLY. Sub-plate is supplied with plugs.	

Description	Catalog Number
1½" Aluminum Fin.	**S1FP15AL**
1½" Brass Fin.	**S1FP15BRS**
1½" Black	**S1FP15BL**
1½" Gray	**S1FP15GY**

Description	Catalog Number
¾" Aluminum Fin.	**S1FP34AL**
¾" Brass Fin.	**S1FP34BRS**
¾" Black	**S1FP34BL**
¾" Gray	**S1FP34GY**

Description	Catalog Number
6-Port Replacement Data Frames Used with open systems sub-plates. Sub-plate is supplied with data frame. Siemon MAX® for use with **S1SPMAX** sub-plate.	 **S1DFMAX**
Ortronics TracJack® for use with **S1SPTRAC** sub-plate.	 **S1DFTRAC**
Black Style Line® blank frame.	 **2100BK**

Extron® is a registered trademark of Extron Electronics. MAX® is a registered trademark of The Siemon Company. Mini-Com® and Panduit® are registered trademarks of Panduit Corp. SYSTIMAX® is a registered trademark of CommScope, Inc. TracJack®, Series II® & Ortronics® are registered trademarks of Ortronics/Legrand.

ScrubShield™ Complies with UL514

Hubbell SystemOne Poke Through

4-Inch Core Through Floor Fittings



- Step down installation clips allow the fitting to be installed or removed from the floor above
- Fire barrier expands during fire conditions to maintain the floor's fire rating
- Adjustable lower fire barrier accommodates concrete floor thicknesses from 2¼ to 7 in.
- Oversized E.M.T. conduit tubes for increased cable capacity

Features

c UL us LISTED

- Accepts all Hubbell SystemOne covers and sub-plates
- Excellent solution for retrofit and new construction
- Delivers power, voice, data and multimedia
- UL listed for use in 1 – 4 hour fire rated floors at 100% rated fill
- Available with integral power junction box
- SystemOne Fire-Rated Poke-Throughs are approved for use in the City of Chicago
- UL installation spacing - minimum 2 feet on center, not more than one per 65 square feet of floor area in each span

Hubbell SystemOne Universal Cover

Universal Flange and Cover Assembly

Carpet Tile



- Hinged doors open 180 degrees flush to the carpet flange or tile
- Locking studs allow each door to be secured independently
- The universal carpet or tile flange can be used for Hubbell SystemOne Fire-Rated Poke-Throughs and Floor Boxes
- Finishes and colors available:

Aluminum Finish | Brass Finish | Black | Gray | Ivory



Features

- Durable cast aluminum construction available in black, gray, brass, aluminum and ivory powder coat finishes
- Features ScrubShield™ technology that exceeds UL514 scrub water exclusion requirements
- Provides consistent look and maximum functionality throughout the installed life

Hubbell SystemOne Sub-Plates

Sub-Plates

Hubbell's modular sub-plate design allows users to economically upgrade Hubbell SystemOne FRPT and Floor Boxes to accommodate future moves, adds and changes. See page 9 for complete offering.



4x4 Sub-Plate



Datacom and Power Sub-Plate



Extron® APP/MAPP and Power Sub-Plate



Dual Style Line® Decorator Sub-Plate



Twist-Lock® Sub-Plate



Furniture Feed Cover, Carpet

Features

- Durable cast aluminum construction, powder coat finish
- Hubbell 4X4: four 20A, 125V receptacles, four keystone openings for voice/data jacks and flush multimedia connectors
- Hubbell X-END™ and iSTATION™ modular connectivity
- Accommodates Extron® Electronics Architectural Series audio/video system integration products
- Accommodates GFCI, surge and standard Style Line® Decorator receptacles
- Twist-Lock® receptacle with two flush keystone openings
- Large capacity and multi-service furniture feed applications
- Open system sub-plates permit maximum data flexibility

Extron® is a registered trademark of Extron Electronics. Siemon™ is a trademark of The Siemon Company. Panduit® is a registered trademark of Panduit Corp. SYSTIMAX® is a registered trademark of CommScope, Inc. Ortronics® is a registered trademark of Ortronics/Legrand.

Hubbell SystemOne 4-Inch Core Hole, One-Piece Units

All Hubbell SystemOne 4-inch core, **one-piece units** include the sub-plate and cover to simplify your order and reduce installation time. Units are also available with a power junction box installed. The junction box is also available for purchase separately.



Description	Color	Catalog Number without Junction Box	Catalog Number with Junction Box*	
One-Piece 4X4 Poke-Through Assembled-unit includes: ■ Hubbell SystemOne 4X4 floor fitting **(S1PT4X4FIT)** ■ 4x4 sub-plate **(S1SP4X4)** ■ Finish flange and universal carpet cover assembly **(S1CFCxx)** Keystone openings accept Hubbell modular jacks, X-END™ connectors and flush multimedia Snap Fit connectors. Receptacles feature single or two circuit wiring and isolated ground capability.	Aluminum Finish Brass Finish Black/Brass Finish Black Gray	**S1PT4X4AL** **S1PT4X4BRS** **S1PT4X4BRS3** **S1PT4X4BL** **S1PT4X4GY**	**S1PT4X4ALJ** **S1PT4X4BRSJ** **S1PT4X4BRS3J** **S1PT4X4BLJ** **S1PT4X4GYJ**	
One-Piece Dual Style Line® Decorator Poke-Through Assembled-unit includes: ■ Hubbell SystemOne dual channel floor fitting **(S1PTFIT)** ■ Dual Style Line® Decorator opening sub-plate **(S1SP)** ■ Finish flange and universal carpet cover assembly **(S1CFCxx)** Style Line® Decorator openings accept two Style Line® Decorator or one surge or GFCI receptacle and one Style Line® Decorator receptacle. Outlet frames can be used to convert the application to a 6-port multi-service or a 12-port all communication solution. Fitting is 4-hr rated at 100% fill to accommodate (12) Cat 6A cables (0.330" diameter).	Aluminum Finish Brass Finish Black Gray	**S1PTAL** **S1PTBRS** **S1PTBL** **S1PTGY**	**S1PTALJ** **S1PTBRSJ** **S1PTBLJ** **S1PTGYJ**	
One-Piece Modular A/V Poke-Through Assembled-unit includes: ■ Hubbell SystemOne A/V floor fitting (**S1PTAVFIT**) ■ 20A, 125V power and 3-unit iSTATION™ sub-plate **(S1SP3IM)** ■ Finish flange and universal carpet cover assembly **(S1CFCxx)** The iSTATION™'s recessed opening can accommodate data/voice/audio and video solutions including15-pin VGA, RCA, S-Video, 3.5mm stereo, X-END™, HDMI and XLR microphone jacks.	Aluminum Finish Brass Finish Black Gray	**S1PT3IMAL** **S1PT3IMBRS** **S1PT3IMBL** **S1PT3IMGY**	**S1PT3IMALJ** **S1PT3IMBRSJ** **S1PT3IMBLJ** **S1PT3IMGYJ**	
One-Piece Furniture Feed Poke-Through Assembled-unit includes: ■ Hubbell SystemOne A/V floor fitting (**S1PTAVFIT**) ■ Hubbell SystemOne Furniture Feed Cover Plate (**S1SPFFxx**) This solution provides one ¾ in. conduit for power and one 1½ in. conduit for low-voltage. Furnished with two screw-in flexible metal conduit connectors.	Aluminum Finish Brass Finish Black Gray	**S1PTFFAL** **S1PTFFBRS** **S1PTFFBL** **S1PTFFGY**	**S1PTFFALJ** **S1PTFFBRSJ** **S1PTFFBLJ** **S1PTFFGYJ**	

* Junction box factory installed on through floor fitting.

ScrubShield Complies with UL514

Hubbell SystemOne 4-Inch Core Through Floor Fittings



Description	Catalog Number without Junction Box	Catalog Number with Junction Box*	
4X4 Through Floor Fitting Through floor fitting with two ¾ in. E.M.T. for communications and one ¾ in. E.M.T. for power. For use with Hubbell SystemOne Universal Covers and **S1SP4X4** and **S1SPTL** series sub-plates **only**. Universal cover and sub-plate ordered separately.	**S1PT4X4FIT**	**S1PT4X4FITJ**	
Dual Channel Through Floor Fitting Through floor fitting with two 1 in. E.M.T. conduit stems to feed power and/or communication services. For use with Hubbell SystemOne universal covers and all Hubbell sub-plates **except S1SP4X4** and **S1SPTL** series. Universal cover and sub-plate ordered separately.	**S1PTFIT**	**S1PTFITJ**	
A/V Through Floor Fitting Through floor fitting with one ¾ in. E.M.T. conduit stem for power and one 1½ in. E.M.T. conduit stem for communication services. Ideal for demanding, high capacity audio/video and data requirements. For use with Hubbell SystemOne universal covers and all Hubbell sub-plates **except S1SP4X4** and **S1SPTL** series. Universal cover and sub-plate ordered separately.	**S1PTAVFIT**	**S1PTAVFITJ**	

* Junction box factory installed on through floor fitting.

Hubbell SystemOne Universal Cover

- Cast aluminum construction
- Durable powder coat finish





Color	Carpet	Tile
Aluminum Finish	**S1CFCAL**	**S1TFCAL**
Brass Finish	**S1CFCBRS**	**S1TFCBRS**
Black	**S1CFCBL**	**S1TFCBL**
Gray	**S1CFCGY**	**S1TFCGY**
Ivory	**S1CFCI**	**S1TFCI**

Aluminum Finish | Brass Finish | Black | Gray | Ivory



Poke Through Accessories

Description		Catalog Number
Abandonment Plates Used to cover abandoned SystemOne Fire-Rated Poke-Throughs or Floor Boxes.		
	Black	**S1AP4BL**
	Gray	**S1AP4GY**
Fire-Rated Closure Plug Used to seal a 4-inch core hole when the FRPT is no longer required and the through-floor fitting is removed. Maintains the floor's 1–4 hour fire rating.		
	Black	**S1FRP4BL**
	Gray	**S1FRP4GY**
Power Junction Box For use with SystemOne Fire-Rated Poke-Throughs. Provides 27.0 cubic inches. Trade size knockouts: Top (1) 1 inch Bottom (1) ¾ inch Sides (2) ½ inch (1) ¾ inch		 **S1FRPTJB**

Hubbell SystemOne Sub-Plates

Style Line® Decorator/GFCI
(2) Style Line® Decorator openings for power and/or datacom applications.

S1SP

Duplex/Duplex
(2) Duplex openings for power and/or datacom applications.

S1SPDU

Duplex/Style Line® Decorator
(1) Duplex and (1) Style Line® Decorator opening for power and/or datacom applications.

S1SPDUSL

Hubbell 4 X 4
(4) 20A, 125V receptacles.
(4) Keystone openings for Hubbell jacks or flush A/V connectors. Power can be wired as single or two circuit with isolated ground capability.

S1SP4X4

Provided with 15 ft. wire leads **S1SP4X415**
Provided with 30 ft. wire leads **S1SP4X430**

Carpet Furniture Feed Cover/Flange*
(1) ¾" and (1) 1½" N.P.T. access holes for power and/or datacom applications.
Universal Cover not required.
Includes carpet flange.


Aluminum Fin. **S1SPFFAL**
Brass Fin. **S1SPFFBRS**
Black **S1SPFFBL**
Gray **S1SPFFGY**

Tile Furniture Feed Cover/Flange*
(1) ¾" and (1) 1½" N.P.T. access holes for power and/or datacom applications.
Universal Cover not required.
Includes tile flange.


Aluminum Fin. **S1SPFFTAL**
Brass Fin. **S1SPFFTBRS**
Black **S1SPFFTBL**
Gray **S1SPFFTGY**

Single Receptacle + Data
Opening for 20 or 30A Twist-Lock® receptacle (1.56" OD) and (2) Keystone openings for Hubbell jacks or flush A/V connectors.

S1SPTL

Hubbell DataCom + Power
(1) 20A, 125V receptacle and 3 unit recessed iSTATION™ opening for data, voice, and A/V applications.

S1SP3IM

Hubbell DataCom + Duplex
(1) Duplex opening, (2) flush Keystone openings and 1.5 unit recessed iSTATION™ opening for data, voice and A/V applications.

S1SPDU2IM

Hubbell DataCom + Style Line® Decorator
(1) Style Line® Decorator opening, (2) flush Keystone openings and 1.5 unit recessed iSTATION™ opening for data, voice and A/V applications.

S1SPSL2IM

Hubbell DataCom
1 unit flush iSTATION™ opening and 3 unit recessed iSTATION™ opening for data, voice, and A/V applications.

S1SP4IM

Active Multimedia + Power
Single 20A, 125V receptacle; (2) flush Keystone openings; (1) rectangular Style Line® Decorator opening to accommodate active multimedia modules or low voltage outlet frames.

S1SPAMM20

Extron® or FSR + Power
(1) 20A, 125V receptacle.
Recessed opening for (3) single Extron® MAAP series adapter plates or FSR IPS plates.

S1SPEXT1

Extron® or FSR + Power
(1) 20A, 125V receptacle.
Recessed opening for (1) single Extron® MAAP and (2) single AAP series adapter plates or FSR IPS plates.

S1SPEXT2

Extron® or FSR Single-Service
Recessed opening for (2) single Extron® MAAP and (2) single AAP series adapter plates or FSR IPS plates.

S1SPEXT3

Extron® AAP + Power
(1) 20A, 125V receptacle.
(2) flush Keystone and recessed opening for (2) single Extron® AAP Series adapter plates.

S1SPEXT4

Ortronics Series II® + Power
(1) 20A, 125V receptacle.
Recessed opening for (3) 1 unit Ortronics Series II® modules.

S1SPORT

Ortronics TracJack® + Power
(1) 20A, 125V receptacle.
Recessed bezel for (6) Ortronics TracJack® modules.

S1SPTRAC

Panduit Mini Com® 4 X 4
(4) 20A, 125V receptacles.
(4) Openings for Panduit Mini-Com Connectivity.

S1SP4X4PA

SYSTIMAX® 4 X 4
(4) 20A, 125V receptacles.
(4) Openings for SYSTIMAX® Connectivity.

S1SP4X4SYS

Siemon MAX® + Power
(1) 20A, 125V receptacle.
Recessed bezel for (6) Siemon MAX® modules.

S1SPMAX

*Furnished with two screw-in flexible metal conduit connectors.

Sub-Plate Accessories

Replacement Threaded Conduit Plugs
Used with **S1SPFFx** and **S1SPFFTx** ONLY.
Sub-plate is supplied with plugs.


Description	Catalog Number	Description	Catalog Number
1½" Aluminum Fin.	**S1FP15AL**	¾" Aluminum Fin.	**S1FP34AL**
1½" Brass Fin.	**S1FP15BRS**	¾" Brass Fin.	**S1FP34BRS**
1½" Black	**S1FP15BL**	¾" Black	**S1FP34BL**
1½" Gray	**S1FP15GY**	¾" Gray	**S1FP34GY**

Description		Catalog Number
6-Port Replacement Data Frames Used with open systems sub-plates. Sub-plate is supplied with data frame. Siemon MAX® for use with **S1SPMAX** sub-plate.		**S1DFMAX**
Ortronics TracJack® for use with **S1SPTRAC** sub-plate.		**S1DFTRAC**
Black Style Line® blank frame.		**2100BK**

Extron® is a registered trademark of Extron Electronics. MAX® is a registered trademark of The Siemon Company. Mini-Com® and Panduit® are registered trademarks of Panduit Corp. SYSTIMAX® is a registered trademark of CommScope, Inc. TracJack®, Series II® & Ortronics® are registered trademarks of Ortronics/Legrand.

Hubbell Power Devices



Description	Catalog No.
Heavy Duty Spec Grade	
15A, 125V	**HBL5262x**
20A, 125V	**HBL5362x**



Description	Catalog No.
Style Line® Decorator	
15A, 125V	**DR15x**
20A, 125V	**DR20x**



Description	Catalog No.
Hubbell-Pro™	
Finder groove face	
15A, 125V	**5262x**
20A, 125V	**5362x**



Description	Catalog No.
Isolated Ground	
Orange	
15A, 125V	**IG5252**
20A, 125V	**IG5352**



Twist-Lock®	
2 Pole, 3 Wire	
20A, 125V	**HB2310**
20A, 250V	**HB2320**



Twist-Lock®	
2 Pole, 3 Wire	
15A, 125/250V	**HBL2610**
20A, 3Ø 250V	**HBL2620**



Surge Suppression	
15A, 125V	**HBL5262xSA**
20A, 125V	**HBL5362xSA**



LED GFCI	
15A, 125V	**GF15xLA**
20A, 125V	**GF20xLA**

For color options: replace **x** with the following: AL (Almond), BK (Black), GY (Gray), I (Ivory), OW (Office White) or W (White).
For Brown, remove **x**. Devices without an **x** are available in Brown only. Please visit our website a www.hubbell-wiring.com to view colors in our virtual catalog.

Hubbell Multimedia Connectivity



Description	Catalog No.
HXJ Series Jack	
10GbE	**HXJ6Axx**
Cat 6	**HXJ6xx**
Cat5e	**HXJ5Exx**



3.5mm Stereo Jack	
Solder	**SF35SJx**
Screw Terminal	**SF35STx**
Pass-through	**SF35FFx**



XLR 3-Pin Connector	
Solder	**XLR10**
Screw Terminal	**XLRST10**



HDMI Connector	
Coupler	**HDMIC1**
3" Tail	**HDMIT1**



Link Cord	
Connector to Device	**HDL*BK**



HDMI Patch Cord	
3' Black	**HDPC03BK**
6' Black	**HDPC06BK**



Horizontal Cord	
Connector to Connector	**HDH*BK**



Description	Catalog No.
RCA Connector	
Solder	**SFRCx(x)**
110 Termination	**SFRC110(x)**
Pass-through	**SFRC(x)Rx**



USB Coupler	
A to B	**SFUSBABW**
A to A	**SFUSBAAW**



RCA Module	
Solder	**IMCRS1xx**
110 Termination	**IMCR110xx**
Pass-through	**IMCRF1xx**



X-End™ A/V Horizontal Run	
Non-Plenum, 8-Pin	**VGA6***BK**
Plenum, 8-Pin	**VGA6P***BK**



X-End™ Patch Cords	
S-Video & 3.5mm	**AVS35****
S-Video & 2 RCA	**AVSRA****
3 RCA w/ L/R Audio	**AVRC****
3 RCA Video	**AVCR****
3 RCA w/ S/PDIF	**AVCRD****
5 RCA w/ L/R Audio	**AVCAR****
3 RCA & S-Video	**AVSCR****
S-Video, 3 RCA w/ L/R Audio	**AVSRC****
3 RCA & 3.5mm	**AVC35****
5-BNC RGBHV	**AVB****



Description	Catalog No.
S-Video Connector	
110 Termination	**SFSV110BK**
Pass-through	**SFSVBK**



Data Coupler	
Cat 6	**SFC6BK**
Cat 5e	**SFC5EBK**



X-End™ Tails - 15-pin to 8-pin	
Non-Plenum	**15M6P1**
Plenum	**15MP6P1**



X-End™ VGA Plug-n-Play Conn.	
Straight 180°	**15S6P1**
Angled 45°	**15A6P1**
180°	**15N6P1**



X-End™ Video Plug-n-Play Module	
RCA Component w/S-Video	**IMSCR815x**
5-BNC RGBHV	**IMB815x**



X-End™ AV Plug-n-Play Module	
RCA Component	**IMCR81x**
S-Video, 2 RCA	**IMSRA81x**
S-Video, 3.5mm	**IMS3581x**



X-End™ Keystone Coupler	
4 Inch Tail	**SFAVCT**
90 Degree	**SFAVCN**
Straight	**SFAVCS**

For housing color options: Replace **x** with the following: AL (Almond), BK (Black), GY (Gray), EI (Electric Ivory), OW (Office White) or W (White).
Replace **xx** with the following: AL (Almond), BK (Black), B (Blue), EI (Electric Ivory), GL (Gold), GY (Gray), GN (Green), LA (Light Almond), OW (Office White), OR (Orange), P (Purple), R (Red), TI (Telco Ivory), W (White) or Y (Yellow).
For insulator color options: Replace **(x)** with the following: BK (Black), B (Blue), GN (Green), OR (Orange), R (Red), W (White) or Y (Yellow).
For length options: Replace * with the following 10 (10'), 15 (15'), 20 (20'), 25 (25') and 30 (30'). Black and non-plenum only.
Replace ** with the following 05 (5'), 10 (10') or T1 (1" Tail)
*** Available from 05 (5') to 100 (100'). Order in multiples of 5 ft.
Please visit our website a www.hubbell-wiring.com to view colors in our virtual catalog.

Hubbell Multimedia Modules and Frames



Description	Catalog No.
XLR Panel Mount Module	
Blank, 1.5-Unit	**IMAVB15x**

Style Line® Decorator Frame	
2-Port	**ISF2x**
3-Port	**ISF3x**
4-Port	**ISF4x**
6-Port	**ISF6x**



Description	Catalog No.
Keystone Module	
1-Port, 1-Unit	**IM1K1x**
2-Port, 1-Unit	**IM2K1x**



Duplex Outlet Frame	
2-Port	**BR106B**
4-Port	**Q106x**



Description	Catalog No.
Angled Keystone Module	
1-Port, 1.5-Unit	**IM1KA15x**
2-Port, 1.5-Unit	**IM2KA15x**



15/9-pin or HDMI Blank Module	
1-Unit	**IMBDS1x**
2-Unit w/3.5mm Stereo Jack	**IMB15315x**

For color options: Replace **x** with the following: AL (Almond), BK (Black), GY (Gray), EI (Electric Ivory), OW (Office White) or W (White).
Please visit our website a www.hubbell-wiring.com to view colors in our virtual catalog.

Hubbell SystemOne Configuration Chart

ScrubShield™ Complies with UL514A

Sub-Plates			Floor Boxes: Non-Metallic	Floor Boxes: Metal			4" Core Hole Fire-Rated Poke-Throughs*		
			 S1PFB	 S1CFB	 S1SFB	 S1SFBAV	 S1PTFIT	 S1PT4X4FIT	 S1PTAVFIT
S1SP	Style Line® Decorator/GFCI		3	3.5	3.5	3.5	✓+ (Single-Service)	✗	✓ (Multi-Service)
S1SPDU	Duplex/Duplex		3	3.5	3.5	3.5	✓+ (Single-Service)	✗	✓ (Multi-Service)
S1SPDUSL	Duplex/Style Line® Decorator		3	3.5	3.5	3.5	✓+ (Single-Service)	✗	✓ (Multi-Service)
S1SP4X4 **S1SP4X4PA** **S1SP4X4SYS**	Hubbell 4 X 4 Panduit Mini-Com® 4 X 4 SYSTIMAX® 4 X 4		4	4	4	4	✗	✓+	✗
S1SPTL	Twist-Lock® Receptacle + Data		4	4	4	4	✗	✓+	✗
S1SP3IM	Hubbell DataCom + Power		5	5	5	5	✓	✗	✓+
S1SP4IM	Hubbell DataCom		3.5	3.5	3.5	3.5	✓	✗	✓+
S1SPDU2IM	Hubbell DataCom + Duplex		5	5	5	5	✓	✗	✓+
S1SPSL2IM	Hubbell DataCom + Style Line® Decorator		5	5	5	5	✓	✗	✓+
S1SPFFxx (Carpet) **S1SPFFTxx (Tile)**	Furniture Feed Cover/ Flange (Replace "x" with BRS (brass finish), AL (aluminum finish), BL (black) or GY (gray).		3	3.5	3.5	3.5	✓	✗	✓+
S1SPEXT1	Extron® MAAP + Power		4	4	4	4	✓	✗	✓+
S1SPEXT2	Extron® AAP/MAAP + Power		4	4	4	4	✓	✗	✓+
S1SPEXT3	Extron Datacom		4.5	4.5	4.5	4.5	✓	✗	✓+
S1SPEXT4	Extron AAP + Flush Keystone + Power		4	4	4	4	✓	✗	✓+
S1SPORT	Ortronics Series II® + Power		5	5	5	5	✓	✗	✓+
S1SPTRAC	Ortronics TracJack® + Power		5	5	5	5	✓	✗	✓+
S1SPMAX	Siemon MAX® + Power		5	5	5	5	✓	✗	✓+
S1SPAMM20	Active Multimedia + Flush Keystone + Power		5	5	5	5	✓	✗	✓+
S1CFCxx SystemOne Carpet Cover	SystemOne Floor Boxes and FRPTs use SystemOne Universal Covers (Replace "x" with BRS (brass finish), AL (aluminum finish), BL (black), GY (gray) or I (ivory).		—	Signifies minimum depth of concrete pour in inches for Hubbell SystemOne Floor Boxes.			✓+ Recommended Floor Fitting	✓ Alternative Floor Fitting	✗ Not Compatible
S1TFCxx SystemOne Tile Cover									

*Fire-Rated Poke-Throughs available with integral power junction box. Add "J" suffix to Catalog Numbers listed above (Example: **S1PTFITJ**).

Extron® is a registered trademark of Extron Electronics. MAX® is a registered trademark of The Siemon Company. Mini-Com® and Panduit® are registered trademarks of Panduit Corp. SYSTIMAX® is a registered trademark of CommScope, Inc. TracJack®, Series II® & Ortronics® are registered trademarks of Ortronics/Legrand.

For more information on Hubbell's complete line of labor saving Delivery Systems products:



Hubbell's Delivery Systems Product Guide is a complete guide to delivery products. It also offers a comprehensive offering of Power, Data and A/V accessories.



Hubbell offers a line of modular wiring and raised access floor products that minimize installation cost and simplify moves, adds and changes of commercial spaces.



Hubbell takes raceway to the next level with Pre-Wired Raceway Systems, manufactured to your exact specifications. Reduce on site installation time by 30%.



The Hubbell SystemOne Selector Wheel makes it easy to select the SystemOne sub-plates and covers best suited to your specific application.

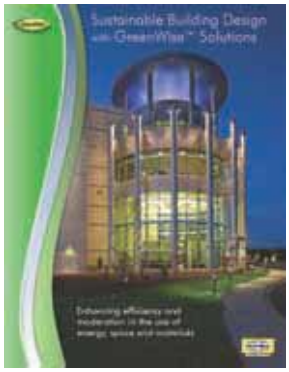




Hubbell's streamlined website features intuitive navigation and dynamic virtual catalogs that make accessing product and specification information fast and easy. Visit **www.hubbell-wiring.com.**

Hubbell Supports the Green Initiative

Many of Hubbell's products help save energy, support space efficiency, and reduce waste in various industrial, commercial and residential applications. The purpose of the GreenWise initiative is to demonstrate and promote how Hubbell's innovative products, and the company as a whole, do their part to safeguard the environment and support sustainable building design. Visit Hubbell's new GreenWise solutions landing page **www.hubbell-wiring.com/green** to learn more.



U.S. Green Building Council Member

Hubbell is a U.S. Green Building Council (USGBC) member dedicated to advancing buildings that are environmentally responsible in the way they are designed, built and operated. USGBC drives its mission with the LEED (Leadership in Energy and Environmental Design) Green Building Rating System™. LEED is a third-party certification program, and the nationally accepted benchmark, that encourages and accelerates global adoption of sustainable green building and development practices through the creation and implementation of universally understood and accepted tools and performance criteria.

HUBBELL®
Wiring Systems

www.hubbell-wiring.com
www.hubbell-premise.com

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484 • Phone (800) 288-6000 • FAX (800) 255-1031
Hubbell Premise Wiring • Hubbell Incorporated (Delaware) • 14 Lord's Hill Road • Stonington, CT 06378-0901 • Phone (800) 626-0005 • FAX (860) 535-8328

Printed in U.S.A. Specifications subject to change without notice.
Twist-Lock® and Style Line® are registered trademarks of Hubbell Incorporated. Hubbell-Pro™, ScrubShield™, X-END™ and iSTATION™ are trademarks of Hubbell Incorporated.

WLBD001 12/09