
brainboxes

It is recommended for all new design in opportunities to use the `New Universal PCI 2 Port Photon RS232 (UC-607)' which is now available

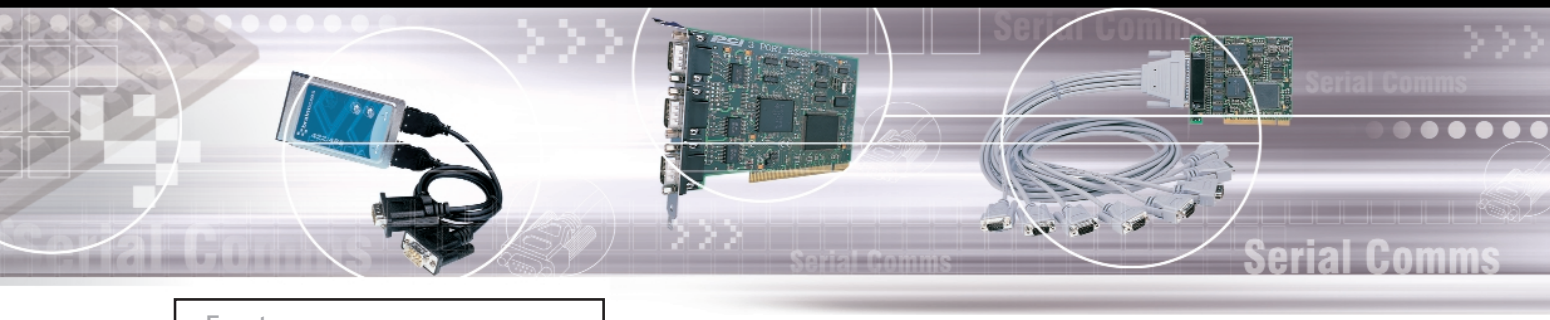

PCI

2 Port Photon RS232

Features

- 2 RS232 Serial Ports
- 128 byte FIFO buffer per port
- High speed: 230,400 maximum baud rate
- PCI Bus - Fully Plug & Play auto configuring interrupt and address
- Sample Programs, Test & Terminal software - all with source code
- Drivers for all popular operating systems

Specifications

Ports:	2 x RS232
UART:	16950
Baud rates:	Up to 230,400
Data Bits:	5,6,7 or 8
Stop Bits:	1 or 2
Parity:	Odd, even, none, mark or space
Power:	200mA @ 5V 7mA @ 12V
Weight:	0.081kg
Size:	8.5 x 12.5cm

Applications

- ISDN and high data rates on external modems
- Modem Connectivity
- Remote Access Servers
- Instrument Control
- UPS Control
- Banking & Financial Sector

Host Processor Controlled

The CPU inside the PC is the highest performance processor available today. Communicating with the latest 128 byte FIFO UART, over the high bandwidth PCI bus, provides unbeatable I/O performance at incredible prices.

Description




This half size card provides 2 industry standard RS232 serial COM ports in a single PCI slot. The fast UART and line drivers give this card a guaranteed maximum data transfer rate of 230,400 baud.

Software

Serial Solutions Device Driver CD contains software for Windows XP, Windows 2000, Windows Millennium, Windows 95, Windows 98, Windows NT4, DOS and OS/2.

Informative manuals and sample programs are supplied with full source code on CD!

For details of RS232, RS422 or RS485 Standards see:
www.brainboxes.com/standards

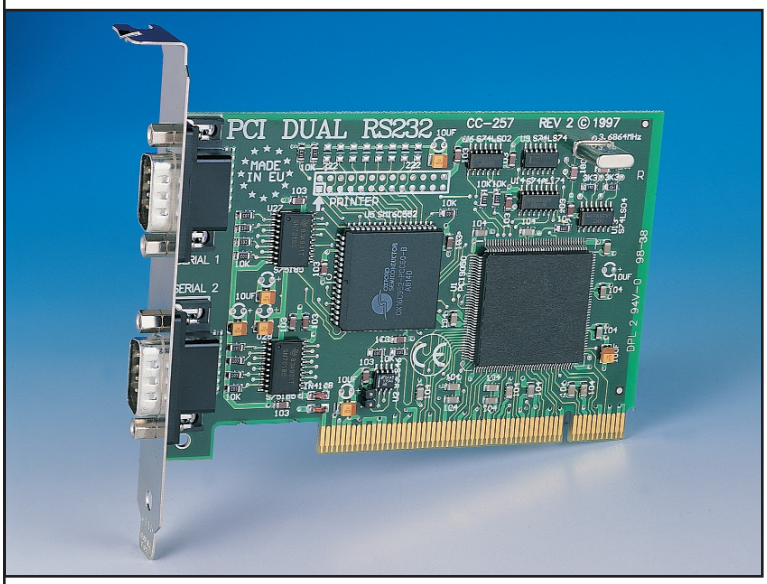

ORDER

Description	Code
PCI PHOTON DUAL RS232	CC-607