

STANDARD CONTROL SYSTEM

NORAC's Standard Control™ is an economical, entry level solution for booms up to 90' and was designed for use in less challenging terrain.


The Standard Control™ system controls wing lift using the sprayer's existing on/off valves. It uses NORAC's ultrasonic sensors mounted on the left and right boom tips to automatically maintain a pre-set height of the wings above the ground or crop.

Benefits & Features:

- Cover more acres
- Avoid boom damage
- Spray day or night
- Use chemicals more efficiently
- Less operator stress and fatigue
- Soil Mode™, Crop Mode™ and Hybrid Mode™ capabilities
- Uses Roll Sensors to measure and compensate for roll in the center section



Display Screen

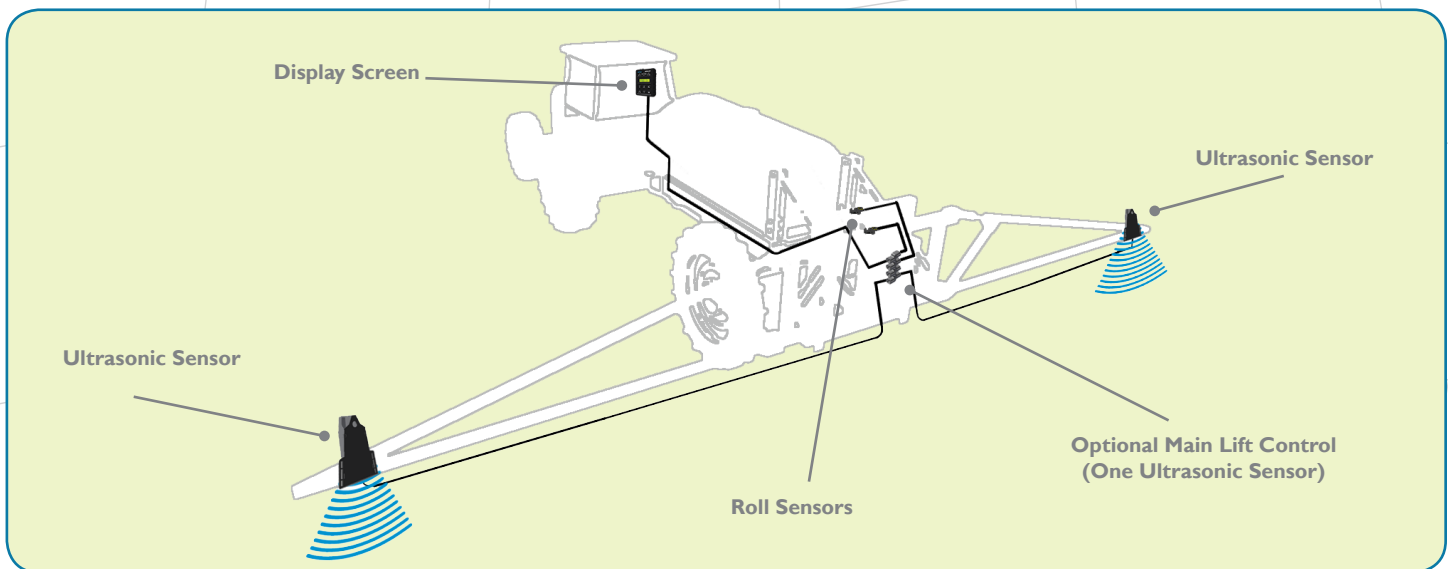

Each Standard Control™ Kit Includes:

- Control panel with mounting bracket
- Left and right wing ultrasonic sensors and brackets
- Two Roll Sensors
- All required interconnecting cables and hardware
- Installation manual
- Operator's manual

Options:

- Main Lift Control (includes main lift ultrasonic sensor and bracket)*

* Only available on select models

Standard Control™ is available for select sprayer models. Contact your local dealer or NORAC sales rep.