

描述 / Descriptions

P 沟道 TO-252 / TO-251 塑封封装场效应管。
P-CHANNEL MOSFET in a TO-252 Plastic Package.


特征 / Features

大电流输出能力。无卤产品。
High Current Capability. HF Product.

用途 / Applications

交流负载开关，蓄电池充电/放电保护。
AC-in load switch, Battery protection charge/discharge.

极限参数 / Absolute Maximum Ratings(Ta=25°C)

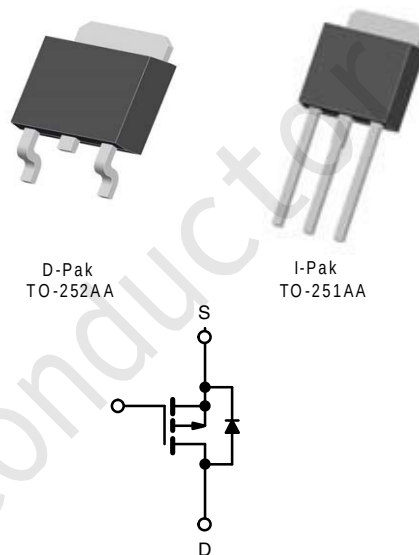

参数 Parameter		符号 Symbol	数值 Rating	单位 Unit
Drain-Source Voltage		V_{DS}	-60	V
Drain Current		$I_D(T_c=25^{\circ}\text{C})$	-20	A
Drain Current - Pulsed		I_{DM}	-80	A
Gate-Source Voltage		V_{GS}	± 20	V
Avalanche Current		I_{AS}	13.8	A
Avalanche energy L=0.5mH		E_{AS}	65	mJ
Power Dissipation		$P_D(T_c=25^{\circ}\text{C})$	20	W
		$P_D(T_c=100^{\circ}\text{C})$	10	W
Junction and Storage Temperature Range		T_j, T_{stg}	-55~150	$^{\circ}\text{C}$
Maximum Junction-to-Ambient	$t \leq 10\text{s}$	$R_{\theta JA}$	30	$^{\circ}\text{C/W}$
Maximum Junction-to-Ambient	Steady-State		60	
Maximum Junction-to-Case	Steady-State	$R_{\theta JC}$	7.5	







电性能参数 / Electrical Characteristics(Ta=25°C)

参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V$ $I_D=-250\mu A$	-60	-70		V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=-60V$ $V_{GS}=0V$			-1.0	μA
		$V_{DS}=-60V$ $V_{GS}=0V$ $T_J=55^\circ C$			-5.0	μA
Gate-Body Leakage Current Forward	I_{GSS}	$V_{GS}=\pm 20V$ $V_{DS}=0V$			± 0.1	μA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$ $I_D=250\mu A$	-1	-1.7	-2.5	V
Static Drain-Source On-Resistance	$R_{DS(on)1}$	$V_{GS}=-10V$ $I_D=-20A$		87	92	m Ω
	$R_{DS(on)2}$	$V_{GS}=-4.5V$ $I_D=-10A$		98	102	m Ω
Diode Forward Voltage	V_{SD}	$I_S=-1A$ $V_{GS}=0V$		-0.7	-1.2	V

参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Input Capacitance	C_{iss}	$V_{DS}=-25V$ $V_{GS}=0V$ $f=1.0MHz$		1650		pF
Output Capacitance	C_{oss}			330		
Reverse Transfer Capacitance	C_{rss}			205		
Gate resistance	R_g	$V_{GS}=0V$ $V_{DS}=0V$ $f=1MHz$		6.4		Ω
Total Gate Charge	$Q_g(10V)$	$V_{GS}=-10V$ $V_{DS}=-30V$ $I_D=-12A$		7.5		nC
Total Gate Charge	$Q_g(4.5V)$			3.8		
Gate Source Charge	Q_{gs}			1.2		
Gate Drain Charge	Q_{gd}			1.9		
Turn-On Delay Time	$t_{d(on)}$	$V_{GS}=-10V$ $V_{DS}=-30V$ $R_L=2.5\Omega$ $R_{GEN}=3\Omega$		4.2		ns
Turn-On Rise Time	t_r			3.4		
Turn-Off Delay Time	$t_{d(off)}$			16		
Turn-Off Fall Time	t_f			2		
Body Diode Reverse Recovery Time	t_{rr}	$I_F=-12A$ $dI/dt=500A/ms$		27		ns
Body Diode Reverse Recovery Charge	Q_{rr}	$I_F=-12A$ $dI/dt=500A/ms$		30		nC




电参数曲线图 / Electrical Characteristic Curve

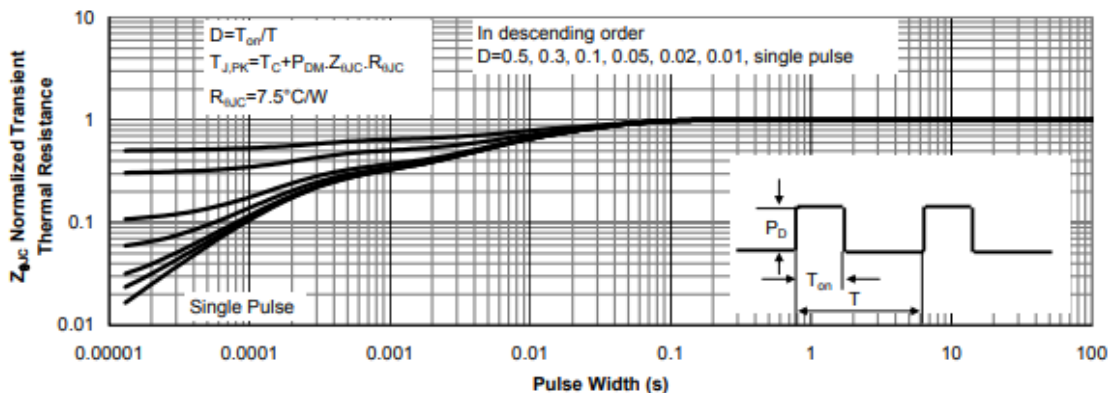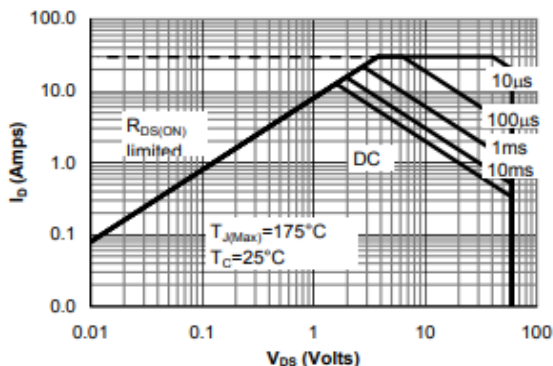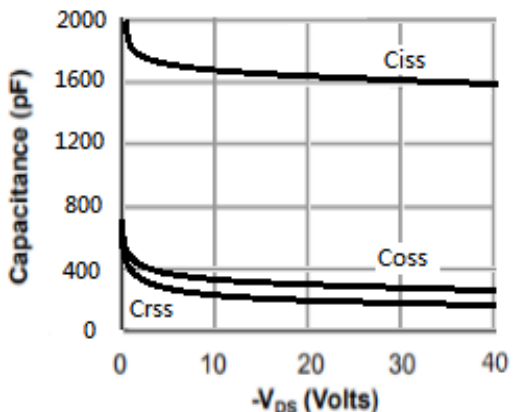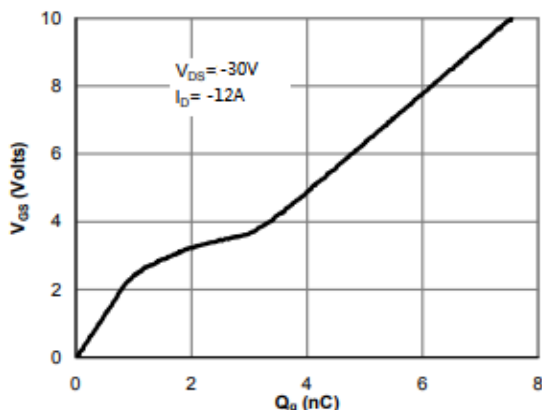

Package Outline

TO-252AA Outline


Dimensions are shown in millimeters (inches)

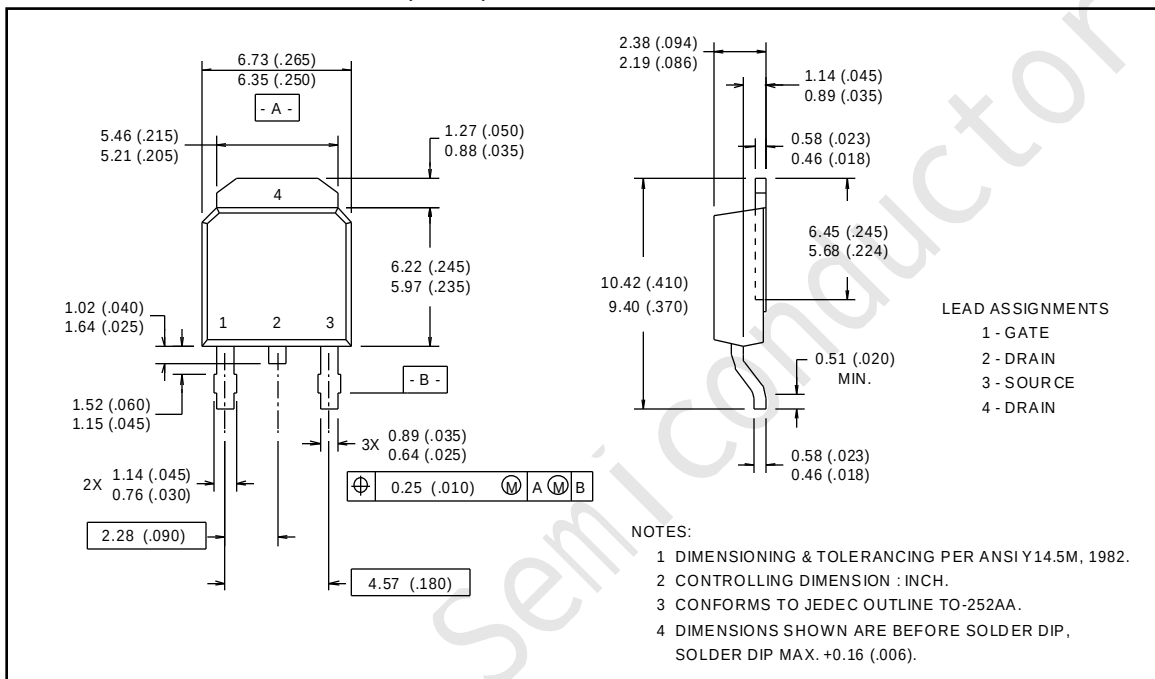

Part Marking Information

TO-252AA (D-Pak)


EXAMPLE : THIS IS AN IRFR5505
WITH ASSEMBLY
LOT CODE 2101

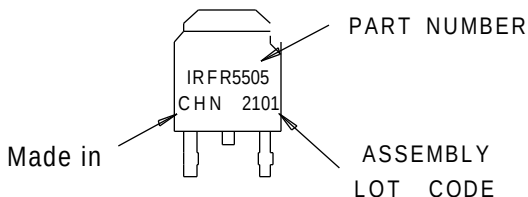

Package Outline

TO-251AA Outline

Dimensions are shown in millimeters (inches)

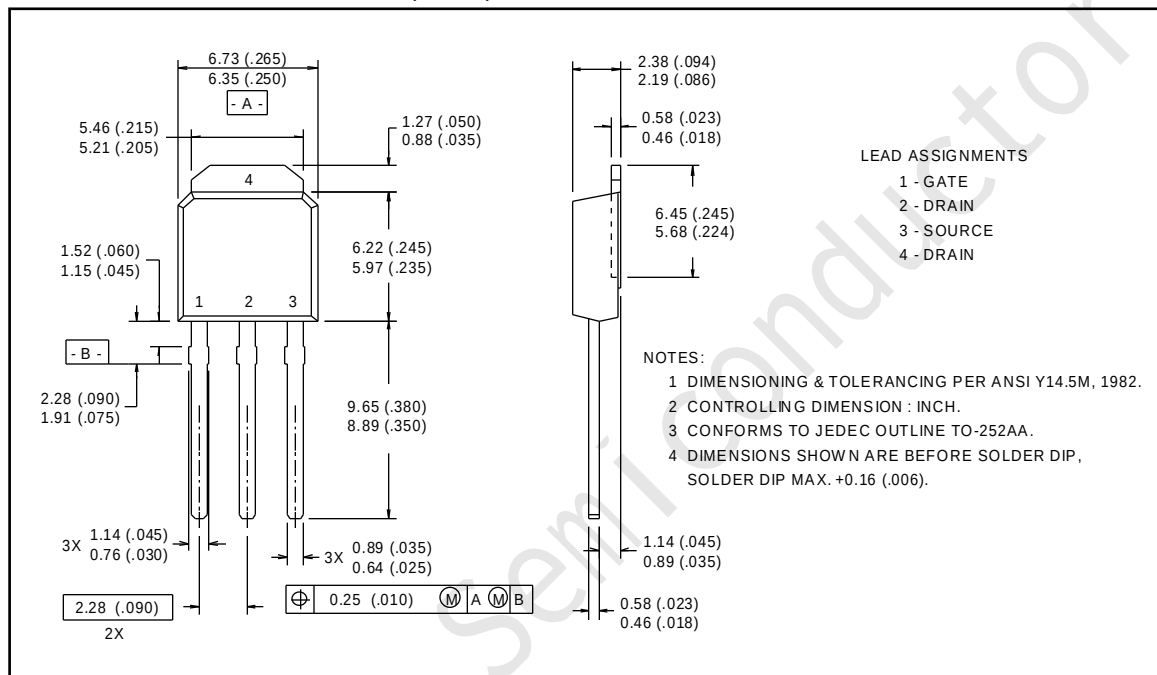

Part Marking Information

TO-251AA (I-Pak)

EXAMPLE : THIS IS AN IRFU5505
 WITH ASSEMBLY
 LOT CODE 2103

