

# QIT600 F1 Interactive LCD Panel

Ergonomic Widescreen Writing Monitor

21.5"

HDMI  
1080p

Angle  
Adjust

Pen  
Annotation



## DESKTOP CONTROL

**The QIT600 F1 Widescreen Interactive Monitor allows you to enhance learning and presentations at ease.**

The QIT600 F1 doubles on your desktop as both an interactive student learning device and a powerful presentation tool. The panel gives presenters full control of their displayed screen with smooth, ultra-fast annotation response time and comfortable simulated hand-writing.



## MULTIPLE ANGLES

For the comfort of the user, the QIT600 F1 easily adjusts to any angle between 0° and 90°.

# QIT600 F1 Interactive LCD Panel

## Ergonomic Widescreen Writing Monitor

### EASY HAND-WRITING

- Write clearly using the handwriting recognition tool, or select the on-screen keyboard to type.
- Interactive pen allows users to write comfortably and without interference.



### TECHNICAL DRAWING

- Drawing is intuitive and smooth, allowing for more efficient design and engineering.
- Realize ideas quickly with ultra-fast on-screen response time.



### EASE-OF-USE

- The screen can be used upright or horizontally, and any angle in between.
- Lines and notes can be marked directly and quickly on documents.




### MULTI-PURPOSE

- Use as a learning tool for interactive vibrant displays conveniently at your desk.
- Have full-control of presentations with a live displays at your desktop or podium.



| QIT600 F1                    |                                                                                                                                                     |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Technology                   | Electromagnetic                                                                                                                                     |
| Dimensions                   | 578mm x 323mm x 28mm                                                                                                                                |
| Weight                       | 5 (kg)                                                                                                                                              |
| Display                      | LCD                                                                                                                                                 |
| Display Area                 | 476.64mm x 268.11mm (WxH)                                                                                                                           |
| Resolution                   | 1920 x 1080                                                                                                                                         |
| Response Time                | 5ms                                                                                                                                                 |
| Pixel Pitch                  | 0.24825 x 0.24825mm                                                                                                                                 |
| Pressure Sensitivity         | 2048 levels                                                                                                                                         |
| Maximum Induction Angle      | 50° (angle between normal display)                                                                                                                  |
| Support Color                | 16.7M                                                                                                                                               |
| Contrast Ratio               | 1000:1 (typical)                                                                                                                                    |
| Stents Angle Adjustable      | Tilt angle: 5° ~ 85°<br>(Stents removable)                                                                                                          |
| Brightness                   | 250 (cd/m2) (typical)                                                                                                                               |
| Viewing Angle                | Level 170°, vertical 160°                                                                                                                           |
| Environmental                | <b>Operating temperature:</b> 0°~40°,<br>20~80%RH (non-condensing);<br><b>Storage temperature:</b> -15~60°C, 10-90%RH                               |
| Operating System Support     | Windows 8/7/Vista/XP, MAC OS                                                                                                                        |
| Handwriting Software Support | Windows Tablet PC Components group, MSN, Outlook Express Office 2007, a variety of professional handwriting, hand painted application software, etc |

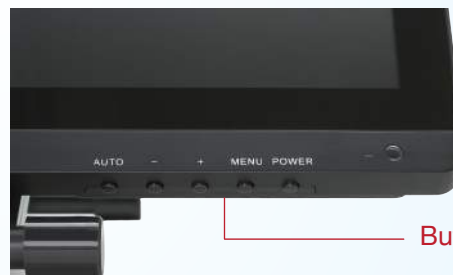

Button Navigation

| CD                   | Drive CD                                                                                                              |
|----------------------|-----------------------------------------------------------------------------------------------------------------------|
| Accuracy             | Center $\pm 0.5$ mm, the maximum deviation $\pm 3$ mm                                                                 |
| Reading Height       | Not less than 5mm, the maximum deviation $\pm 3$ mm                                                                   |
| Data Interface       | USB Interface; HDMI                                                                                                   |
| Data Report Rate     | 138 pps (points/sec)                                                                                                  |
| Handwriting Pen Suit | Handwriting Pen Suit includes: handwriting pen (dry battery), handwriting pen charger (optional), spare tip, tip clip |
| Power Adapter        | External power adapter (input 100-240VAC, 50/60Hz, output 12VDC 4A)                                                   |
| Power Line           | 1.5 AC power line                                                                                                     |



866-990-QOMO info@qomo.com www.qomo.com



Copyright©2015 Qomo Hitevision, LLC. All rights reserved. This document may not be copied in any form without the permission from Qomo Hitevision, LLC. Information in this document is subject to change without notice.

Version 1  
5/2015