

BUFFALO MACHINERY CO., LTD.
56, Lane 318, Der Sheng Road, Ta Ya, Taichung City, Taiwan, R.O.C.
P.O. Box 320, Ta Ya, Taichung City, Taiwan R.O.C.
Tel: 886-4-25 60 37 59 Fax: 886-4-25 60 37 69 E-mail: info@mail.buffalo.com.tw
www.buffalo.com.tw

Challenger

Microcut

CNC Horizontal Milling and Boring Center









HBM LINE

ISO 14001:2004 EMS 546518
ISO 9001:2008 FM 538421

Nov. 2010





Buffalo machinery has been well known for its brand name –Microcut and Challenger. It has been established in 1978 and began its production since 1997, keeping pace with the modern demands of metal cutting industry. Through its unceasing pursuit of best quality and service, Buffalo Machinery delivers machine tools with innovative and efficient value all over the world. The entire production includes 8 premises and still keeps expanding with the market demand. Microcut/Challenger delivers highest value to customers and achieves 50% of its turnover in Europe. It will be Buffalo Machinery who is your best partner, providing highest quality and service!

High quality production standard and its quick service of Microcut/Challenger were recognized by the certification of ISO9001 and its environmental activities comply with ISO 14001 regulation.

Microcut/Challenger satisfies each customer with the reliable machine. To offer maximum productivity and profit, medium size table type horizontal borer is developed and larger floor type borer is also under development. The HBM line is widely productive in power industry, transportation, mining, oil & gas industry, mold and steel construction. Both quill and ram type are available. There is a wide range of table loading capacity for selection.



HBM-4

Travel: X, Y, Z 2200 x 1600 x 1600mm
W 550mm
Maximum load on table center: 5 tons
Spindle torque: 740NM(std.) / 863NM(opt.)
Spindle diameter: 110mm
Spindle motor: 15/18.5KW(std.) /18.5/22KW(opt.)
Construction of one-piece bed is optional.



HBM-4T

Travel:
X: 2000 (std.) / 3000 mm(opt.)
Y, Z: 2000 x 1400mm
W: 700mm (std.)
Maximum load on table center:
8 tons (std.) / 10 tons (opt.)
Spindle torque: 1976NM
Spindle diameter: 130mm
Spindle motor: 22/30KW





HBM-5T

Travel:
X: 3500mm (std.) / 4500mm (std.) / 5500mm (opt.)
Y: 2600mm (std.) / 3200mm (opt.)
Z: 1400mm (std.) / 2000mm (opt.)
W: 700mm (std.)
Table size:
1800 x 2200mm-10 tons(std.)/15 tons(opt.)/20 tons(opt.)
Spindle torque: 2362NM
Spindle diameter: 130mm
Spindle motor: 37/45KW

CNC Horizontal Milling and Boring Center

HBM-5TE

HBM-5TE is a horizontal boring and milling machine with T-type construction equipped with extremely large Y- travel. A powerful CNC unit provides a multiple axis controll continuously. It provides powerful function, high technology and high cutting capacity for large and heavy workpiece. HBM-5TE is especially suitable for LCD industry, mold, injection mold, power generating equipment and construction machine industry.

Travel:
- X: 4500mm (std.) / 5500mm (opt.) / 6500mm (opt.)
- Y: 4300mm
- Z: 1450mm / 2000mm(opt.)
- W1: 700mm
- W2: 1000mm

Table size:
4500 x 3000mm - 15 tons (std.) 20 tons (opt.)
3200 x 3200mm - 40 tons (option)
Spindle torque: 2362NM
Spindle diameter: 130mm
Spindle motor: 37/45KW

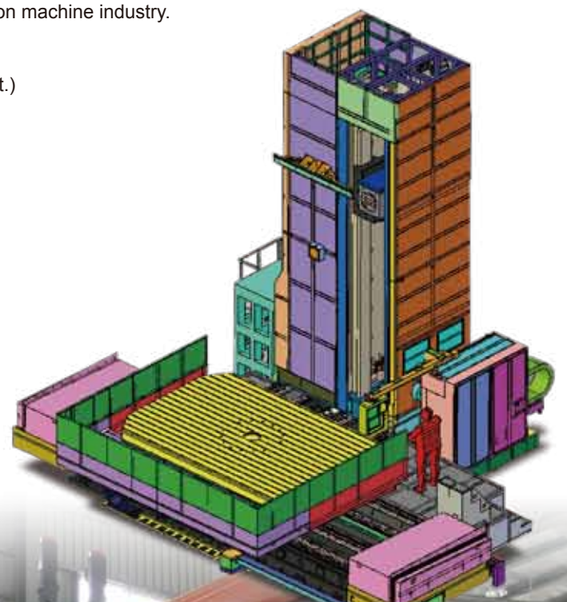



High-performance spindle

Designed for deep hole boring

Spindle designed with cylindrical roller bearing (double roller) is capable for heavy duty machining. Ground spindle and sleeve provides high precise accuracy. Spindle speed up to 3000rpm enables high speed machining. Moreover, spindle is prepared for coolant through spindle with high pressure pump system and anti-vibration control.

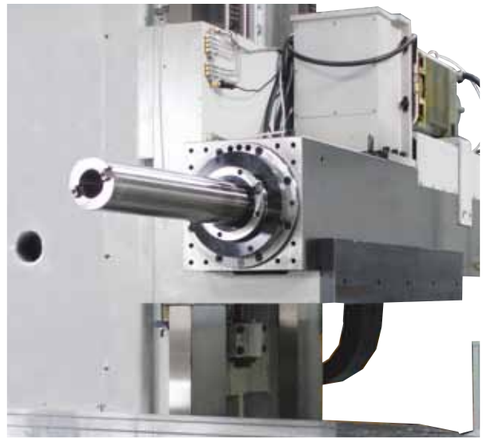





The spindle and sleeve are made of chrome alloy steel under hardened and ground treatment. The hardness is around HRC52-55. The box type spindle housing provides strong rigidity and ISO 50 taper spindle can work with extremely high removable rate.

Lubrication

Sealed type bearing in spindle is lubricated by grease. It's maintenance free and ensures long spindle life. And the lubrication layout as following figure:

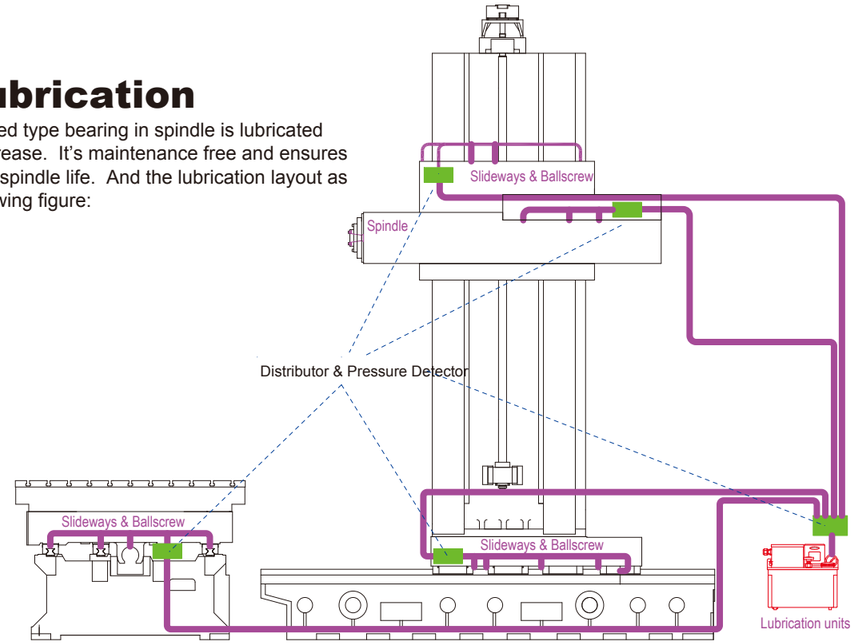

Spindle Vibration Supervision

SVS

High finish quality

•Spindle vibration suppression

Longer life time

•Wear reduction on spindle bearings and tools

Information recorder

•Abnormal vibration data recorded for maintenance

Spindle Vibration implies lots of important information such as unusual spindle conditions (e.g.lubrication shortage, worn bearings, out-of-balance or even crash). Also, the vibration information can be used as the index of chatter-free control to eliminate the undesired chattering during machining. A motion sensor is integrated into the spindle to gather the vibration data. According to the recorded vibration data, the status of the spindle and machine can be identified.

If the vibration is over the setting level, three data will be recorded.

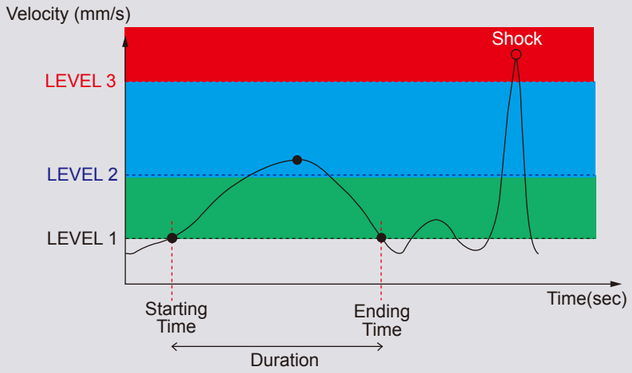

Three levels for spindle vibration monitoring:

- First level: shows the warning message when the vibration occurs and notifies the operator.
- Second level: shows the error message and reduces spindle speed and feed rate.
- Third level: when vibration reaches level 3 the machine will be shut down immediately to prevent crash.

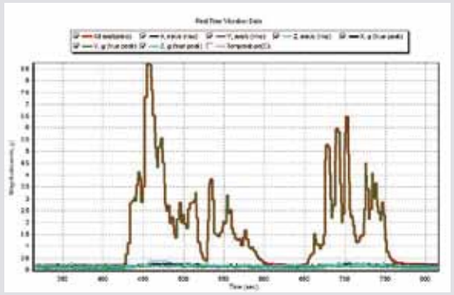

Fig.1 Vibration report before compensation

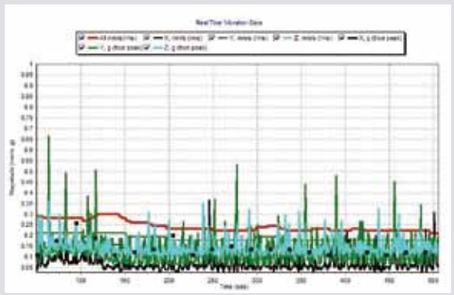

Fig.2 Vibration report after compensation

Precision rotary table

The continuous rotary table is equipped with a high resolution HEIDENHAIN encoder. The direct measuring and feed back to CNC provide high precision. The encoder is well-protected and sealed on top of table, easy for maintenance and trouble shooting. The automatic positioning of the table is at increments of 0.001˚





Heidenhain ±5″ rotary encoder

Highlights

•Table rotation speed: 1.5 rpm.
•Positioning accuracy: 15 sec.
•Repeatability: 4 sec.
•Feed driven by AC servo-drives & two worm gear systems
•10 Tons (std.) / 15 Tons (opt.) / 20 Tons(opt.) / 30 Tons(opt.) load capacity



Strongly ribbed and stable casting construction. The upper table is available optionally in high quality grey casting. For maintenance work, the table can easily be taken off without disassembly of the saddle unit.

A massive size of high accuracy rotary table carries large loading capacity. It is made by Meehanite licensed casting with hardness HB180-220. 10 tons loading capacity as standard, 15 tons, 20 tons, and 30 tons are available on request. Two circles of lubrication on rotary table contact and supported by 3 rings makes table rotates smoothly. Digitally controlled AC servo-drives and double worm gear driving system ensure backlash free after using for span.

Chip removal

Machine is equipped with chip auger carries out most of chips produced from machining area to chip trolley.
Floor chip conveyor is available on request for automatic chip collecting from chip augor.







Precise and reliable movement

All major structural components are Meehanite licensed casting with stress released, ensuring maximum stability and rigidity.



The extra-wide roller type linear guide ways for X/Z axes offer high speed, stable movement and rigidity. This will be easy for maintenance. It is hardened & ground at hardness HRC 52-55. The bearing surface of headstock bracket is applied with Turcite B. The X/Y/Z axes are standard with 1μm linear scale, and B axis with angle scale provides the best accuracies.



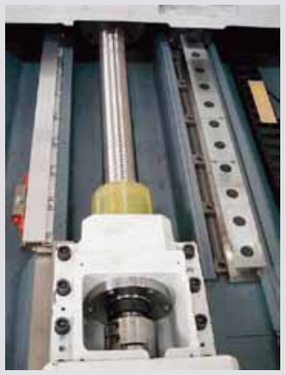

ballscrews



Box guide way

C3 double nut, high class precision ballscrews

C3 class ballscrews with double nuts are applied on X/Y/Z/W axes which offer high axis accuracy and less deforming under axial force.
All the ballscrew nuts are preloaded to ensure less tension deforming. Moreover, ballscrews are pre-tensioned for thermal compenstation. The large diameter and high precision (C3) ballscrews with supporter drives axes in most smooth motion.

Column with box guide way

Extra wide box guide ways withstands the cutting force of powerful machining. Hydraulic counter weight is ideal for headstock stability and thus furthermore offers perfect surface finishing.

Geometrical test for high accuracy

The geometrical accuracy is tested according to ISO 3070-2 standard and the repeatability and positioning accuracy is tested according to the ISO230-1. And it is approved by laser equipment. Moreover, all machines roundness is approved by Ball bar measurement and with roundness within 12μm.
All the geometrical testing is finished after 24 hours full function runing then a cutting test is conducted on machine and the full testing programs are saved in the CNC.

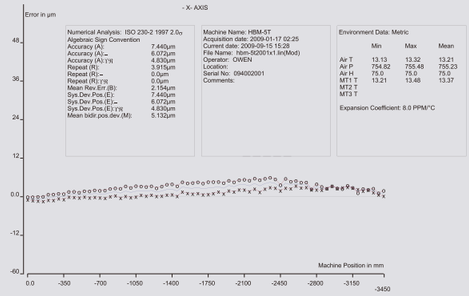

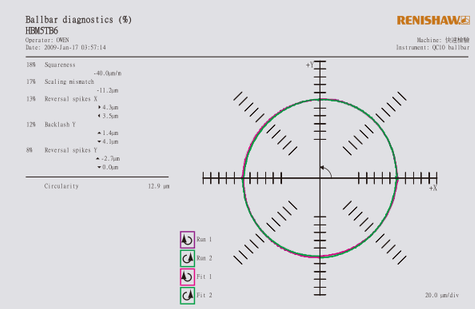

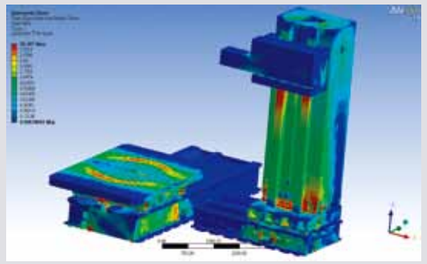

Strain and stress analysis ensures ideal structure of design and rigidity.

Controller

Fanuc 18i, 31i, Heidenhain iTNC 530, Siemens 840DSL / Standard CNC accessories

- Digital control display
- Controllable axes: spindle 5 axes
- Spindle orientation function:
  automatic tool change rigid tapping and ballbar diagnostics
- Optional axes
  U axis – NC facing head
  AC axis - universal milling head
- 10.4” or 15”(opt.) LCD controller screen
- MPG
- Interface RS 232 / High-speed network RS 422
- Ethernet



Option accessories



Automatic Multi-angular Head



Universal milling head



Angle milling head



Facing head (A)



Facing Head (B)



Extension sleeve



NC facing head



Angle plate



ATC 60T



ATC 28T(for HBM-4 only)



NC facing head



NC contour facing head



NC Facing head with spindle through(opt.)

Specifications

	Unit	HBM-4	HBM-4T	HBM-5T	HBM-5TE
Table					
Table size	mm	1200 x 1500(1") 1250 x 1500(0.001")	1400 x 1600(std.) 1600 x 1800(opt.)	1800x2200	4500 x 3000(std.) 3200 x 3200(opt.)
Table height	mm	1100	1250	1250	1985
T-slot(w/pitch/no)	mm	22H8x150x7	22H8x160x9	22H8x160x11	M22x160x19
Max. table load	tons	5	8(std.)/10(opt.)	10(std.)/15(opt.)/20(opt.)	15(std.)/20(opt.) 40(opt.-for 3200mm table only)
Table index	degree	1˚(std.)/0.001°(opt.)	0.001°	0.001°	0.001°
Rotary table positioning accuracy	sec.	15	15	15	15
Rotary table repeatability accuracy	sec.	4	4	4	4
Rotary table encoder accuracy	sec.	±5	±5	±5	±5
Travel					
X axis - standard	mm	2200	2000	3500	4500
X axis - option	mm	x	3000	4500 / 5500	5500 / 6500
Y axis	mm	1600	2000	2600	4300
Z axis - standard	mm	1600	1400	1400	1450
Z axis - option	mm	x	2000	2000	2000
W1 axis	mm	550	700	700	700
W2 axis	mm	x	800(opt.)	800(opt.)	1000
Distance between spindle nose to table surface	mm	0-1600	-25~1975	0~2600	-25~4275
Distance between spindle nose to table center	mm	105-2255	-65~2090	-100~2000	-100~3030
Spindle					
Spindle taper		ISO 50	ISO 50	ISO 50	ISO 50
transmission		Gear	Gear	Gear	Gear
Spindle speed	rpm.	35-3000	35-3000	35-3000	35-3000
Spindle output (Fanuc)	kw	15/18.5	22/30	37/45	37/45
Spindle torque	Nm	740 / 863	1976	2362	2362
Spindle step	sec.	2 step	2 step	2 step	2 step
Quill diameter (W axis)	mm	110	130	130	130
Spindle bearing I/D	mm	150	170	170	170
Axes Transmission					
X axis ballscrew	mm	ø55xP12xC3	ø80xP10xC3	ø80xP10xC3	ø80xP20xC3
Y axis ballscrew	mm	ø55xP12xC3	ø63xP10xC3	ø63xP10xC3	ø63xP20xC3
Z axis ballscrew	mm	ø55xP12xC3	ø80xP10xC3	ø80xP10xC3	ø80xP20xC3
W axis ballscrew	mm	ø40xP5xC3	ø40xP5xC3	ø40xP5xC3	W_1/W_2 ø40xP5xC3
Motor output					
Axes motor (X/Y/Z/B/W)	Nm	22/38/22/22/12	75/38/38/38/22	75/38/38/38/22	95/95x2/75/75/22x2
hydraulic motor	kW	3.75	7.5	7.5	7.5
Coolant motor	kW	1.7	1.7	1.7	1.7
Lubrication pump motor	W	25	25	25	25
Guide way					
X axis guide way type		Box way	Linear way	3 Linear way	4 Linear way
X axis guide distance	mm	700	1010	1250	2150
Y axis guide way type		Box way	Box way	Box way	Box way
Y axis guide distance	mm	540	1120	1120	1764
Z axis guide way type		Box way	Linear way	Linear way	Linear way
Z axis guide distance	mm	1000	954	1374	2600
Axes feed rate					
X/Y/Z/W rapid feed	m/min.	12/12/12/6	10/10/10/8	10/10/10/8	10/10/10/10
X/Y/Z cutting feed	m/min.	10/10/10/6	10/10/10/5	10/10/10/5	10/10/10/5
B axis cutting feed	rpm	5.5(1˚) / 2(0.001˚)	1.5	1.5	1.5
ATC system					
ATC type		Arm	Arm		
No. of tool		28/60	60		
Tool shank type		BT/CAT/DIN#50	BT/CAT/DIN #50		
Tool changing time(T-T)	sec.	9	16		
Max. tool diameter	mm	125	125		
Max. tool diameter with next tool empty	mm	250	250		
Max. tool length	mm	300/500	300/500		
Max. tool weight	kgs	25	25		
Max. loading weight	kgs	900	900		
Dimension					
Length	mm	7750	7800	8450(z1400)/9050(z2000)	10200
Width	mm	4715	7050/7800	6980/8420/9720	10200/11200/12200
Height	mm	3706	4600	5040	8115
Weight	kgs	22500	40000	49000	95000

**Specifications are subject to changer without notice.*

Torque & horse power chart

HBM-4(std.)15/18.5kw

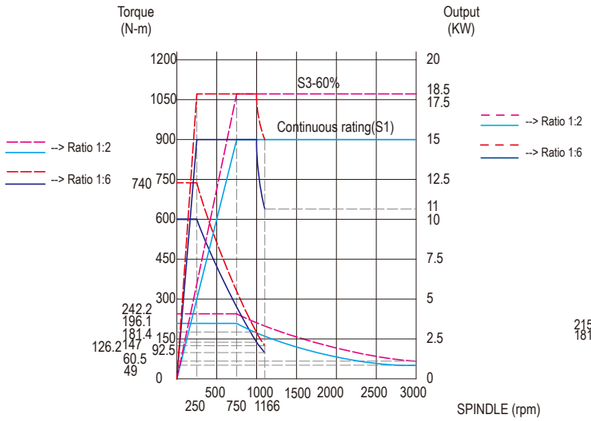

Torque / Horsepower Chart Data				
Spindle Taper	ISO	BT50	Spindle Motor	FANUC α15/7000i
		CAT50	Motor Output	15 / 18.5 kw
	DIN	DIN 69871	Gear Ratio	1:2 / 1:6
Spindle Speed	3000 RPM		Pulley Ratio	-

HBM-4(opt.)18.5/22kw

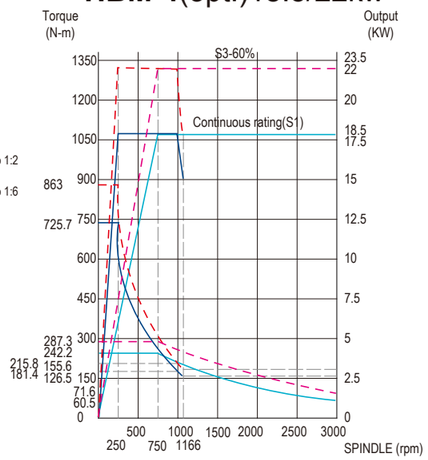

Torque / Horsepower Chart Data				
Spindle Taper	ISO	BT50	Spindle Motor	FANUC £\18/7000i
		CAT50	Motor Output	18.5 / 22 kw
	DIN	DIN 69871	Gear Ratio	1:2 / 1:6
Spindle Speed	3000 RPM		Pulley Ratio	-

HBM-4T 22/30kw

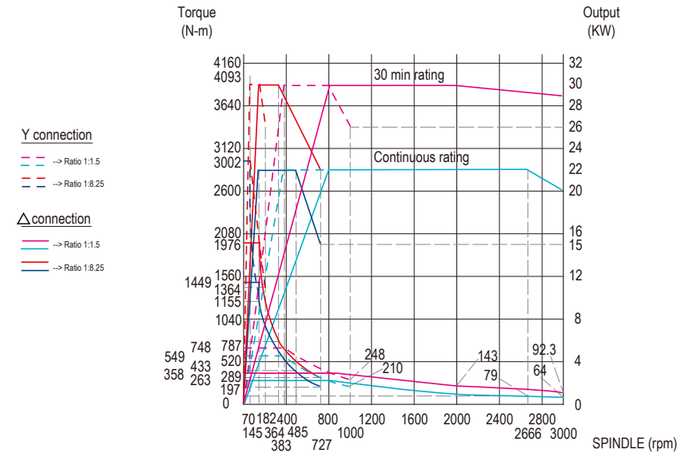

Torque / Horsepower Chart Data				
Spindle Taper	ISO	BT50	Spindle Motor	FANUC aP50/6000i
		CAT50	Motor Output	22/30 kw
		DIN 69871	Gear Ratio	1:1 / 1:5.5
Spindle Speed	3000 RPM		Pulley Ratio	1:1.5

Interference drawing

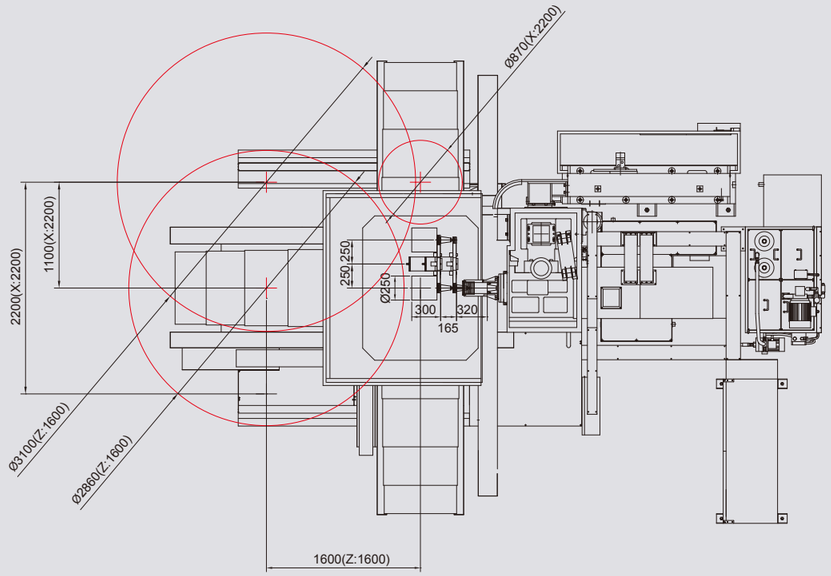

HBM-4

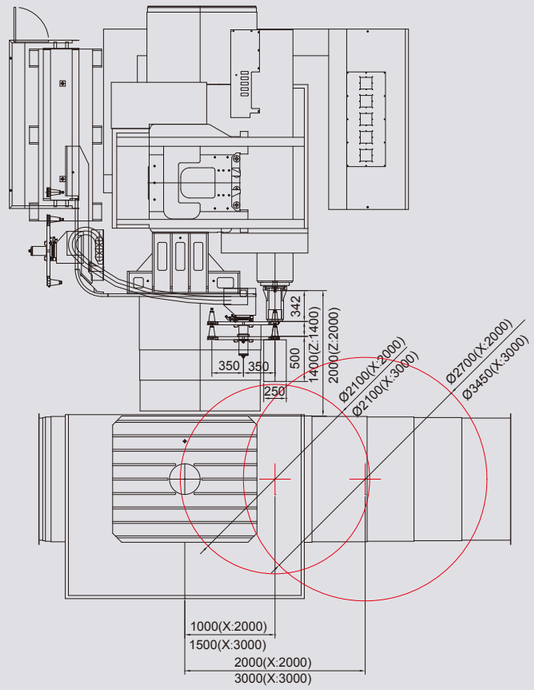

HBM-4T

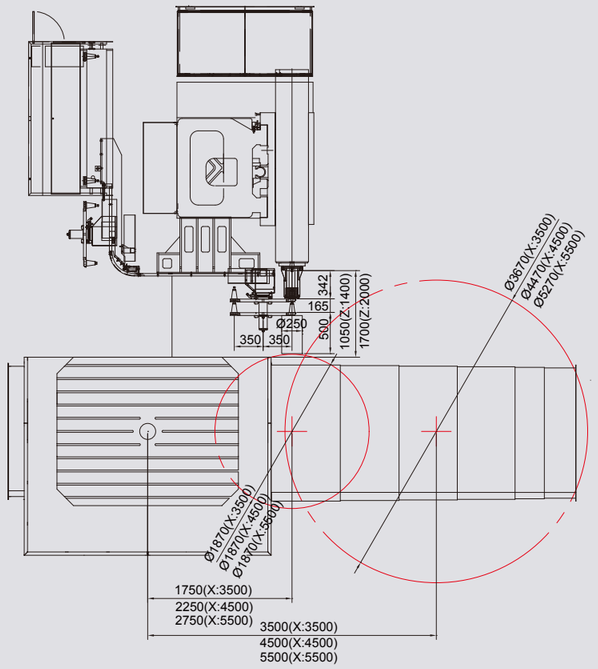

HBM-5T

Torque & horse power chart

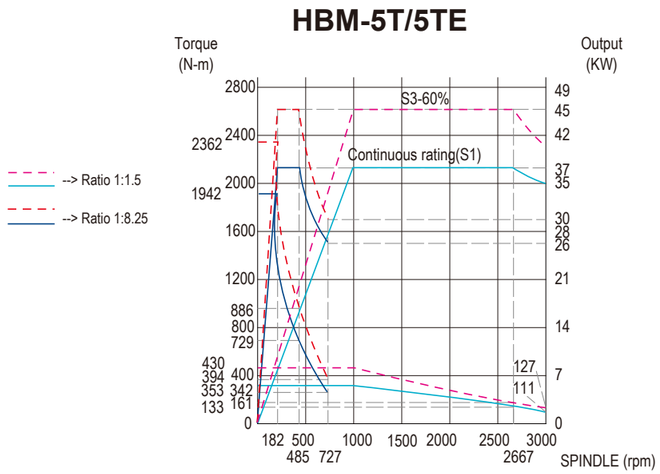

Torque / Horsepower Chart Data				
Spindle Taper	ISO	BT50	Spindle Motor	FANUC a40/6000i
		CAT50	Motor Output	37/45 kw
		DIN 69871	Gear Ratio	1:1 / 1:5.5
Spindle Speed	3000 RPM		Pulley Ratio	1:1.5

Interference drawing

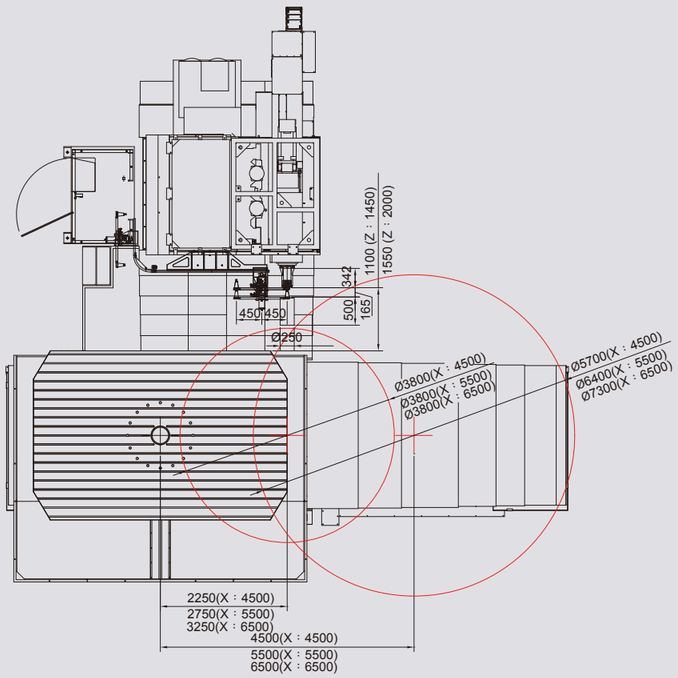

HBM-5TE



Parts for Aerospace



Parts for Bulldozer



Motor Parts



Oil Tube



Parts for Ship



Parts of Bulldozer



Center machining



Machine Parts

Challenger

Microcut

CNC Horizontal Milling and Boring Center



HBM LINE

Table type
T-type
ø110/ø130 spindle

National Award of Outstanding

SMT

ISO 14001:2004
EMS 546518

ISO 9001:2008
FM 538421

May 2012



Buffalo Machinery has been committed to the field of metal working machinery since the company was founded in 1978 and has acquired a great experience of machine tools manufacturing knowledge. Since year 1997, Buffalo Machinery started the production of CNC machines, up to now, a complete line of metal working machine has been continuously developed, which meets the requirement of various metal-cutting industries. In the last 14 years, Buffalo Machinery has built up its own 8 production factories in Taichung City, Taiwan. The demand of the market increases so strong that the productivity is not enough to accommodate. Today, Buffalo Machinery has reached the point as being one of the major world-known metal-working machinery development and production facility, and continues to pursue excellence in quality and service. Microcut the Challenger metal-working machines are highly efficient with the features of innovative design which are highly percentage marketed in top quality market, the potential are looking for high speed, high productivity. Microcut the Challenger has built high satisfaction from its feedback. Meanwhile Buffalo Machinery provides high quality products and excellent grade of after sales service, it definitely can be considered as one of the best partners to work with!

Base on the high quality, reliable products and efficient after sales service, Microcut the Challenger products has been well marketed internationally. In year 2008, Buffalo Machinery has been certified to the ISO9001-2008 quality standards and the ISO14001-2004 certification standards. In the same year, Buffalo Machinery awarded National Award of Outstanding Small and Medium Enterprise in year 2008. Microcut the Challenger CNC machines are a range of reliable products that can always satisfy the needs of every single customer.

The HBM series horizontal milling and boring machine are able to provide a wider selection of working capability and can meet various potential needs. The large loading capacity working tables can be widely utilized in the energy industry, mining industry, oil & gas industry, and die & mold industry. Besides the model HBM-4 with working table type, a wide range of T-type HBM series have been developed, such as model HBM-4T and HBM-5T have been successfully serviced in the field. The company is targeting to develop Floor Type Boring Mills, Ram Type Boring Mills and Ram Type CNC Mills. These models will be announced in late 2012.

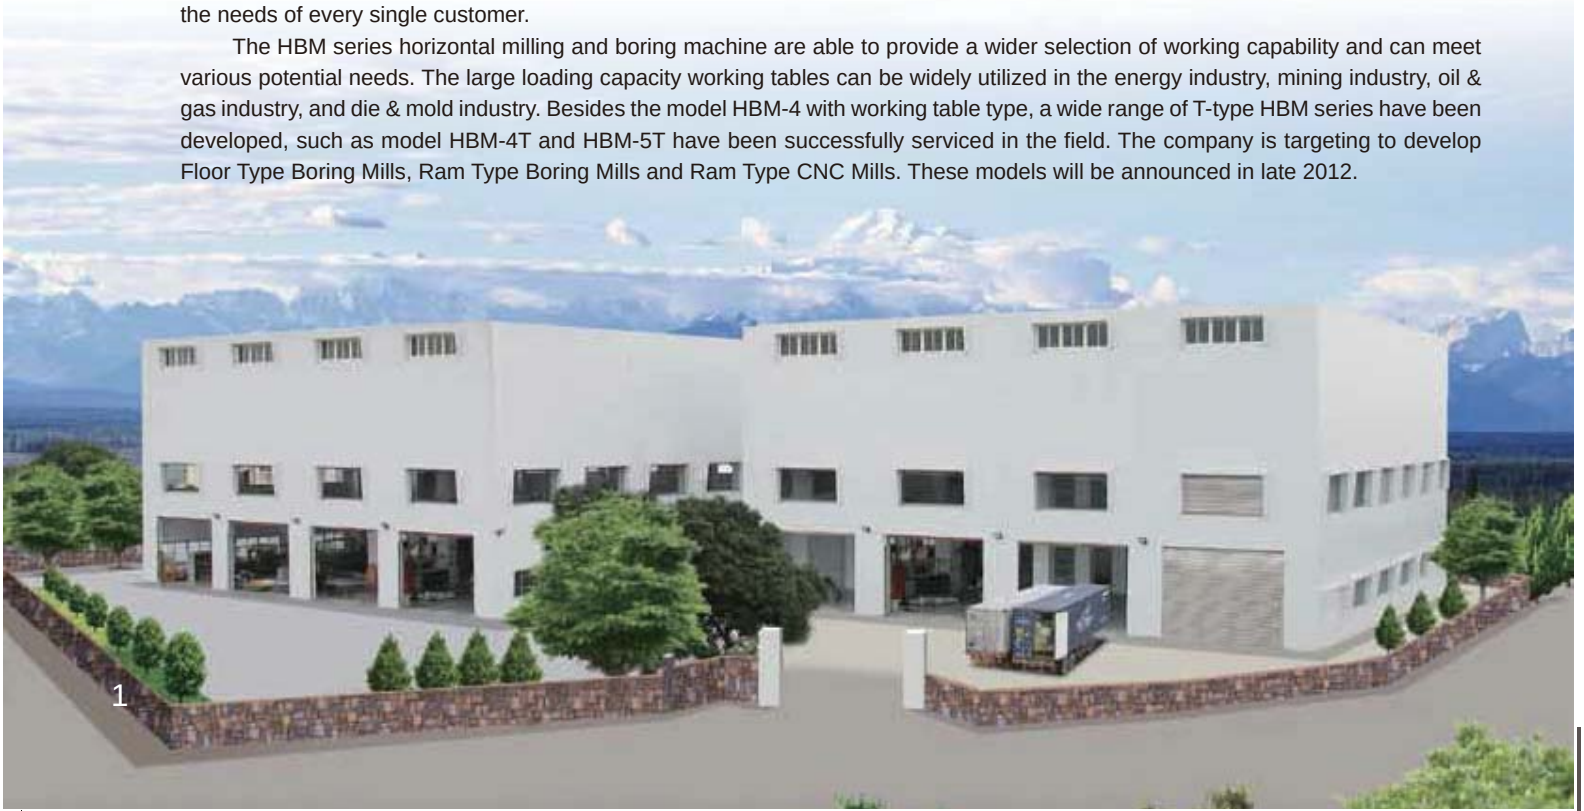



HBM-4

Travel: X, Y, Z 2200 x 1600 x 1600mm
W 550mm
Maximum load on table center: 5 tons
Spindle torque: 740Nm(std.) / 863Nm(opt.)
Spindle diameter: 110mm
Spindle motor: 15/18.5Kw(std.) /18.5/22Kw(opt.)
Construction of one-piece bed is optional.

HBM-4T

Travel: X:2000mm(std.)/3000mm(opt.)
Y: 2000mm(std.)
Z: 1400mm(std.)/2000mm(opt.)
W1: 700mm
Table size:
1400x1600mm 8 tons(std.)
1600x1800mm 10 tons(opt.)
Spindle torque:3002Nm
Spindle motor:22/30Kw(Fanuc)
Spindle diameter:130mm



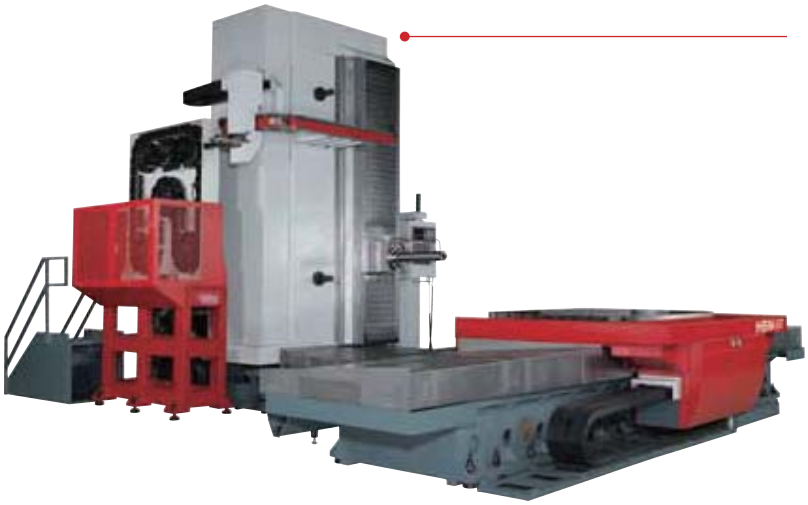

HBM-5T

Travel: X: 3500mm(std.)/4500mm(opt.)
5500mm(opt.)
Y: 2600mm(std.)
Z: 1400mm(std.)/2000mm(opt.)
W1: 700mm
Table size:1800x2200mm
Max. table load:15 tons(std.)/20 tons(opt.)
Spindle torque:2362Nm
Spindle motor:37/45Kw(Fanuc)
Spindle diameter:130mm

HBM-5TL

Travel: X: 4500mm(std.)/5500mm(opt.)
Y: 3200mm(std.)
Z: 2000mm(std.)
W1: 700mm(std.)
Table size:2500x2500mm
Max. table load:20 tons(std.)/30 tons(opt.)
Spindle torque:2362Nm
Spindle motor:37/45Kw(Fanuc)
Spindle diameter:130mm



Model HBM-4
Table Type Borer







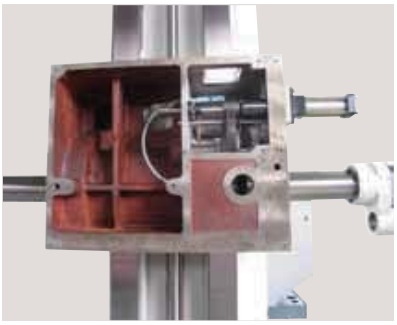

Rotary table

- Large diameter supporting bearing surface for heavy loading capacity.
- 3-piece Hirth couplings transmission and clamping for precise positioning every 1 degree standard table and multi-pitch worm gear for transmission system offers 0.001 degree variable positioning on request.
- Generous dimensioning of the hydraulic clamping system which enables the capability for heavy cutting.
- Integrated chip auger located below cutting areas for easy chip removal.

Spindle & Gear box

- 110mm quill diameter with travel 550mm for deep hole boring and milling.
- The main headstock supporting part is made of grade GGG iron casting. Spindle and sleeve are made of chrome alloyed steel which performs a great reliability.
- The spindle and quill is driven by the servo unit and lubricated by sintered bronze in order to ensure durability and longevity.
- A two-speed gear box, featuring two big ratios (1:6 for roughing operations, and 1:2 for normal work). Speed step shifts automatically according to the spindle speed setting.
- Coolant through spindle device is prepared for easy retrofit.

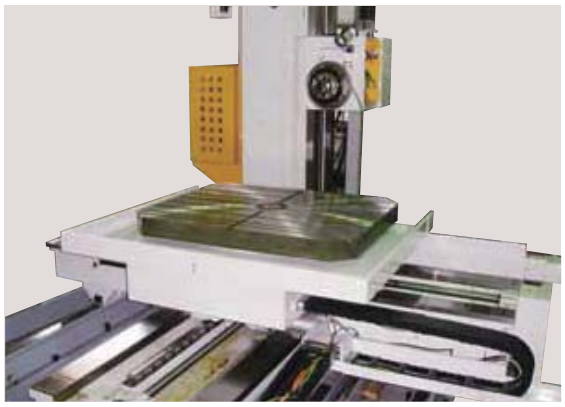

Bed

- All major structural components are made of Meehanite licensed casting iron with stress released, ensuring maximum stability and rigidity.
- Harden & ground box way offer great heavy loading capacity and high reliability.
- 2 additional support ways to ensure accuracy & rigid support for the large longitudinal travel.
- Absolute linear measuring system for 3 axes on request.

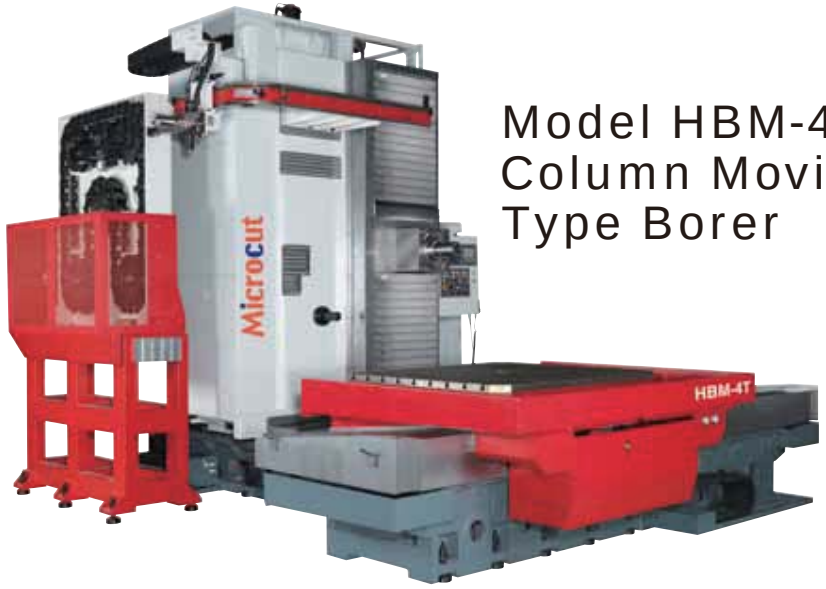

Model HBM-4T Column Moving Type Borer





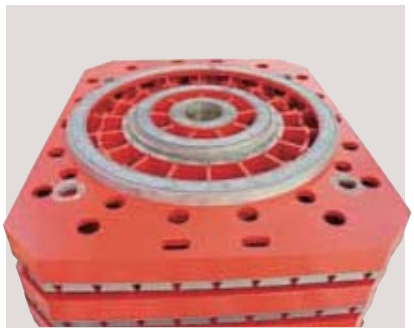

Spindle

- 130mm quill diameter with travel 700mm for deep hole machining. Head structure is prism shaped 400x400x2330 mm.
- The interface for main headstock supporting part is made of grade GGG iron casting. The slide coating on the bearing surface in hand scrapped finish which ensures high precision assembly.
- The spindle and quill is driven by the servo unit. Sintered bronze made front Ring is to ensure easy maintenance, reliability and longevity.
- A two-speed planet gear box, featuring two large ratios (1:5.5 for roughing operations, and 1:1 for normal work). Speed step shifts automatically according to the spindle speed setting.

Rotary table

- Both the table slide and clamping plates are made of a robust cross-ribbed casting which is treated by thermal stabilization.
- Centrally integrated rotary encoder guarantees precision positioning and easy maintenance.
- 0.001 degree variable positioning in any angular position and available for rotary milling.
- Dual worm-gear driven system ensures backlash free.
- 3 rings of bearing surface coated and hand-scrap treated for stable and longevity.
- The rotary table is reinforced with integrated hydraulic clamping force and four points lock pins provides heavy loading capacity and large clamping force.





X-axis and Z-axis

- All major structural components are made of Meehanite licensed casting iron with stress released, ensuring maximum stability and rigidity.
- Two roller type linear guideways with six pieces blocks for both axes offers heavy loading and high accuracy.
- Absolute linear measuring system for precise positioning.

Y-axis

- The machine column and slide are joined in a one unit fabricated from a robust cast. The device provides maximum rigidity and strength of the slide/column structure.
- Y-axis is driven by a braking motor and a N.C electromagnetic brake system adopted in the end of ballscrew as a safety security.

Model HBM-5T/5TL Column Moving Type Borer





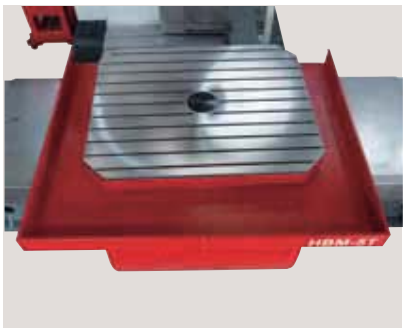

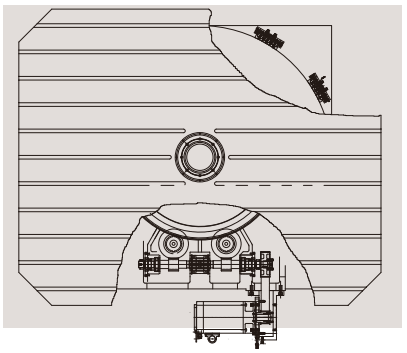

Spindle

- 130mm quill diameter with travel 700mm for deep hole machining. Head structure is prism shaped 400x400x2330 mm.
- Spindle is supported by cylindrical roller bearings (double roller) for heavy duty machining.
- Spindle and sleeve provides high precision accuracy. The spindle surface hardness is around HRC52-55.
- The spindle is equipped with automatic OTT Jakob tool chuck collets using disc springs with chucking power booster; release is provided by the hydraulic cylinder.

Rotary table

- Both the table slide and clamping plates are made of a robust cross-ribbed casting which is treated by thermal stabilization.
- Centrally integrated rotary encoder guarantees precision positioning and easy maintenance.
- 0.001 degree variable positioning in any angular position and available for rotary milling.
- Dual worm-gear driven system ensures backlash free.
- 3 rings of bearing surface coated and hand-scrap treated for stable and longevity.
- The rotary table is reinforced with integrated hydraulic clamping force and four points lock pins provides heavy loading capacity and large clamping force.



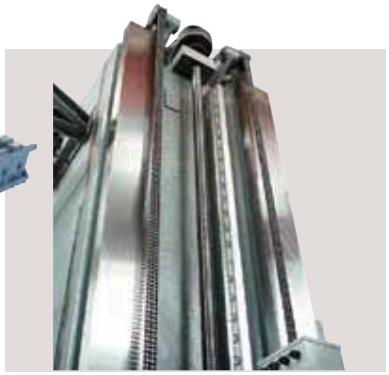

X-axis and Z-axis

- All major structural components are made of Meehanite licensed casting iron with stress released, ensuring maximum stability and rigidity.
- Two roller type linear guideways with six pieces blocks for both axes offers heavy loading and high accuracy.
- Absolute linear measuring system for precise positioning.

Y-axis

- The machine column and slide are joined in a one unit fabricated from a robust cast. The device provides maximum rigidity and strength of the slide/column structure.
- Y-axis is driven by a braking motor and a N.C electromagnetic brake system adopted in the end of ballscrew as a safety security.

High finish quality

•Spindle vibration suppression

Longer life time

•Wear reduction on spindle bearings and tools

Vibration data recorder

•Abnormal vibration data recorded for maintenance

Spindle Vibration implies lots of important information such as unusual spindle conditions (e.g.lubrication shortage, worn bearings, out-of-balance or even crash). Also, the vibration information can be used as the index of chatter-free control to eliminate the undesired chattering during machining. A motion sensor is integrated into the spindle to gather the vibration data. According to the recorded vibration data, the status of the spindle and machine can be identified.

If the vibration exceeds setting level, three data will be recorded.

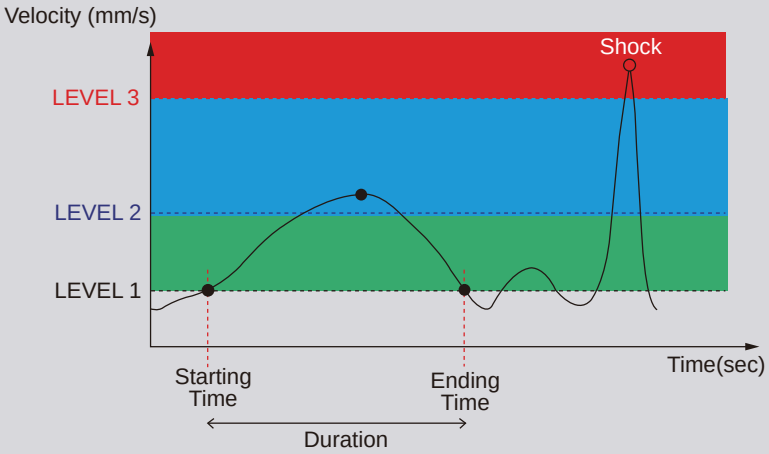

Three levels for spindle vibration monitoring:

- First level: shows the warning message when the vibration occurs and notifies the operator.
- Second level: shows the error message and reduces spindle speed and feed rate.
- Third level: when vibration reaches level 3 the machine will be shut down immediately to prevent crash.

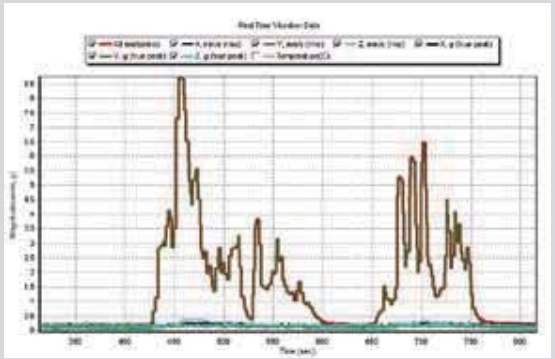

Fig.1 Vibration report without compensation

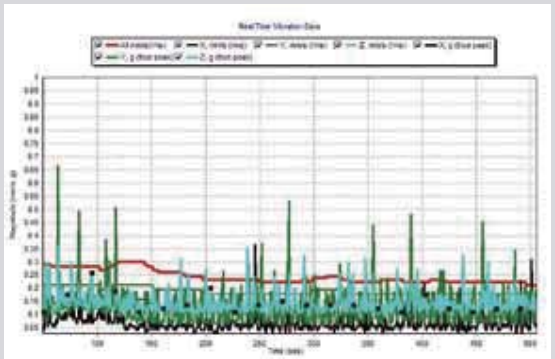

Fig.2 Vibration report with compensation

SVS

Spindle Vibration Supervision



High precision ballscrews

- C3 class ballscrews with double nuts are applied on X/Y/Z/W axes which offer high axis accuracy and less deforming under axial force.
- All the ballscrew nuts are preloaded to ensure less tension deforming. Ballscrews are pretended for thermal compensation.
- Ballscrew supporter offered as standard on travel 3-meter and up ease the ballscrew deformation and ensure axes traverse in most smooth.

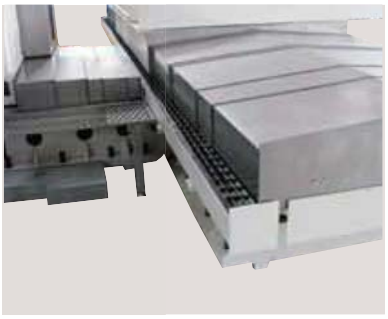



Chip arrangement

Machine is equipped with chip auger which carries out the chips to chip trolley.
Floor chip conveyor is available if required.

Lubrication system





- Automatic lubrication system uses pressure-released type lubricator, oil volume is controlled by distribution metered values.
- Oil is supplied according to the lubrication oil demand of the sliding surface and the ball screw.
- Oil level detector unit is provided.
- Alarm will be shown on screen while oil supply is short. Sealed type spindle bearings are lubricated by grease.



Measuring system

The X, Y, Z axes are equipped with abosolute linear scale.
W axis is measured by the axis servo motor.
The rotary table integrated with rotary encoder, providing resolution +/-5".
Spindle speed is measured by rotary sensor which is built in spindle motor.

Wide Selection of CNC



Heidenhain iTNC530 HSCI



Fanuc 31i/32i control



Siemens 840D SL



Portable MPG



Portable control panel Fanuc/Siemens



Portable control panel Heidenhain

All systems provide full control of 5 machines axes plus spindle rotation. Control system in basic configuration consists of:

- Standard software functions
- 15” color display (Heidenhain) / 10.4” color display (Fanuc/Siemens)
- Operational panel with keyboard
- Portable auxiliary control panel with electronic hand wheel
- Rigid tapping
- USB / Ethernet
- Tool management
- Helical

In addition, control functions may equip with:

Measuring touch probes
Additional rotary table
Automatic universal or angel heads

Please refer to Sales Manual for more details.

Optional Accessories



Automatic Multi-angular head (2.5˚/2.5˚or 1˚/1˚)



Universal Milling Head



Angle Milling Head



Facing Head



Automatic Facing Head



Extension sleeve



NC Facing Head



Angle Plate



Automatic Angle Head



Lifting Arm of NC Facing



HBM-4 Table Guard



HBM-4T/5T/6T Table Guard

AutomaticTool Changer

60 tools chain type ATC for HBM-4T/5T/5TL

28 tools or 60 tools ATC for HBM-4



ATC 60T (for HBM-4T/5T/5TL)



ATC 28T (for HBM-4 only)



NC Facing Head



NC Contour Facing Head



NC Facing Head with W-axis Through

Specifications

Model	Unit	HBM-4	HBM-4T	HBM-5T	HBM-5TL
Table					
Table size	mm	1200 x 1500(std.) 1250 x 1500(opt.)	1400 x 1600(std.)/1600 x 1800(opt.)	1800x2200	2500x2500
Table height	mm	1100	1250	1250/1350	1400
T-slot(w/pitch/no)	mm	22H8x150x7	22H8x160x9	22H8x160x11	28H8x160x15
Max. table load	tons	5	8(std.)/10(opt.)	15(std.)/20(opt.)	20(std.)/30(opt.)
Table index	degree	1˚(std.)/0.001°(opt.)	0.001˚		
Rotary table positioning accuracy	sec.	15	15		
Rotary table repeatability accuracy	sec.	4	4		
Rotary table encoder accuracy	sec.	±5	±5		
Travel					
X axis - standard	mm	2200	2000	3500	4500
X axis - option	mm	-	3000	4500 / 5500	5500
Y axis	mm	1600	2000	2600	3200
Z axis - standard	mm	1600	1400	1400	2000
Z axis - option	mm	-	2000	2000	-
W1 axis	mm	550	700	700	700
W2 axis	mm	-	-	-	-
Distance between spindle nose to table center(standard Z-travel & table size)	mm	105~2255	-30~2070	-100~2000	250~2950
Spindle					
Spindle taper		ISO 50	ISO 50	ISO 50	
transmission		Gear	Gear	Gear	
Spindle speed	rpm.	35-3000	35-3000	35-3000	
Spindle output (Fanuc)	kw	15/18.5	22/30	37/45(std.)	
Spindle torque	Nm	726 / 863	1976/3002	1942/2362(std.)	
Spindle step		2 step	2 step	2 step	
Quill diameter (W axis)	mm	110	130	130	
Spindle bearing I/D	mm	150	170	170	
Axes Transmission					
X axis ballscrew	mm	ø55xP12xC3	ø80xP10xC3	ø80xP10xC3	ø80xP10xC3
Y axis ballscrew	mm	ø55xP12xC3	ø63xP10xC3	ø63xP10xC3	ø63xP10xC3
Z axis ballscrew	mm	ø55xP12xC3	ø80xP10xC3	ø80xP10xC3	ø80xP10xC3
W axis ballscrew	mm	ø40xP5xC3	ø40xP5xC3	ø40xP5xC3	ø40xP5xC3
Motor output					
Axes motor (X/Y/Z/B/W)	Nm	22/38/22/22/12	75/38/38/38/22	75/38/38/38/22	75/38/38/38/22
hydraulic motor	kW	3.75	7.5		
Coolant motor	kW	1.7	1.7		
Lubrication pump motor	W	25	25		
Guide way					
X axis guide way type		Box way	2 Linear way	3 Linear way	3 Linear way
X axis guide distance	mm	700	1010	1250	1250
Y axis guide way type		Box way	Box way		
Y axis guide distance	mm	540	1120	1120	1120
Z axis guide way type		Box way	2 Linear way	3 Linear way	3 Linear way
Z axis guide distance	mm	1000	954	1374	1374
Axes feed rate					
X/Y/Z/W rapid feed	m/min.	12/12/12/6	10/10/10/8	10/10/10/8	10/10/10/8
X/Y/Z/W cutting feed	m/min.	10/10/10/6	10/10/10/5		
B axis cutting feed	rpm	5.5(1˚) / 2(0.001˚)	1.5		
ATC system					
ATC type		Arm	Arm		
No. of tool		28/60	60		
Tool shank type		BT/CAT/DIN#50	BT/CAT/DIN #50		
Tool changing time(T-T)	sec.	9	16		
Max. tool diameter	mm	125	125		
Max. tool diameter with next tool empty	mm	250	250(std.) / 450(opt.)		
Max. tool length	mm	300/500	300(std.) / 500(opt.)		
Max. tool weight	kgs	25	25		
Max. loading weight	kgs	900	900		
Dimension					
Length	mm	7750	7800	8450(Z1400)/9050(Z2000)	9055(Z2000)
Width	mm	4715	7050/7800	6980(X3500)/8500 (X4500)/9720(X5500)	8500(X4500)/9720(X5500)
Height	mm	3706	4600	5040	8115
Weight	kgs	22500	40000	49000	55000

**Specifications subject to change without notice.*

Torque & horse power chart

FANUC control

HBM-4(std.)15/18.5Kw

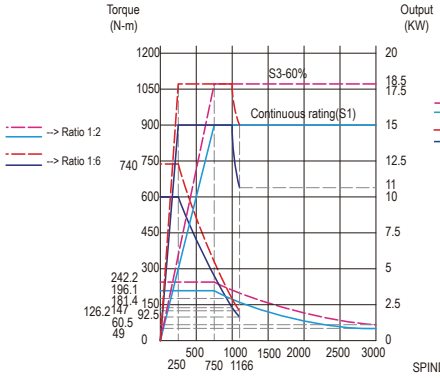

Torque / Horsepower Chart Data				
Spindle Taper	ISO	BT50	Spindle Motor	FANUC α15/7000i
		CAT50	Motor Output	15 / 18.5 kw
	DIN	DIN 69871	Gear Ratio	1:2 / 1:6
Spindle Speed	3000 RPM		Pulley Ratio	-

HBM-4(opt.)18.5/22Kw

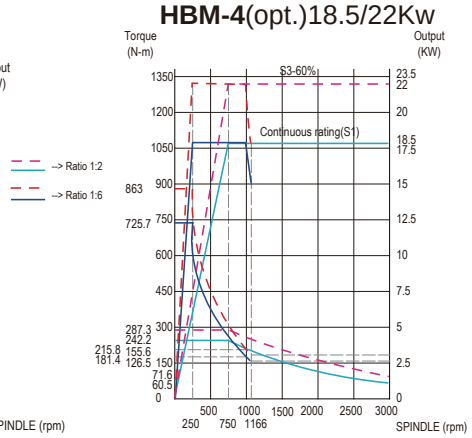

Torque / Horsepower Chart Data				
Spindle Taper	ISO	BT50	Spindle Motor	FANUC £\18/7000i
		CAT50	Motor Output	18.5 / 22 kw
	DIN	DIN 69871	Gear Ratio	1:2 / 1:6
Spindle Speed	3000 RPM		Pulley Ratio	-

HBM-4T 22/30Kw

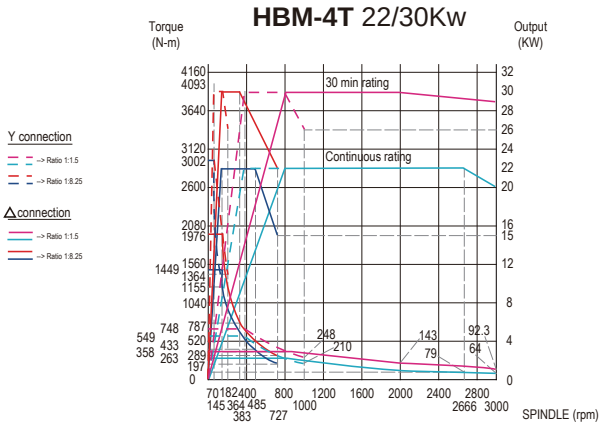

Torque / Horsepower Chart Data				
Spindle Taper	ISO	BT50	Spindle Motor	FANUC aP50/6000i
		CAT50	Motor Output	22/30 kw
		DIN 69871	Gear Ratio	1:1 / 1:5.5
Spindle Speed	3000 RPM		Pulley Ratio	1:1.5

HBM-5T/5TL 37/45Kw

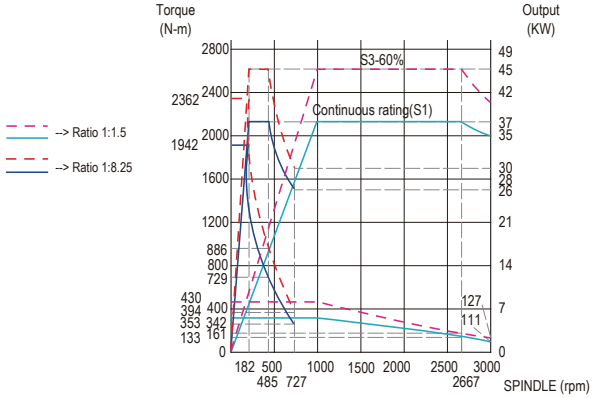

Torque / Horsepower Chart Data				
Spindle Taper	ISO	BT50	Spindle Motor	FANUC a40/6000i
		CAT50	Motor Output	37/45 kw
		DIN 69871	Gear Ratio	1:1 / 1:5.5
Spindle Speed	3000 RPM		Pulley Ratio	1:1.5

Heidenhain & Siemens control

HBM-4 --Heidenhain

std.-**15/25Kw**

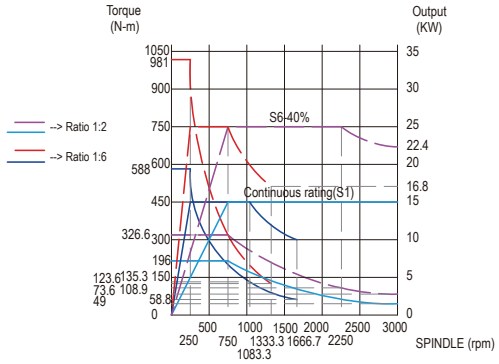

Torque / Horsepower Chart Data				
Spindle Taper	ISO	BT50	Spindle Motor	HEIDENHAIN QAN-260M
		CAT50	Motor Output	15/25 KW
	DIN	DIN 69871	Gear Ratio	1:2 / 1:6
Spindle Speed	3000 RPM		Pulley Ratio	-

opt.-**20/30Kw**

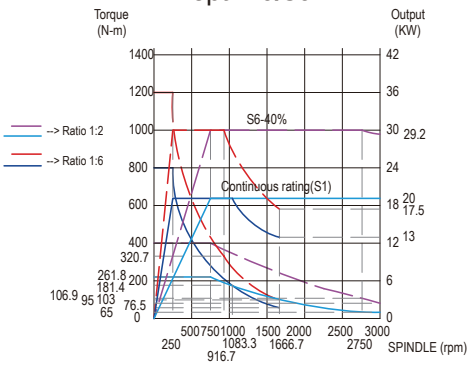

Torque / Horsepower Chart Data				
Spindle Taper	ISO	BT50	Spindle Motor	HEIDENHAIN QAN-260L
		CAT50	Motor Output	20/30 KW
	DIN	DIN 69871	Gear Ratio	1:2 / 1:6
Spindle Speed	3000 RPM		Pulley Ratio	-

HBM-4 --Siemens

std.-**15/23Kw**

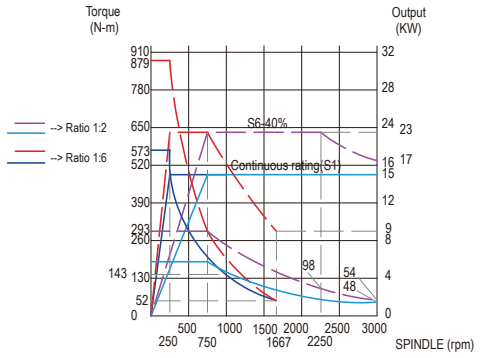

Torque / Horsepower Chart Data				
Spindle Taper	ISO	BT50	Spindle Motor	Siemens 1PH 7133-2NF-OL
		CAT50	Motor Output	15/23 Kw
	DIN	DIN 69871	Gear Ratio	1:2 / 1:6
Spindle Speed	3000 RPM		Pulley Ratio	-

opt.-**22/33Kw**

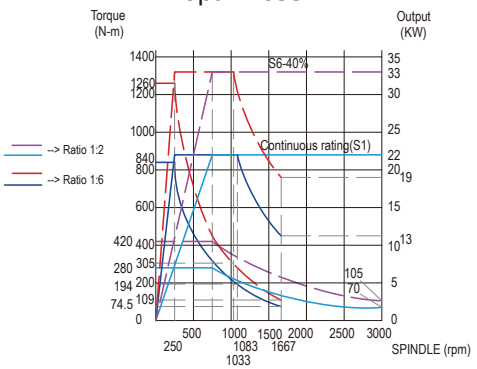

Torque / Horsepower Chart Data				
Spindle Taper	ISO	BT50	Spindle Motor	SIEMENS 1PH7137-2NF-OL
		CAT50	Motor Output	22/33 KW
	DIN	DIN 69871	Gear Ratio	1:2 / 1:6
Spindle Speed	3000 RPM		Pulley Ratio	-

HBM-4T/5T

Siemens & Heidenhain (Heidenhain CNC is equipped with Siemens motors)

37/56Kw

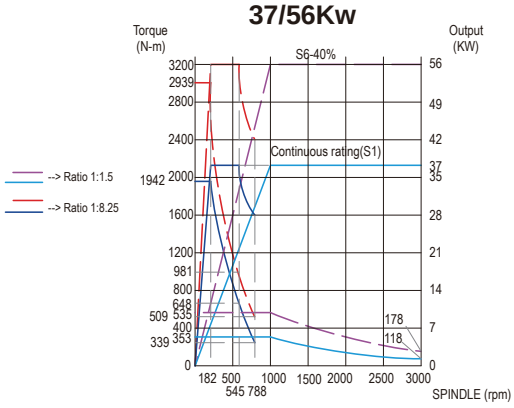

Torque / Horsepower Chart Data				
Spindle Taper	ISO	BT50	Spindle Motor	SIEMENS 1PH7167-2NF
		CAT50	Motor Output	37 / 56 kw
	DIN	DIN 69871	Gear Ratio	1:1 / 1:5.5
Spindle Speed	3000 RPM		Pulley Ratio	1:1.5

Interference drawing

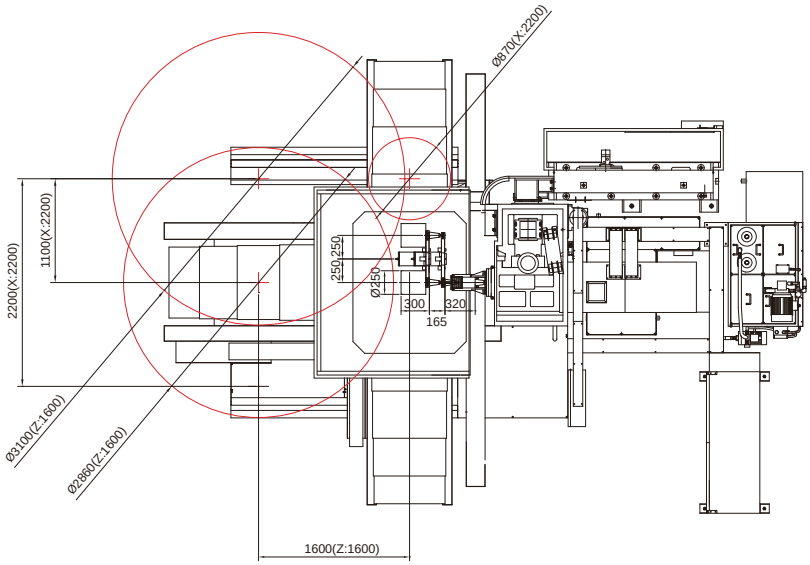

HBM-4

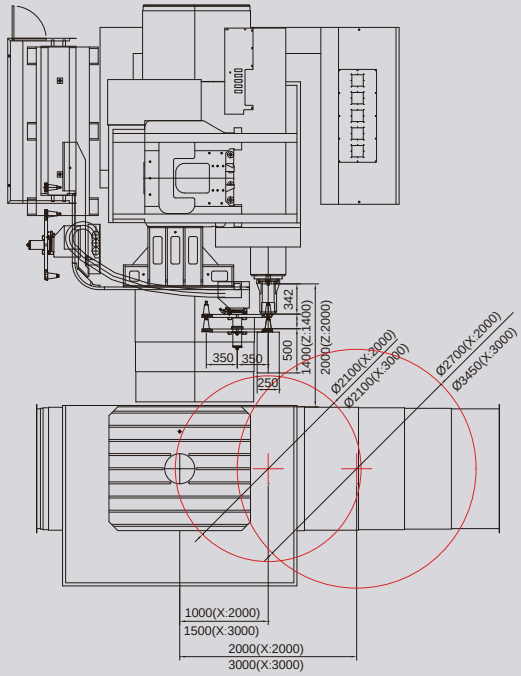

HBM-4T

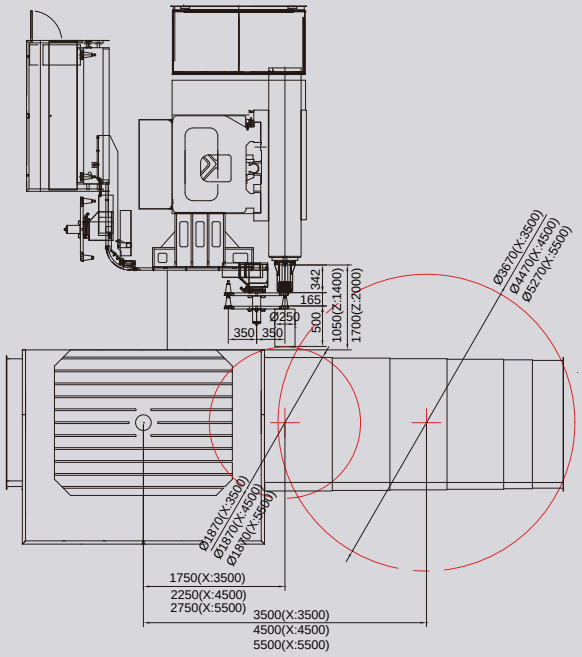

HBM-5T/5TL

Applied in various applications



Optical coating machine stainless steel vacuum chamber



Machine column



High speed screw production machine



Construction equipment



Housing of deep boring machine



A press brake machine frame (by angle head, opt.)



Deep boring of inner pipe hub



Turning big diameter hole by NC facing head(opt.)



Milling rope drums for Mining industry



Elbows for steel industry



Boring and drilling truck wheel axle



Milling and boring a fire-fight equipment



BUFFALO MACHINERY CO., LTD.
56, Lane 318, Der Sheng Road, Ta Ya, Taichung City, Taiwan, R.O.C.
P.O. Box 320, Ta Ya, Taichung City, Taiwan R.O.C.
Tel: 886-4-25 60 37 59 Fax: 886-4-25 60 37 69 E-mail: info@mail.buffalo.com.tw
www.buffalo.com.tw