TOTO

保　证　书

用　　户	
销售安装店	
购 买 日	
保 修 期	自购买日起埋墙式淋浴头本体保修期为1年

*若上栏内容未记全，该保证书将视为无效。因此请用户购买时对记入内容进行确认。
*本保证书中的保修项目仅限于保证书中所约束的免费维修项目进行维修。
*在保修期间，若产品发生故障（漏水、渗漏），请拨打全国售后服务电话报修。

维修规定

1. 保修期间，在用户正确按安装说明书、不干贴等指示，使用本公司产品的情况下，本公司将对有故障产品进行免费维修。
2. 在保修期内发生损坏需要得到免费维修时，请拨打全国售后服务电话报修。
3. 在保修期内，下面所列场合的维修为有偿维修。
   ① 使用不当或私自进行的不当修理及改造所造成的故障及损伤。
   ② 安装施工时的不注意或过失造成的故障及损伤。
   ③ 安装后又拆移等原因造成的故障及损伤。
   ④ 超出使用范围以外的场合下使用本产品所造成的故障及损伤（如家庭用商品作为业务上商品使用）。
   ⑤ 沙粒或污物等造成的损伤。
   ⑥ 由于日常的维护保养不当造成的肮脏、电镀部分生锈等不良。
   ⑦ 由于火灾、地震、水灾、雷击及其他天灾、公害、气害（液化气）、盐害及异常电压、使用指定外的电源（电压、频率）等原因造成的故障及损伤。
   ⑧ 本保证书没有指定的场合。
   ⑨ 本保证书中用户姓名、销售店、安装店、购买日期未填写的场合。
   ⑩ 不能出示购买发票的场合。
   ⑪ 由结冰引起的故障。
4. 本保证书只在中国境内有效。（香港、澳门、台湾地区除外）
5. 本保证书丢失不补，请顾客妥善保管。

合　格　证

本产品经检查判定合格
执行标准：GB18145-2014
产品型号：见包装箱上的标签
产品名称：见包装箱上的标签
生产日期：见包装箱上的标签
组装工厂：东陶机器(广州)有限公司
电　　话：（020）34764020
厂　　址：广州市番禺区南村镇兴南大道715号

东陶(中国)有限公司
全国售后服务电话：800-820-9787(固定电话)
400-820-9787(手机用户)

销售商：东陶(中国)有限公司
地　址：北京市朝阳区光华路1号
北京嘉里中心北楼1915室
网　址：www.toto.com.cn

扫描二维码，
服务预约，方便快捷

TOTO

埋墙式淋浴头本体

使用产品前请仔细阅读本使用说明书，并保留备用


明　细　单

本体……1个
装饰盖……1个
O型圈 ……1个
施工说明书……1张
使用说明书……2张


使用此明细单的产品包括：
TBW01014* 埋墙式淋浴头本体（圆型）
TBW02013* 埋墙式淋浴头本体（方型）

产　品　示　意　图

TBW01014*系列 埋墙式淋浴头本体（圆型）

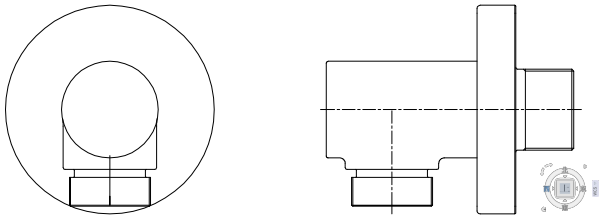

TBW02013* 埋墙式淋浴头本体（方型）

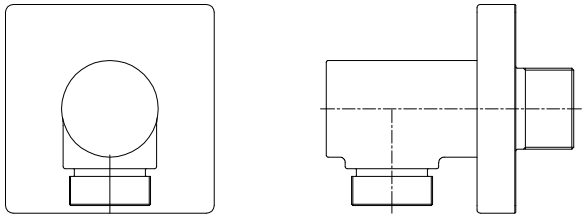

使 用 条 件

1. 埋墙式淋浴头本体需配合手持花洒和水嘴使用。
2. 供冷水*供热水压力:
   最低压力……0.05MPa(流动压)
   最高压力……1.0MPa(流动压)
   推荐使用压力……0.1～0.5MPa(流动压)
   检测压力……1.75MPa(静压)
3. 供热水温度不得超过70℃，建议使用温度60℃，供热水请勿使用蒸汽。
4. 使用环境温度0℃以上，如果不高于0℃，淋浴头本体会出现变形、冻裂等现象。
5. 为了达到最好的安装与使用效果，埋墙式淋浴头本体系列推荐与「TOTO」水嘴及手持花洒一起配套使用。
6. 长时间不使用时，可能淋浴头本体内部及外部锈蚀不能使用等现象。
7. 如果您需要废弃本产品，请勿将其作为一般生活垃圾处理，请依照法规经由独立的回收体系进行合适的处理、恢复和回收。
8. 本说明书的产品具有清洗功能。
9. 在可能结冰的场所使用时，要切实做好防冻措施。
   由于结冰，零件破损，有可能导致漏水，造成财产损失。因结冰而造成的破损即使在保修期内也是有偿修理。请不要让产品的温度低于0℃。

施 工 上 的 注 意

⚠警告　表示如果无视此标志而误操作时，有可能造成人员重伤或死亡。

⚠注意　表示如果无视此标志而误操作时，有可能造成人身伤害或财产损失。

⚠警告

1. 幼儿禁止使用或幼儿需要由成年人监护使用、老人和残障人士等特殊群体应在有行动能力人员陪同下使用。
2. 水嘴的供热水一侧处于高温状态，请勿使皮肤直接接触五金配件表面，否则可能会烫伤。
3. 请勿配反冷*热水配管，否则可能会烫伤。
4. 供热水请勿使用蒸汽，否则可能会烫伤。

⚠注意

1. 请勿撞击本产品，否则可能会造成故障、漏水。
2. 经常用软布擦拭，间或用机油或车用蜡浸布擦拭，但粘着于树脂部件时，部件将失去光泽或产生锈蚀，请充分注意勿使粘着。
3. 不得使用去污粉、抛光粉等含粗颗粒的洗涤剂或尼龙刷帚。
4. 由于酸性洗涤剂能侵蚀镀层，故不得使用，如果用酸性洗涤剂洗过瓷砖，要立即对瓷砖及水嘴充分进行水洗。
5. 建议不要长时间不使用，否则可能会导致淋浴头本体内部及外部锈蚀不能使用等现象。
6. 随着产品式样的不断更新，实物可能与图示不符，但基本原理相同。

防 冻 措 施

在可能结冰的场所使用时，要切实做好防冻措施。
1. 产品结冰的话零件损坏，成为漏水的原因。
2. 因结冰造成的零件损坏即使在保修期内也是有偿修理。
3. 施工完了后或长时间不使用时，要有预防突然降温的准备，要对产品进行结冰预防。
4. 因为由结冰的危险，请不要让产品周围的温度在0℃以下。

保 养


为长期保持产品的美观， 请用户按以下方法维护保养。
1. 经常用软布擦拭，间或用软布蘸水擦拭。
2. 当有污垢且较明显时，请用中性洗涤剂擦拭后充分进行水洗。
3. 不得使用洁厕粉、去污粉、机油、辛那水、强酸、强碱性洗涤剂或含颗粒物质的洗涤剂、尼龙刷子来清洁本产品。

拆 卸 与 检 查

现　　象	检 查 项 目
漏　　水	1
本 体 晃 动	1

安装后万一出现故障，请按以下要领拆卸。

以TBW01014*为例
共通品番：TBW02013*

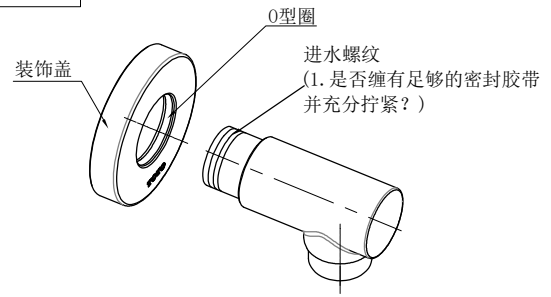

TOTO

Guarantee

User	
Sales shop or installation shop	
Date of buying	
Warranty period	From the date of buying, the warranty period is 1 year for the wall burial type shower head body.

*If the contents in the above column are not complete, the guarantee shall be deemed as invalid. Therefore, user should confirm the contents put in at the time of buying.
*The items covered in this guarantee are only limited to repair to those free repair items as agreed in the guarantee.
*During the warranty period, if any failure occurs to the product (water leakage, seepage),please call after sale service to request repairs.

Repair Regulations

1.During the warranty period, if the user uses the products of the company correctly according to relevant instructions, adhesiv labels, the company will provide free repair to any faulty product.
2.When any free repair is required due to damage within the warranty period, please call after sale service to request repairs.
3.Within the warranty period, the repair in the following occasions is paid repair.
① Any failure and damage due to any improper use or any improper repair and modification conducted privately.
② Any failure and damage resulting from any carelessness or fault in installation construction.
③ Any failure and damage attributed to such reasons as removal for relocation after installation, etc.
④ Any failure and damage due to using this product in occasions beyond the specified scope of use (for example, home commodity is used for any business purpose).
⑤ Any damage caused by sand grains or dirt, etc.
⑥ Such adverse results as dirtiness, plating part rusting, etc. attributed to improper daily maintenance and care.
⑦ Any failure and damage due to fire, earthquake, flood, lightning strike and other natural disasters, public nuisances, gas damage (liquefied gas), salt damage and abnormal voltage, use of any power supply (voltage, frequency) other than the specified ones, etc.
⑧ The occasions not specified in this warranty.
⑨ The occasion in which the user name, sales shop, installation shop or buying date is not filled in.
⑩ No buying invoice can be presented.
⑪ Failure caused by frost damage.
4.The warranty is valid within the territory of the People's Republic of China, excluding Hongkong, Macao and Taiwan.
5.This product warranty card shall not be reissued when being lost. Customers are requested to keep it properly.

TOTO Asia Oceania Pte. Ltd.
Telephone:65-6744-6955
FAX: 65-6841-0819
Address :
10 Eunos Road 8 #12-07 Singapore Post
Centre Singapore 408600
Website:asia.toto.com

TOTO KOREA LTD.
전화번호 : (02)-3141-8236
FAX 번호 : (02)-3141-8240
주소 :서울시 마포구 상수동 351-16번지
로이코빌딩 3층
홈페이지 : http://www.totokr.co.kr

TOTO

Wall Mounted Handshower Inlet

Please read carefully the present instructions for operation before using the product and keep the same properly for future use


Detailed list

Body.....1 piece
Decorating cover.....1 piece
O-ring.....1 piece
Instructions for construction.....1 sheet
Instructions for operation.....2 sheets


The products using this detailed list include:
TBW01014* "L Shower" Shower Elbow (Standard Type)
TBW02013* "L Shower" Shower Elbow (Contemporary Type)

Product Schematic Diagram

TBW01014*"L Shower" Shower Elbow (Standard Type)

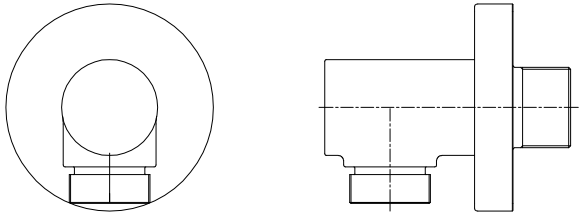

TBW02013* "L Shower" Shower Elbow (Contemporary Type)

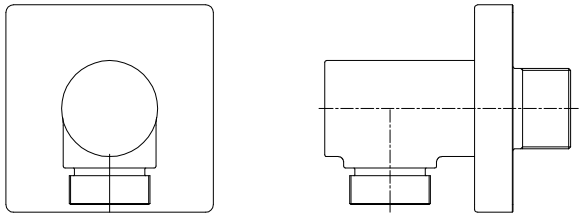

Use condition

1.The wall burial type shower head body is used with the handheld shower and water nozzle.
2.Cold water supply*hot water supply pressure
Minimum pressure.....0.05MPa (flow pressure)
Maximum pressure.....1.0MPa (flow pressure)
Recommended service pressure.....0.1~0.5MPa (flow pressure)
Testing pressure.....1.75MPa (static pressure)
3.The temperature for hot water supply is not beyond 70ºC. It is suggested to use the temperature of 60ºC. Please do not use steam to supply hot water.
4.The ambient temperature for use is above 0ºC. If the ambient temperature is not higher than 0ºC, the shower head body may deform and crack from freezing.
5.To attain the best installation and service effect, it is recommended that the wall burial shower head body series should be used with the water nozzle and handheld shower from TOTO.
6.In case of being left unused for a long time, the internal and external parts of the shower head body may get rusty and cannot be used any more.
7.If you want to scrap this product, please do not dispose it as general living garbage. Please let an independent recovery system dispose,restore and recover in accordance with relevant statutes.
8.The product in the present instructions has a cleaning function.
9.When using in places where frost damage may occur, anti-freezing measures must be taken.
The parts will be damaged due to frost damage, which may cause water leakage and property loss. Damages caused by frost damage are repaired for a fee even during the warranty period. Please ensure that the ambient temperature of the product is always above 0℃.

Attentions in construction

⚠Warning: it means that ignoring this mark and misoperation may cause serious personal injury and death.

⚠Attention: it means that ignoring this mark and misoperation may cause personal injury or property loss.

⚠Warning

1.Children are not allowed to use or can use only under the custody of adult. Such special groups as the aged and disabled should be accompanied by those with behavioral competence when using it.
2.The hot water supply side of the water nozzle is in a condition of high temperature. Do not allow skin to contact with the hardware surface directly. Otherwise, scalding may happen.
3.Please do not reverse the cold and hot water pipes. Otherwise, scalding may occur.
4.Please do not use steam to supply hot water. Otherwise, scalding may occur.

⚠Attentions

1.Do not impact the product. Otherwise, failure, water leakage may occur.
2.Use a piece of soft cloth to wipe frequently or use from time to time a piece of cloth immersed in machine oil or vehicle wax to wipe. However, when adhering to resin components, they may lose gloss or get rusty. Please take sufficient care not to have anything mentioned above to adhere to resin components.
3.Do not use any such detergent as abstergent, polishing powder, etc. containing thick particles and nylon brush.
4.As acidic detergents corrode plating coat, it is not allowed to use them. If ceramic tiles are washed with any acidic detergent, wash immediately the ceramic tiles or water nozzle with water sufficiently.
5.It is suggested not to leave it unused for a long time. Otherwise, this may lead to the internal and external rust to shower head body to such a degree that it cannot be used any more, etc.
6.With the product design being updated constantly, the physical object may not coincide with the figure. However, the basic principle is the same.

Anti-freezing measures

When using in places where frost damage may occur, anti-freezing measures must be taken.
1. The parts will be damaged due to frost damage, which may cause water leakage.
2. Damaged parts caused by frost damage are repaired for a fee even during the warranty period.
3. After the construction is completed or when it is not used for a long time, prepare to prevent sudden drop of temperature and prevent the product from frost damage.
4. Because of the risk of frost damage, please ensure that the ambient temperature of the product is always above 0℃.

Maintenance

To maintain a beautiful appearance of the product, the user is requested to conduct maintenance and care in the following method.
1.Wipe with a piece of soft cloth frequently and use a piece of soft cloth dipped in water to wipe from time to time.
2.When dirt exists obviously, please use water to wash sufficiently after wiping with a neutral detergent.
3.Do not use toilet cleaning powder, abstergent, machine oil, xina water, strong acidic and alkaline detergent or such detergent as containing particle matters, nylon brush to clean this product.

Removal and inspection

Symptom	Inspecting item
Water leakage	1
Body swings	1

In case of any failure after installation, please remove according to the following main points .

Take TBW01014* as an example
General product number:
TBW02013*

