
DM-524B

DYNAMIC MICROPHONE LO Z

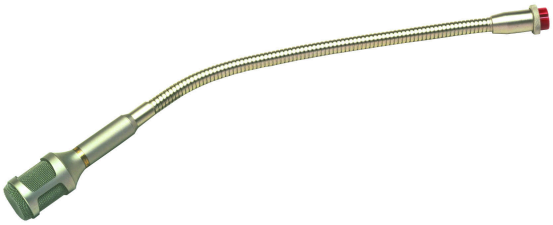

A unidirectional microphone with a gooseneck shaft. Use this microphone in conjunction with the ST-73A desk-top stand (option).


Key features

- Flexible and durable gooseneck
- Suppresses handling noise
- 600 Ω, balanced
- 3-pin connector

Specifications

Type	Moving coil microphone
Polar Pattern	Cardioid pattern
Impedance	600 Ω, balanced
Sensitivity	-54.5 dB (1 kHz, 0 dB=1 V/Pa)
Frequency Response	100 Hz - 10 kHz
Output Terminal	Ø21, 3-pin plug (BTS21P3B)
Finish	Microphone body, Gooseneck shaft: Gold, sparkling paint
Weight	465 g
Included Accessories	Ø21 3-pin receptacle (BTS21R3A)……1, M3x10 screw……3, W3 washer……3, SW3 spring washer……3, M3 nut……3
Compatible Stand	ST-73A (option) or #21 mm 3-pin socket

Dimensions

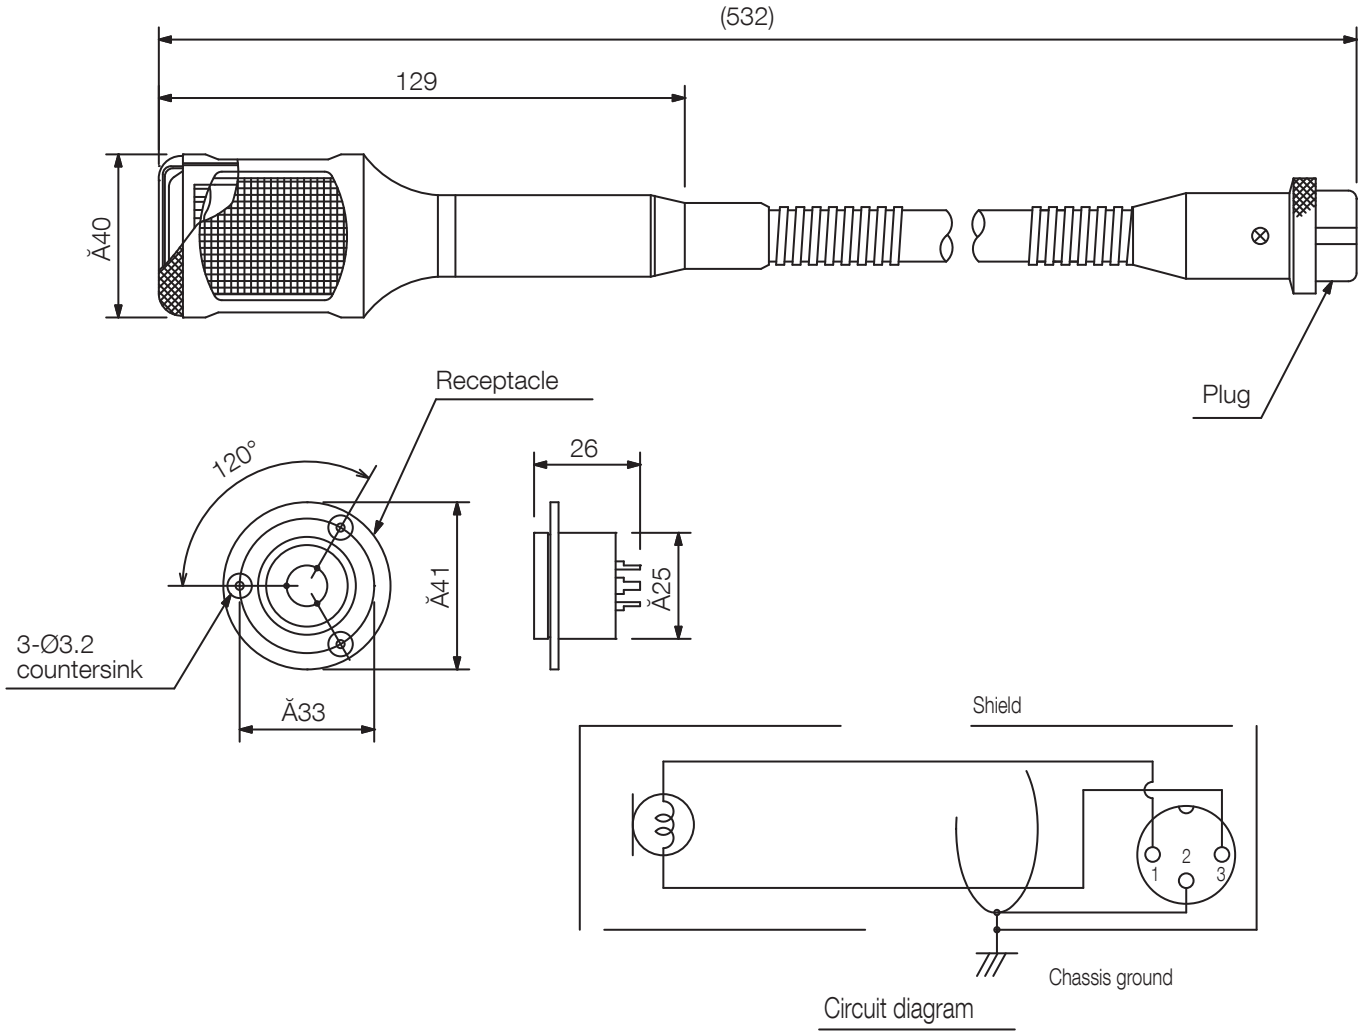

UNIT:mm SCALE:1/2

Note: Numerical values in parentheses are for reference only.

A&E specifications

Gooseneck microphone with thread for stands, desensitized against ground noise and feedback.