FUJITSU

SUBMITTAL ADUH12LUAS1

AIRSTAGE H-Series

Inverter Driven Heat Pump — **12,000 BTU Slim Duct Type**

Job Name		Date	
Location		Approval	
Engineer		Construction	
Submitted To		Unit No	
Submitted By		Drawing No	
Reference			

PRODUCT FEATURES

Automatic Changeover
Auto/Cool/Dry/Fan/Heat Modes
24 Hr./Weekly timer
Built in Condensate Pump
Auxiliary Heat Control Logic
Auto Restart
Economy Mode



MODEL NUMBERS		
Indoor Unit		ADUH12LUAS1
Nominal Capacity		12,000
LINESET REQUIREMENTS		
Connection Method		Flare
Liquid	in (mm)	Ø 1/4 (Ø 6.35)
Gas		Ø 3/8 (Ø 9.52)
Drain hose	Material	HARD PVC
	in (mm)	Ø1 (Ø25) (I.D.), Ø1-1/4 (Ø32) (O.D.)
INDOOR DIMENSIONS & WEIGHT		
Net (H × W × D)	in (mm)	7-13/16 × 27-9/16 × 24-7/16 (192 x 700 x 620)
Gross (H × W × D)		10-13/16 × 37-3/16 × 30-3/8 (274 × 945 × 772)
Net Weight	lb (kg)	37 (17)
Gross Weight		49 (22)

ELECTRICAL SPECIFICATIONS		
Voltage/Frequency/Phase		208/230 V ~ 60 Hz
Available Voltage Range		187–253 V
Running Current	A	0.35
Input Power	W	58

SOUND PRESSURE				
Indoor Unit	Cooling	HIGH	dB (A)	29
		MED		28
		LOW		27
		QUIET		26
	Heating	HIGH		29
		MED		28
		LOW		27
		QUIET		24

FAN DATA				
Indoor Unit Airflow rate	Cooling	HIGH	CFM (m3/h)	382 (650)
		MED		353 (600)
		LOW		324 (550)
		QUIET		283 (480)
	Heating	HIGH		382 (650)
		MED		353 (600)
		LOW		324 (550)
		QUIET		283 (480)

Warranty Information

7 Year Compressor, 5 Year Parts out-of-the-box Warranty

10 Year Compressor, 10 Year Parts Warranty when registered within 60 days of installation in a residence

12 Year Compressor, 12 Year Parts Warranty when registered within 60 days of installation in a residence, and installed by a Fujitsu Elite contractor

ACCESSORIES	
UTY-RNRUZ*	Wired Remote Controller
UTY-RSRY	Simple Remote Controller
UTY-RHRY	Simple Remote Controller
UTY-LBTUM	IR Kit (Remote & IR Receiver Unit)
UTY-TFSXZ2	WLAN Adapter
UTY-VMSX	Modbus Converter
UTD-GXTB-W	Cassette Grille
UTY-TTRXZ1	Thermostat Converter
UTY-XWZXZG	External Connect Kit


Due to continuous product improvements, specifications are subject to change without notice. Please log in to the Fujitsu Portal for the most up-to-date documentation https://connect.fujitsugeneral.com

Effective Date: 1/12/2023

DIMENSIONS:

Units: In. (mm)

Indoor Unit:

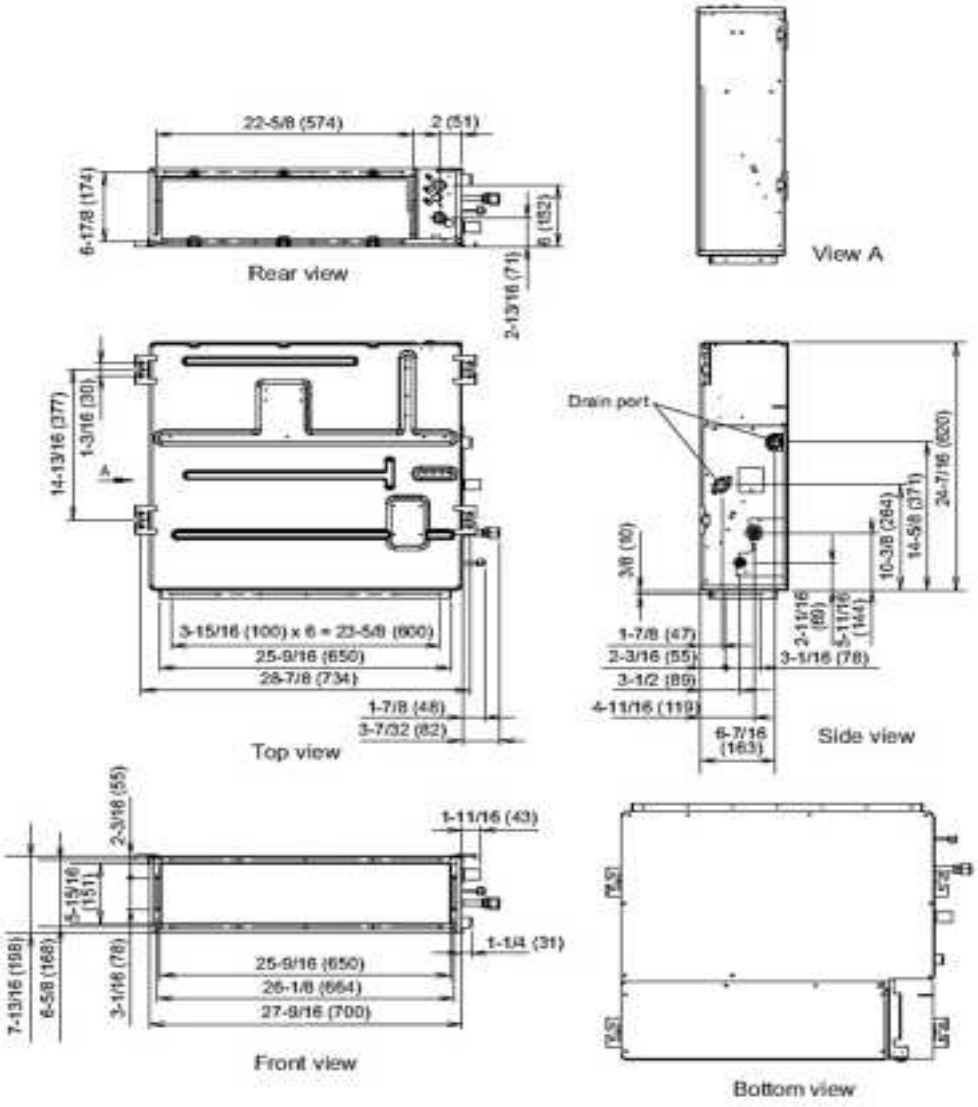

The Fujitsu logo is a worldwide trademark of Fujitsu General Limited. The Airstage logo and name is a worldwide trademark of Fujitsu General Limited and is a registered trademark in Japan, the USA and other countries or areas. Copyright 2022 Fujitsu General America, Inc. Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this brochure without notice and without incurring any obligations.

Note: Specifications are based on the following conditions:
Cooling: Indoor temperature of 80°F (26.7°C) DB/67°F (19.4°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB. Heating: Indoor temperature of 70°F (21.1°C) DB/60°F (15.6°C) WB, and outdoor temperature of 47°F (8.3°C) DB/43°F (6.1°C) WB. Pipe length: 25ft. (7.5m), Height difference: 0ft. (0m) (Outdoor unit – indoor unit).