

Bothhand USA PG2P829RNZ LF MAGNETICS MODULES Datasheet

<http://www.manuallib.com/bothhand-usa/pg2p829rnz-lf-magnetics-modules-datasheet.html>

Designed for Ethernet 100/1000 BASE-T, full duplex applications.

Supports 8 pairs of category 5 UTP cable.

Cable interface for isolation and low common mode emissions.

Compliant with IEEE 802.3ab standard for 1000 BASE-T.

Compliance with ROHS requirements.

Operating temperature range: 0 to +70.

Storage temperature range: -25 to +85.


ManualLib.com collects and classifies the global product instruction manuals to help users access anytime and anywhere, helping users make better use of products.

<http://www.manuallib.com>

1000 BASE –T DUAL PORT
MAGNETICS MODULES
P/N: PG2P829RNZ LF DATA SHEET



Feature




- Designed for Ethernet 100/1000 BASE-T, full duplex applications.
- Supports 8 pairs of category 5 UTP cable.
- Cable interface for isolation and low common mode emissions.
- Compliant with IEEE 802.3at standard for 1000 BASE-T.
- Compliance with ROHS requirements.
- Operating temperature range:0℃ to +70℃.
- Storage temperature range: -25℃ to +85℃.

Electrical Specifications @ 25°C							
Part Number	Turns Ratio (±5%)		OCL (uH Min) @100KHz/0.1V with 18mA DC Bias	Cross talk (dB Min)			HI-POT (Vrms)
	TX	RX		30MHz	60MHz	100MHz	
PG2P829RNZ LF	1CT:1CT	1CT:1CT	350	-40	-35	-30	1500

Continue									
Part Number	Insertion Loss (dB Max)	Return Loss (dB Min)@ Load 100Ω					DCMR (dB Min)		
	1-100MHz	1-30MHz	40MHz	50MHz	60-80MHz	100MHz	30MHz	60MHz	100MHz
PG2P829RNZ LF	-1.0	-18	-14.4	-13.1	-12	-10	-43	-37	-33


Schematic

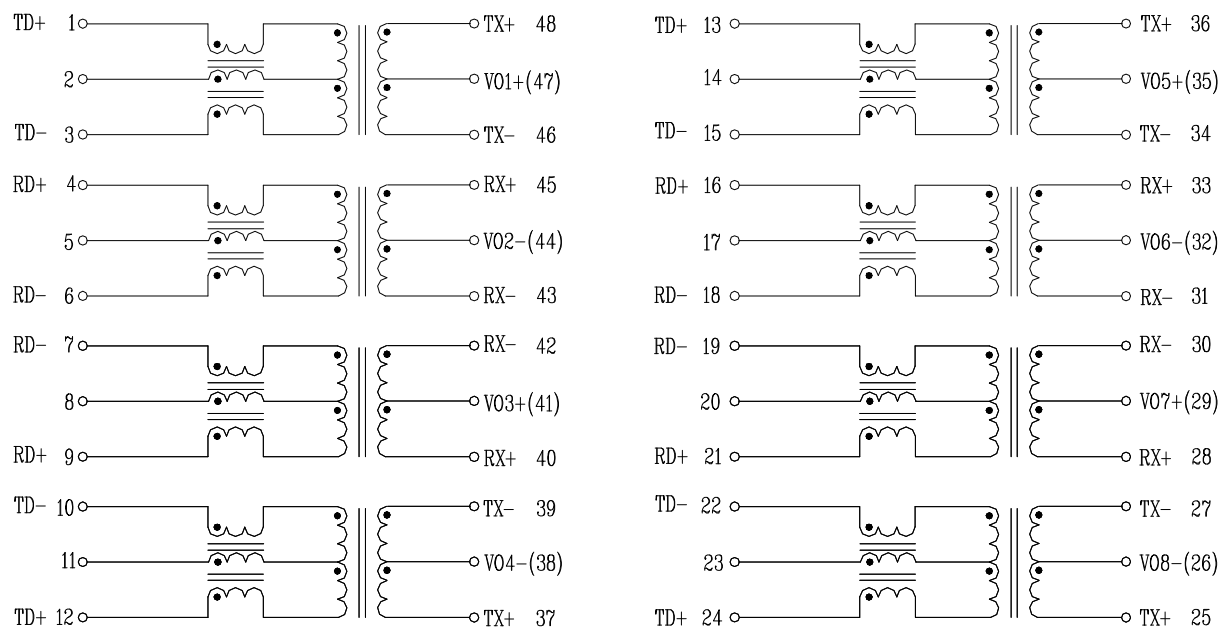

1000 BASE –T DUAL PORT
MAGNETICS MODULES
P/N: PG2P829RNZ LF DATA SHEET



Mechanical

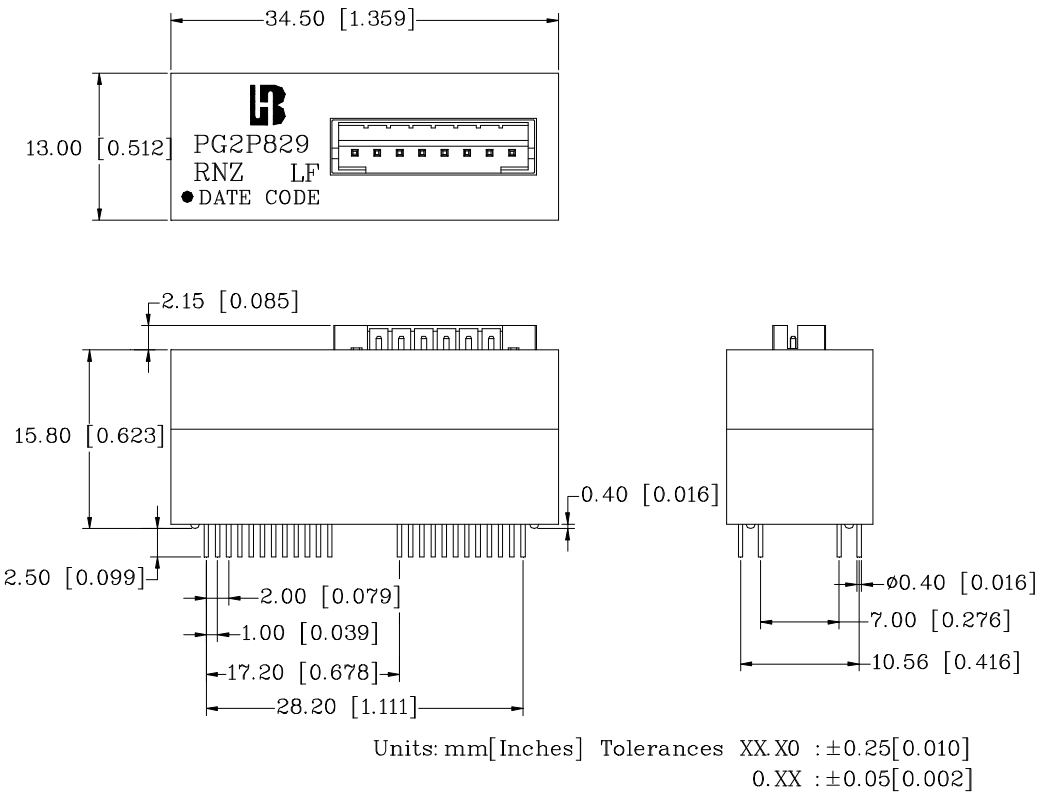

PCB Layout mounting Hole (Top View)

