

BOWEI OX30 Oscillator Datasheet

<http://www.manuallib.com/bowei/ox30-oscillator-datasheet.html>

Features

SC cut 10120MHz

High stable output, wide temperature range

Standard freq 10MHz100MHz

Any frequency available

ManualLib.com collects and classifies the global product instruction manuals to help users access anytime and anywhere, helping users make better use of products.


<http://www.manuallib.com>

Features

- High stable output, wide temperature range
- Standard freq 10MHz, 100MHz
- SCut (10~120MHz)
- Any frequency available



MP3030



Pin function

- 1: Frequency control
- 2: Reference voltage output or NC
- 3: Power supply
- 4: RF output
- 5: Ground

Electrical specification


Parameter		Characteristic	
Power supply		+12V ±5% (option +5V)	
Frequency range		10~140MHz	
Frequency stability	Vs. temperature	±5~±200ppb (see the table)	
	Vs. supply changes	±2ppb (Max) /Vdc ±5%	
	Vs. Ageing	±0.05~0.5ppm/1 st year (Max)	
Output	Sinewave	Level	+7dBm/50 Ω
		Harmonics	≤-20dBc
		Non-Harmonic Suppression	≤-70dBc
	HCMOS/TTL (~50MHz)	Risetime	≤6ns
		Falltime	≤6ns
		Duty cycle	45%~55%
Phase noise 10MHz Typical	100Hz	-140 dBc/Hz	
	1KHz	-150 dBc/Hz	
	100KHz	-155 dBc/Hz	
Input power (turn-on/steady)		3.6W/1.8W (Max) @25°C	
Operation temperature range		Different range (see the table)	
Storage temperature range		-55~+85°C	
Frequency adjustment		±0.5~±2ppm	
Dimension		30mm*30mm*12.7mm	

Frequency temperature Stability (ppm)


	±5	±10	±20	±50	±100	±200
0~50°C	MP	LP	KP	JP	HP	GP
-10~60°C	MQ	LQ	KQ	JQ	HQ	GQ
-20~70°C	MR*	LR	KR	JR	HR	GR
-30~70°C		LS*	KS	JS	HS	GS
-40~70°C			KT*	JT	HT	GT
-40~85°C				JU*	HU	GU
-55~85°C					HW*	GW

Contact us

Outside frequency adjustment



with variable-resistance




with control voltage


Absolute maximum ratings

Supply voltage---+15V(+6V)

Storage temperature---+105°C

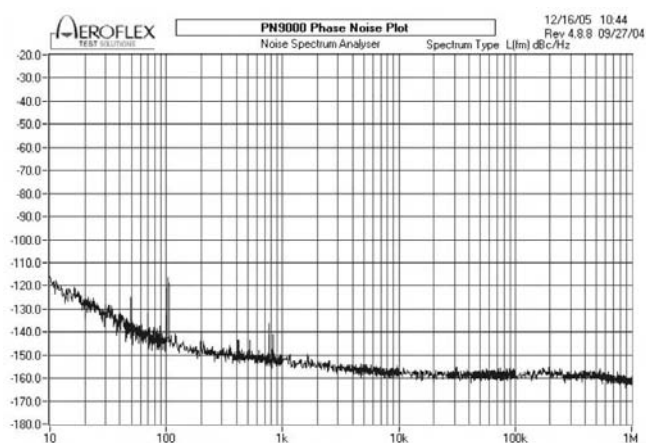

Phase noise vs Offset frequency @SC10MHz/12V

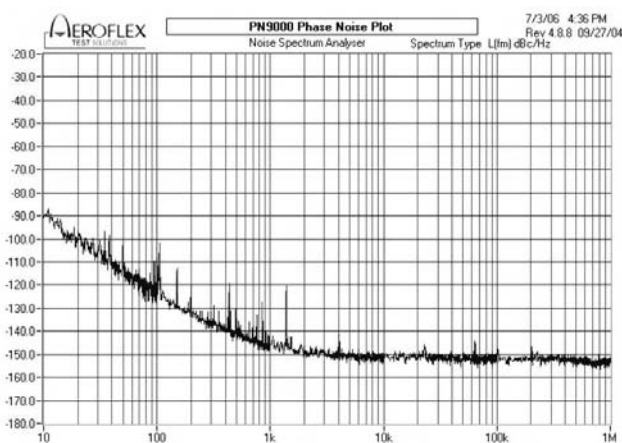

Phase noise vs Offset frequency @AT70MHz/12V