

CTC 1N5400G-1N5408G RECTIFIER Datasheet

<http://www.manuallib.com/ctc/1n5400g-1n5408g-rectifier-datasheet.html>

FEATURES

Low cost

Diffused junction

Low forward voltage drop

Low reverse leakage current

High current capability

The plastic material carries UL recognition 94V-0

ManualLib.com collects and classifies the global product instruction manuals to help users access anytime and anywhere, helping users make better use of products.

<http://www.manuallib.com>

GLASS PASSIVATED RECTIFIERS

REVERSE VOLTAGE - 50 to 1000 Volts
FORWARD CURRENT - 3.0 Amperes


FEATURES

- Low cost
- Glass passivation junction
- Low forward voltage drop
- Low reverse leakage current
- High current capability
- The plastic material carries UL recognition 94V-0

MECHANICAL DATA

- Case : JEDEC DO-201AD molded plastic
- Polarity : Color band denotes cathode
- Weight : 0.04 ounces, 1.2 grams
- Mounting position : Any

DO-201AD

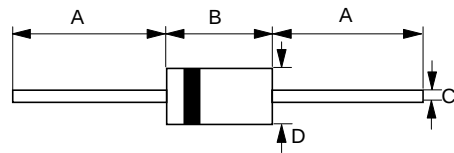

DO-201AD		
Dim.	Min.	Max.
A	25.4	-
B	7.20	9.50
C	1.20	1.30
D	4.80	5.30
All Dimensions in millimeter		

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	1N 5400G	1N 5401G	1N 5402G	1N 5403G	1N 5404G	1N 5405G	1N 5406G	1N 5407G	1N 5408G	UNIT
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	300	400	500	600	800	1000	v
Maximum RMS Voltage	V _{RMS}	35	70	140	210	280	350	420	560	700	v
Maximum DC Blocking Voltage	V _{DC}	50	100	200	300	400	500	600	800	1000	v
Maximum Average Forward Rectified Current @T _A =75°C	I(AV)	3.0									A
Peak Forward Surge Current 8.3ms single half sine-wave super imposed on rated load (JEDEC METHOD)	I _{FSM}	150									A
Maximum forward Voltage at 3.0A DC	V _F	1.1									v
Maximum DC Reverse Current at Rated DC Blocking Voltage @T _J =25°C @T _J =100°C	I _R	5 50									uA
Typical Junction Capacitance (Note 1)	C _J	50						35			pF
Typical Thermal Resistance (Note 2)	R _{θJA}	20									°C/W
Operating Temperature Range	T _J	-55 to +150									°C
Storage Temperature Range	T _{STG}	-55 to +150									°C

NOTES : 1.Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
2.Thermal Resistance Junction to Ambient.

RATINGS AND CHARACTERISTIC CURVES

