


1N6762, 1N6762R, JANTX1N6762, JANTX1N6762R, JANTXV1N6762, JANTXV1N6762R
1N6763, 1N6763R, JANTX1N6763, JANTX1N6763R, JANTXV1N6763, JANTXV1N6763R
1N6764, 1N6764R, JANTX1N6764, JANTX1N6764R, JANTXV1N6764, JANTXV1N6764R
1N6765, 1N6765R, JANTX1N6765, JANTX1N6765R, JANTXV1N6765, JANTXV1N6765R

JANTX, JANTXV POWER DUAL RECTIFIERS IN A TO-254AA PACKAGE QUALIFIED TO MIL-PRF-19500/642



50V Thru 200V, 12A, Dual, Common Cathode
or Common Anode Center-Tap Ultra-Fast
Rectifiers



FEATURES

- Center-Tap Configuration
- Isolated and Hermetically Sealed
- Ultra-Fast
- Low V_F
- Qualified to MIL-PRF-19500/642


DESCRIPTION

This hermetically packaged QPL product features the latest silicon and packaging technology. It is ideally suited for Military low voltage rectifier requirements where small size, high performance and high reliability are required, and in applications such as switching power supplies, motor controls, inverters, choppers, audio amplifiers and high energy pulse circuits.

SCHEMATIC

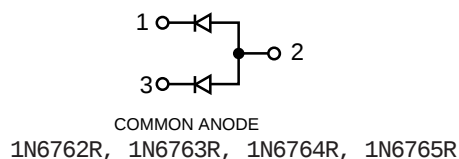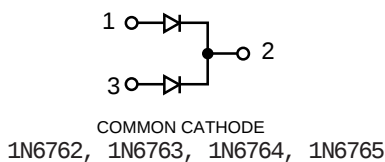

MECHANICAL OUTLINE

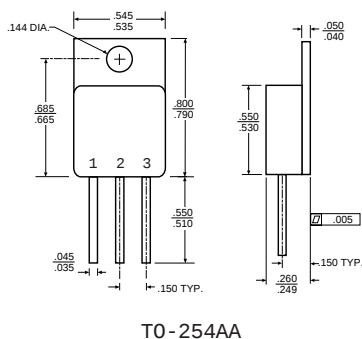

Note: "R" at end of Part Number Designates Common Anode

1N6762, 1N6762R, JANTX1N6762, JANTX1N6762R, JANTXV1N6762, JANTXV1N6762R
 1N6763, 1N6763R, JANTX1N6763, JANTX1N6763R, JANTXV1N6763, JANTXV1N6763R
 1N6764, 1N6764R, JANTX1N6764, JANTX1N6764R, JANTXV1N6764, JANTXV1N6764R
 1N6765, 1N6765R, JANTX1N6765, JANTX1N6765R, JANTXV1N6765, JANTXV1N6765R

PRIMARY ELECTRICAL CHARACTERISTICS

MAXIMUM RATINGS @ 25°C Per Diode

MIL-PRF 19500	PART NUMBER	V_{RWM} $T_C = 100^\circ C$	I_F Amps 8.3 mSec	I_F Surge	$R_{\theta JC}$ Temp Range	Operating
642	1N6762, 1N6762R	50 V	12 A	165 A	2.0 $^{\circ}C/W$	-65 $^{\circ}C$ to + 150 $^{\circ}C$
642	1N6763, 1N6763R	100 V	12 A	165 A	2.0 $^{\circ}C/W$	-65 $^{\circ}C$ to + 150 $^{\circ}C$
642	1N6764, 1N6764R	150 V	12 A	165 A	2.0 $^{\circ}C/W$	-65 $^{\circ}C$ to + 150 $^{\circ}C$
642	1N6765, 1N6765R	200 V	12 A	165 A	2.0 $^{\circ}C/W$	-65 $^{\circ}C$ to + 150 $^{\circ}C$

ELECTRICAL CHARACTERISTICS @ 25°C Per Diode

MIL-PRF 19500	PART NUMBER	V_F @ 6 A	V_F @ 12 A	I_R @ 25 $^{\circ}C$	I_R @ 100 $^{\circ}C$	t_{RR} $I_F = 1.0A$, $di/dt = 50A/\mu s$	C_J $f = 1.0 MHz$
642	1N6762, 1N6762R	0.95 V	1.05 V	10 μA	500 μA	35 nsec	300 pF
642	1N6763, 1N6763R	0.95 V	1.05 V	10 μA	500 μA	35 nsec	300 pF
642	1N6764, 1N6764R	0.95 V	1.05 V	10 μA	500 μA	35 nsec	300 pF
642	1N6765, 1N6765R	0.95 V	1.05 V	10 μA	500 μA	35 nsec	300 pF

PRIMARY ELECTRICAL CHARACTERISTICS @ $T_C = 25^\circ C$

MIL-PRF 19500	PART NUMBER	V_{RWM} , Volts	V_F @ 12A	I_F Amps @ $T_C = 100$
642	1N6762, JANTX, JANTXV	50	1.05	12
642	1N6763, JANTX, JANTXV	100	1.05	12
642	1N6764, JANTX, JANTXV	150	1.05	12
642	1N6765, JANTX, JANTXV	200	1.05	12



Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com