

Installation

Note The product model shown in this QIG is TL-WN721N, as an example.

1

For Windows XP

1 Installing Adapter Driver

Insert the adapter into an available USB slot on your laptop. You may see the **Found New Hardware Wizard** when the adapter is plugged.

Note For TL-WN722N, it is highly recommended that the antenna should not be detached because poor performance will be delivered without it.

This is the default setup wizard of Windows XP. For a smoother installation, **please click "Cancel" and insert the provided TP-LINK resource CD.**

Click **Cancel**




After inserting the provided Resource CD into your CD-ROM drive. The Setup Wizard will automatically pop up on your computer's screen.


Choose **Install Driver&Utility**



Click **Next**

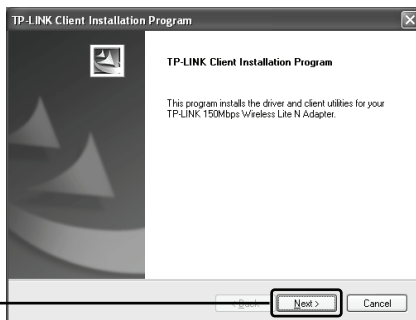

Choose **Install Driver Only**

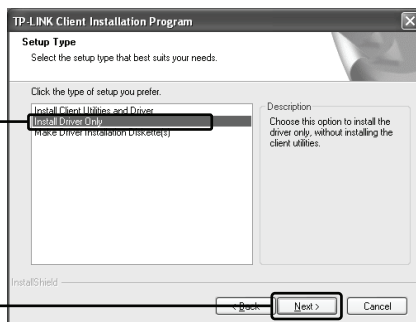


Click **Next**

Follow the step-by-step instructions to finish the driver installation.

If prompted to 'The software has not passed Windows Logo testing to verify its compatibility with Windows XP', click **Continue Anyway** to continue.


Click **Finish**

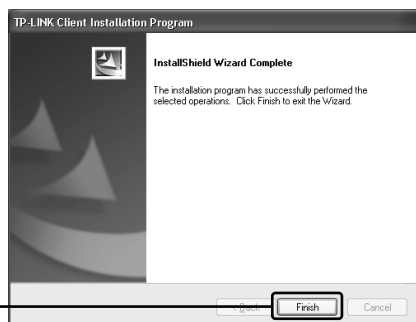

2 Connecting to the Wireless Router/Access Point


Note If the Wireless Router/Access Point supports **Wi-Fi Protected Setup (WPS)** function, you are recommended to use the QSS (Quick Secure Setup) to quickly connect to your wireless network. Please refer to the **Appendix Connecting to the Wireless Router by QSS**.

After you have successfully installed the driver software, the icon  will appear on the bottom right-hand corner of your desktop.

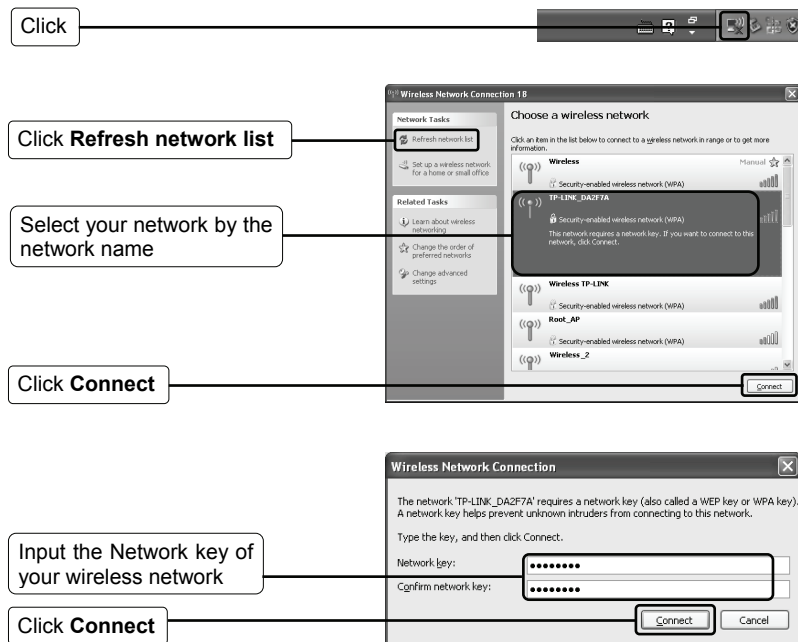

Note If you don't know the wireless network key, please consult the network administrator or login to the setup page of your Wireless Router/Access Point with an Ethernet cable to check the wireless security settings. Please refer to the manual of your Wireless Router/Access Point or contact the manufacturer's technical support for more details.

You have now successfully connected to your wireless network.

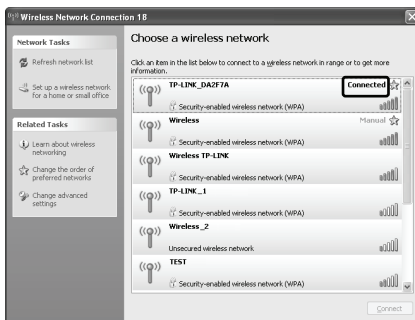

Note If your network is an unsecured network, you will not be prompted to input the Network key. It will connect to your network automatically.

2

For Windows Vista

1

Installing Adapter Driver

Insert the adapter into an available USB slot on your computer. You may see the **Found New Hardware Wizard** when the adapter is plugged.

Note For TL-WN722N, it is highly recommended that the antenna should not be detached because poor performance will be delivered without it.

This is the default setup wizard of Windows Vista. For a smoother installation, **please click "Cancel" and insert the provided TP-LINK resource CD.**

Click **Cancel**




After inserting the provided Resource CD into your CD-ROM drive. The Setup Wizard will automatically pop up on your computer's screen.

Choose **Install Driver&Utility**




Click **Next**

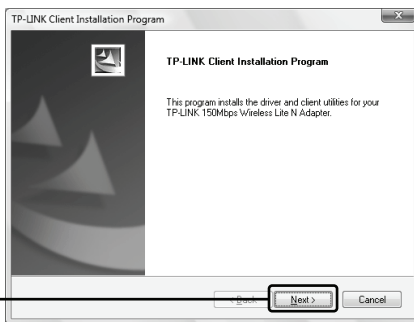

Follow the step-by-step instructions to finish the driver installation.

If prompted to 'Windows can't verify the publisher of this driver software', click **Install this driver software Anyway** to continue.


Click **Finish**

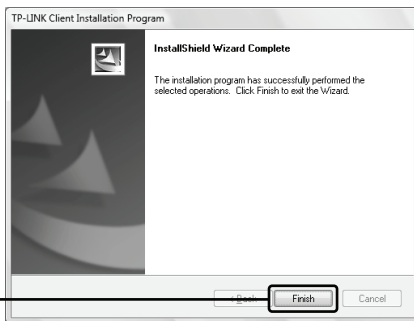

2 Connecting to the Wireless Router/Access Point


Note If the Wireless Router/Access Point supports **Wi-Fi Protected Setup (WPS)** function, you are recommended to use QSS (Quick Secure Setup) to quickly connect to your wireless network. Please refer to the Appendix **Connecting to the Wireless Router by QSS**.

Click this icon at the bottom right of the desktop then click **Connect to a network**




Click this button to refresh the network list

Select your network by the network name

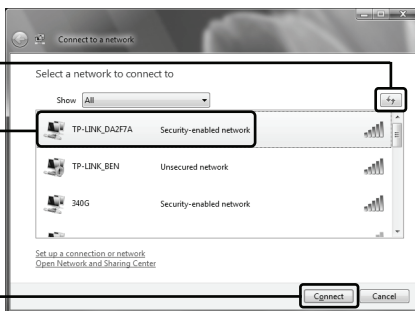

Click **Connect**

Input the Network key

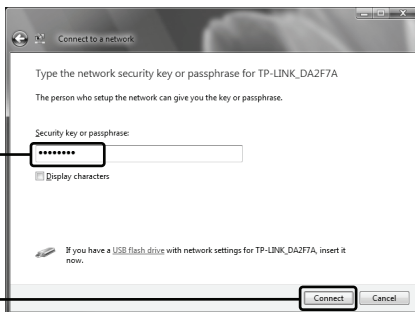


Click **Connect**

Note If you don't know the wireless network key, please consult the network administrator or login to the setup page of your Wireless Router/Access Point with an Ethernet cable to check the wireless security settings. Please refer to the manual of your Wireless Router/Access Point or contact the manufacturer's technical support for more details.

You have now successfully connected to your wireless network.

Save this network for automatically connecting

Click **Close**

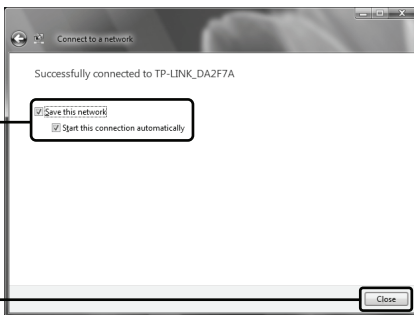

Note If your network is an unsecured network, you will not be prompted to input the Network key. It will connect to your network automatically.

3

For Windows 7

1 Installing Adapter Driver


Insert the adapter into an available USB slot on your computer.

After inserting the provided Resource CD into your CD-ROM drive. The Setup Wizard will automatically pop up on your computer's screen.

Please select the model number of your product and click **Install Driver&Utility**




Click **Next**

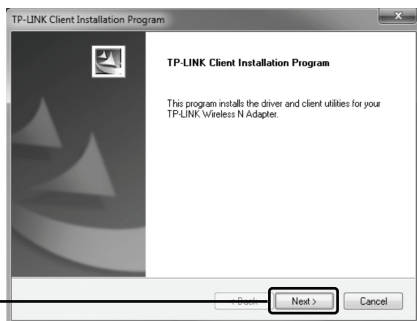

If prompted to 'Windows can't verify the publisher of this driver software', click **Install this driver software anyway** to continue.


Click **Finish**

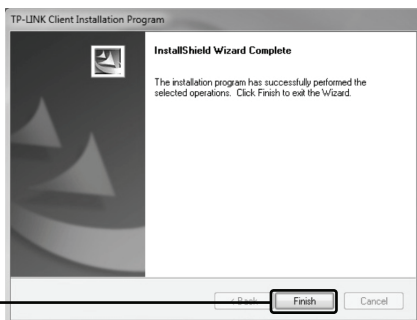

2 Connecting to the Wireless Router/Access Point

After you have successfully installed the driver software, the icon  will appear on the bottom right-hand corner of your desktop.


Click



Click this button to refresh the network list

Select your network by the network name

Click **Connect**



Input the Network Key of your wireless network

Click **OK**



Note If you don't know the wireless network key, please consult the network administrator or login to the setup page of your Wireless Router/Access Point with an Ethernet cable to check the wireless security settings. Please refer to the manual of your Wireless Router/Access Point or contact the manufacturer's technical support for more details.

You have now successfully connected to your wireless network.



Note If your network is an unsecured network, you will not be prompted to input the Network key. It will connect to your network automatically.

Appendix Connecting to the Wireless Router by QSS


1 Installing the QSS Driver

Click **Install QSS**



Follow the step-by-step instructions to finish the QSS installation.

Click **Finish**

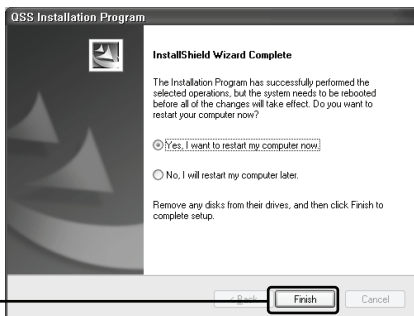

2 Connecting to the Wireless Router

Note If your Wireless Router has a **QSS button** (other brands may call it **Wi-Fi Protected Setup button**), use **method one** to connect to your network. Otherwise, use **method two** to connect to your network.


Method One:

Connecting to the Wireless Router by pushing the QSS button

Push the **QSS button** on the front panel of the Router




Press and hold the **QSS button** on the Adapter for 2 to 3 seconds



Wait for the adapter to connect to the wireless Router.



Click **Finish** to complete the connection.

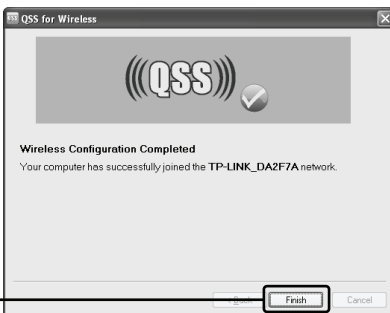


Click **Finish**

Method Two:

Connecting to the Wireless Router by PIN

Double click the icon  on the desktop to open the QSS Utility where this page may prompt.


Click **Next**

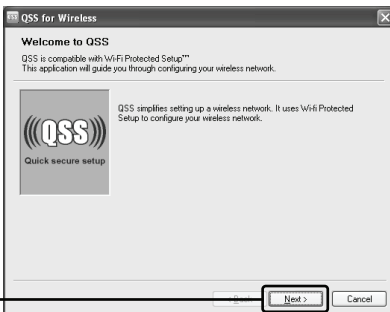

Select **Enter the PIN from my access point**

Input the **PIN** printed on the back of the Router

Click **Next**

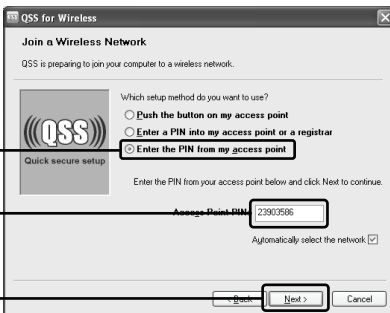


Wait for the Adapter to connect to the Wireless Router.



Click **Finish** to complete the connection.

Click **Finish**

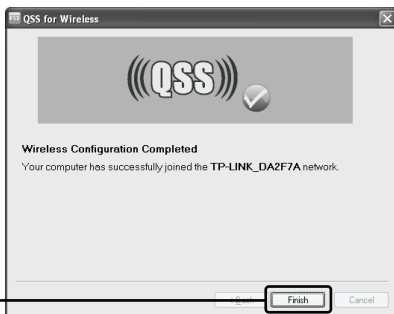

Technical Support

- For more troubleshooting help, go to **www.tp-link.com/support/faq.asp**
- To download the latest Firmware, Driver, Utility and User Guide, go to **www.tp-link.com/support/download.asp**
- For all other technical support, please contact us by using the following details:

Global

Tel: +86 755 26504400

E-mail: support@tp-link.com

Service time: 24hrs, 7days a week

Singapore

Tel: +65 62840493

E-mail: support.sg@tp-link.com

Service time: 24hrs, 7days a week

UK

Tel: +44 (0) 845 147 0017

E-mail: support.uk@tp-link.com

Service time: 24hrs, 7days a week

Switzerland

Tel: +41 (0)848 800998 (German service)

E-mail: support.ch@tp-link.com

Note:

Fee: 4-8 Rp/min, depending on rate of different time

Service Time: Monday to Friday
9:00 AM to 6:00 PM.

GMT+1 or GMT+2 (Daylight Saving Time)

Australia & New Zealand

Tel: AU 1300 87 5465

NZ 0800 87 5465

E-mail: support@tp-link.com.au

Service time: Monday to Friday
9:00 AM to 9:00 PM AEST

USA/Canada

Toll Free: +1 866 225 8139

E-mail: support.usa@tp-link.com

Service time: 24hrs, 7days a week

Germany / Austria

Tel: +49 1805 875465 (German Service)

E-mail: support.de@tp-link.com

Note:

Fee: 0.14EUR/min from the German fixed phone network and up to 0.42EUR/min from mobile phone.

Service time: Monday to Friday
9:00 AM to 6:00 PM

GMT+ 1 or GMT+ 2 (Daylight Saving Time in Germany)
Except bank holidays in Hesse